



Project Hav — hull dimensions (deep-V RIB, v5)

All dimensions in mm (inches in brackets). x = forward of transom, h = above baseline (keel at transom). Generated from cad/hull.py — regenerate, don't hand-edit.


PROFILE (starboard side, bow to the right)

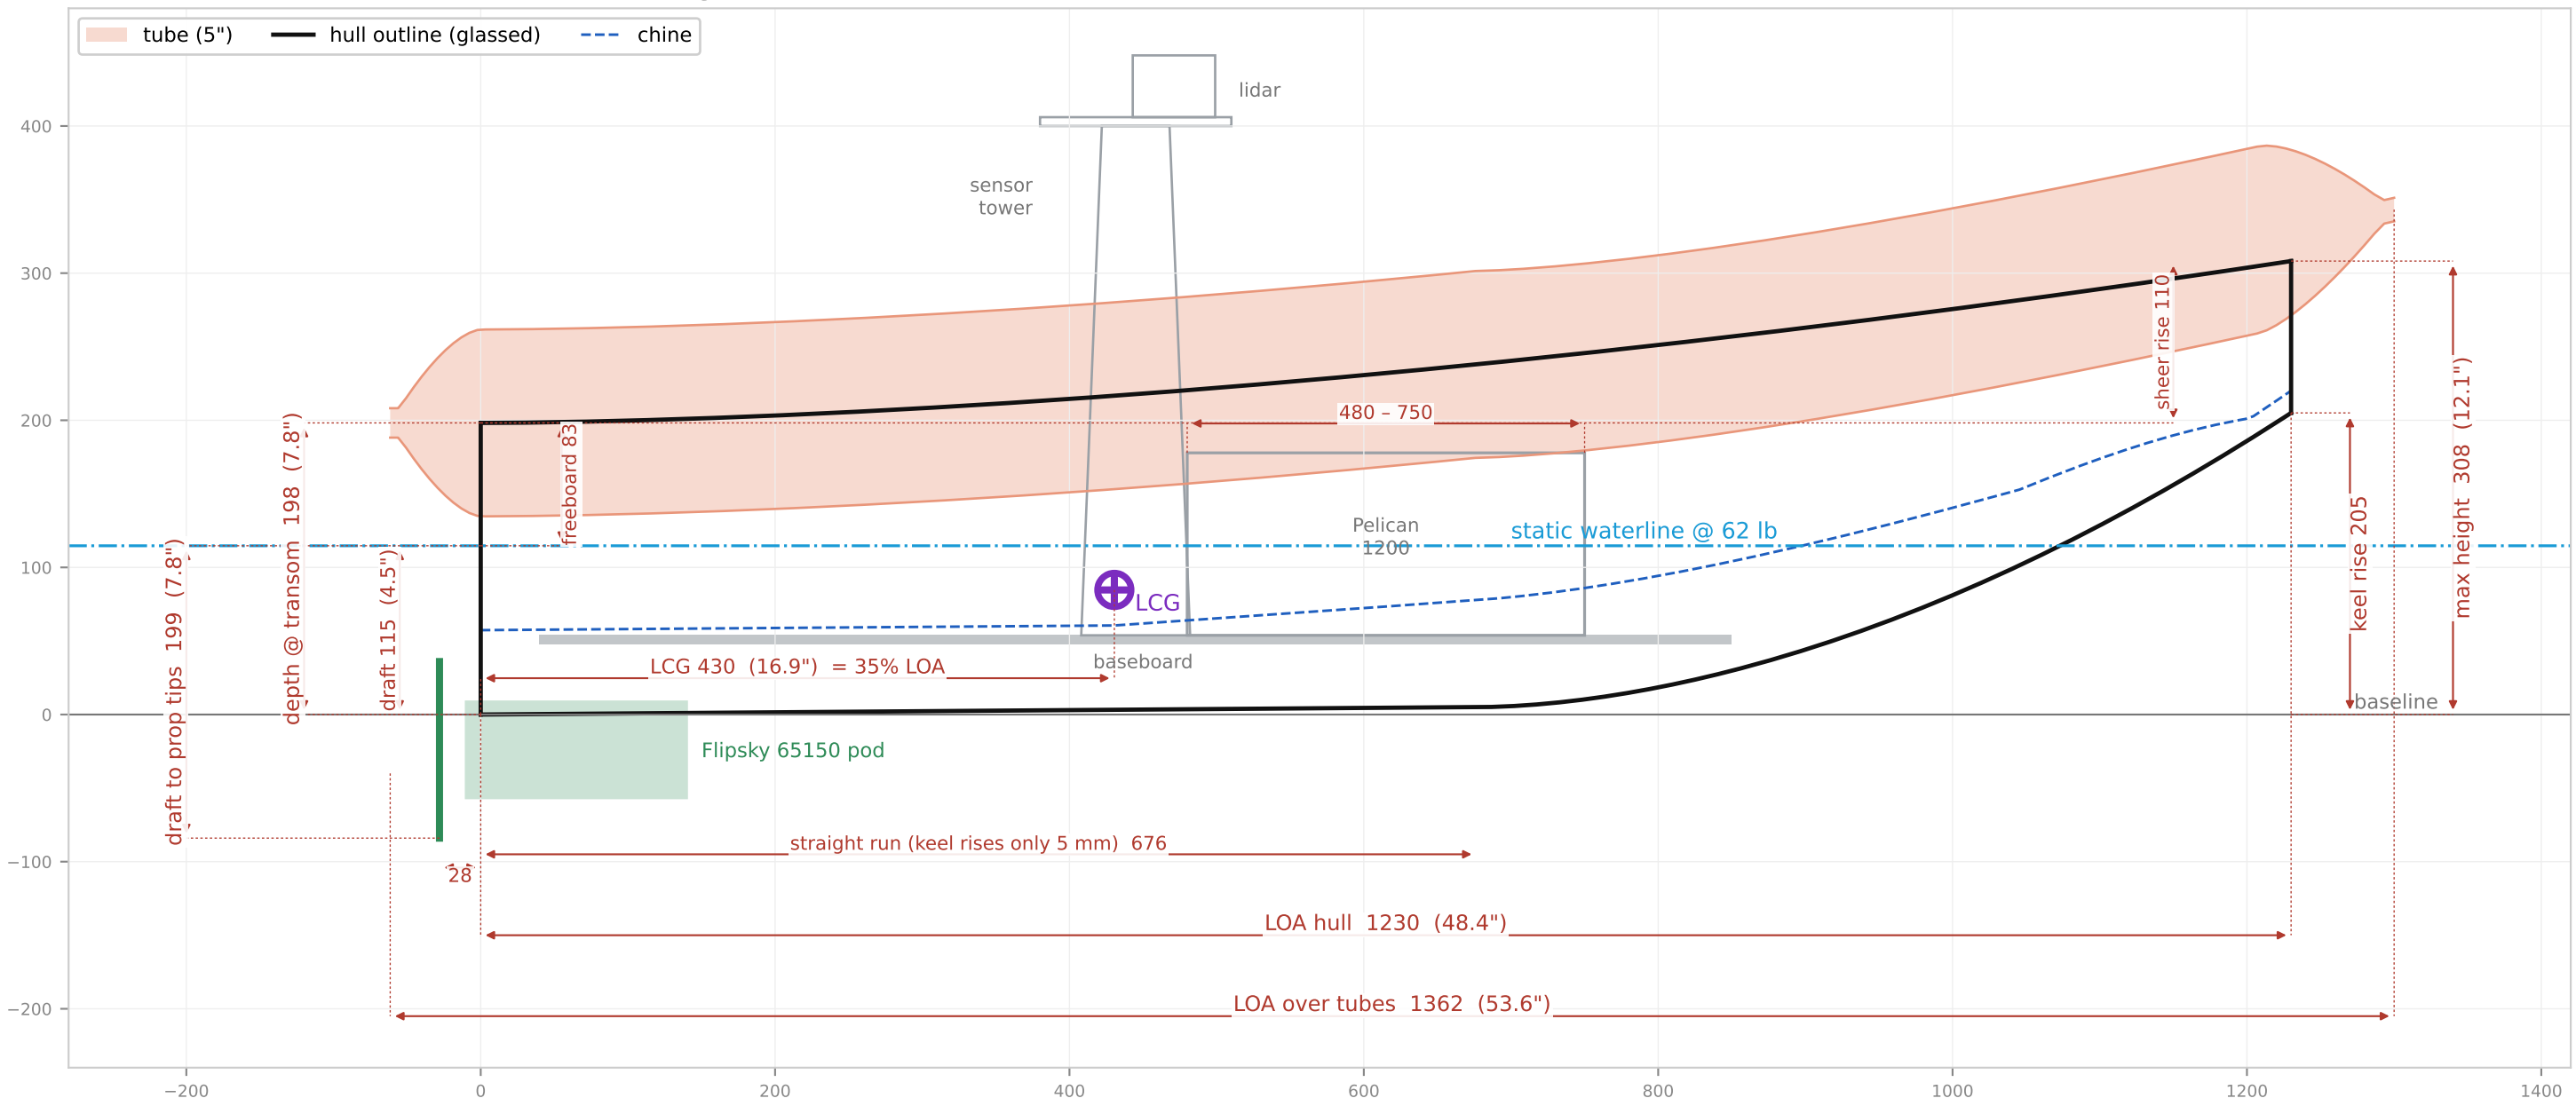


SECTION AT TRANSM (looking forward)

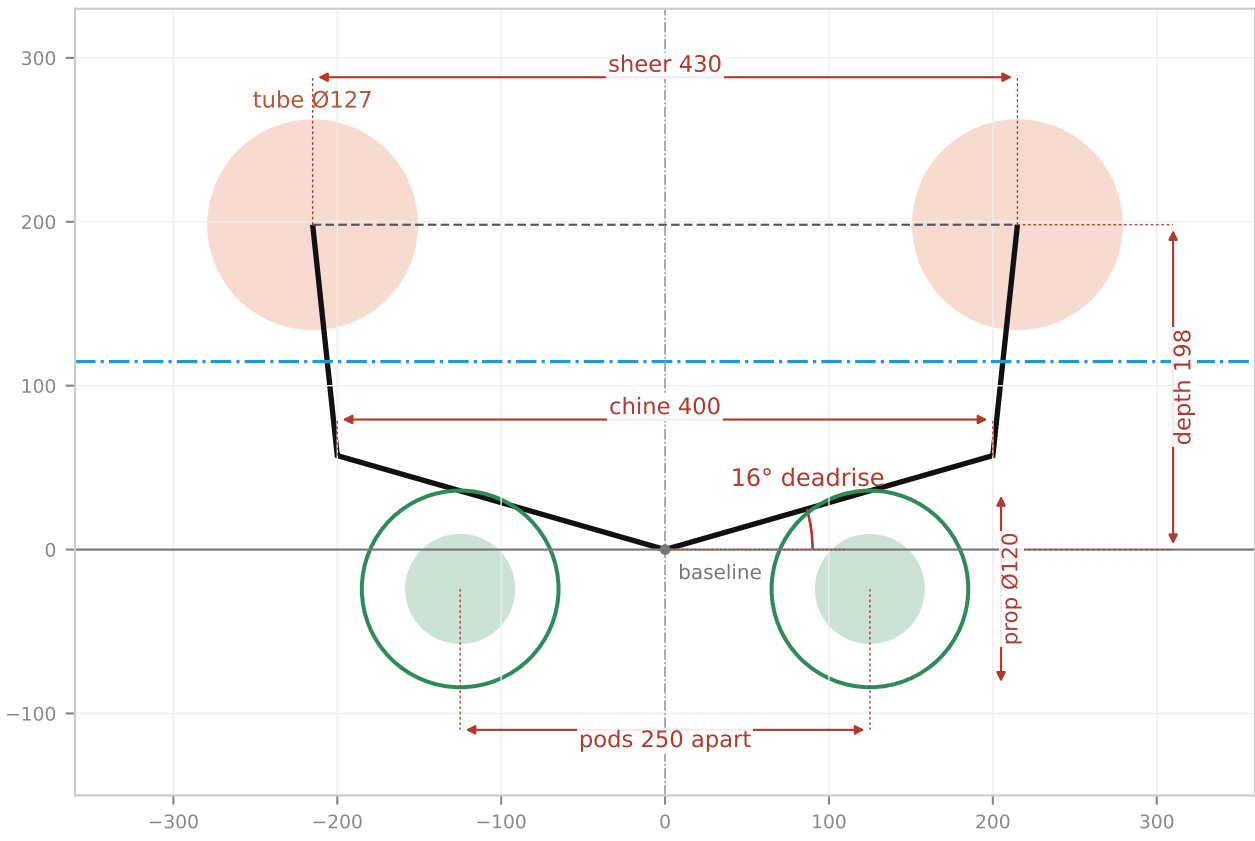

PLAN (looking down, bow to the right)

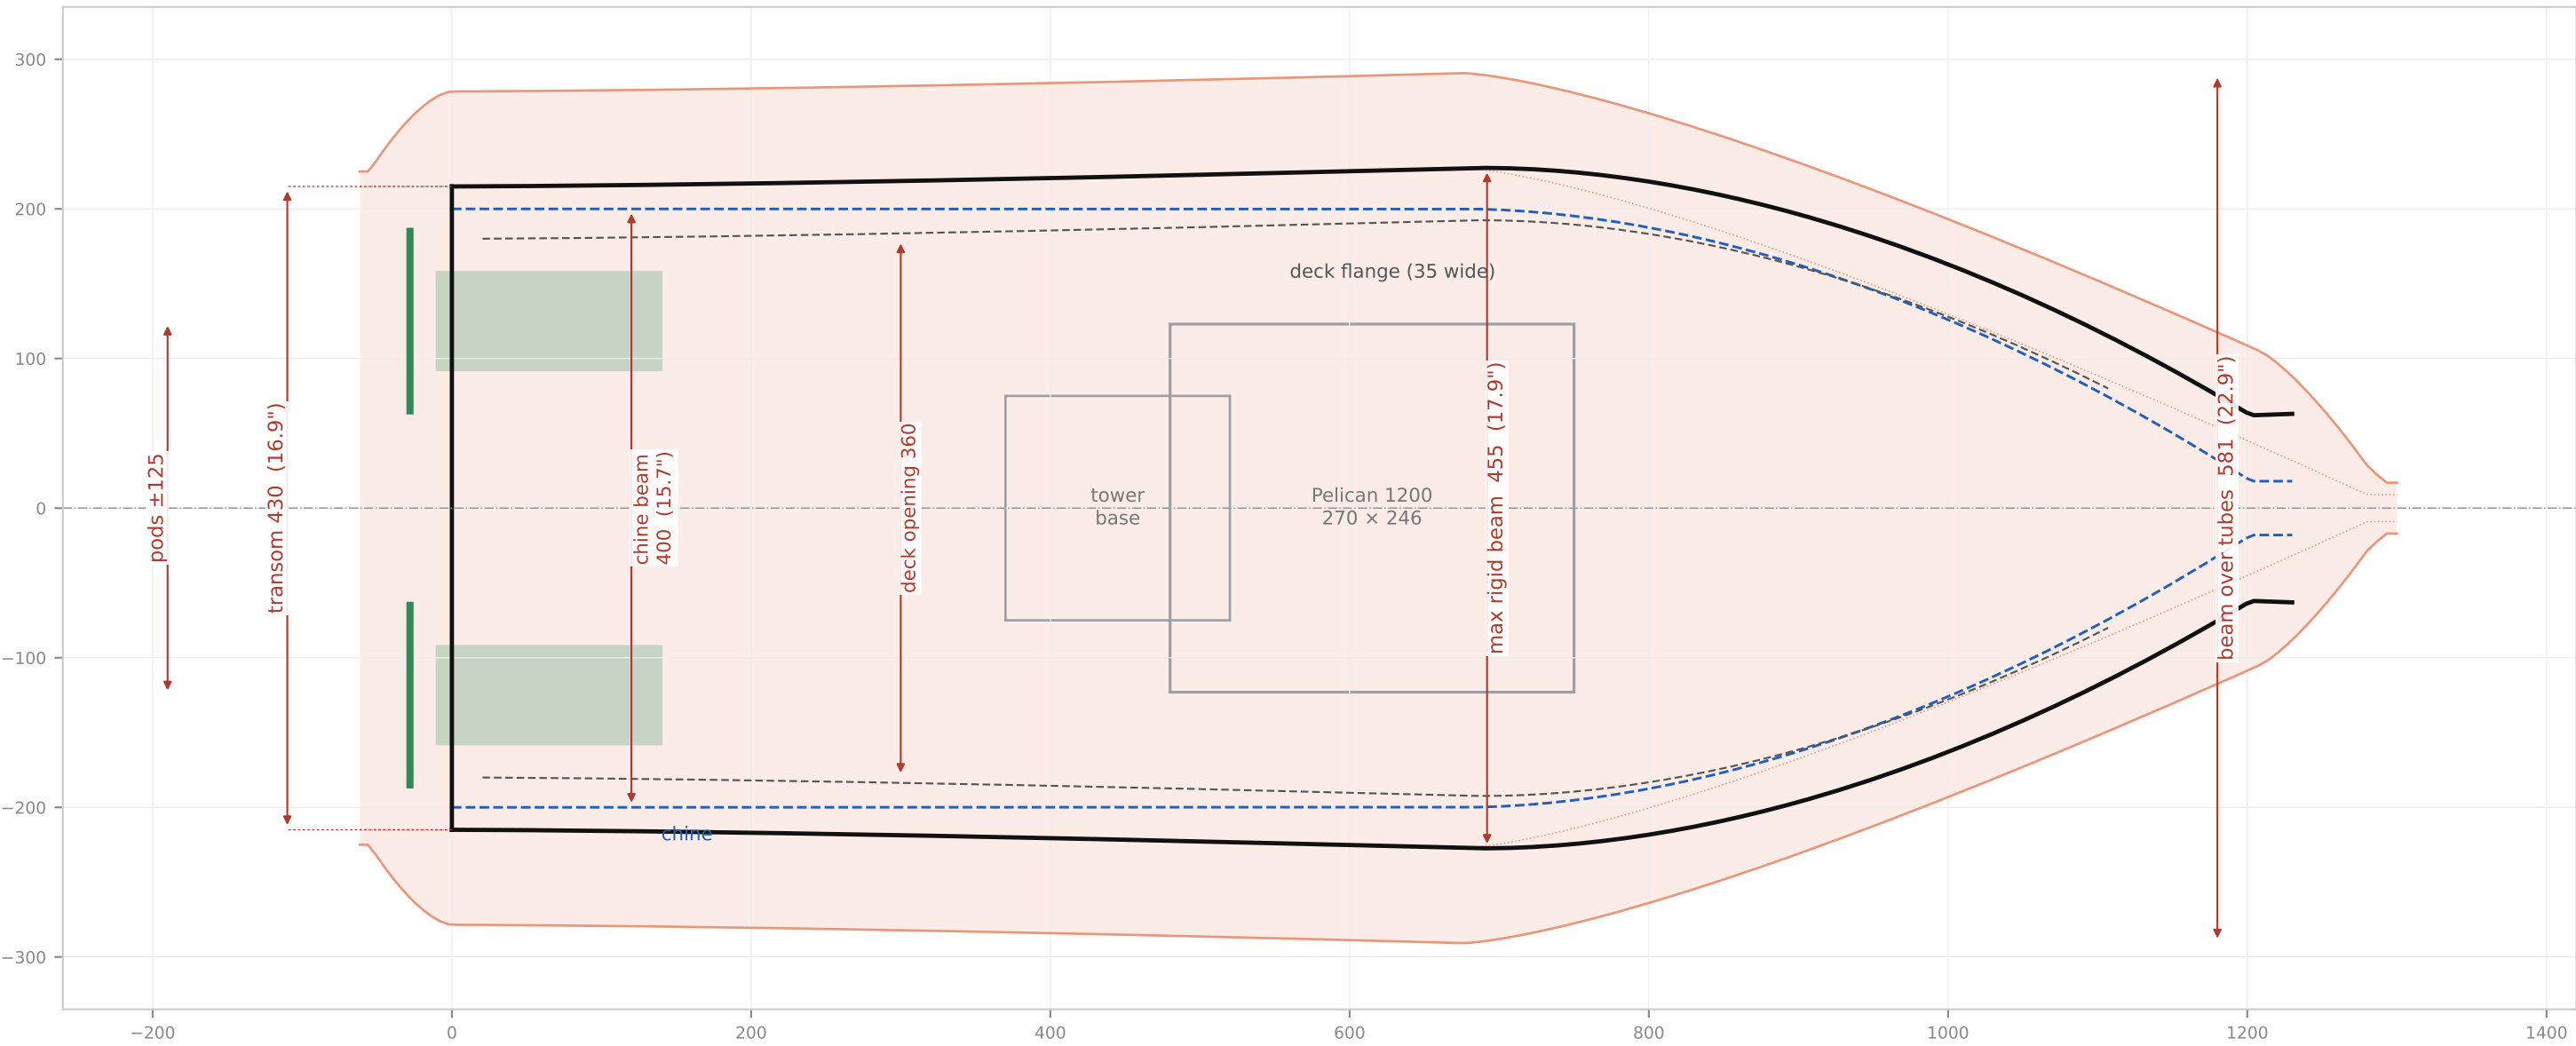

SECTION AT MIDSHIPS (x = 615)

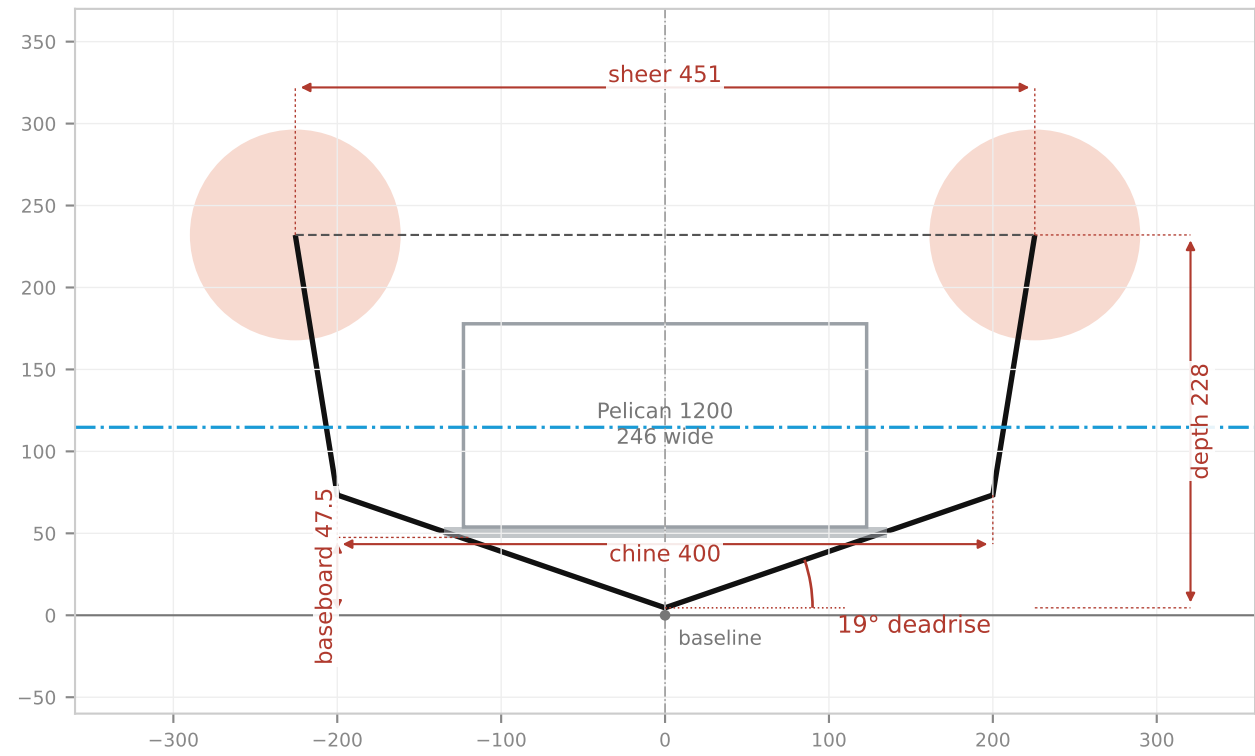

LENGTH & BEAM

LOA hull / over tubes	1230 / 1362	(48.4" / 53.6")
Chine beam / max rigid beam / over tubes	400 / 455 / 581	(22.9"; 591 over rub strake)
L / B (chine)	3.08	

DEPTH & DRAFT

Depth @ transom / max height	198.2 / 308.2	
Draft @ 62 lb / to prop tips	114.7 / 198.7	(4.5" / 7.8")
Freeboard @ transom (to rigid sheer)	83.5	

SHAPE

Deadrise	16° to 35% L0A → 26° at 85% → 40° at stem
Keel	straight for aft 55% (5 mm rise), then +200 to stem
Sheer rise / topside flare	110 mm to bow / 15 mm aft → 45 mm fwd
Hull shell	3 mm PETG + 1.2 mm glass skin = 4.2; transom 16

PAYLOAD & PROPULSION

LCG	430 fwd of transom (35% L0A)
Pods / props	±125 off CL, axis 24 below baseline, Ø120, 28 aft of transom
Baseboard / Pelican	h 47.5, 1/4" ply / x 480–750
Tubes	Ø127 (5"), centred on the sheer, 62 aft of transom

BINDING CONSTRAINTS

Printer Z (H2D 325)	hull height 308 → 17 mm spare
Prop tip vs chine	185 vs 200 → 15 mm spare
Pod crown to hull bottom	27.5 mm – all the bracket gets
Pelican in the V	baseboard height set by where the V fits 246 mm