SMART TRAFFIC MANAGEMENT SYSTEM-DEVELOPMENT PART1

Creating a basic Smart Traffic Management system using the Wokwi Simulator with Arduino involves simulating sensors, traffic lights, and vehicles to demonstrate how the system would work in a real-world scenario. Here's a simplified example to help you get started:

- **Components Needed:**
- 1. **Arduino Board (e.g., Arduino Uno, Nano, or ESP8266):** This will serve as the core controller for your traffic management system.
- 2. **LEDs (Red, Yellow, and Green):** These will simulate traffic lights.
- 3. **Ultrasonic Sensors:** To simulate vehicle presence detectors.
- 4. **Servo Motor:** To control a gate or barrier that opens and closes the road.
- 5. **Breadboard and Jumper Wires:** To connect and prototype the components.
- **Steps to Create the Smart Traffic Management System:**
- 1. **Hardware Setup:**
 - Connect the LEDs to appropriate pins on the Arduino to simulate traffic lights.
 - Connect the ultrasonic sensors to the Arduino to simulate vehicle presence detectors.
 - Connect the servo motor to the Arduino to simulate a gate or barrier.
- 2. **Programming the Arduino:**
 - Write Arduino code to control the behavior of the traffic lights, sensors, and gate.
- Use ultrasonic sensors to detect the presence of vehicles and change the state of traffic lights accordingly (e.g., red light when a vehicle is detected).
 - Simulate the traffic light sequence (e.g., red, green, yellow) based on timing or sensor inputs.
 - Use the servo motor to control the gate's opening and closing based on sensor inputs.
 - Implement any additional logic, such as pedestrian crossings or timers.

```
**Program**

`cpp

const int mainRoadRedPin = 2;

const int mainRoadGreenPin = 3;

const int sideRoadRedPin = 4;

const int sideRoadGreenPin = 5;

const int mainRoadSensorPin = 6;
```


```
const int sideRoadSensorPin = 7;
void setup() {
 pinMode(mainRoadRedPin, OUTPUT);
 pinMode(mainRoadGreenPin, OUTPUT);
 pinMode(sideRoadRedPin, OUTPUT);
 pinMode(sideRoadGreenPin, OUTPUT);
 pinMode(mainRoadSensorPin, INPUT PULLUP);
 pinMode(sideRoadSensorPin, INPUT_PULLUP);
}
void loop() {
 // Check if there are vehicles on the main road
if (digitalRead(mainRoadSensorPin) == LOW) {
  // Main road has vehicles, so stop side road traffic
  digitalWrite(mainRoadRedPin, LOW);
  digitalWrite(mainRoadGreenPin, HIGH);
  digitalWrite(sideRoadRedPin, HIGH);
  digitalWrite(sideRoadGreenPin, LOW);
 } else if (digitalRead(sideRoadSensorPin) == LOW) {
  // Side road has vehicles, so stop main road traffic
  digitalWrite(mainRoadRedPin, HIGH);
  digitalWrite(mainRoadGreenPin, LOW);
  digitalWrite(sideRoadRedPin, LOW);
  digitalWrite(sideRoadGreenPin, HIGH);
 } else {
  // No vehicles, all lights are red (4-way stop)
  digitalWrite(mainRoadRedPin, LOW);
  digitalWrite(mainRoadGreenPin, HIGH);
  digitalWrite(sideRoadRedPin, LOW);
  digitalWrite(sideRoadGreenPin, HIGH);
}
}
```

3. **Simulation on Wokwi:**


- Go to the Wokwi platform (wokwi.com) and create an account if you don't have one.
- Set up a new Arduino simulation project.
- Build the virtual circuit in the Wokwi simulator, replicating your hardware setup virtually.
- Upload your Arduino code to the virtual Arduino board.
- Test and simulate the traffic management system to see how it behaves.

4. **Simulation Interactions:**

- In the simulation, you can interact with the virtual traffic management system to observe its behavior. For example, you can:
 - Simulate vehicles approaching the ultrasonic sensors to trigger traffic light changes.
 - Toggle the state of the traffic lights.
 - Manually control the servo motor to open and close the gate.

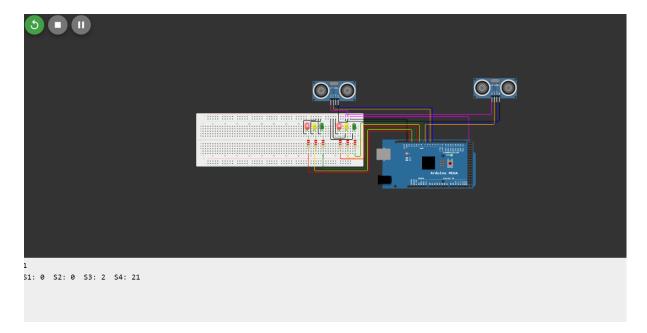

a.output

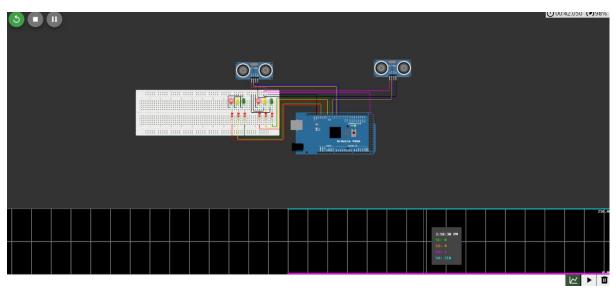

b.simulation

- 5. **Observations and Improvements:**
 - Observe how your traffic management system behaves in different scenarios.
- Make any necessary improvements or adjustments to the code and simulation to better simulate real-world conditions.

This is a basic example to get you started. In a real-world implementation, you would have more complex sensors, a more intricate traffic light control system, and integration with a central management system. Additionally, you could connect your system to a mobile application or a web interface for remote monitoring and control.