



Messenger Helios

39.2025

Content

General information	1
Standard features and options	2
How to order	2
System drawings	3
Text / element size – routing	4
Warranty	5
Maintenance	5

General information

Messenger Helios is part of the Messenger Exterior sign system. Messenger Helios is an innovative, off-grid, solar-powered monolith developed by Modulex, which reduces the energy consumption over time and simplifies the installation of the signs. Panels are removable to make future update of the signs simple and cost effective.

The monoliths are in thickness 104 mm [4.1"], which gives the possibility of combining both Messenger signs without light, Messenger monoliths with access to electricity and Messenger Helios powered by solar energy. All with the same look and design.

Messenger is an exterior sign system comprising wall signs and monoliths with front interchangeable text panels as well as pictogram signs, which can be fitted on walls and as well as on legs for fitting on ground sleeve or concrete foundation.

Messenger is a relatively narrow sign system in a flat design giving the signs personality and individuality. The monoliths are delivered in two thicknesses (53mm/104mm)[2.1/4.1]. This is not a free option, but a result of the actual configuration, which gives the monolith a slim and elegant design without making it too thin. The monoliths

can be fitted in ground sleeve or concrete foundation (depending on the sign dimension and wind load category), which makes the sign installation flexible.

Size specification

Throughout this document measurements will be given in both millimetres and inches. The metric measurements are exact whereas the English standard is calculated and therefore shown in brackets: 25.4 [1.0]

Standard features and options

Typical use

- Main Site ID
- Site Entrance ID
- Site Overview map
- Site Directory

Material

- Panels in 2 mm [0.08"] aluminium plate-aluminium alloy EN 5052 H12
- Frame in extruded aluminium profile

Surface

- Panels can be painted in any Modulex colour.
- Profiles for the frame are painted in MX16 colour

Ground sleeve and concrete flange

- Galvanized welded iron

Graphic methods

- Vinyl graphics
- ECO-print
- UV-print

LED

- Sloan Poster Box Slim 2
- IP 66
- LED Lifetime > 50.000 hours
- LED warranty 5 years
- Watt consumption 1,6 Watt

Solar panels, solar charge controller and batteries:


- The solar panels are incorporated in the aluminium panels.
- The solar panels are 800x250 mm [31.5x9.8"].
- The panels come together with a solar charge controller, which must be installed inside the monolith together with the necessary number of batteries.

How to order


A standard assortment is created in Modulex Global Sign Family and can be ordered in WOT.

Small details in the text and graphic on the illuminated panels can be made with translucent foil or UV-print directly onto the 3 mm [0.12"] translucent acrylic.

Messenger Helios monolith in 2 sizes with visible batteries.

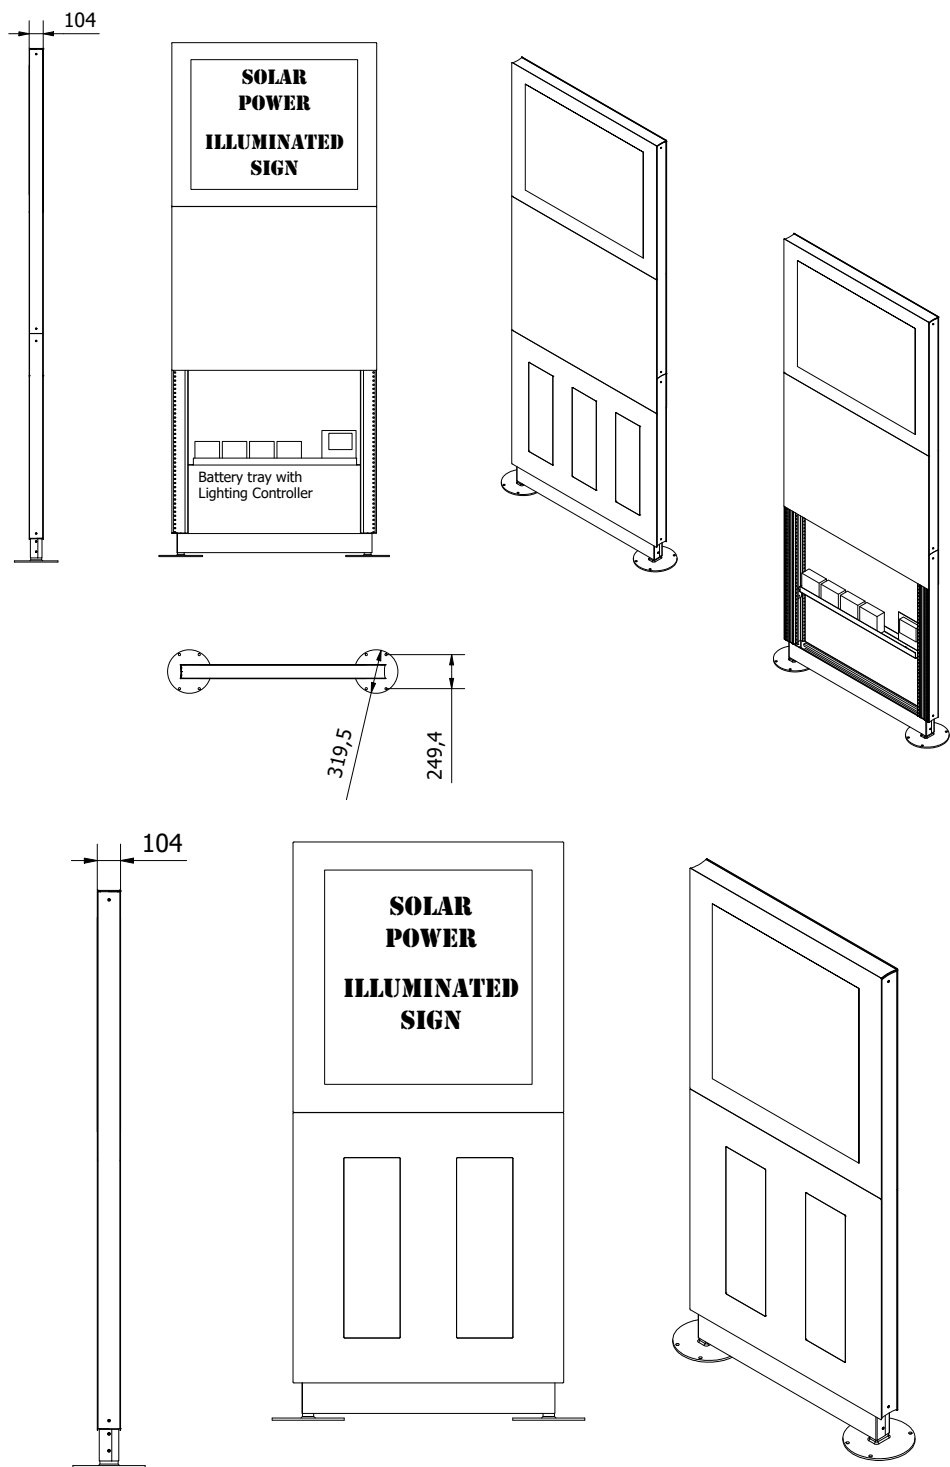

Text / element size – routing

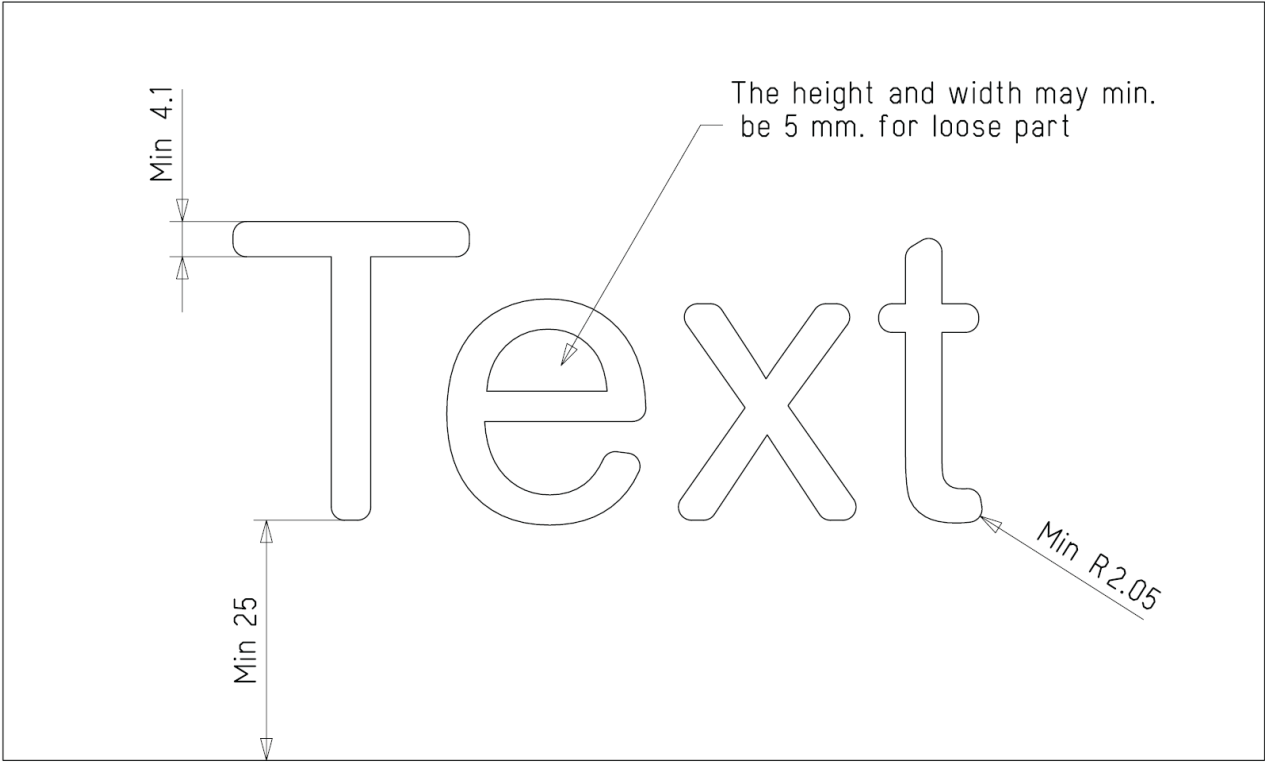

Warranty

- 2-year production warranty on all parts
 - 10-year supplementation guarantee
- (The supplementation guarantee applies to all articles that are produced, marketed and delivered by Modulex A/S. Within 10 years of delivery by Modulex A/S of products for a main/first order, Modulex A/S guarantees to be able to make supplementary deliveries of products with a similar functionality and design (shape, colour, typography and graphics) as delivered under the main order, unless otherwise specifically stated in Modulex A/S' offer or order confirmation.
- [As for third party products Modulex A/S grants the same supplementary guarantee as the producer.])

Maintenance

- Use a soft cloth moistened with a mild window detergent for painted surfaces

Modulex Contact Info

Modulex A/S
Kløvervej 95 A
DK-7190 Billund
Denmark

Tel.: +45 7219 3000

Mail: info@modulexbillund.com
Web: www.modulex.com/billund