PACK LitzWire

RUPATEX®

RUPATEX® class B or class F with triple insulation will revolutionize your transformer design.

Maximize safety, minimize costs

Technical and economic benefits:

- Class B and class F
- Tinned by solder dipping, mechanical stripping unnecessary
- Insulation between primary and secondary winding not required
- Creepage and leakage distances are included in the wire
- Considerably faster winding time
- Small quantities available
- Different colours available on request

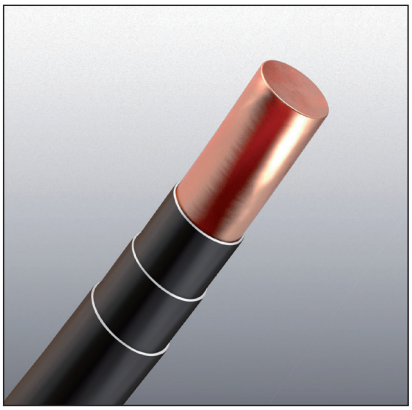

Examples of application:

- HF-transformers
- HF-chokes
- Switch mode power supplies

Construction:

- Magnet wire (class B und class F)
- Tinned copper wire (class Fmed.)
- 0,10-1,00 mm (38-18 AWG) + 3 layers ETFE (Tefzel®)
- Other diameters available on request

Diameter	External diameter	Article No. class B	Article No. class F
0.10 mm / 38 AWG	0.30 mm	80-0001	85-0019
0.12 mm / 36 AWG	0.32 mm	80-0002	85-0020
0.14 mm / 35 AWG	0.34 mm	80-0003	85-0021
0.15 mm	0.35 mm	80-0004	85-0022
0.16 mm/ 34 AWG	0.36 mm	80-0005	85-0023
0.18 mm / 33 AWG	0.38 mm	80-0006	85-0024
0.20 mm / 32 AWG	0.40 mm	80-0007	85-0001
0.22 mm / 31 AWG	0.42 mm	80-0008	85-0025
0.24 mm	0.44 mm	80-0009	85-0026
0.25 mm / 30 AWG	0.45 mm	80-0010	85-0002
0.28 mm / 29 AWG	0.48 mm	80-0011	85-0027
0.30 mm	0.50 mm	80-0012	85-0003
0.32 mm / 28 AWG	0.52 mm	80-0013	85-0004
0.35 mm / 27 AWG	0.55 mm	80-0014	85-0005
0.40 mm / 26 AWG	0.60 mm	80-0015	85-0006
0.45 mm / 25 AWG	0.65 mm	80-0016	85-0007
0.50 mm / 24 AWG	0.70 mm	80-0017	85-0008
0.55 mm	0.75 mm	80-0018	85-0009
0.60 mm	0.80 mm	80-0019	85-0010
0.65 mm	0.85 mm	80-0020	85-0011
0.70 mm / 21 AWG	0.90 mm	80-0021	85-0012
0.75 mm	0.95 mm	80-0022	85-0013
0.80 mm / 20 AWG	1.00 mm	80-0023	85-0014
0.85 mm	1.05 mm	80-0024	85-0015
0.90 mm / 19 AWG	1.10 mm	80-0025	85-0016
1.00 mm / 18 AWG	1.20 mm	80-0026	85-0017

UL-no.: E257248
IEC 60950

VDE Reg-no. D254:
DIN EN 60950-1
DIN EN 60065
DIN EN 61558-1
DIN EN 61558-2-16
DIN EN 60601

Working voltage:
max. 1000 Vrms
max. 1410 Vpeak

©Registered trademark for DuPont company

Rudolf Pack GmbH & Co. KG
Am Bäuweg 9-11
D-51645 Gummersbach-Derschlag
Telefon: +49 (0) 22 61 / 95 67-0
Telefax: +49 (0) 22 61 / 95 67-67
E-Mail: info@packlitzwire.com
www.packlitzwire.com

Anhang C
(informativ)

Elektrischer Widerstand

Die Werte für den Nennwiderstand in Tabelle C.1 werden nur zur Information angegeben. Sie werden aus dem Nenndurchmesser des Leiters und einem spezifischen Nennwiderstand von 1/58,5 $\Omega\ mm^2\ m^{-1}$ berechnet.

Die Mindest- und Höchstwerte des Widerstandes für Leiternenndurchmesser über 0,071 mm bis einschließlich 1,000 mm werden nach B.2 Anhang B berechnet.

Tabelle C.1 – Elektrischer Widerstand – Nenndurchmesser des Leiters über 0,063 mm bis einschließlich 1,000 mm (1 von 2)

Nenndurchmesser des Leiters	Widerstand bei 20 °C Ω/m		
mm	Mindestwert	Nennwert	Höchstwert
0,018		67,18	
0,020		54,41	
0,022		44,97	
0,025		34,82	
0,028		27,76	
0,032		21,25	
0,036		16,79	
0,040		13,60	
0,045		10,75	
0,050		8,706	
0,056		6,940	
0,063		5,484	
0,071		4,318	
0,080	3,133	3,401	3,703
0,090	2,495	2,687	2,900
0,100	2,034	2,176	2,333
0,112	1,632	1,735	1,848
0,125	1,317	1,393	1,475
0,140	1,055	1,110	1,170
0,160	0,812 2	0,850 2	0,880 6
0,180	0,644 4	0,671 8	0,700 7
0,200	0,523 7	0,544 1	0,565 7
0,224	0,418 8	0,433 8	0,449 5
0,250	0,334 5	0,348 2	0,362 8
0,280	0,267 6	0,277 6	0,288 2

Tabelle C.1 (2 von 2)

Nenndurchmesser des Leiters	Widerstand bei 20 °C Ω/m		
mm	**Mindestwert**	**Nennwert**	**Höchstwert**
0,315	0,212 1	0,219 3	0,227 0
0,355	0,167 4	0,172 7	0,178 2
0,400	0,131 6	0,136 0	0,140 7
0,450	0,104 2	0,107 5	0,110 9
0,500	0,084 62	0,087 06	0,089 59
0,560	0,067 36	0,069 40	0,071 53
0,630	0,053 35	0,054 84	0,056 38
0,710	0,041 98	0,043 18	0,044 42
0,800	0,033 05	0,034 01	0,035 00
0,900	0,026 12	0,026 87	0,027 65
1,000	0,021 16	0,021 76	0,022 40
1,120		0,017 35	
1,250		0,013 93	
1,400		0,011 10	
1,600		0,008 502	
1,800		0,006 718	
2,000		0,005 441	
2,240		0,004 338	
2,500		0,003 482	
2,800		0,002 776	
3,150		0,002 193	
3,550		0,001 727	
4,000		0,001 360	
4,500		0,001 075	
5,000		0,000 870 6	