



## 1. Description

### 1.1. Project

Project Name	my_project
Board Name	STM32F411E-DISCO
Generated with:	STM32CubeMX 6.4.0
Date	04/25/2022


### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411VETx
MCU Package	LQFP100
MCU Pin number	100

### 1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

## 2. Pinout Configuration

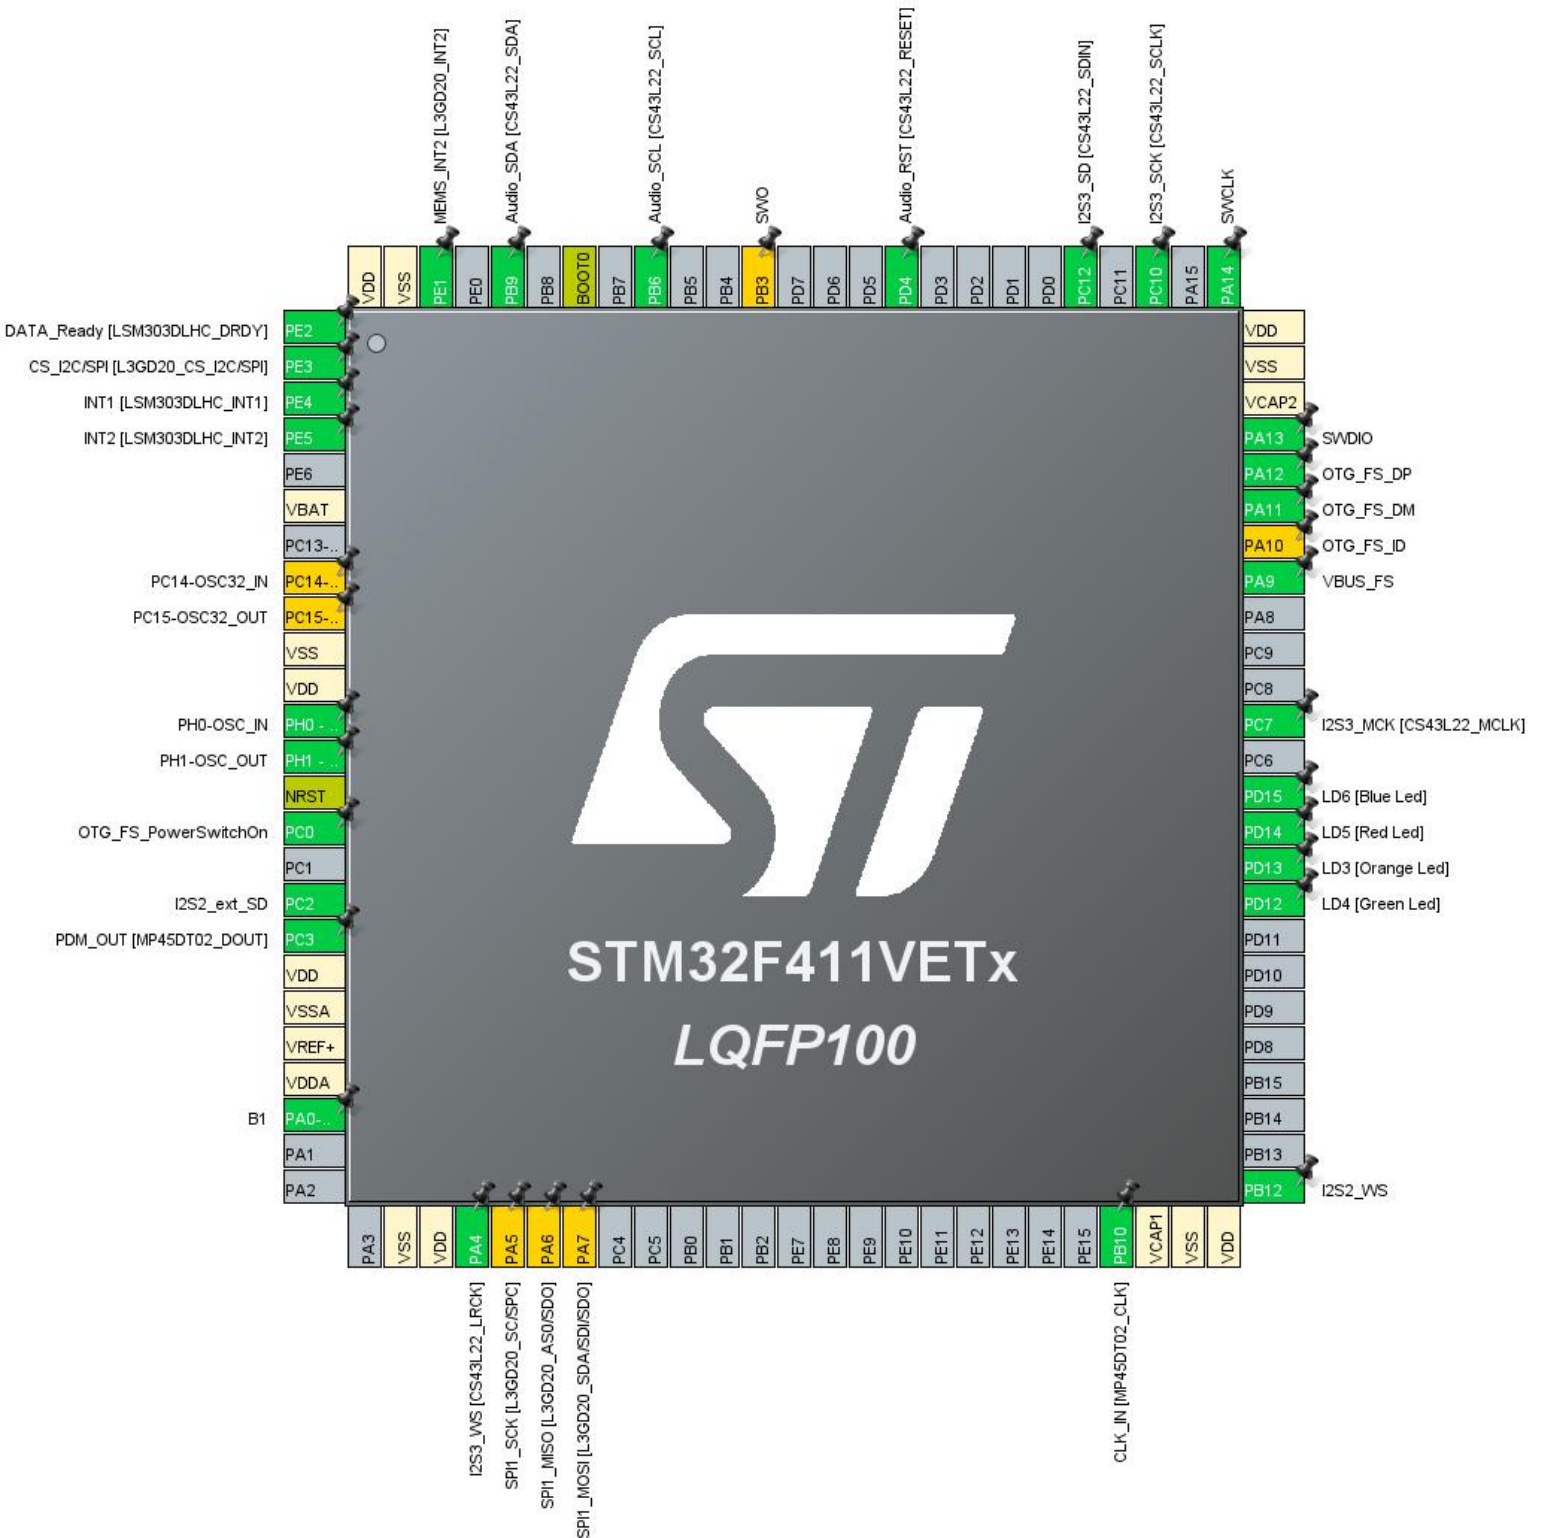

### 3. Pins Configuration


Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2 *	I/O	GPIO_Input	DATA_Ready [LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
3	PE4	I/O	GPIO_EXTI4	INT1 [LSM303DLHC_INT1]
4	PE5	I/O	GPIO_EXTI5	INT2 [LSM303DLHC_INT2]
6	VBAT	Power		
8	PC14-OSC32_IN **	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT **	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0 - OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
15	PC0 *	I/O	GPIO_Output	OTG_FS_PowerSwitchOn
17	PC2	I/O	I2S2_ext_SD	
18	PC3	I/O	I2S2_SD	PDM_OUT [MP45DT02_DOUT]
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	GPIO_EXTI0	B1
27	VSS	Power		
28	VDD	Power		
29	PA4	I/O	I2S3_WS	I2S3_WS [CS43L22_LRCK]
30	PA5 **	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SC/SPC]
31	PA6 **	I/O	SPI1_MISO	SPI1_MISO [L3GD20_AS0/SDO]
32	PA7 **	I/O	SPI1_MOSI	SPI1_MOSI [L3GD20_SDA/SDI/SDO]
47	PB10	I/O	I2S2_CK	CLK_IN [MP45DT02_CLK]
48	VCAP1	Power		
49	VSS	Power		
50	VDD	Power		
51	PB12	I/O	I2S2_WS	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
64	PC7	I/O	I2S3_MCK	I2S3_MCK [CS43L22_MCLK]
68	PA9	I/O	USB_OTG_FS_VBUS	VBUS_FS
69	PA10 **	I/O	USB_OTG_FS_ID	OTG_FS_ID
70	PA11	I/O	USB_OTG_FS_DM	OTG_FS_DM
71	PA12	I/O	USB_OTG_FS_DP	OTG_FS_DP
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
78	PC10	I/O	I2S3_CK	I2S3_SCK [CS43L22_SCLK]
80	PC12	I/O	I2S3_SD	I2S3_SD [CS43L22_SDIN]
85	PD4 *	I/O	GPIO_Output	Audio_RST [CS43L22_RESET]
89	PB3 **	I/O	SYS_JTDO-SWO	SWO
92	PB6	I/O	I2C1_SCL	Audio_SCL [CS43L22_SCL]
94	BOOT0	Boot		
96	PB9	I/O	I2C1_SDA	Audio_SDA [CS43L22_SDA]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_INT2]
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

\*\* The pin is affected with a peripheral function but no peripheral mode is activated

## 4. Clock Tree Configuration

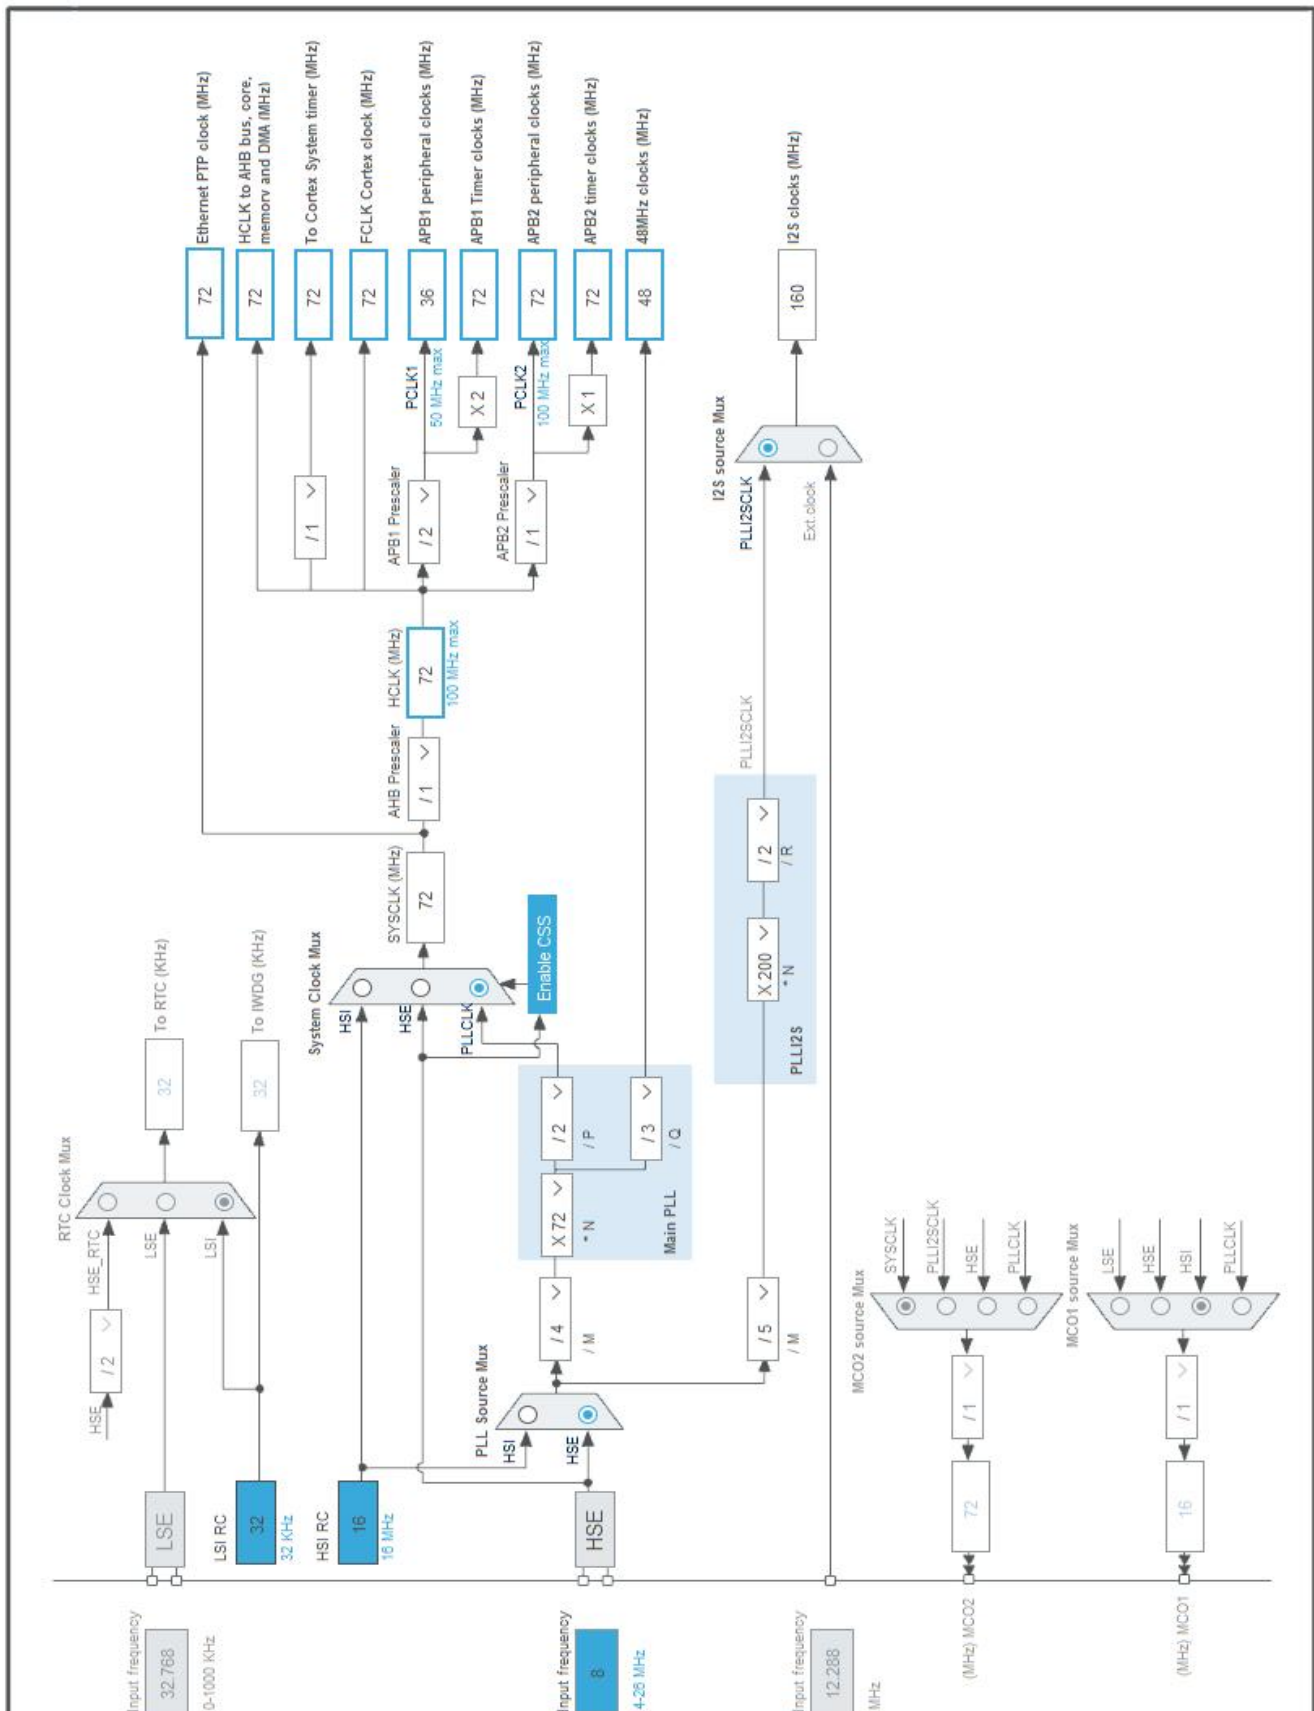

## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	my_project
Project Folder	C:\Users\Marcel\STM32CubeIDE\workspace_1.8.0\my_project
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.26.2
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

### 5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_I2S2_Init	I2S2
4	MX_I2S3_Init	I2S3
5	MX_I2C1_Init	I2C1
6	MX_USB_DEVICE_Init	USB_DEVICE

## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411VETx
Datasheet	DS10314_Rev6

### 6.2. Parameter Selection

Temperature	25
Vdd	1.7

### 6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1




#### 6.4. Sequence

<b>Step</b>	Step1	Step2
<b>Mode</b>	RUN	STOP
<b>Vdd</b>	1.7	1.7
<b>Voltage Source</b>	Battery	Battery
<b>Range</b>	Scale1-High	No Scale
<b>Fetch Type</b>	SRAM	n/a
<b>CPU Frequency</b>	100 MHz	0 Hz
<b>Clock Configuration</b>	HSE PLL	Regulator_LPLV Flash-PwrDwn
<b>Clock Source Frequency</b>	4 MHz	0 Hz
<b>Peripherals</b>		
<b>Additional Cons.</b>	0 mA	0 mA
<b>Average Current</b>	12.7 mA	9 $\mu$ A
<b>Duration</b>	0.1 ms	0.9 ms
<b>DMIPS</b>	125.0	0.0
<b>Ta Max</b>	104.07	105
<b>Category</b>	In DS Table	In DS Table

#### 6.5. Results

Sequence Time	1 ms	Average Current	1.28 mA
Battery Life	3 months, 19 days, 6 hours	Average DMIPS	125.0 DMIPS

#### 6.6. Chart

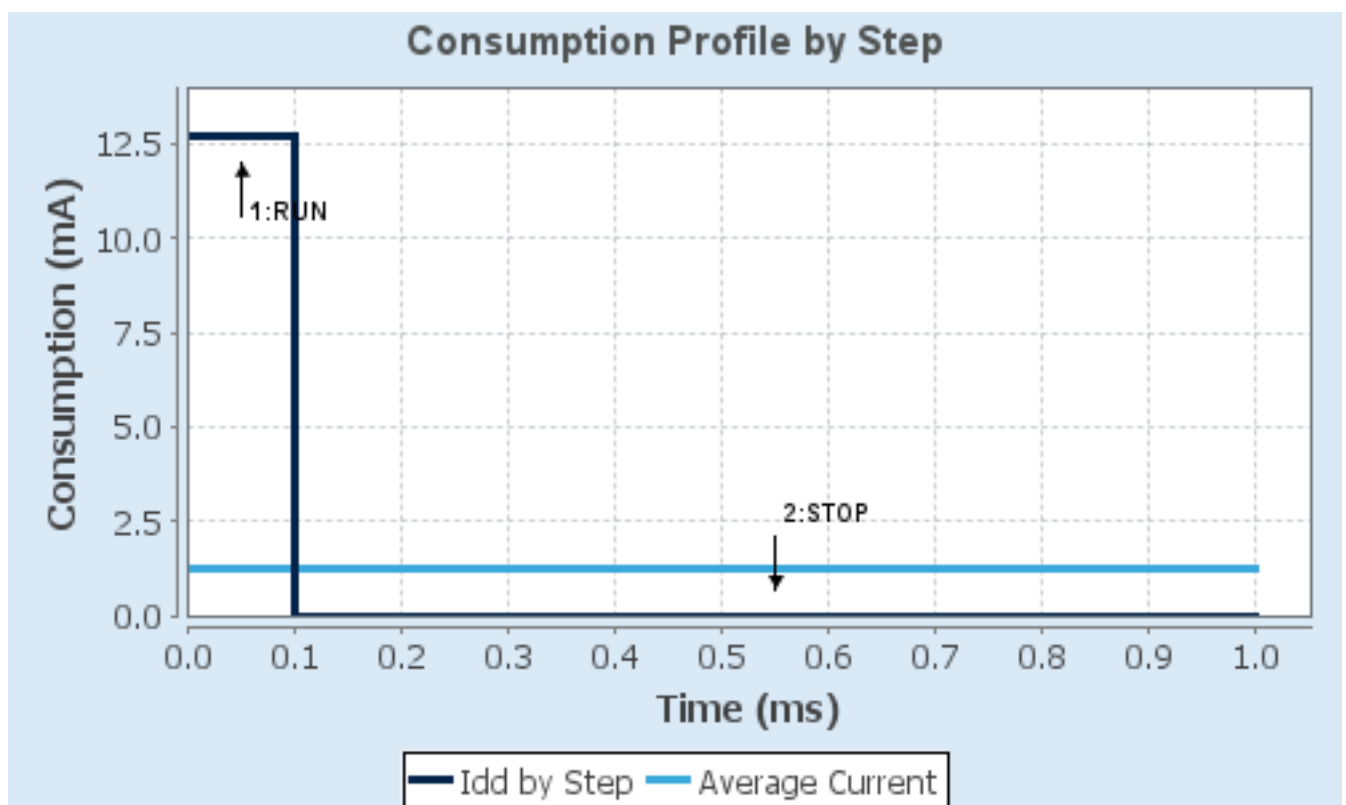

## 7. Peripherals and Middlewares Configuration

### 7.1. I2C1

#### I2C: I2C

##### 7.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 7.2. I2S2

#### Mode: Full-Duplex Master

##### 7.2.1. Parameter Settings:

###### Generic Parameters:

Transmission Mode	Mode Master Transmit
Communication Standard	I2S Philips
Data and Frame Format	16 Bits Data on 16 Bits Frame
Selected Audio Frequency	<b>96 KHz *</b>
Real Audio Frequency	<b>96.153 KHz *</b>
Error between Selected and Real	<b>0.15 % *</b>

###### Clock Parameters:

Clock Source	I2S PLL Clock
Clock Polarity	Low

### 7.3. I2S3

#### Mode: Half-Duplex Master

#### mode: Master Clock Output

##### 7.3.1. Parameter Settings:

#### Generic Parameters:

Transmission Mode	Mode Master Transmit
Communication Standard	I2S Philips
Data and Frame Format	16 Bits Data on 16 Bits Frame
Selected Audio Frequency	<b>96 KHz *</b>
Real Audio Frequency	<b>89.285 KHz *</b>
Error between Selected and Real	<b>-6.99 % *</b>

#### Clock Parameters:

Clock Source	I2S PLL Clock
Clock Polarity	Low

## 7.4. RCC

### High Speed Clock (HSE): Crystal/Ceramic Resonator

#### 7.4.1. Parameter Settings:

#### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

#### RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

#### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

## 7.5. SYS

### Debug: Serial Wire

### Timebase Source: SysTick

## 7.6. USB\_OTG\_FS

## Mode: Device\_Only

## mode: Activate\_VBUS

### 7.6.1. Parameter Settings:

Speed	Device Full Speed 12MBit/s
Low power	Disabled
Link Power Management	Disabled
VBUS sensing	Enabled
Signal start of frame	Disabled

## 7.7. USB\_DEVICE

### Class For FS IP: Communication Device Class (Virtual Port Com)

#### 7.7.1. Parameter Settings:

##### Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

##### Class Parameters:

USB CDC Rx Buffer Size	2048
USB CDC Tx Buffer Size	2048

#### 7.7.2. Device Descriptor:

##### Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

##### Device Descriptor FS:

PID (Product Identifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

**\* User modified value**

## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	<b>Pull-up *</b>	Low	Audio_SCL [CS43L22_SCL]
	PB9	I2C1_SDA	Alternate Function Open Drain	<b>Pull-up *</b>	Low	Audio_SDA [CS43L22_SDA]
I2S2	PC2	I2S2_ext_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	PDM_OUT [MP45DT02_DOUT]
	PC3	I2S2_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB10	I2S2_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	CLK_IN [MP45DT02_CLK]
	PB12	I2S2_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	
I2S3	PA4	I2S3_WS	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_WS [CS43L22_LRCK]
	PC7	I2S3_MCK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_MCK [CS43L22_MCLK]
	PC10	I2S3_CK	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SCK [CS43L22_SCLK]
	PC12	I2S3_SD	Alternate Function Push Pull	No pull-up and no pull-down	Low	I2S3_SD [CS43L22_SDIN]
RCC	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
USB_OTG_FS	PA9	USB_OTG_FS_VBUS	Input mode	No pull-up and no pull-down	n/a	VBUS_FS
	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High *</b>	OTG_FS_DM
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High *</b>	OTG_FS_DP
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High *</b>	SPI1_SCK [L3GD20_SC/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b>	SPI1_MISO [L3GD20_AS0/SDO]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
					*	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	SPI1_MOSI [L3GD20_SDA/SDI/SDO]
	PA10	USB_OTG_FS_ID	Alternate Function Push Pull	No pull-up and no pull-down	<b>Very High</b> *	OTG_FS_ID
	PB3	SYS_JTDO-SWO	n/a	n/a	<b>n/a</b>	SWO
GPIO	PE2	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	DATA_Ready [LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE4	GPIO_EXTI4	<b>External Event Mode with Rising edge trigger detection *</b>	No pull-up and no pull-down	n/a	INT1 [LSM303DLHC_INT1]
	PE5	GPIO_EXTI5	<b>External Event Mode with Rising edge trigger detection *</b>	No pull-up and no pull-down	n/a	INT2 [LSM303DLHC_INT2]
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	OTG_FS_PowerSwitchOn
	PA0-WKUP	GPIO_EXTI0	<b>External Interrupt Mode with Falling edge trigger detection</b>	No pull-up and no pull-down	n/a	B1
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]
	PD4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	Audio_RST [CS43L22_RESET]
	PE1	GPIO_EXTI1	<b>External Event Mode with Rising edge trigger detection *</b>	No pull-up and no pull-down	n/a	MEMS_INT2 [L3GD20_INT2]

## 8.2. DMA configuration

nothing configured in DMA service



### 8.3. NVIC configuration

#### 8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line0 interrupt	true	0	0
USB On The Go FS global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI2 global interrupt	unused		
SPI3 global interrupt	unused		
FPU global interrupt	unused		

#### 8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line0 interrupt	false	true	true
USB On The Go FS global interrupt	false	true	true

**\* User modified value**

## 9. System Views

### 9.1. Category view

#### 9.1.1. Current

Middleware					
USB_DEVICE ✓					
System Core	Analog	Timers	Connectivity	Multimedia	Computing
DMA			I2C1 ✓	I2S2 ✓	
GPIO ⚠			USB_FS ✓	I2S3 ✓	
IVVIC ✓					
RCC ✓					
SYS ✓					

## 10. Docs & Resources

Type	Link
Datasheet	<a href="http://www.st.com/resource/en/datasheet/DM00115249.pdf">http://www.st.com/resource/en/datasheet/DM00115249.pdf</a>
Reference manual	<a href="http://www.st.com/resource/en/reference_manual/DM00119316.pdf">http://www.st.com/resource/en/reference_manual/DM00119316.pdf</a>
Programming manual	<a href="http://www.st.com/resource/en/programming_manual/DM00046982.pdf">http://www.st.com/resource/en/programming_manual/DM00046982.pdf</a>
Errata sheet	<a href="http://www.st.com/resource/en/errata_sheet/DM00137034.pdf">http://www.st.com/resource/en/errata_sheet/DM00137034.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00167594.pdf">http://www.st.com/resource/en/application_note/CD00167594.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00211314.pdf">http://www.st.com/resource/en/application_note/CD00211314.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00249778.pdf">http://www.st.com/resource/en/application_note/CD00249778.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00259245.pdf">http://www.st.com/resource/en/application_note/CD00259245.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264321.pdf">http://www.st.com/resource/en/application_note/CD00264321.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264342.pdf">http://www.st.com/resource/en/application_note/CD00264342.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264379.pdf">http://www.st.com/resource/en/application_note/CD00264379.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00024853.pdf">http://www.st.com/resource/en/application_note/DM00024853.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00040802.pdf">http://www.st.com/resource/en/application_note/DM00040802.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00040808.pdf">http://www.st.com/resource/en/application_note/DM00040808.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00042534.pdf">http://www.st.com/resource/en/application_note/DM00042534.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00046011.pdf">http://www.st.com/resource/en/application_note/DM00046011.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00072315.pdf">http://www.st.com/resource/en/application_note/DM00072315.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00073742.pdf">http://www.st.com/resource/en/application_note/DM00073742.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00073853.pdf">http://www.st.com/resource/en/application_note/DM00073853.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00080497.pdf">http://www.st.com/resource/en/application_note/DM00080497.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00081379.pdf">http://www.st.com/resource/en/application_note/DM00081379.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00115714.pdf">http://www.st.com/resource/en/application_note/DM00115714.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00129215.pdf">http://www.st.com/resource/en/application_note/DM00129215.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00144612.pdf">http://www.st.com/resource/en/application_note/DM00144612.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00156364.pdf">http://www.st.com/resource/en/application_note/DM00156364.pdf</a>

Application note [http://www.st.com/resource/en/application\\_note/DM00160482.pdf](http://www.st.com/resource/en/application_note/DM00160482.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00213525.pdf](http://www.st.com/resource/en/application_note/DM00213525.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00220769.pdf](http://www.st.com/resource/en/application_note/DM00220769.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00226326.pdf](http://www.st.com/resource/en/application_note/DM00226326.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00236305.pdf](http://www.st.com/resource/en/application_note/DM00236305.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00257177.pdf](http://www.st.com/resource/en/application_note/DM00257177.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00272912.pdf](http://www.st.com/resource/en/application_note/DM00272912.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00281138.pdf](http://www.st.com/resource/en/application_note/DM00281138.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00296349.pdf](http://www.st.com/resource/en/application_note/DM00296349.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00315319.pdf](http://www.st.com/resource/en/application_note/DM00315319.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00325582.pdf](http://www.st.com/resource/en/application_note/DM00325582.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00327191.pdf](http://www.st.com/resource/en/application_note/DM00327191.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00354244.pdf](http://www.st.com/resource/en/application_note/DM00354244.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00380469.pdf](http://www.st.com/resource/en/application_note/DM00380469.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00395696.pdf](http://www.st.com/resource/en/application_note/DM00395696.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00431633.pdf](http://www.st.com/resource/en/application_note/DM00431633.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00493651.pdf](http://www.st.com/resource/en/application_note/DM00493651.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00536349.pdf](http://www.st.com/resource/en/application_note/DM00536349.pdf)  
Application note [http://www.st.com/resource/en/application\\_note/DM00725181.pdf](http://www.st.com/resource/en/application_note/DM00725181.pdf)