



The joint — three nested parts

Cross-section of one rigid↔flexible joint. Silicone is stretched over the spigot, so it never has to bond to the resin.

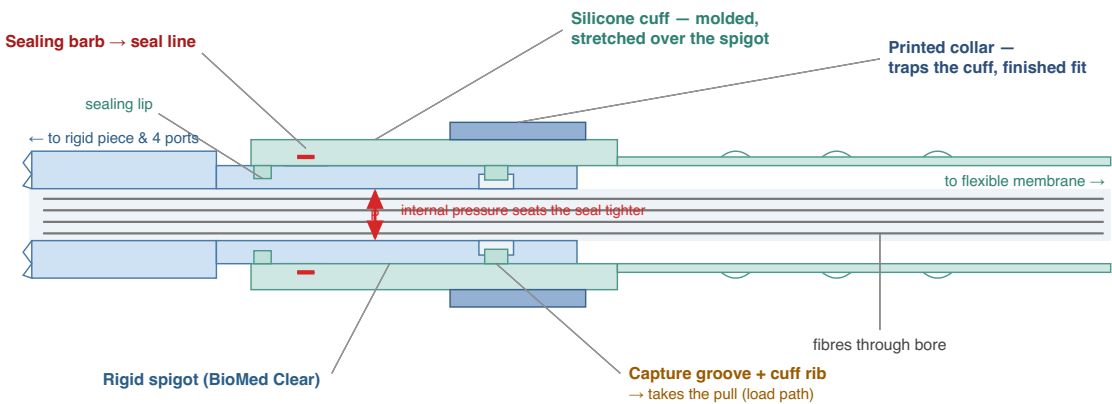

Assembly order

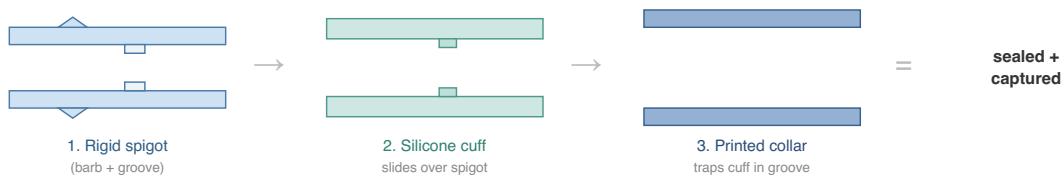

Seal (silicone interference + barb) and load (groove/rib + collar) live on separate features — so 10,000 cycles can't unseat the seal.