


Step 1 Detect lost frames within each wireless datastream

Each MCU frame is sent as 8 buffers over the optical link:



The same datastream over the recording (one row of MCU frames):

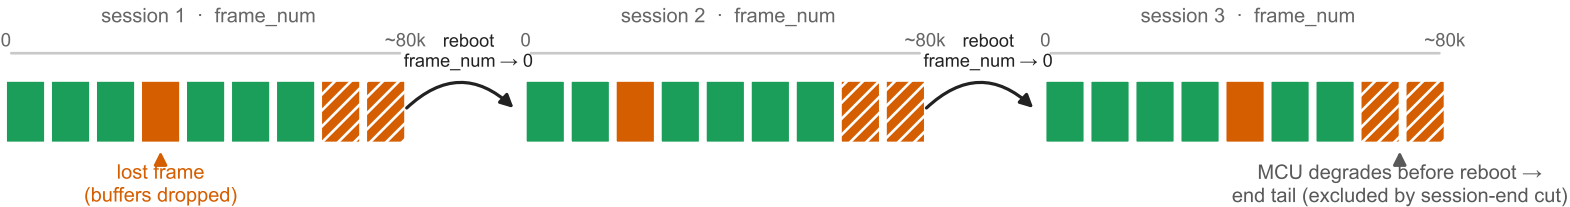

Step 2 Combine: keep a good copy from either datastream

Align both datastreams by MCU frame_num; for each frame keep whichever datastream delivered it. Lost only if BOTH failed.

