

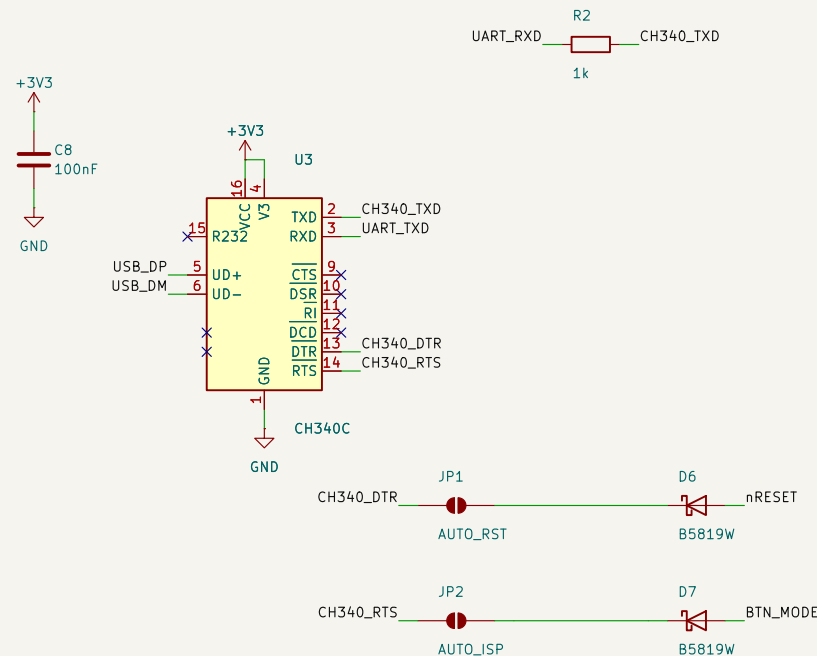
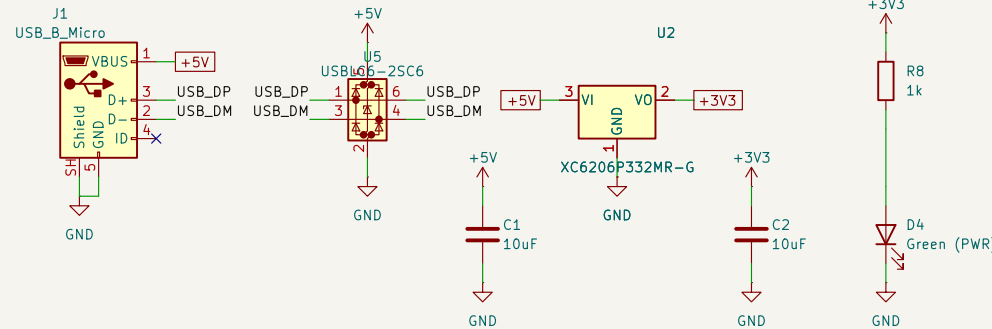
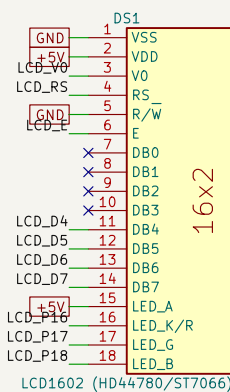




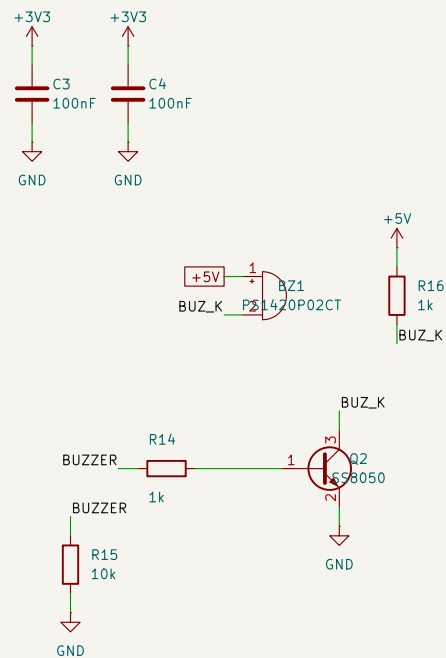


The schematic diagram illustrates the board's power and signal connections. It features two 7-pin headers, J2 and J3. Header J2 is connected to a +3V3 power source (R3, 4k7) and I2C_SCL/I2C_SDA signals. Header J3 is connected to a +3V3 power source (R4, 4k7) and UART_TXD/UART_RXD signals. Ground connections are also shown for both headers.

The diagram shows a 12MHz crystal oscillator circuit. A crystal, labeled Y1 12MHz, is connected between XTAL_IN and XTAL_OUT. The crystal has two pins, 1 and 3, which are connected to XTAL_IN and XTAL_OUT respectively. The other two pins, 2 and 4, are connected to ground. Two 33pF capacitors, C5 and C6, are connected to ground. C5 is connected to XTAL_IN and C6 is connected to XTAL_OUT. The ground connections are labeled GND.

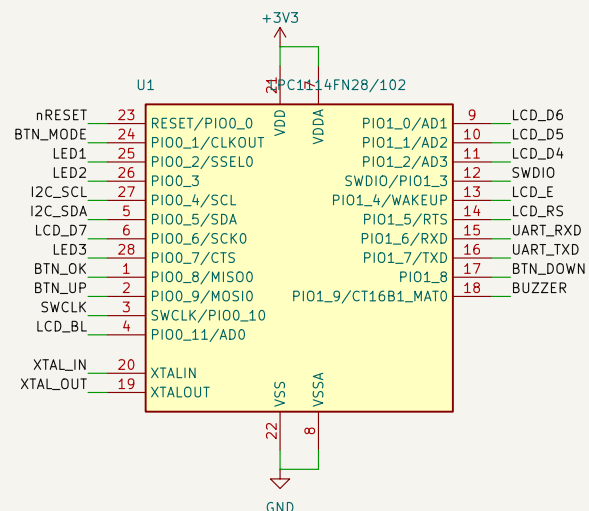

at 3.3V (HD44780/ST7066 VDD = 2.2V).

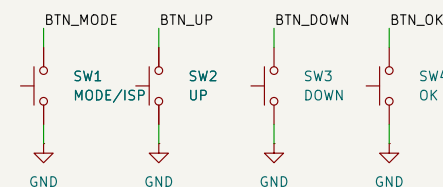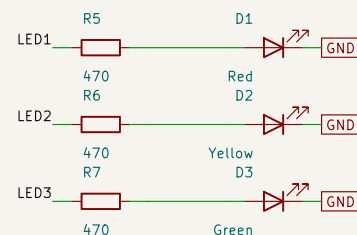

PI00_1 low during reset -> UART ISP bootloader. PI00_11, PI01_0..2 need IOCON FUNC=1 for GPIO.

[illegible]