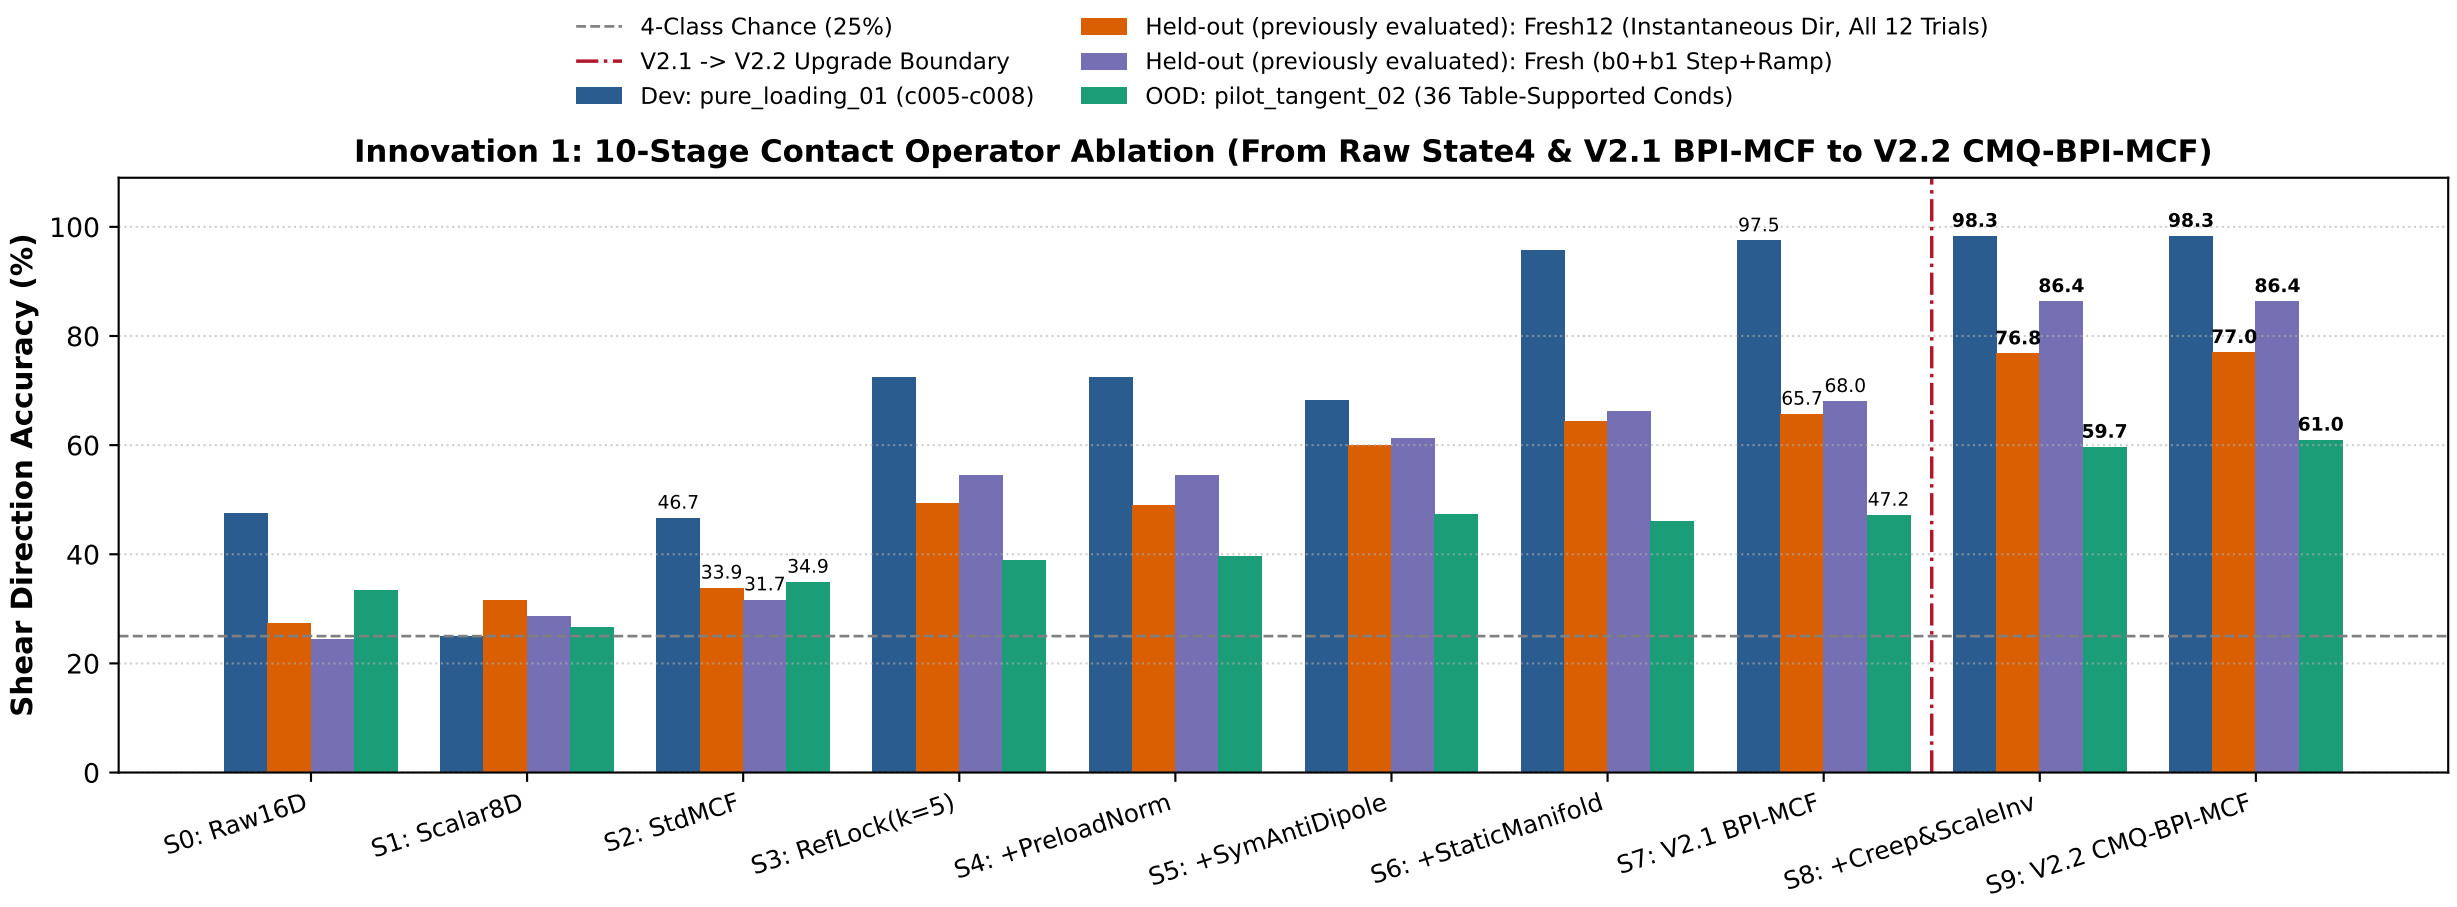
4-Class Chance (25%)
V2.1 -> V2.2 Upgrade Boundary
Dev: pure_loading_01 (c005-c008)
Held-out (previously evaluated): Fresh12 (Instantaneous Dir, All 12 Trials)
Held-out (previously evaluated): Fresh (b0+b1 Step+Ramp)
OOD: pilot_tangent_02 (36 Table-Supported Conds)
Innovation 1: 10-Stage Contact Operator Ablation (From Raw State4 & V2.1 BPI-MCF to V2.2 CMQ-BPI-MCF)
Shear Direction Accuracy (%)
0
20
40
60
80
100
46.7
33.9
31.7
34.9
97.5
65.7
68.0
47.2
98.3
76.8
86.4
59.7
98.3
77.0
86.4
61.0
S0: Raw16D
S1: Scalar8D
S2: StdMCF
S3: RefLock(k=5)
S4: +PreloadNorm
S5: +SymAntiDipole
S6: +StaticManifold
S7: V2.1 BPI-MCF
S8: +Creep&ScaleInv
S9: V2.2 CMQ-BPI-MCF