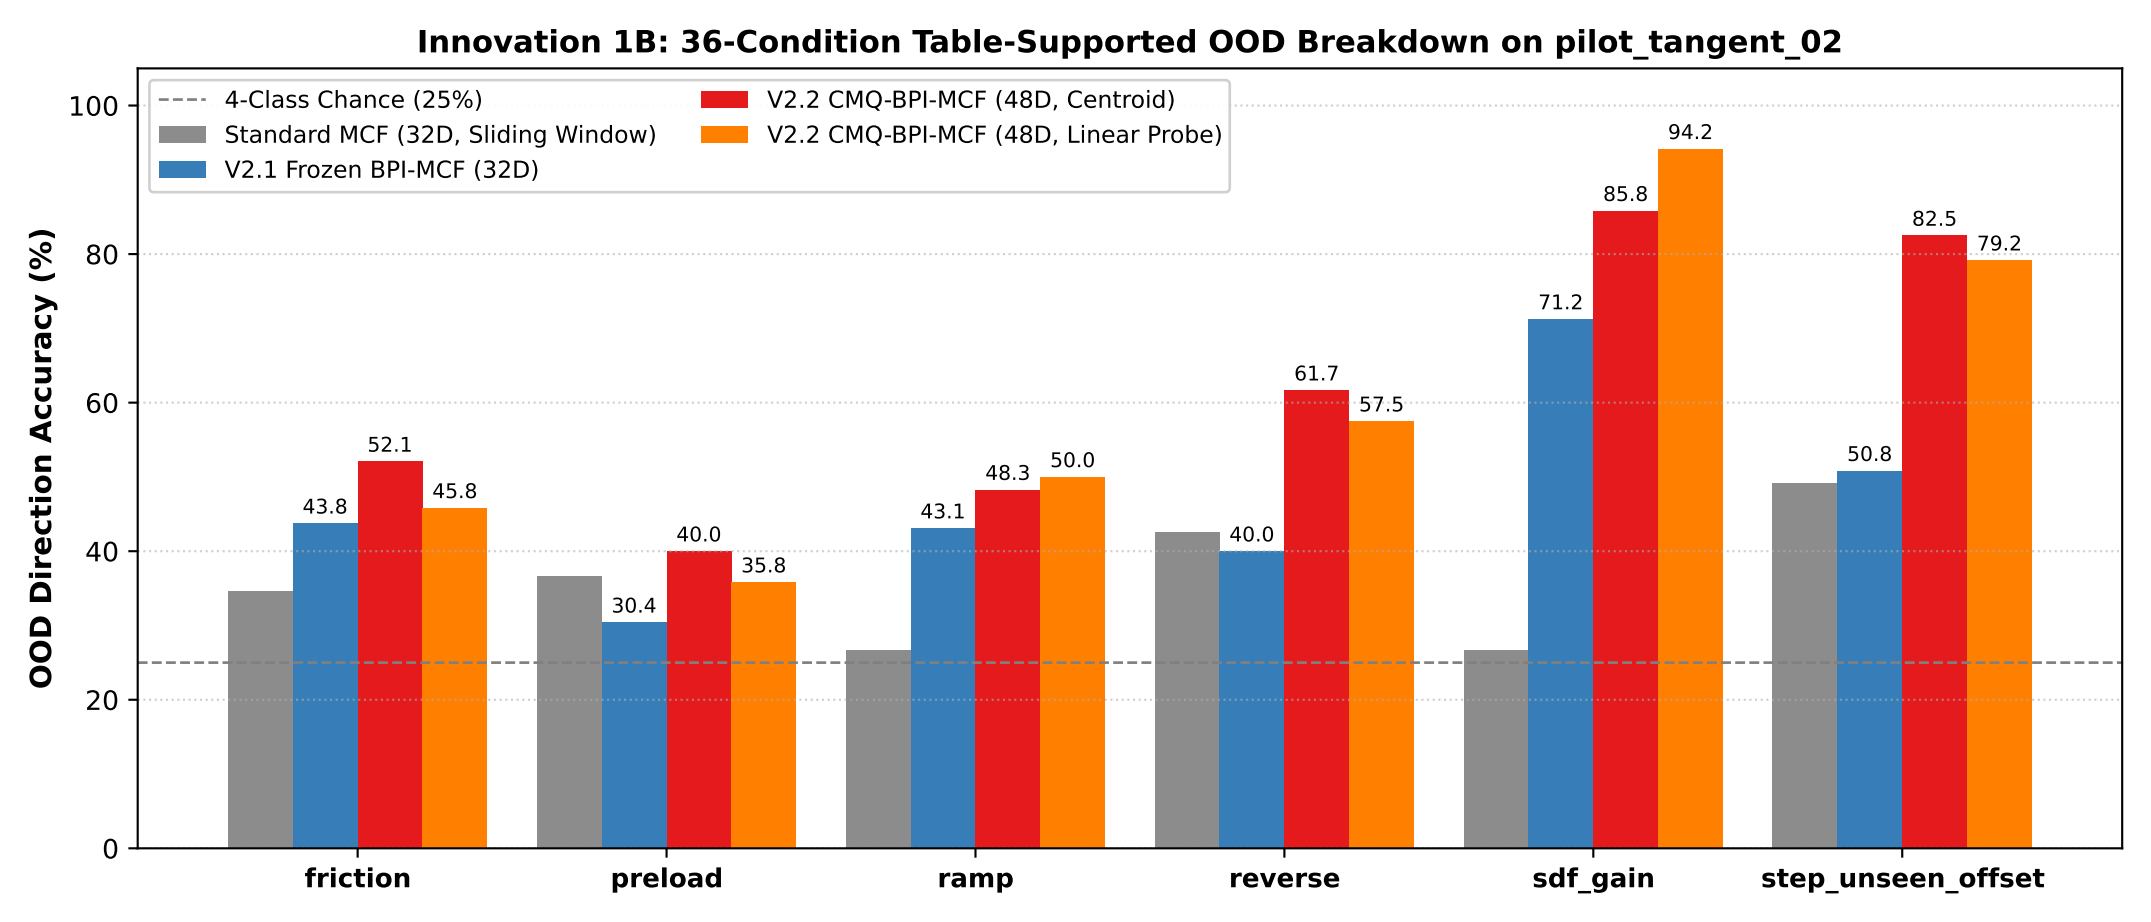
Innovation 1B: 36-Condition Table-Supported OOD Breakdown on pilot_tangent_02
4-Class Chance (25%)
Standard MCF (32D, Sliding Window)
V2.1 Frozen BPI-MCF (32D)
V2.2 CMQ-BPI-MCF (48D, Centroid)
V2.2 CMQ-BPI-MCF (48D, Linear Probe)
OOD Direction Accuracy (%)
0
20
40
60
80
100
43.8
52.1
45.8
30.4
40.0
35.8
43.1
48.3
50.0
40.0
61.7
57.5
71.2
85.8
94.2
50.8
82.5
79.2
friction
preload
ramp
reverse
sdf_gain
step_unseen_offset