




Input supply

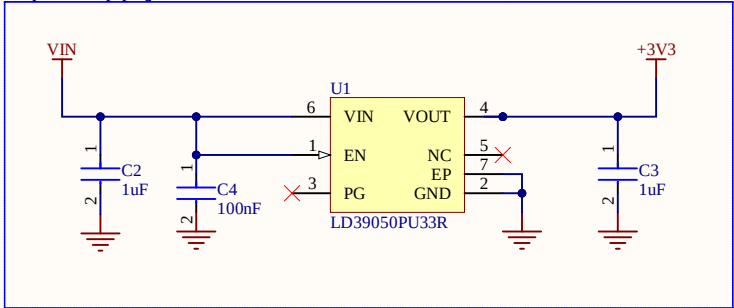


RFM95

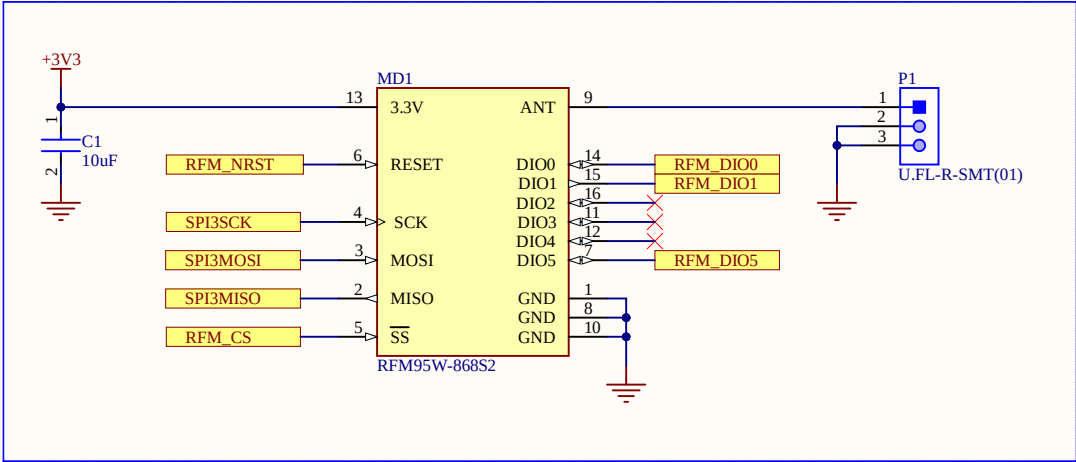

MCU Pinout

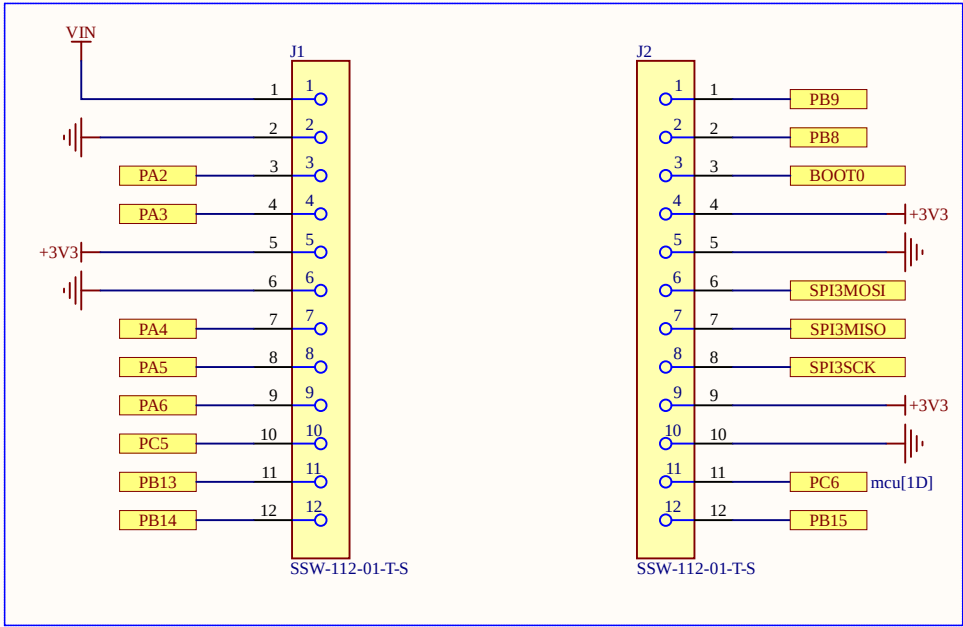

ST-Link Connector

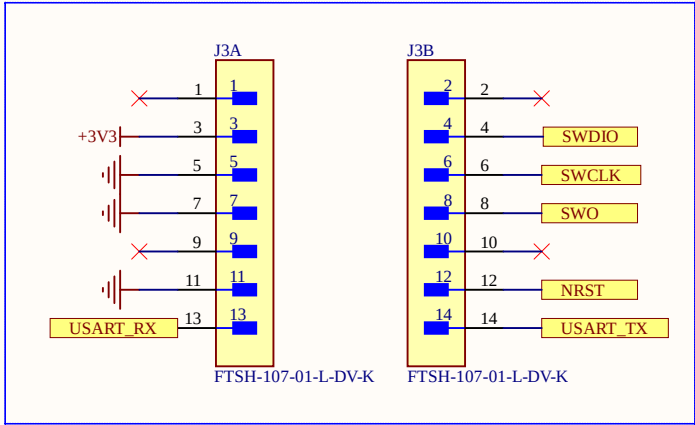

Title LDO supply - RFM95 - External connectors		
Size A4	Number	Revision V1.0
Date: 9/16/2025	Sheet of	
File: supply_rfm_connectors.SchDoc	Drawn By:	

The schematic diagram illustrates the pin connections for the MCU LQFP64 (IC1A). The MCU is shown with its pins and internal connections. The power supply is connected to the VDD_1, VDD_2, VDD_3, VDDUSB, and VBAT pins. The ground connections are made to the GND pins. The control signals NRST and BOOT0 are connected to the corresponding pins. External components include capacitors C5, C6, C7, C8, C9, C10, C11, and C12, a resistor R1, and a switch SW1. The diagram is color-coded: red for power, blue for ground, and yellow for control signals.

MCU LQFP64

MCU Pin	MCU Label	External Component
PA0	14	
PA1	15	
PA2	16	
PA3	17	
PA4	20	
PA5	21	
PA6	22	
PA7	23	
PA8	41	
PA9	42	
PA10	43	
PA11	44	
PA12	45	
PA13	46	
PA14	49	
PA15	50	
PC0	8	
PC1	9	
PC2	10	
PC3	11	
PC4	24	
PC5	25	
PC6	37	
PC7	38	

External Components:

- SWO
- USART TX
- USART RX
- PB8
- PB9
- PB13
- PB14
- PB15
- RFM_CS
- SPI3SCK
- SPI3MISO
- SPI3MOSI
- C13 6.8pF
- C14 6.8pF
- X1 ABS25-32.768KHZ-6-T

Title			MCU (STM32L4)		
Size	Number			Revision	V 1.0
A4					
Date:	9/16/2025			Sheet	of
File:	mcu.SchDoc			Drawn By:	