
(a) Supply distribution and output routing


Full board - top-side projection

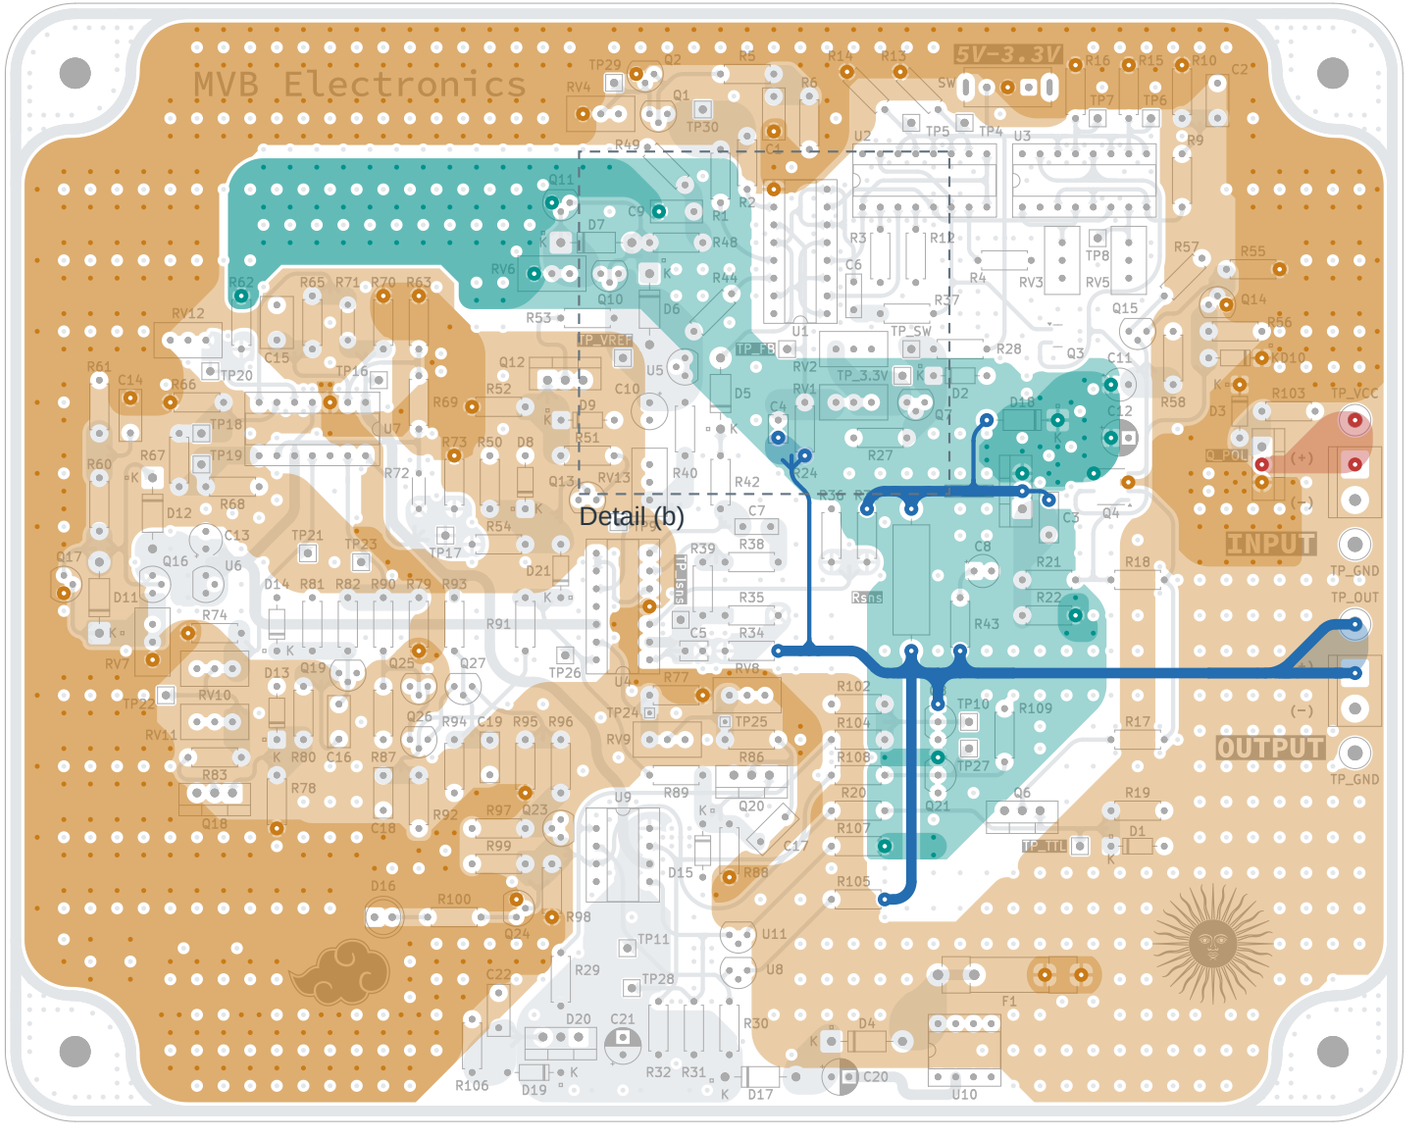

- VCC - input terminal
- VCTRL - startup-circuit output
- VEE - after polarity protection
- Output path - pass device / Rsns / OUT

(b) Feedback and reference detail

Magnified upper-board region

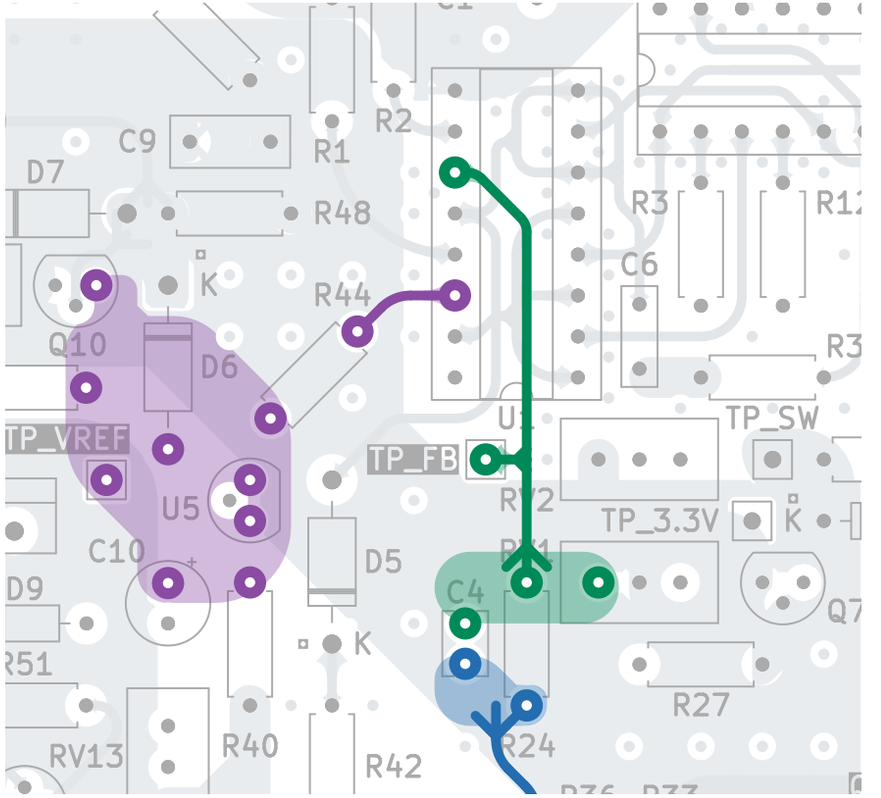

- OUT - output pickup at R24 / C4
- FB - divider to U1 pin 11
- VREF - reference and path through R44

Front and back copper projected together.
Ground fills omitted; other nets shown in gray.
Colored circles mark connected pad centers.
R44 separates VREF from U1 pin 14.
Rsns separates the pass collector from OUT.