
Power-on and input-fault response

5 V mode | Accepted LTspice results | Load: SIM-01 = 50 ohm; SIM-07 = 5 ohm

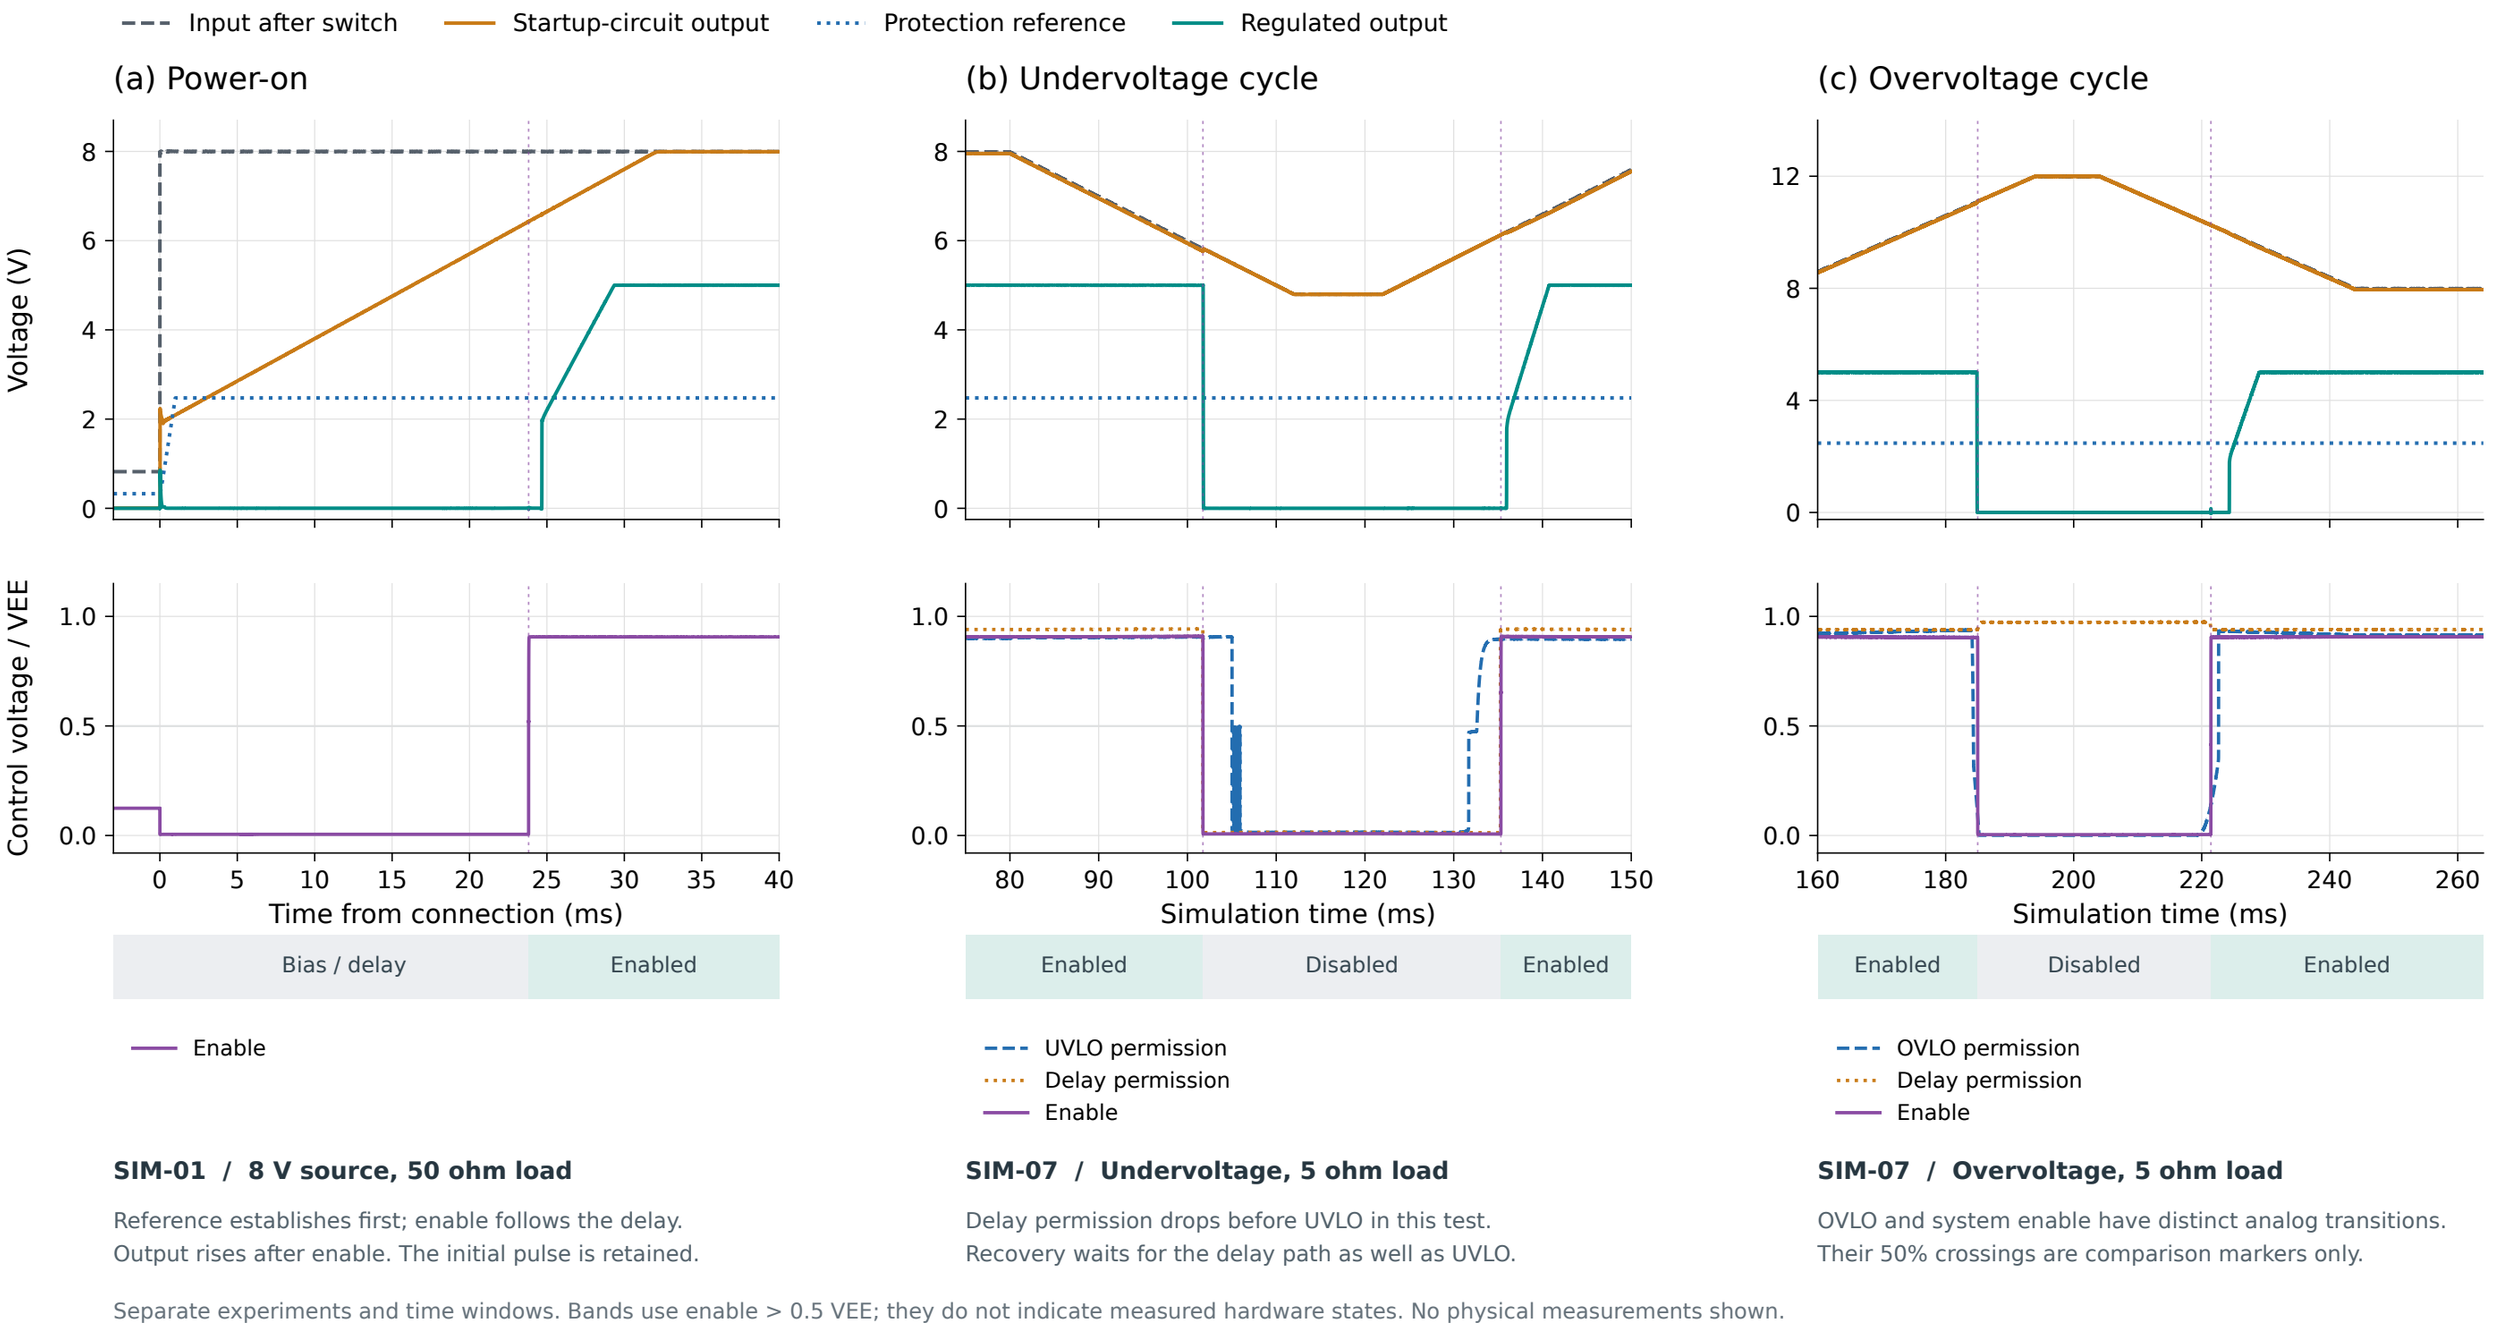

SIM-01 / 8 V source, 50 ohm load

Reference establishes first; enable follows the delay.
Output rises after enable. The initial pulse is retained.

SIM-07 / Undervoltage, 5 ohm load

Delay permission drops before UVLO in this test.
Recovery waits for the delay path as well as UVLO.

SIM-07 / Overvoltage, 5 ohm load

OVLO and system enable have distinct analog transitions.
Their 50% crossings are comparison markers only.

Separate experiments and time windows. Bands use enable > 0.5 VEE; they do not indicate measured hardware states. No physical measurements shown.