


TECHNICAL
SPECIFICATIONS

C75 Indoor Coils with Fixed Orifice - Model C75BHM0*C-* & C75BAM0*C*

MODEL IDENTIFICATION CODE

	C	7	5	B	H	M	0	36	C	-	B	
Coil												Cabinet Identifier
Design Series												A = 14-1/4" Width
5 = SEER2, R454B												B = 17-1/2" Width
B = Brazed												C = 21" Width
A = Vertical												D = 24-1/2" Width
H = Horizontal												C = Cased Coil
Multipoise Coil												Nominal Capacity/Range (00/00) Btuh
												Micro-Channel
												Meter Device
												0 = Fixed Orifice
												X = TXV

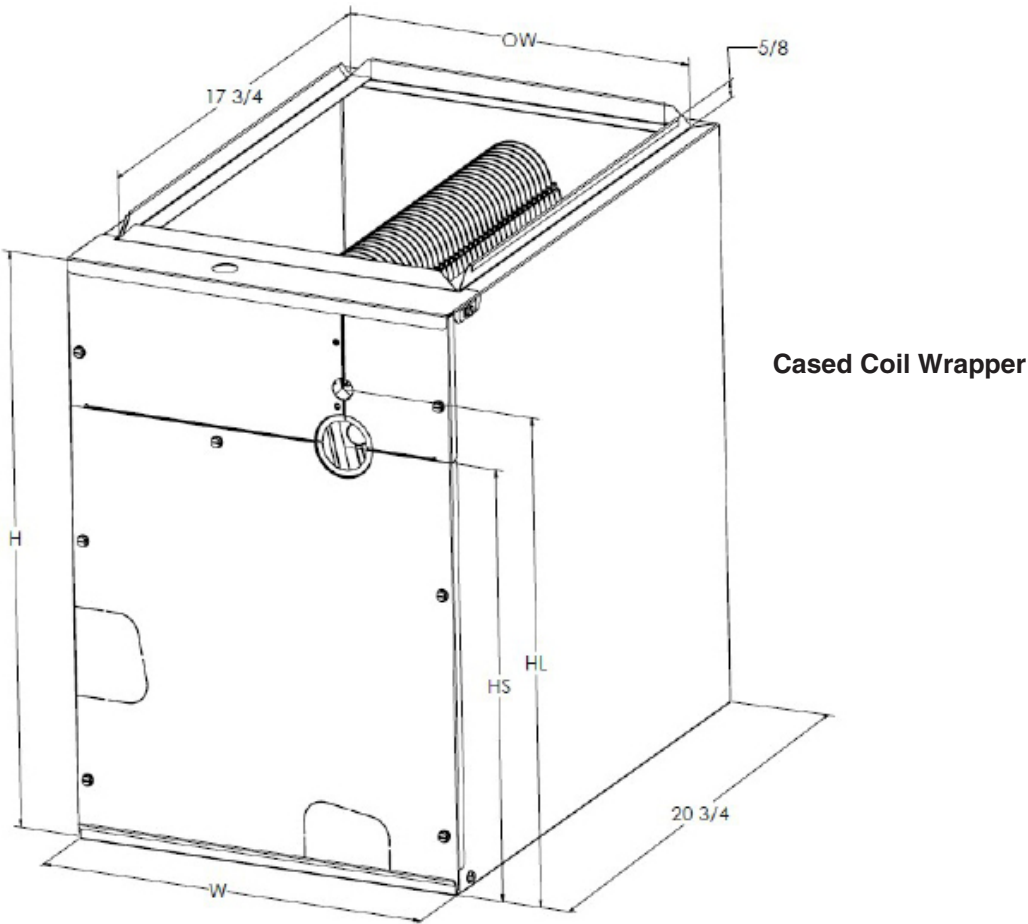

C75B(A,H)M CASED COIL SPECIFICATIONS

	UPFLOW & DOWNFLOW UNITS								
	A-CABINETS		B-CABINETS			C-CABINETS			D-CABINETS
C75BAM	018C-A	02430C-A	018C-B	02430C-B	03642C-B	030C-C	03642C-C	04860C-C	04860C-D
NOMINAL CAPACITY, MIN BTUH	18,000	24,000	18,000	24,000	36,000	30,000	36,000	48,000	48000
NOMINAL CAPACITY, MAX BTUH		30,000		30,000	42,000		42,000	60,000	60000
INSTALLED ORIFICE SIZE (IN.)	0.045	0.050	0.045	0.050	0.063	0.058	0.063	0.075	0.075
W - WIDTH (IN.)	14.25	14.25	17.5	17.5	17.5	21	21	21	24.5
H - HEIGHT (IN.)	20.75	20.75	20.75	20.75	26.75	26.75	26.75	30.25	30.25
HL - HEIGHT OF LIQUID LINE (IN.)	17.5	17.5	17.5	17.5	23.5	23.5	23.5	27	27
HS - HEIGHT OF SUCTION LINE (IN.)	15.5	15.5	15.5	15.5	21.5	21.5	21.5	25	25
OW - OPENING WIDTH	12 7/8"	12 7/8"	16 1/8"	16 1/8"	16 1/8"	19 5/8"	19 5/8"	19 5/8"	23 1/8"
CONNECTION - LIQUID LINE	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
CONNECTION - SUCTION LINE	3/4	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8
HORIZONTAL DRAIN PAN KIT (4)	920265	920265	920265	920265	920266	920266	920266	920267	920267

C75BAM Cased Coil Specifications (Orifice Only)

	HORIZONTAL UNITS								
	A-CABINETS		B-CABINETS			C-CABINETS			D-CABINETS
C75BHM	018C-A	02430C-A	018C-B	02430C-B	03642C-B	030C-C	03642C-C	04860C-C	04860C-D
NOMINAL CAPACITY, MIN BTUH	18,000	24,000	18,000	24,000	36,000	30,000	36,000	48,000	48000
NOMINAL CAPACITY, MAX BTUH		30,000		30,000	42,000		42,000	60,000	60000
INSTALLED ORIFICE SIZE (IN.)	0.045	0.050	0.045	0.050	0.063	0.058	0.063	0.075	0.075
W - WIDTH (IN.)	14.25	14.25	17.5	17.5	17.5	21	21	21	24.5
H - HEIGHT (IN.)	26.75	26.75	26.75	26.75	26.75	26.75	26.75	30.25	30.25
HL - HEIGHT OF LIQUID LINE (IN.)	23.5	23.5	23.5	23.5	23.5	23.5	23.5	27	27
HS - HEIGHT OF SUCTION LINE (IN.)	21.5	21.5	21.5	21.5	21.5	21.5	21.5	25	25
OW - OPENING WIDTH	12 7/8"	12 7/8"	16 1/8"	16 1/8"	16 1/8"	19 5/8"	19 5/8"	19 5/8"	23 1/8"
CONNECTION - LIQUID LINE	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
CONNECTION - SUCTION LINE	3/4	3/4	3/4	3/4	7/8	7/8	7/8	7/8	7/8

C75BHM Cased Coil Specifications (Orifice Only)

NOTES:

1. Rated for 10,000 ft maximum elevation.
2. Individual restrictors are available by part number - PN 664*** (where *** represents the size). Example 664103 is a restrictor 0.103 in diameter.
3. Refer to sales specification sheets for Listed/Certified combinations of equipment and required accessories.
4. Refer to the current AHRI Directory for certified ratings of splits systems.
5. Not required for "H" horizontal ready coils.
6. The downflow kit that include the additional drain pan condensate baffle for A-cabinets is available as PN 1049100.
7. A2L sensor kit is available as PN 1049246.

C75 CASED COIL DIMENSIONS



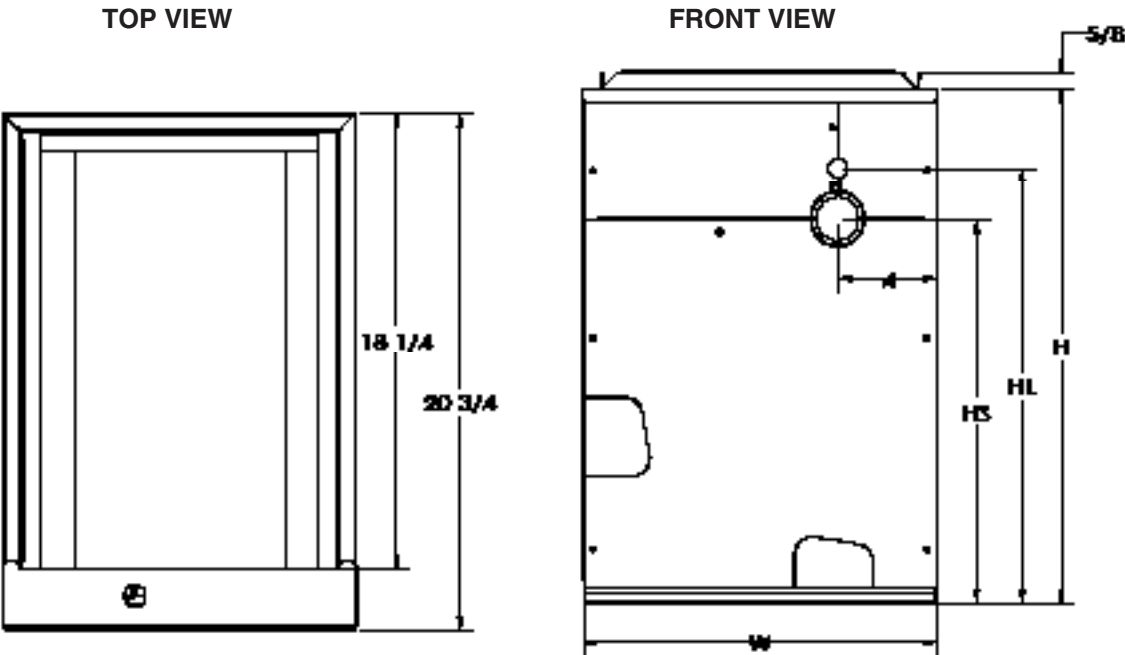


Figure 1. C75 Coil Dimensions (with fixed orifice)

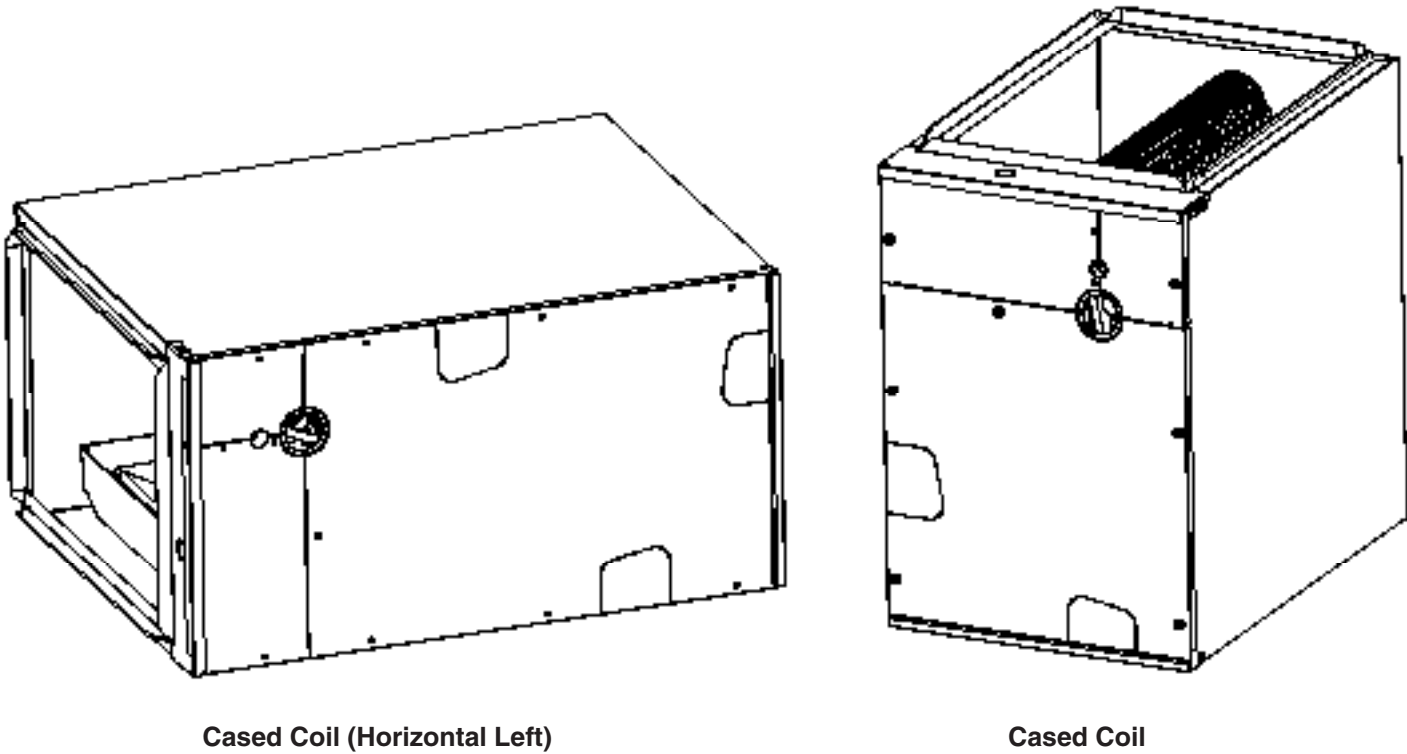

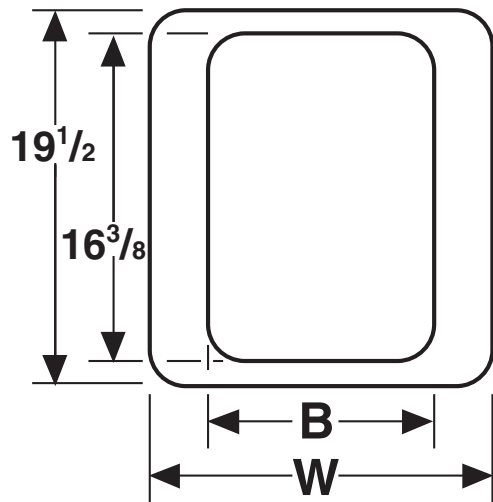

Drain Pan—Bottom View

DRAIN PAN DIMENSIONS

Dimension	A Cabinet	B Cabinet	C Cabinet	D Cabinet
W	12 3/4	16	19 1/2	23
B	6 5/8	9 7/8	12 3/8	16 7/8



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (09/2024)