

FRIGIDAIRE®

FRIGIDAIRE

# Delivering Comfort

WITH THE **FG7S(A,K)-FS SERIES** OF GAS FURNACES



# Table of Contents

- 2** CONTRACTOR SUPPORT
- 3** PRODUCT FEATURES & BENEFITS
- 4** TECHNICAL SPECIFICATIONS
  - MODEL ID CODES
- 5** SPECIFICATIONS
- 6** LOCATION OF FURNACE COMPONENTS
- 8** DIMENSIONS
- 10** ACCESSORIES





# THE FRIGIDAIRE®

# TOTAL PACKAGE™


**Designed with contractors in mind.** Frigidaire HVAC equipment is designed with the contractor in mind. Each unit is equipped with features designed to make them easier to install and service, reducing time spent on each job while ensuring peak performance and safety.



EASY TO  
**Service**



EASY TO  
**Install**

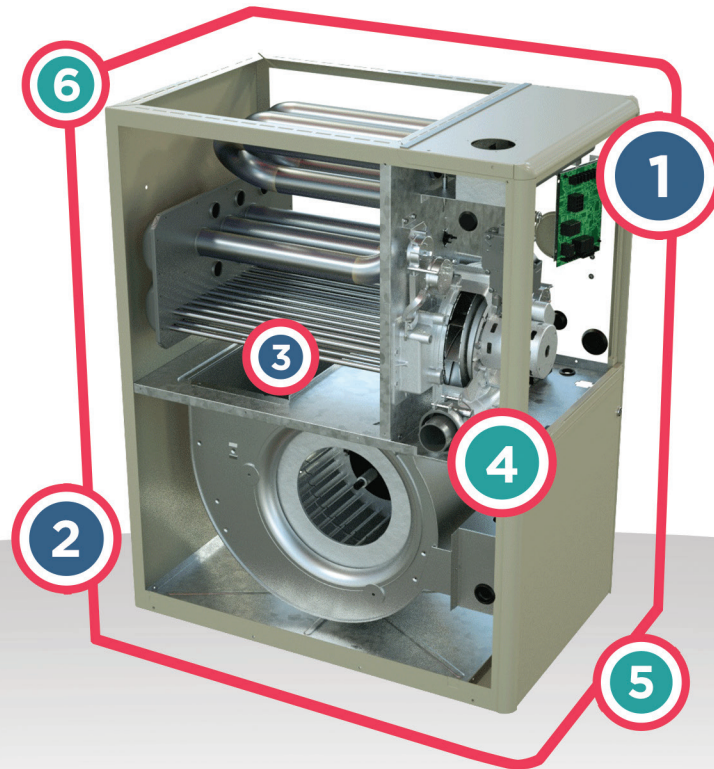

# FG7S(A,K)-FS Series

Single Stage, Gas Furnaces | 80% AFUE | High Efficiency Upflow/Horizontal & Downflow

**The FG7S(A,K)-FS Series of furnaces offers exceptional performance.**

This high efficiency gas furnace may be installed free standing in a utility room, basement, or enclosed in an alcove or closet. The rounded corner jacket provides a pleasing “appliance appearance.”

Easy to

## Service

Easy to

## Install

### ① REMOVABLE SIDE PANELS

Side panels can be easily removed and replaced without removing the top grill.

### ② COLOR CODED WIRE HARNESS

Utilizes quick-connect fittings for ease of service and component replacement.

### ③ GALVANIZED STEEL EXTERIOR

Powder-coated paint and gloss finish eliminates sharp edges and reduces scratching.

### ④ QR CODES

QR codes on each unit link directly to the product's technical literature, eliminating the need to search for relevant documentation when working on the unit.

### ⑤ HIGH STATIC BLOWERS


All models equipped with high static blowers.

### ⑥ LOW BOY HEIGHT

Easy to apply in low ceiling applications, works well with taller high SEER2 coils, easier to handle and install.



# MODEL ID CODES

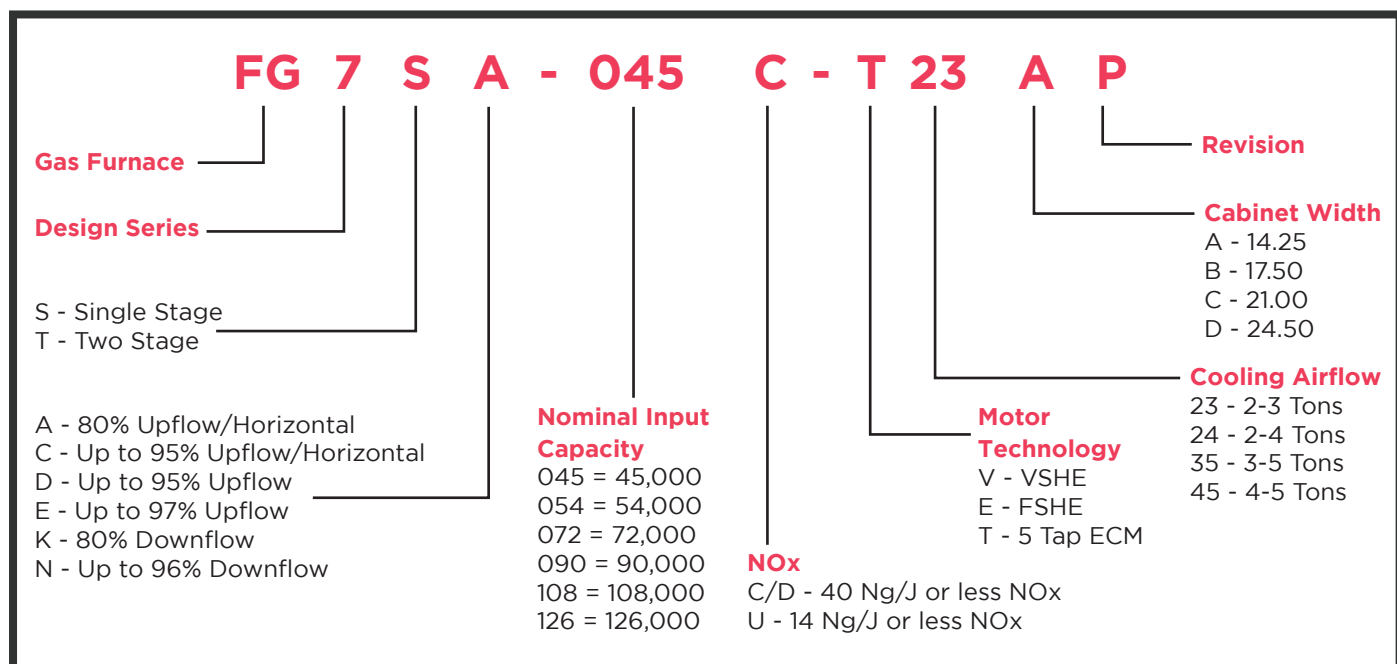

# SPECIFICATIONS


| <b>FG7SA MODEL NUMBERS</b>  | <b>-045-T23A</b> | <b>-054-T23A</b> | <b>-072-T24B</b> | <b>-072-T35C</b> | <b>-090-T24B</b> | <b>-090-T35C</b> | <b>-108-T35C</b> | <b>126-T45D</b> |
|-----------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------|
| Input - Btuh (a)            | 45,000           | 52,000           | 70,000           | 75,000           | 90,000           | 85,000           | 108,000          | 122,000         |
| Heating Capacity - Btuh     | 36,000           | 42,000           | 56,000           | 60,000           | 72,000           | 68,000           | 86,000           | 98,000          |
| AFUE                        | 80               | 80               | 80               | 80               | 80               | 80               | 80               | 80              |
| Motor H.P. - Speed - Type   | 1/2 - 5 - ECM    | 1/2 - 5 - ECM    | 3/4 - 5 - ECM    | 3/4 - 5 - ECM    | 3/4 - 5 - ECM    | 3/4 - 5 - ECM    | 1 - 5 - ECM      | 1 - 5 - ECM     |
| Motor FLA                   | 6.4              | 6.4              | 8.8              | 8.8              | 8.8              | 8.8              | 11.5             | 11.5            |
| Rated Ext. SP - In. W.C.    | 0.5              | 0.5              | 0.5              | 0.5              | 0.5              | 0.5              | 0.5              | 0.5             |
| Temperature Rise Range - °F | 30-60            | 30-60            | 30-60            | 35-65            | 35-65            | 35-65            | 35-65            | 40-70           |
| Shipping Weights (lbs)      | 95               | 95               | 110              | 115              | 115              | 134              | 136              | 147             |

| <b>FG7SK MODEL NUMBERS</b>  | <b>-045-T23A</b> | <b>-108-T35C</b> | <b>126-T45D</b> |
|-----------------------------|------------------|------------------|-----------------|
| Input - Btuh (a)            | 54,000           | 72,000           | 90,000          |
| Heating Capacity - Btuh     | 43,000           | 58,000           | 72,000          |
| AFUE                        | 80               | 80               | 80              |
| Motor H.P. - Speed - Type   | 1/2 - 5 - ECM    | 3/4 - 5 - ECM    | 3/4 - 5 - ECM   |
| Motor FLA                   | 6.4              | 8.8              | 8.8             |
| Rated Ext. SP - In. W.C.    | 0.5              | 0.5              | 0.5             |
| Temperature Rise Range - °F | 30-60            | 35-65            | 35-65           |
| Shipping Weights (lbs)      | 102              | 110              | 115             |

**NOTE:**

(a) Ratings to 2,000 ft. Over 2,000 ft. reduce 4% for each 1,000 ft. above sea level.


# LOCATION OF FURNACE COMPONENTS

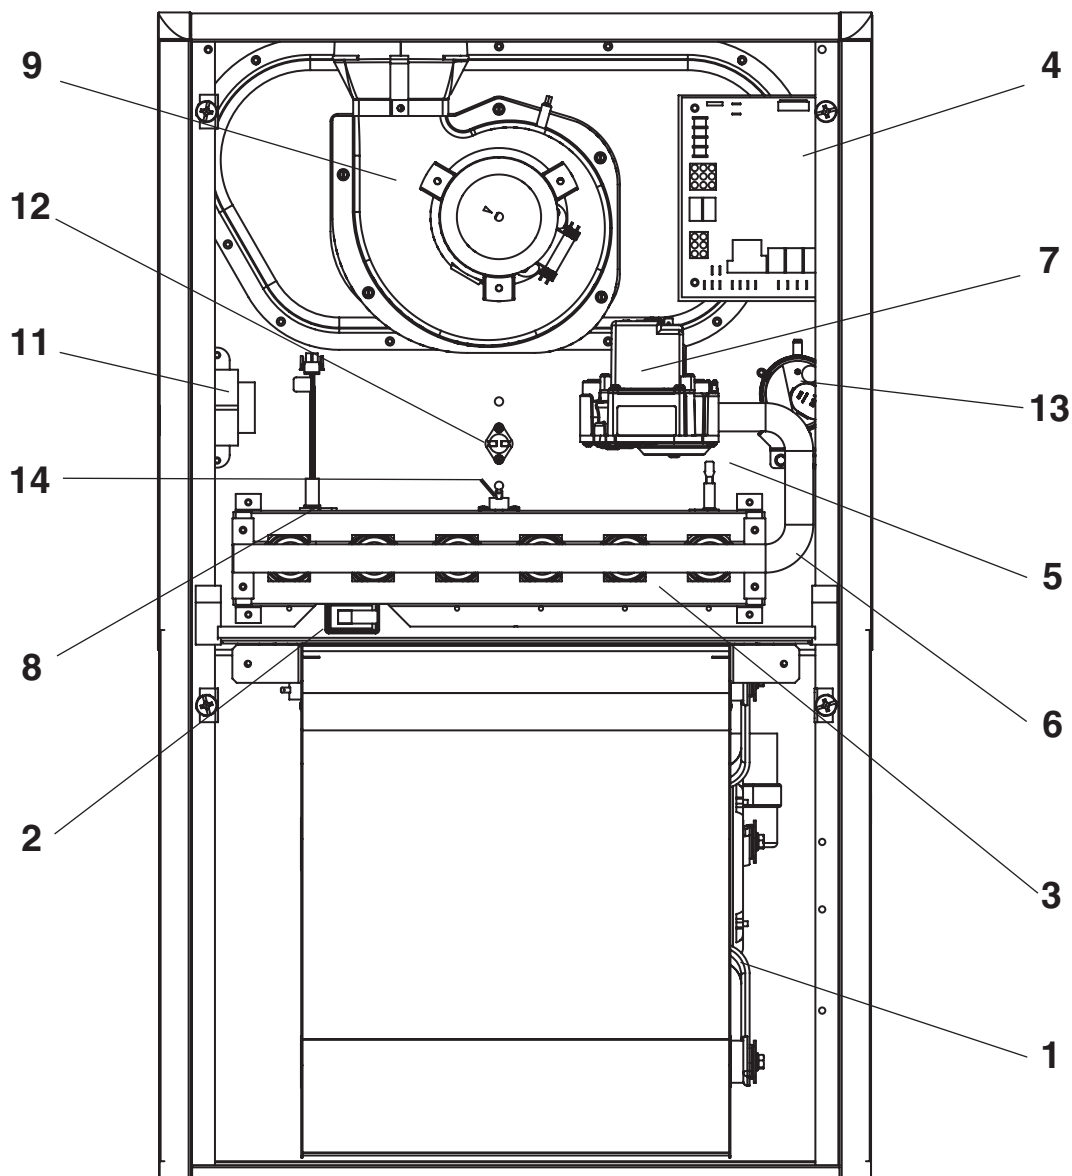

- |                       |                                                    |
|-----------------------|----------------------------------------------------|
| 1. Blower Assembly    | 9. Inducer                                         |
| 2. Blower Door Switch | 10. Insulated Combustion Tube<br>(Downflow Models) |
| 3. Burner Assembly    | 11. Low Voltage Transformer                        |
| 4. Control Board      | 12. Main Air Limit Switch                          |
| 5. Flame Sensor       | 13. Pressure Switch                                |
| 6. Gas Manifold       | 14. Roll-Out Switch(s)                             |
| 7. Gas Valve          |                                                    |
| 8. Igniter            |                                                    |

**FG7SA 80% AFUE High Efficiency Upflow/Horizontal Series**

# LOCATION OF FURNACE COMPONENTS CONTINUED

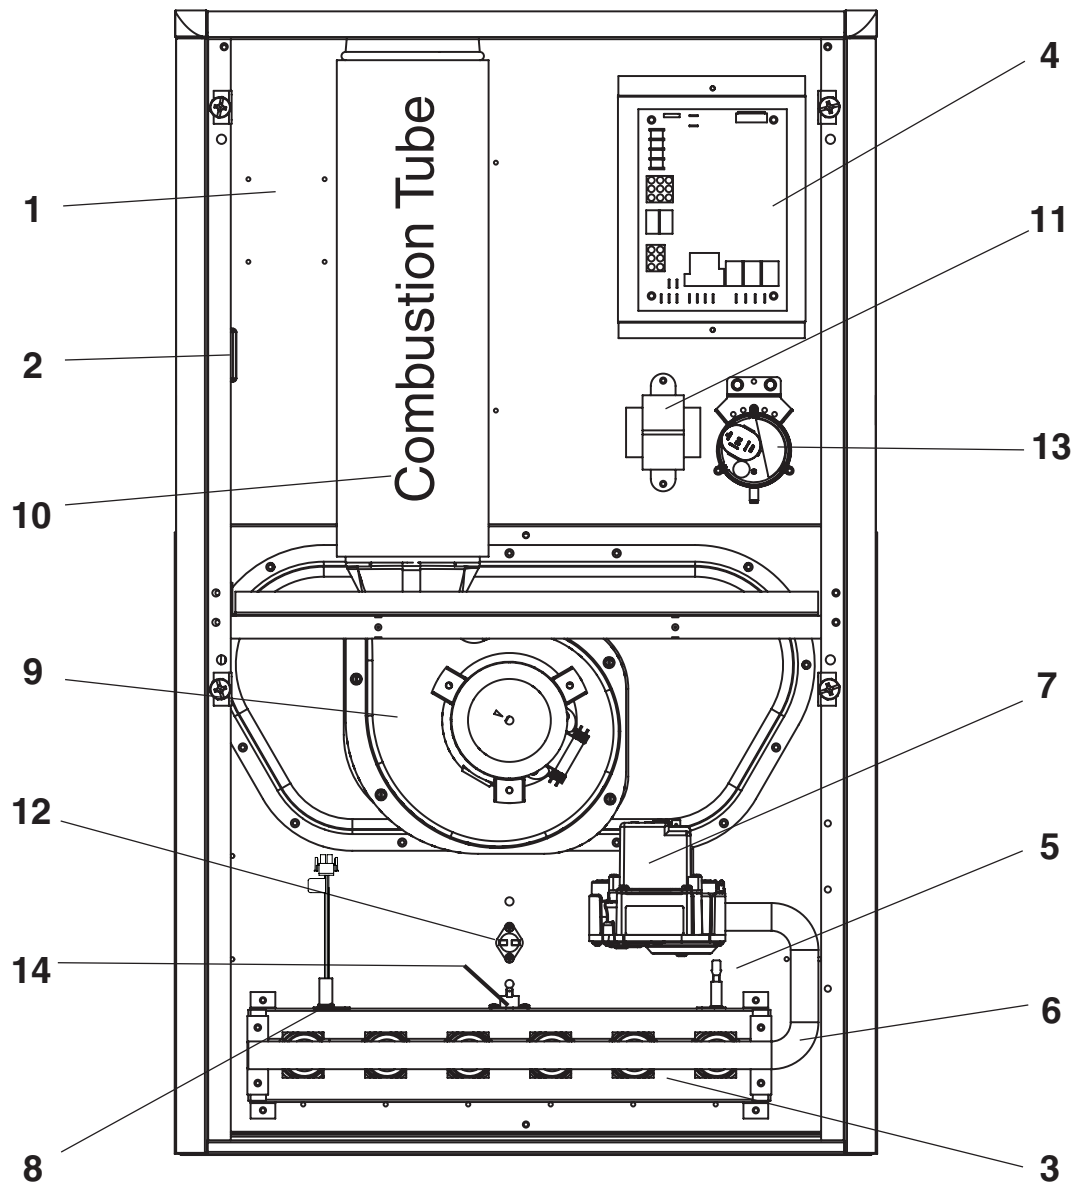

- |                       |                                                    |
|-----------------------|----------------------------------------------------|
| 1. Blower Assembly    | 9. Inducer                                         |
| 2. Blower Door Switch | 10. Insulated Combustion Tube<br>(Downflow Models) |
| 3. Burner Assembly    | 11. Low Voltage Transformer                        |
| 4. Control Board      | 12. Main Air Limit Switch                          |
| 5. Flame Sensor       | 13. Pressure Switch                                |
| 6. Gas Manifold       | 14. Roll-Out Switch(s)                             |
| 7. Gas Valve          |                                                    |
| 8. Igniter            |                                                    |


**FG7SK 80% AFUE High Efficiency Downflow Series**



# DIMENSIONS

| Model FG7SA | Dimension "A" | Dimension "B" | Dimension "C" | Dimension "D" |
|-------------|---------------|---------------|---------------|---------------|
| O45-23A     | 14 1/4        | 10 3/4        | 12 5/8        | 12 7/8        |
| O54-23A     |               |               |               |               |
| O72-24B     | 17 1/2        | 11 3/4        | 15 7/8        | 16 1/8        |
| O90-24B     |               |               |               |               |
| O72-35C     | 21            | 14            | 19 3/8        | 19 7/8        |
| O90-35C     |               |               |               |               |
| 108-35C     |               |               |               |               |
| 126-45D     | 24 1/2        | 15 1/4        | 22 7/8        | 23 1/8        |

**NOTE:** Dimensions shown in inches


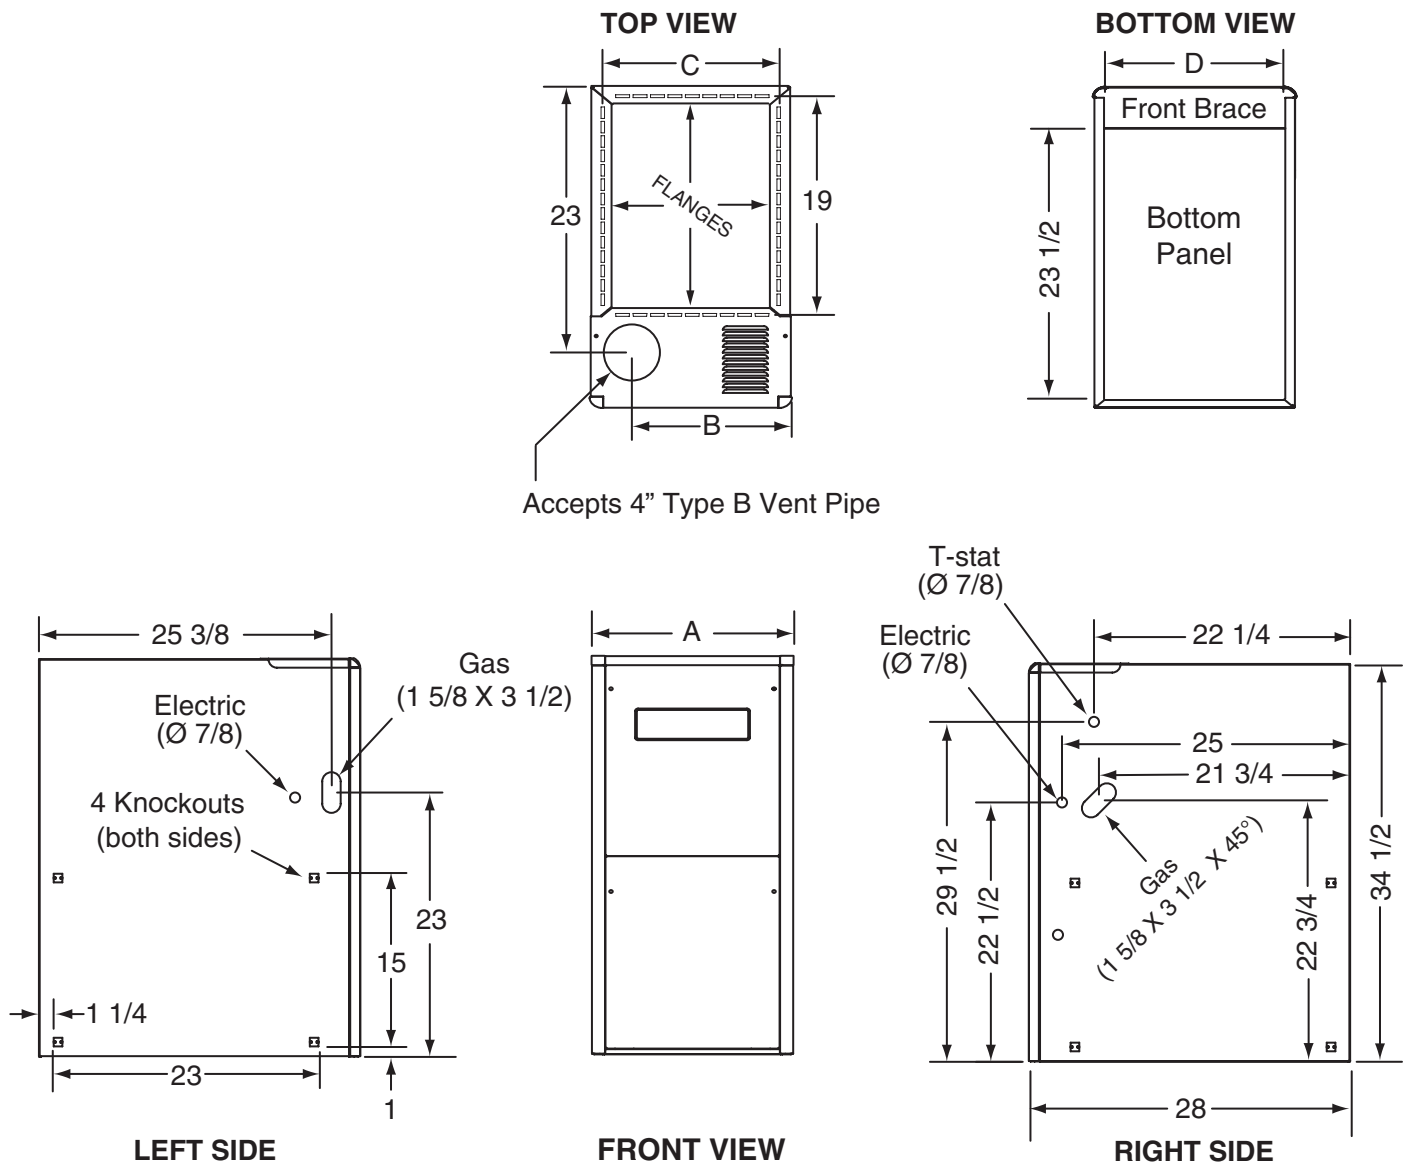


**FG7SA 80% AFUE High Efficiency Upflow/Horizontal Series**

# DIMENSIONS CONTINUED

| Model FG7SK | Dimension "A" | Dimension "B" | Dimension "C" | Dimension "D" |
|-------------|---------------|---------------|---------------|---------------|
| 054-23A     | 14 1/4        | 10 3/4        | 12 5/8        | 12 7/8        |
| 072-24B     | 17 1/2        | 11 3/4        | 15 7/8        | 16 1/8        |
| 090-24B     |               |               |               |               |
| 108-35C     | 21            | 14            | 19 3/8        | 19 5/8        |
| 126-45D     | 24 1/2        | 15 1/4        | 22 7/8        | 23 1/8        |

**NOTE:** Dimensions shown in inches

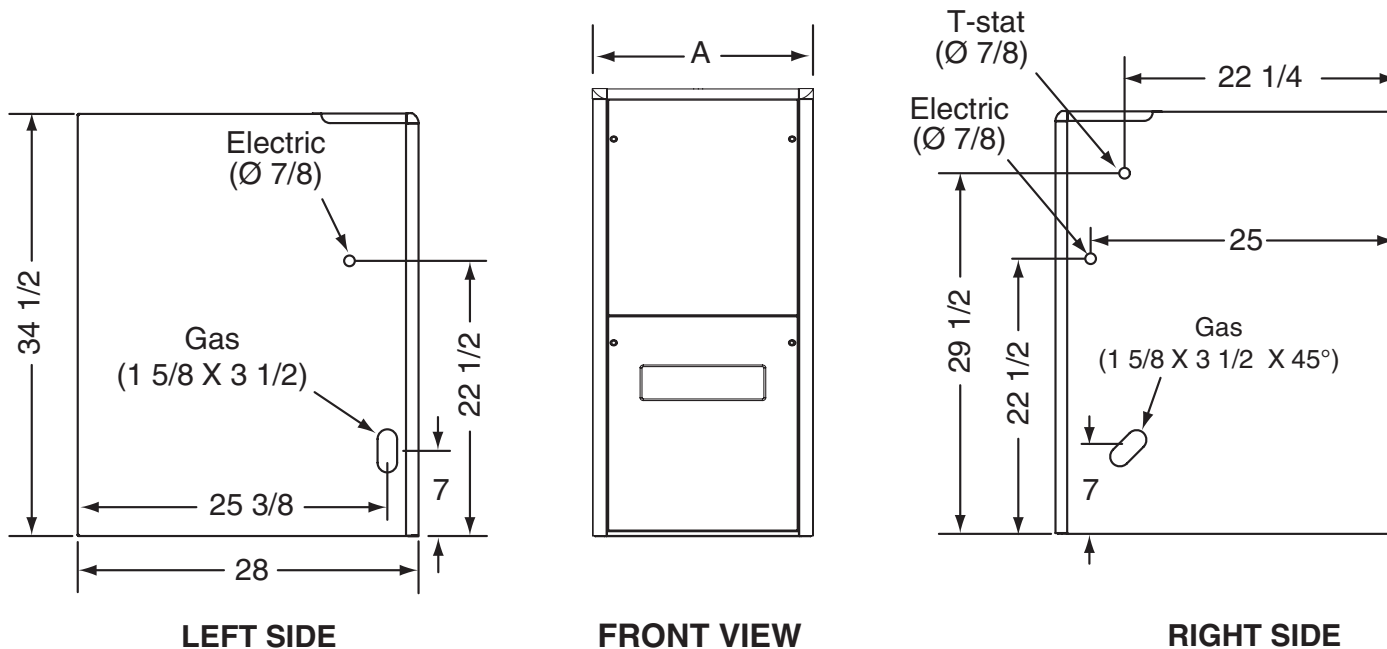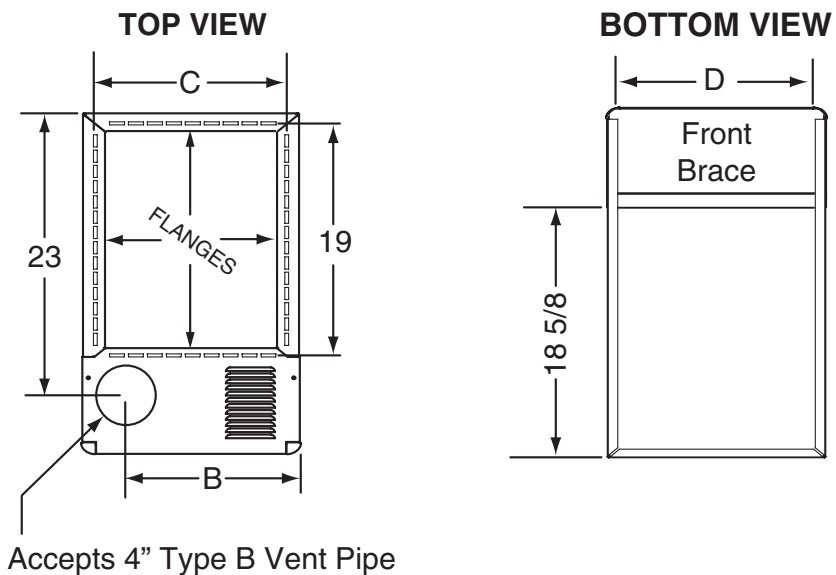

**FG7SK 80% AFUE High Efficiency Downflow Series**

# ACCESSORIES

## FG7S(A,K) Kits

| Description                                                    | SKU     |
|----------------------------------------------------------------|---------|
| A Cabinet Downflow Sub Base Kit                                | 902974  |
| B, "C", "D" Cabinet Downflow Sub Base Kit                      | 904911  |
| U.S. LP Conversion kit (0 to 10,000 ft.) and High Altitude LP  | 905028  |
| Canada LP Conversion kit (0 to 4,500 ft.) and High Altitude LP | 905029  |
| Side Return Filter Kit                                         | 541036  |
| Furnace Twinning Kit                                           | 1010035 |

### GENERAL TERMS OF LIMITED WARRANTY

Nordyne, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.



# DISCOVER Comfort

You are committed to building your business and serving your customers. So is Frigidaire®. sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Quis ipsum suspendisse ultrices gravida. Risus commodo viverra maecenas accumsan lacus vel facilisis.

GET STARTED AT **FRIGIDAIREHVAC.COM**



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (06/24)

FRIGIDAIRE is a registered trademark of Electrolux Home Products Inc. and used under a license from Electrolux Home Products, Inc.

© Nordyne, LLC 2024. All Rights Reserved.

990F-0624



# FRIGIDAIRE®

