

TECHNICAL SPECIFICATIONS

Flex Match Series

DHH()PUK3IH

Up to 21 SEER2, 10.0 HSPF2
Single-Zone Heat Pump
9K-24K BTUH Capacity

DKH()FMK3IH

Up to 21 SEER2, 10.0 HSPF2
Cassette Indoor Unit
09K–24K BTUH Capacity

DXH()FMK3IH


Up to 21 SEER2, 10.0 HSPF2
Multi Zone Heat Pump
18K-42K BTUH Capacity



FEATURES and BENEFITS


- **Inverter Driven Compressor and Fan** – State-of-the-art inverter driven technology that offers wide range of modulation
- **Flared Piping Connections** – Ensures easy and quick installation.
- **Wireless Remote Controller** – Remote include in all multi-zone indoor units
- **Anti-Corrosion Coils** – Blue fin coatings improves the heating efficiency, accelerates defrost, and adds significant resistance to corrosive elements
- **Intelligent Defrost** – Intelligent Defrosting is only performed when needed, which reduces energy waste by eliminating the unnecessary defrosting process
- **Base Pan Heater** – prevents freezing and improves heating efficiency during low temperature operation

MODEL IDENTIFICATION CODE

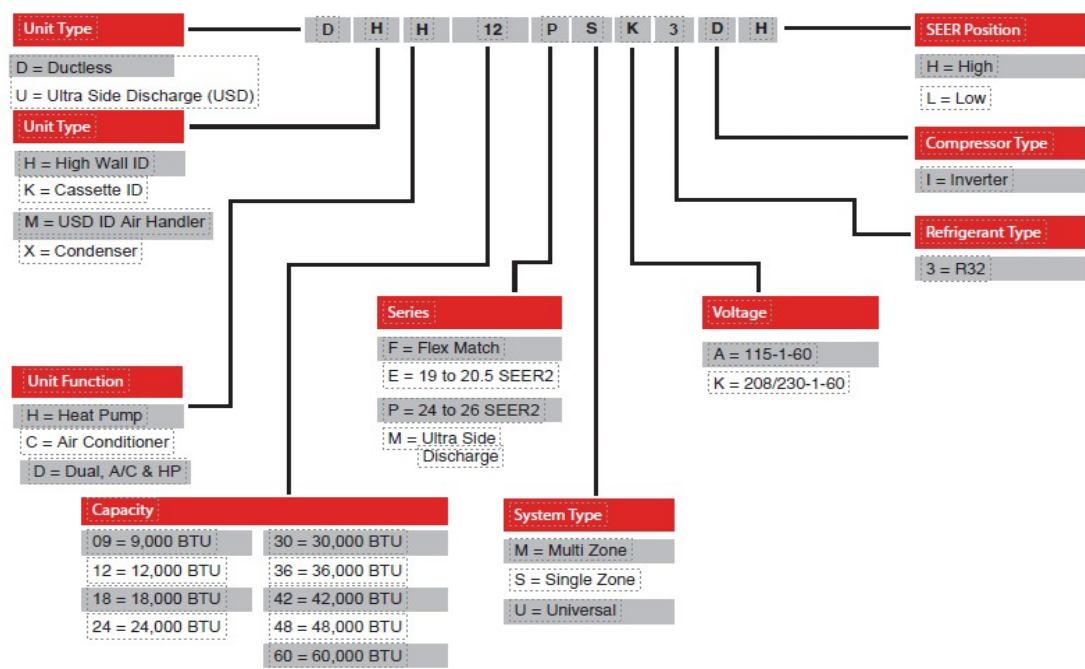


DIMENSIONS

FMK3IH	18K	24K	30K	36K	42K
H	21.65"	26.00"	32.51"	32.51"	32.51"
W	32.36"	37.95"	40.15"	40.15"	40.15"
D	13.85"	15.82"	16.81"	16.81"	16.81"

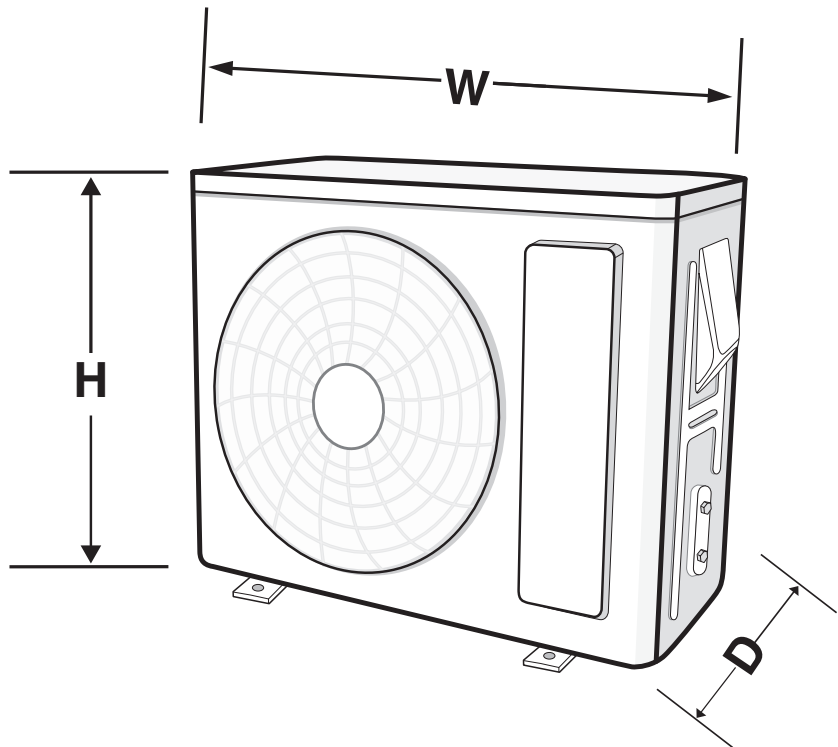

CLEARANCES

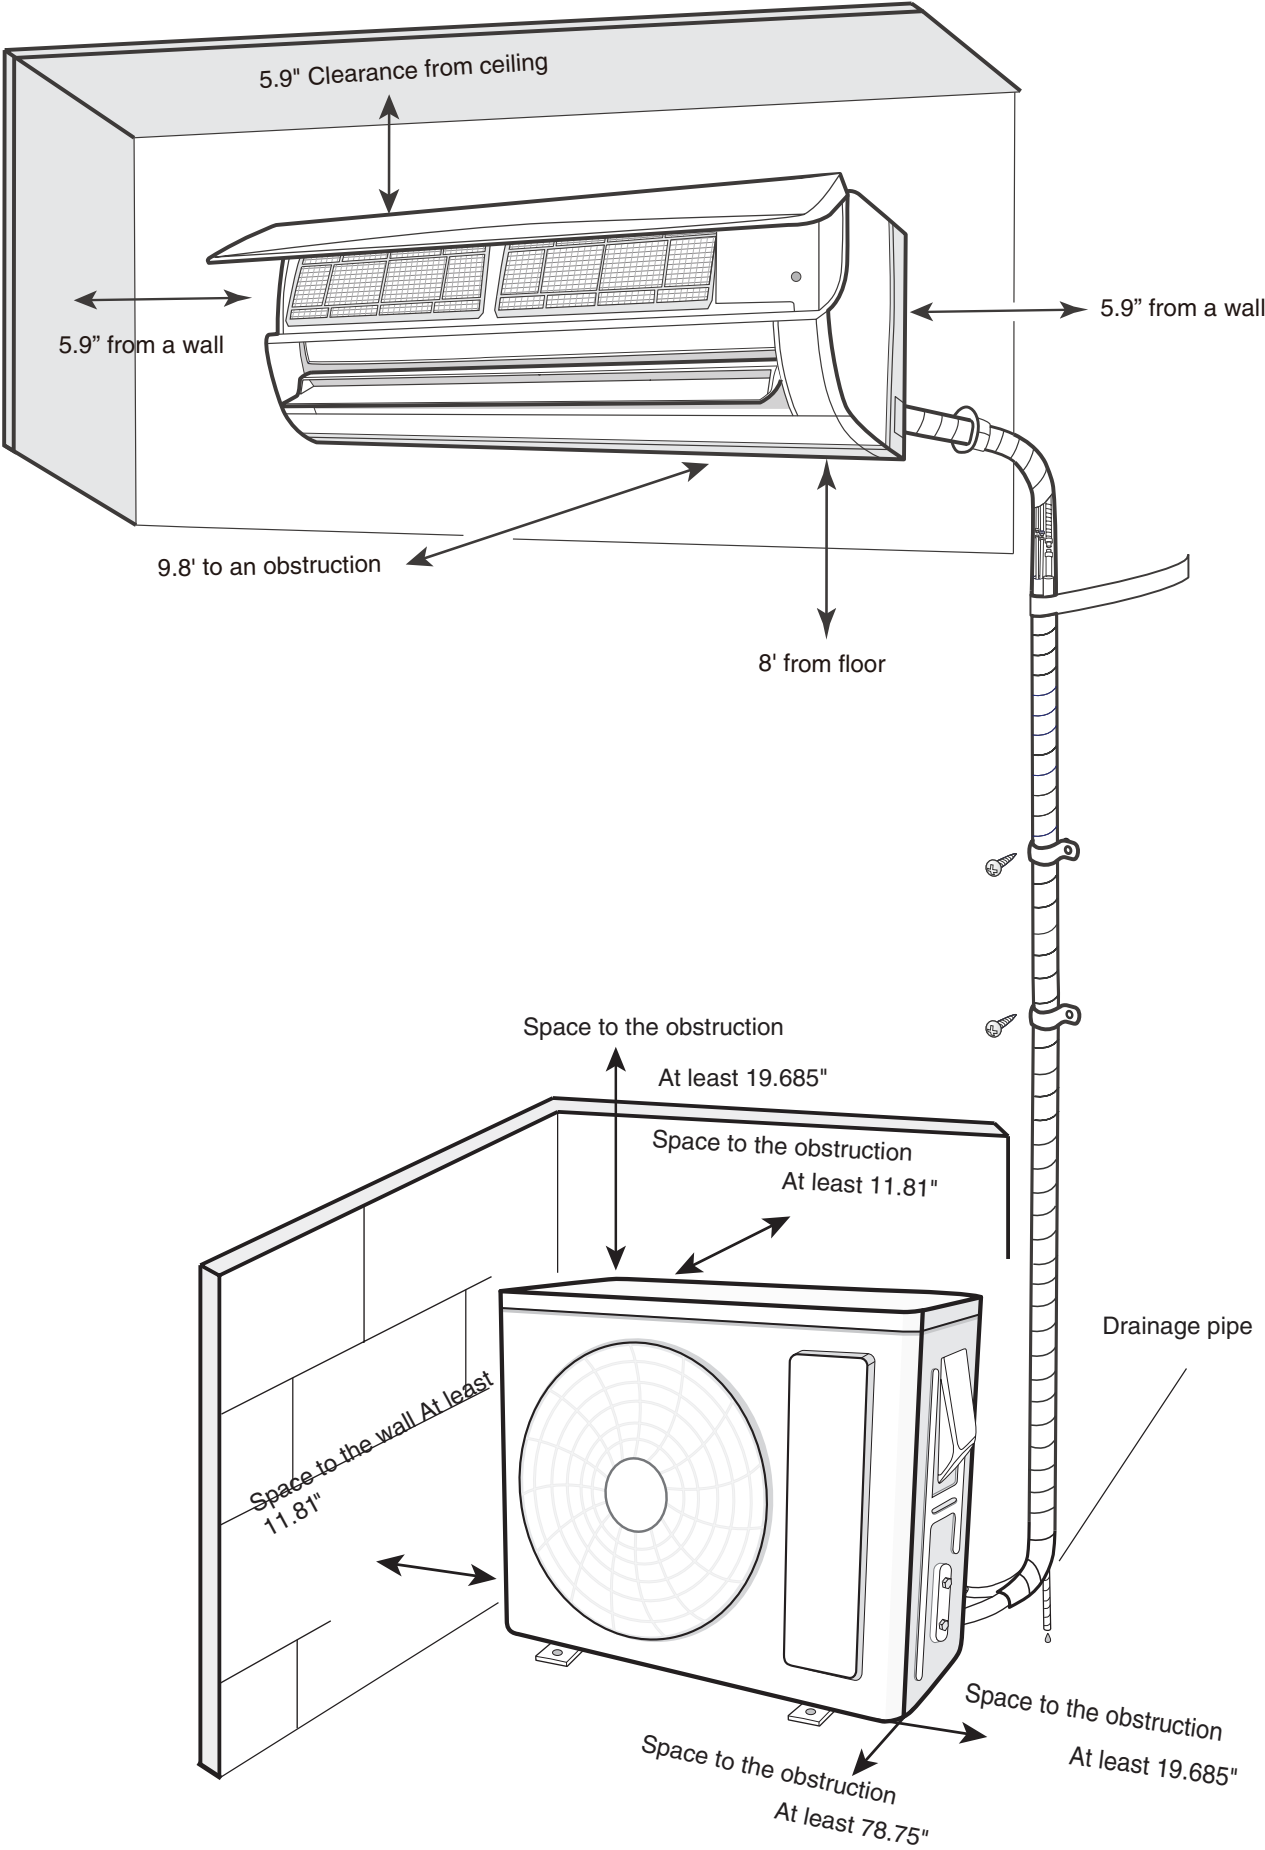

MULTI-ZONE SERIES VALVE ADAPTERS

Multi-Zone units include line set adapters for use at the outdoor service valves. Used when indoor unit connectors are larger and take precedence.

Model BTU	Supplied Adaptors	Size	Partners Choice
18K	1	3/8 to 1/2	1049493 – 3/8 to 5/8
24K	2	3/8 to 1/2	1049503– 3/8 to 1/2
30K	8	(2) 3/8 to 5/8, (4) 3/8 to 1/2	—
36K	8	(2) 3/8 to 5/8, (4) 3/8 to 1/2	—
42K	9	(3) 3/8 to 5/8, (4) 3/8 to 1/2	—

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS
21 SEER2 — High Efficiency — Single Phase

Model		FMK3IH				
Unit Size		18K	24K	30K	36K	42K
Electrical Data	Motor Full Load Amp (FLA)	0.6	1.8	2.5		
	Fan Motor RPM (Cooling/Heating)	900/900	850/850	860/860		
	Fan Motor Output (Watts)	30	60	130		
	Compressor RLA (A)	9.5	12	13.5	19.6	
Refrigeration Data	Condenser Number of Rows	2			3	
	Refrigerant	R32				
	Refrigerant Charge (oz)	31.752	59.976	77.616	95.256	
	Throttling Method	Electronic Expansion Valve				
	Cooling Operation Ambient Temperature Range (°F)	-22~118				
	Heating Operation Ambient Temperature Range (°F)	-22~75				
Maximum Number of ID Units	Indoor Unit	2	3	4		5
Precharged Lineset Length	Length (ft)	32.81	98.42	131.23		164
Connecting Pipe Diameter	Suction (in)	3/8"				
	Liquid (in)	1/4"				
Performance Data	Minimum Cooling Capacity (Btu/H)	7300	7500	8190	8870	8870
	Maximum Cooling Capacity (Btu/H)	19800	31400		40900	44300
	Minimum Heating Capacity (Btu/H)	7300	7500	8190	8870	
	Maximum Heating Capacity (Btu/H)	18100	31400	40900	51180	54592
Sound Level	Decibels (dB)	54	58	62	63	
Weight	Net Weight (lb)	78.3	112.5	145.5	173.1	174.2

PHYSICAL AND ELECTRICAL SPECIFICATIONS / CASSETTE ID UNITS

High Efficiency — Single Phase


	Unit Size	09K	12K	18K	24K
Electrical Data	Voltage	208/230			
	Hertz (Hz)	60			
	Internal Fuse (Amps)	3.15			5
	Blower FLA	0.5		1	1.2
	Blower Output (Watts)	30			35
Connecting Pipe Diameter	Suction (Inch)	3/8		1/2	5/8
	Liquid (Inch)	1/4			
	Maximum Pipe Length (Ft)	65.6			
	Maximum Lineset Rise (Ft)	49.2			
Drain Pipe	Diameter (in)	0.74803			0.98425
Performance Data	Cooling Capacity (Btu/Hr)	9100	12000	18000	22000
	Heating Capacity (Btu/Hr)	10500	12000	18000	24000
	Airflow (CFM) (Min)	206	206	206	471
	Airflow (CFM) (Max)	330	330	383	647
Sound Level	Cooling - Minimum Sound Level (dB)	29	29	30	39
	Cooling - Maximum Sound Level (dB)	40	40	44	45
Weight	Pounds (lb)	37.485			63.945

PHYSICAL AND ELECTRICAL SPECIFICATIONS / INDOOR UNITS

25 SEER2 — High Efficiency — Single Phase

Unit Size		9K	12K	18K	36K
Electrical Data	Motor (RLA)	0.35	0.4	0.6	1
	Fan Motor RPM Cooling	1300/1200/ 1100/1000/ 900/800/ 750/500	1450/1200/ 1120/1050/ 980/920/ 750/500	1400/1200/ 1120/1050/ 980/860/ 750	1500/1150/ 1100/1000/ 950/900/ 850
	Fan Motor RPM Heating	1300/1200/ 1100/1000/ 900/850/ 800	1450/1200/ 1140/1080/ 1020/960/ 900	1400/1200/ 1120/1050/ 950/850/ 750	1500/1200/ 1100/1050/ 1000/950/ 900
	Fan Motor Output (watts)	15	55	50	110
Performance Data	Minimum CFM	129	202	324	383
	Maximum CFM	353	400	589	736
	Set Temp Range (°F)	61 ~ 86			
Pipe Diameter	Suction (in.)	3/8"	1/2"		5/8"
	Liquid (in.)	1/4"			
Sound Level (dB)	Minimum Cooling (dB)	30		39	44
	Maximum Cooling (dB)	51	53	58	62
Weight	Net Weight (lb)	20.9		28.7	35.3

SYSTEM PIPING HEIGHT DIFFERENCE INFORMATION

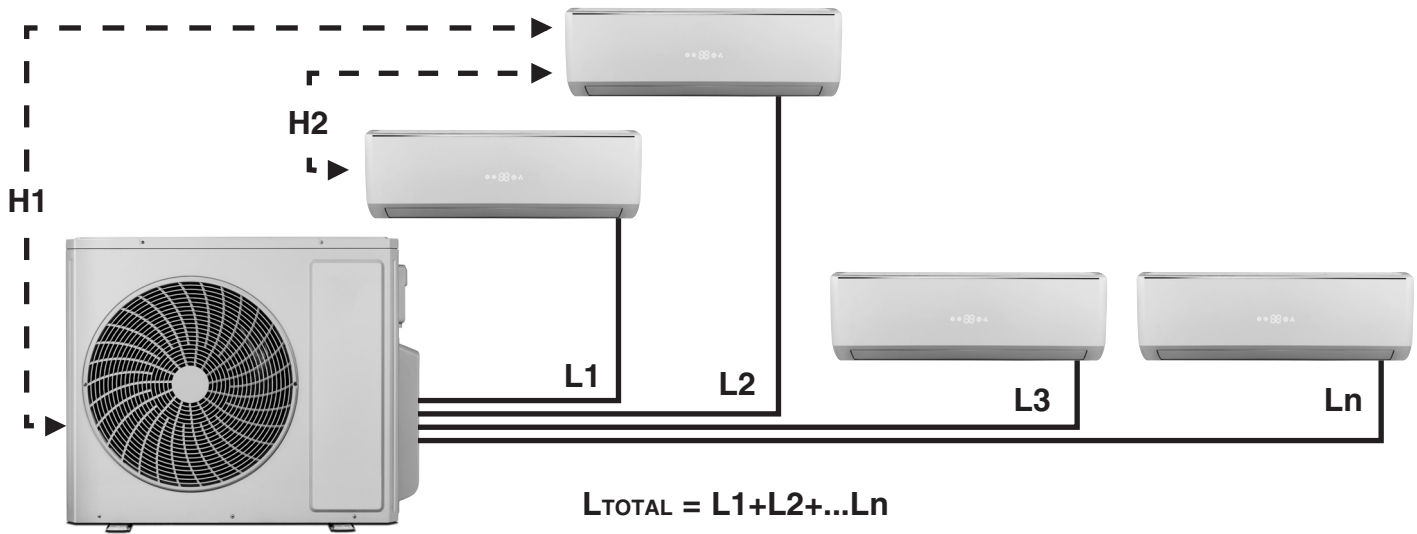

Model Number	Minimum Piping Length Per Indoor Unit (Ln)	Maximum Piping Length Per Indoor Unit (Ln)	Maximum Total Piping Length (L _{TOTAL})
DXH18FMK3IH	32.8	65.6	131.2
DXH24FMK3IH	98.4	65.6	196.8
DXH30FMK3IH	131.2	82.0	82.02
DXH36FMK3IH	131.2	82.0	262.4
DXH42FMK3IH	164	82.0	328.0

"L" is the linear equivalent length of liquid line including elbows.

Model Number	Maximum Height Difference Between Indoor and Outdoor Units (H1)	Maximum Height Difference Between Indoor Units (H2)
DXH18FMK3IH	49.2	49.2
DXH24FMK3IH	49.2	49.2
DXH30FMK3IH	82.0	82.0
DXH36FMK3IH	82.0	82.0
DXH42FMK3IH	82.0	82.0

"H" is the difference in height measured from the piping connections

MATCHING MULTI-ZONE INDOOR UNITS



High Wall

SKU	Model
1049128	DHH09PUK3IH
1049130	DHH12PUK3IH
1049132	DHH18PUK3IH
1049134	DHH24PUK3IH



Cassette

SKU	Model
1049185	DKH09FMK3IH
1049186	DKH12FMK3IH
1049187	DKH18FMK3IH
1049188	DKH24FMK3IH

MULTI-ZONE INDOOR UNIT COMBINATIONS - ZONE RANGE

	2	2 to 3	2 to 4	2 to 4	2 to 5		2	2 to 3	2 to 4	2 to 4	2 to 5
Indoor Combinations	Condenser Range					Indoor Combinations	Condenser Range				
9K+9K	18K	24K	30K	36K	42K	18K+18K+18K				36K	42K
9K+12K						9K+9K+9K+24K					
12K+12K						9K+9K+12K+18K					
9K+18K						9K+9K+12K+24K					
12K+18K						9K+9K+18K+18K					
18K+18K						9K+12K+12K+18K					
9K+9K+9K						12K+12K+12K+12K					
9K+9K+12K						12K+12K+12K+18K					
9K+9K+18K						9K+18K+24K					
9K+12K+12K						9K+24K+24K					
12K+12K+12K						12K+24K+24K					
9K+24K		30K	36K	42K	42K	9K+9K+18K+24K					
12K+24K						9K+12K+12K+24K					
18K+24K						9K+12K+18K+18K					
9K+9K+24K						9K+12K+18K+24K					
9K+12K+18K						9K+18K+18K+18K					
9K+12K+24K						12K+12K+12K+24K					
9K+18K+18K						12K+12K+18K+18K					
12K+12K+18K						9K+9K+9K+9K+9K					
9K+9K+9K+9K						9K+9K+9K+9K+12K					
9K+9K+9K+12K						9K+9K+9K+9K+18K					
9K+9K+9K+18K						9K+9K+9K+9K+24K					
9K+9K+12K+12K						9K+9K+9K+12K+12K					
9K+12K+12K+12K						9K+9K+9K+12K+18K					
21K+24K						9K+9K+9K+12K+24K					
24K+24K						9K+9K+9K+18K+18K					
9K+18K+24K						9K+9K+12K+12K+12K					
9K+21K+24K						9K+9K+12K+12K+18K					
12K+12K+24K						9K+12K+12K+12K+12K					
12K+18K+18K						9K+12K+12K+12K+18K					
12K+18K+24K						12K+12K+12K+12K+12K					

ADDITIONAL CHARGE TABLE

Model Number	SKU#	Standard Line Set Length (ft)	Additional Refrigerant Charge (oz/ft)
DXH18FMK3IH	1049136	32.81	0.2
DXH24FMK3IH	1049137	98.42	
DXH30FMK3IH	1049138	131.23	
DXH36FMK3IH	1049139	131.2	
DXH42FMK3IH	1049140	164	



GENERAL TERMS OF LIMITED WARRANTY

Nordyne LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A. (11/24).