



Mini-Split Single-Zone and Multi-Zone Heat Pumps

Residential Catalog 2021



Gibson®

Gibson[®]



Complete comfort at your fingertips



Why choose Gibson?



Gibson has been a trusted brand in home appliances since their start manufacturing ice boxes in 1877. Today, the Gibson brand covers a diverse range of home heating and cooling solutions. These new ductless mini-split air conditioning systems offer the latest, most-advanced inverter technology to maximize efficiency and energy savings as well as provide superior, quiet comfort.

Contents

	Page		Page		Page
Advantages of Ductless Mini-Splits	4	- Select Your Size	19	- Multi-Zone Indoor Units	37
Spot Cooling for Room Additions	4	- Piping for Single-Zone Systems	20	- System Piping Information	37
True Zoning Throughout Your Home	6	- 30 Series Models	21	- Easy Installation	38
Mini-Split Technology	8	- 23 Series Models	22	- Indoor Unit Piping Connection Sizes	39
Mini-Split Remote Control	12	- 16 Series Models	24	- Multi-Zone Design Considerations	40
Indoor Air Quality	14	Pro Series Light Commercial		- Multi-Zone Configurations	41
Installation Techniques	16	Single-Zone Heat Pump Systems	26-34	- Multi-Zone Matrix	43
Mini-Splits	18-24	- Control System Lineup	33	- Product Specifications	44
- Mini-Split Single-Zone & Multi-Zone Nomenclature	18	- Heat Pump Models	34	- Multi-Zone Mini-Split Controls	48
		Multi-Zone Systems	36-48	Partners Choice Accessories	49
		- Multi-Zone Mini-Split Heat Pump Condensers	36		

**Advantages of
ductless mini-
splits for whole
home heating
and cooling
year round.**

The United States Department of Energy states that nearly 50% of utility bills go towards heating and cooling the home. Mini-splits offer faster payback than other traditional heating cooling systems. The high-efficiency of mini-splits along with their true zoning capability have proven to reduce heating and cooling bills by as much as 50%. This represents a 25% reduction in total utility costs.

Mini-split systems offer year-round heating and cooling comfort, even in cold climates. Soft start up and whisper quiet operation.


Inverter technology - Our mini-splits are so efficient and quiet because of inverter technology. The inverter converts AC voltage to DC voltage through a diode bride (bridge rectifier) allowing power consumption to be modulated to nearly zero levels.

**Spot cooling for
room additions,
hot/cold spots,
server rooms.**

Single-zone mini-splits allow easy addition of heating and cooling to specific areas in the home. Room additions, hot and cold spots, and remodeling can present challenges in terms of adequately heating and cooling these spaces. Ductless mini-split systems are the perfect solution to provide year-round comfort.

These high-efficiency heat pump systems also provide tremendous energy savings.

Home Utility Costs

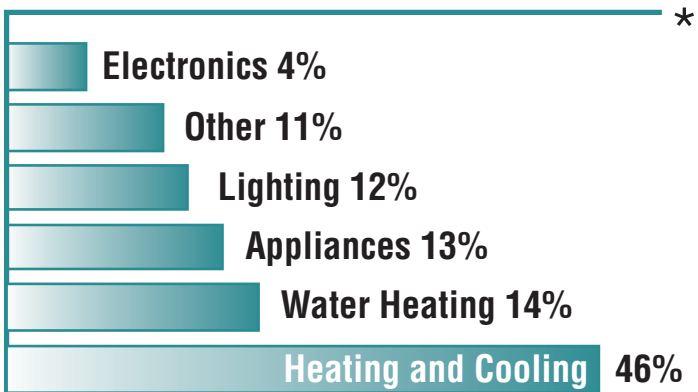

* Source: energystar.gov


DSIRE™
Database of State Incentives for Renewables & Efficiency

Check for local rebates on
website at www.dsireusa.org



True Zoning Throughout Your Home

Multi-zone mini-splits allow each space in the home to be individually controlled, potentially saving hundreds of dollars on energy bills. Multiple indoor units are attached to one outdoor unit for a clean, easy, attractive installation.

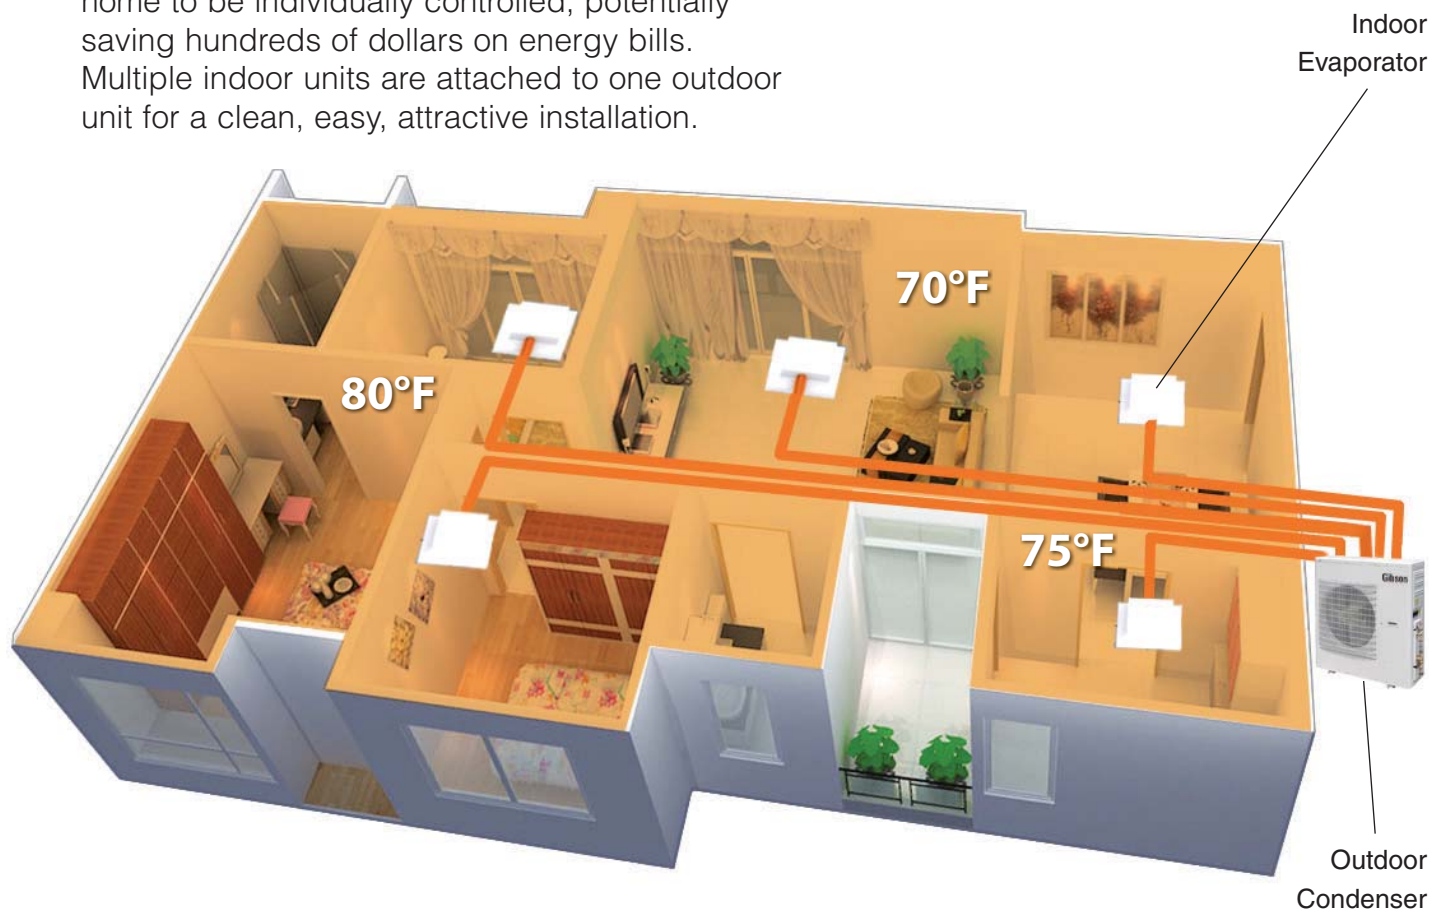


With multiple systems throughout your home, airflow can be selectively channeled where it's needed depending on changing climate conditions or activities during the course of a day. For example, you may choose to keep a bedroom cooler than the family room at night. By only conditioning selected areas according to need, you can lower your overall utility costs.

Aside from lowering utility costs, multiple systems can also help with other problematic scenarios. Vaulted ceilings, great rooms with connected kitchen and dining spaces, expanses of glass windows exposed to the sun from the south and/or winds from the north, and sprawling ranches with hard-to-reach rooms can all benefit from separate cooling systems in each area.



Mini-Split Technology


How Inverter Technology Saves Energy

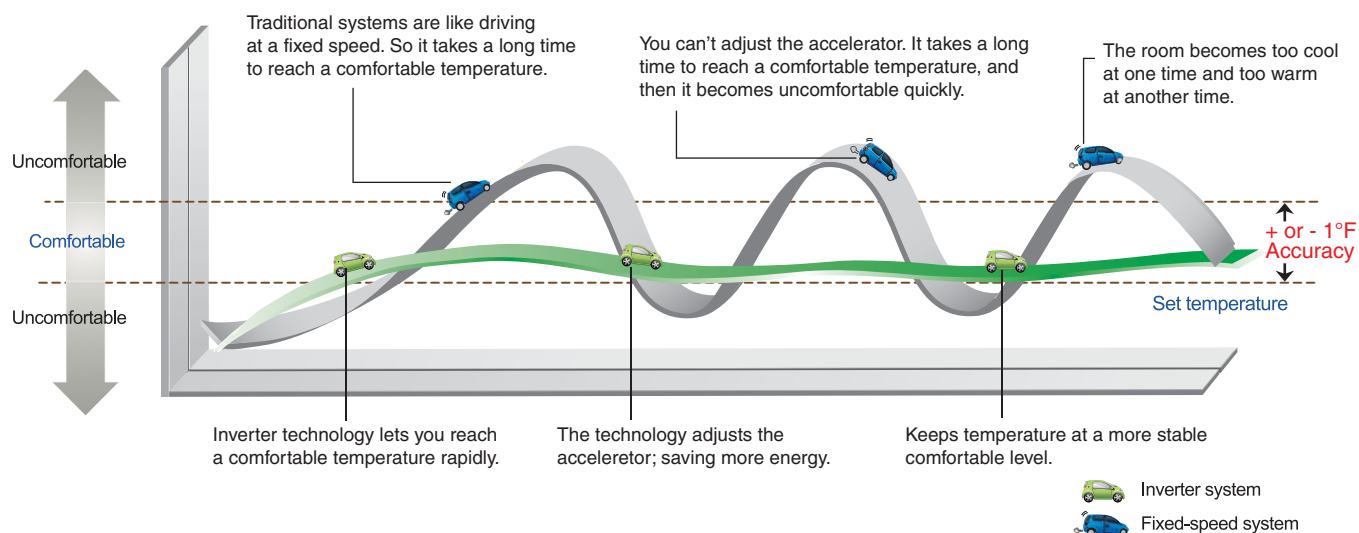

Refrigeration System



High-efficiency inverter compressor



High-efficiency and larger heat exchanger with optimized piping system



High-efficiency electronic expansion valve (EEV) controls refrigerant flow precisely



Optimized linear fan design with larger air volume and enhanced heat exchange efficiency




Optimized axial fan design with larger diameter to increase air volume and enhanced heat exchange efficiency

Eco-Friendly Refrigerant



Faster Cooling



Precise Temperature Control



Energy Saving

R-410A


Standard Blue Fin Coating

Blue fin coating improves the heating efficiency by accelerating the defrosting process and adds significant resistance to salty air, rain and other corrosive elements.



Two-Stage Compressor

A two-stage inverter compressor provides increased energy savings compared to a traditional compressor. Improved COP and EER up to 25%.



Two-Stage Inverter Compressor



Traditional Compressor

Easy to Handle

The outdoor unit is equipped with handles for easier transportation and protection of wiring terminal and valves.



Improved Base Pan Design

Base pan heater and improved drainage allows condensate water to flow easily and prevents freezing. It also improves heating efficiency during low temperature operation.




Gibson®

Mini-Split Technology


Turbo Cooling

Press the “Turbo” button on the remote control to enjoy increased airflow, which enables the indoor temperature to reach the set temperature in a shorter time.

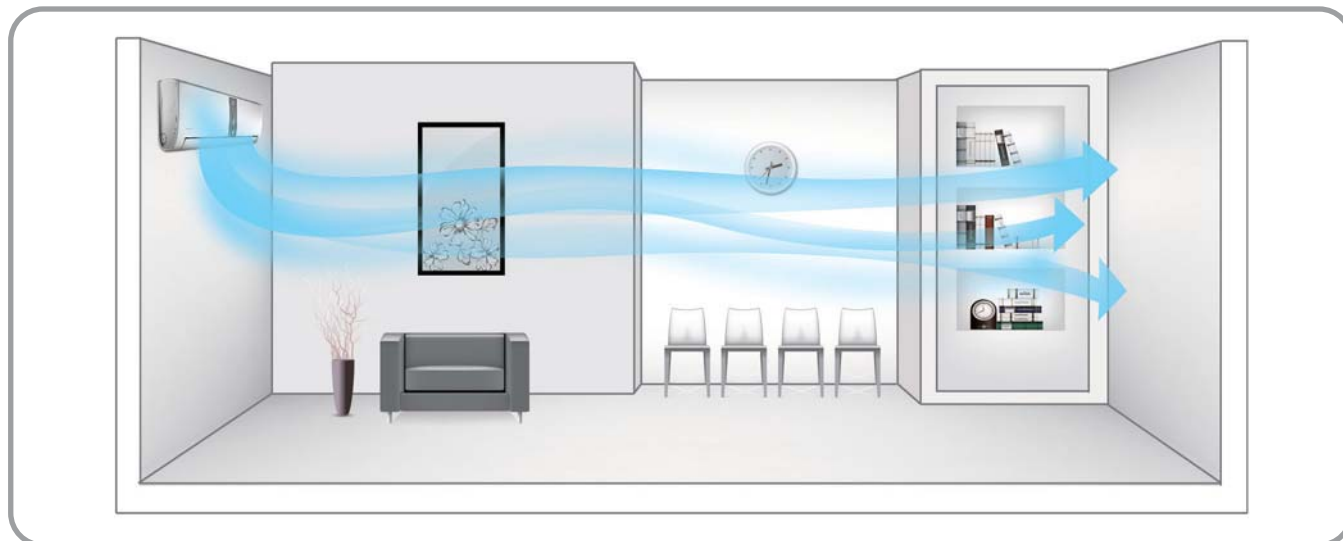

4-Way Air Outlet

On some models the louver can be vertically or horizontally adjusted so as to maximize airflow and comfort in the room.

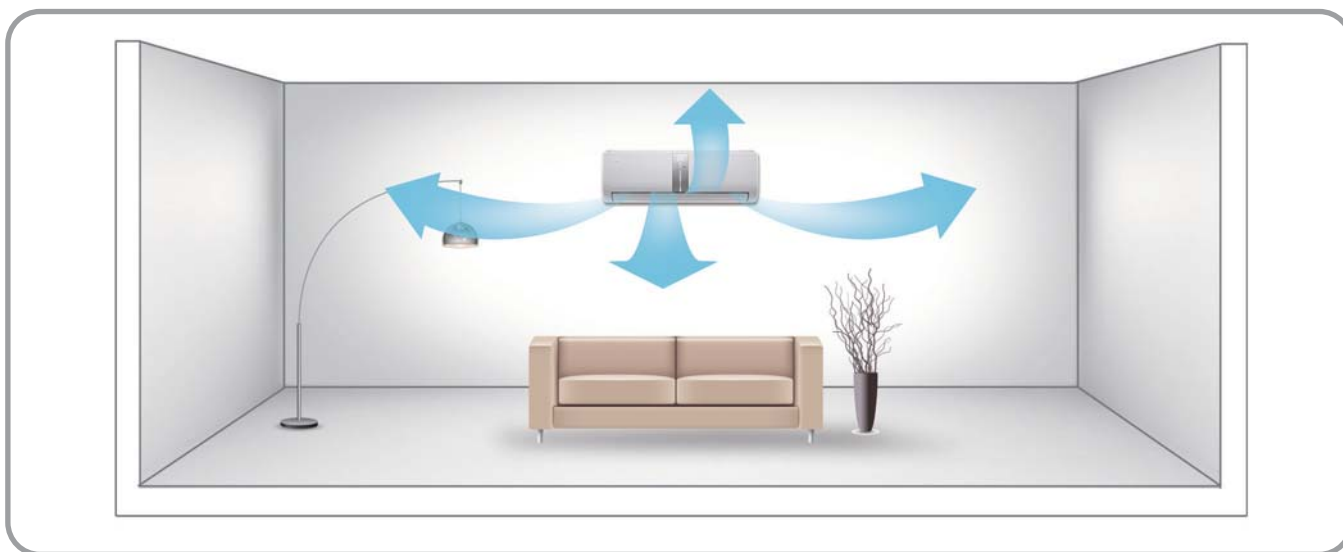

Mini-Split Technology


7 Fan Speeds

From super low to turbo, you can choose the desired airflow.



Low Noise

Operates as quietly as 21dB.

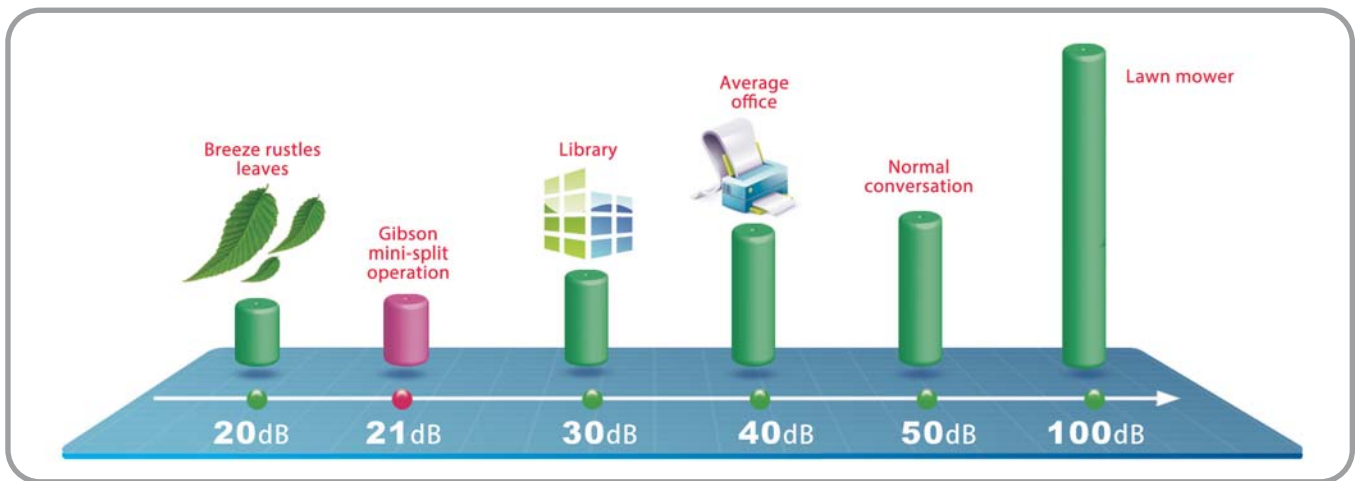


3 Sleep Set-Back Curves

Mode 1: Allows indoor temperature to automatically rise (when cooling) or drop (when heating).

Mode 2: Features unique refresh function, where the temperature is automatically ramped toward set the point before you wake up.

Mode 3: Programmable set-back function allows user to design personal settings in DIY mode.

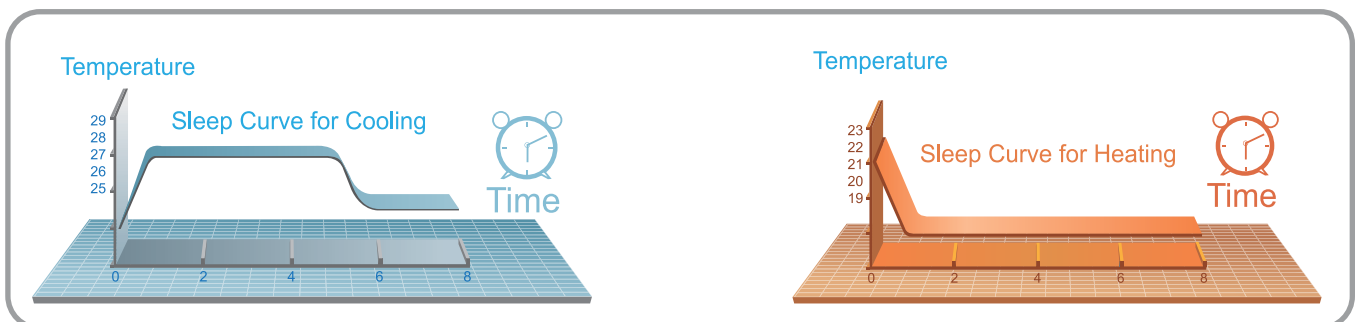

Mini-Split Remote Control

The Perfect Temperature is Right at Your Fingertips


	Power
	Choose fan speeds and settings
	Change operation mode: Auto, Cool, Dry, Fan and Heat
	Raise set temperature; hold the button for 2 seconds to raise set temperature rapidly
	Decrease set temperature; hold the button for 2 seconds to decrease set temperature rapidly
	For rapid cooling or heating
	Press this button to set swing angle
	Set present time or display timer
	For turning off timer
	Operation of the unit will be adjusted according to temperature sensed by remote control to maximize your comfort
	Air conditioner will run according to the preset sleep temperature curve
	Turn on/off the light on the unit
	Change between inside and outside temperature




Mini-Split Remote Control

Now your thermostat can be wherever you are, for perfect temperature control. The mini sensor in the remote control can sense its surrounding temperature, and transmit the signal back to the indoor unit. The unit adjusts airflow volume and temperature accordingly providing maximum comfort.

Remote with IFeel

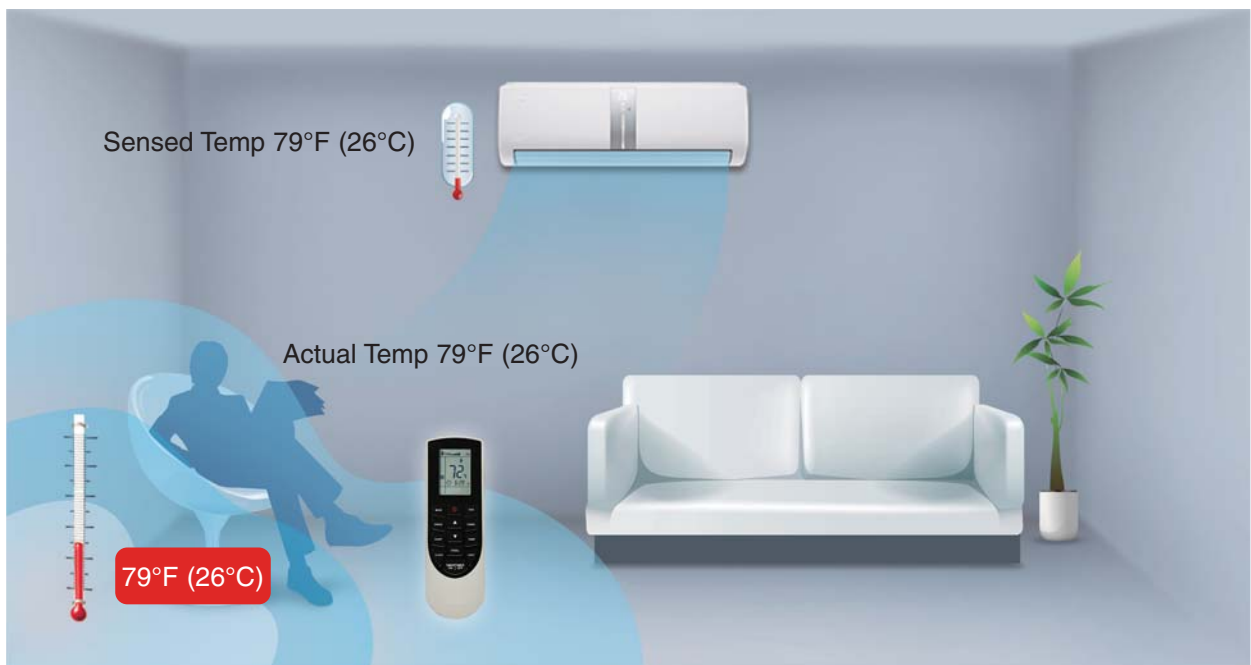

Remote without IFeel


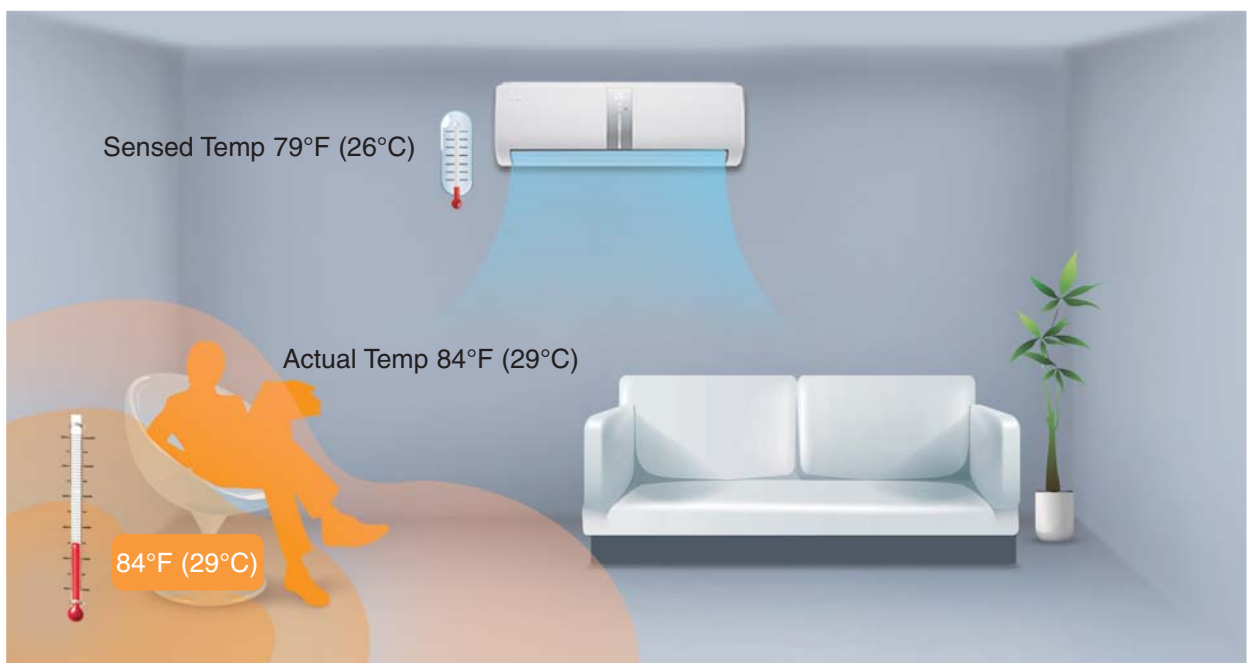



Indoor Air Quality

Replacement filters available through
Partners Choice. (SKU Number 1014085)

Auto Clean (X-Fan)

After set point temperature is satisfied, fan continues to run to dry inside of indoor unit preventing growth of mold and bacteria.

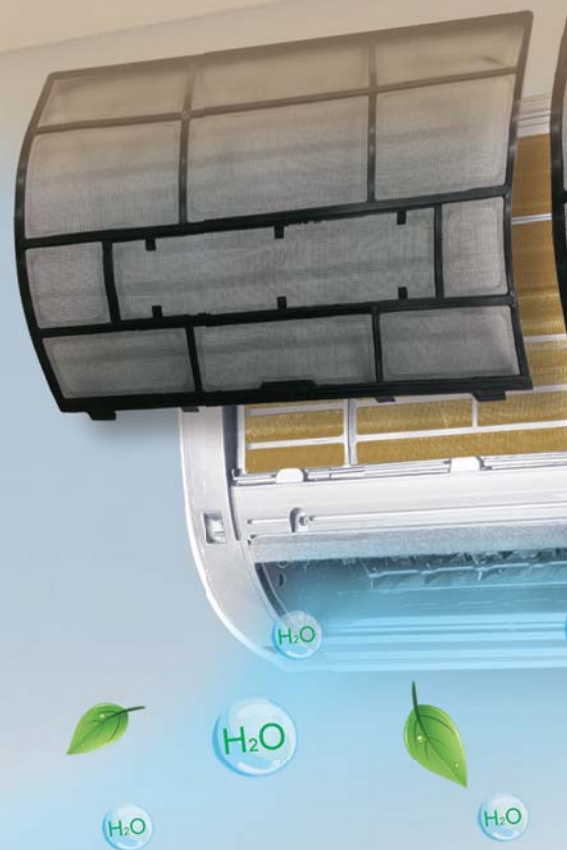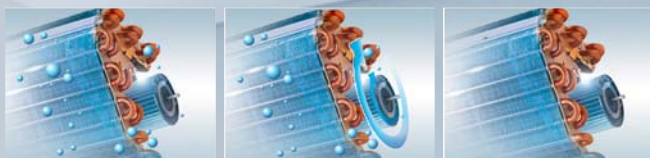

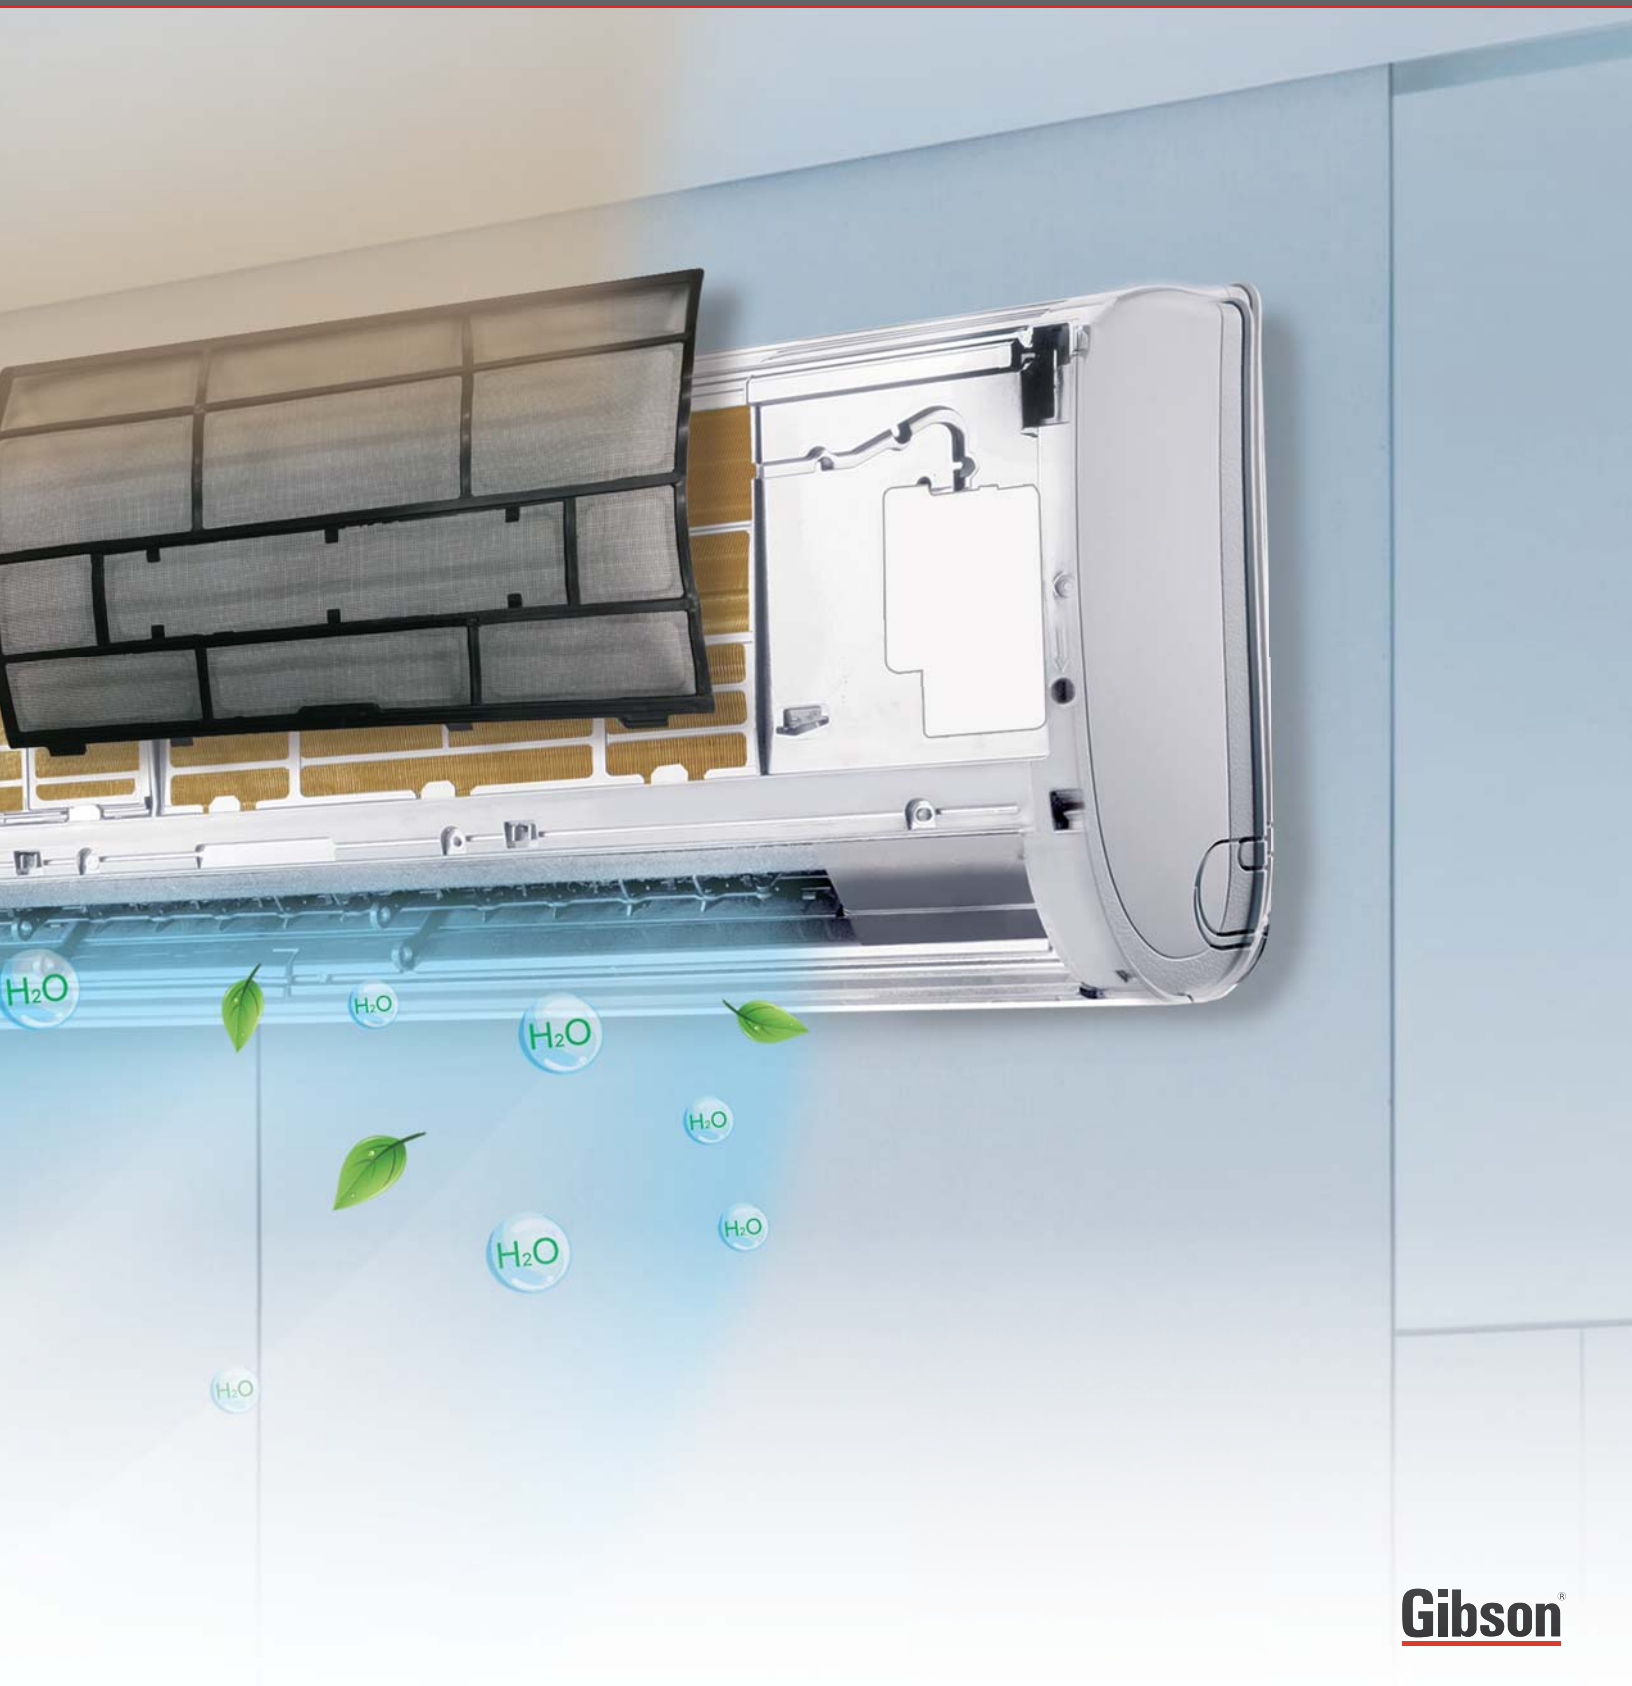

Gibson[®]

Installation Techniques

What You Need To Install Ductless Mini-Splits

At their core, ductless mini-splits are still a simple refrigeration system. They just use advanced technologies like inverters, electronic expansion valves, and numerous sensors in both the indoor and outdoor units to modulate and maintain comfort in a more efficient manner than conventional systems.

Regardless of your experience in the industry, there are a few important tips that will help ensure a high quality trouble-free installation with NO CALL BACKS.

Invest in the Right Tools - Trying to do the job right is nearly impossible if you don't have the right tools.

Flare Nut Torque Wrench – Torqueing to proper specs is essential to a quality installation. Leaks can occur over time with expansion and contraction if not tightened to the proper specs.

45° Flaring Tool - Residential mini-splits are connected with flare fittings. Reason: the systems are only equipped with a small strainer to keep large debris out of the compressor. We do not allow brazing because debris can plug the strainer or expansion valves, or damage the compressor. We do not allow filter dryers because desicant can break loose and cause the same issues.

Multi-Meter with Diode Setting and Needle Probes – Mini-splits convert incoming AC voltage to DC through a diode bridge (bridge rectifier). The ability to check diode functionality is essential to the troubleshooting process. Standard meter probes cannot get into small harness casings.

Gibson®



Flare Nut Torque Wrench

Partners Choice

SKU Number 1014071



45° Flaring Tool

Partners Choice

SKU Number 1016628



Flare Gauge

Partners Choice

SKU Number 1016629




Meter with Diode Setting/Needle Probes

**Refrigeration lines use
45° flares.**

Installation Step-By-Step

STEP 1 - Mount Indoor Unit

Drill 3" hole through interior and exterior wall. Use a level to ensure bracket is level.

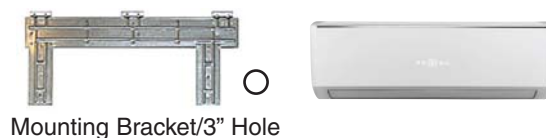

STEP 2 - Mount Condenser

18'x36' Pad, brackets to elevate from snow, risers, concrete, bricks, etc. If you stay within 25' you will not need to add refrigerant.




STEP 3 - Connect Piping, Wiring & Drain



STEP 4 - Torque Flare Fittings

Flare nut torque wrench. Essential for trouble free, leak free installation.

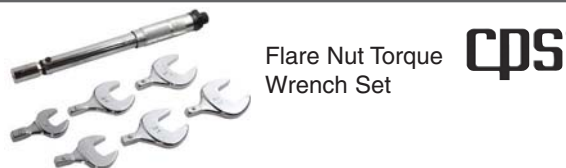

STEP 5 - Nitrogen and Bubble Leak Test

Pressure test with nitrogen at 500 psi. Cal Blue® bubble test all connections. Nitrogen will help dry out piping and enable quicker evacuation.



STEP 6 - Vacuum Test

Pull vacuum to 500 microns. Wait a minimum 2 hours to ensure pressure is holding and there are no leaks.



STEP 7 - System Test

Service valves should not be opened before all other steps are complete. For heat pump, check both modes for proper performance.



STEP 8 - Cover Lines

Cap off your job professionally with SlimDuct® line covers. There are 3 styles to choose from and they are paintable.




Accessories available from Partners Choice.

Ask your Gibson sales representative for more details.


Gibson®

Mini-Split Single-Zone & Multi-Zone Nomenclature

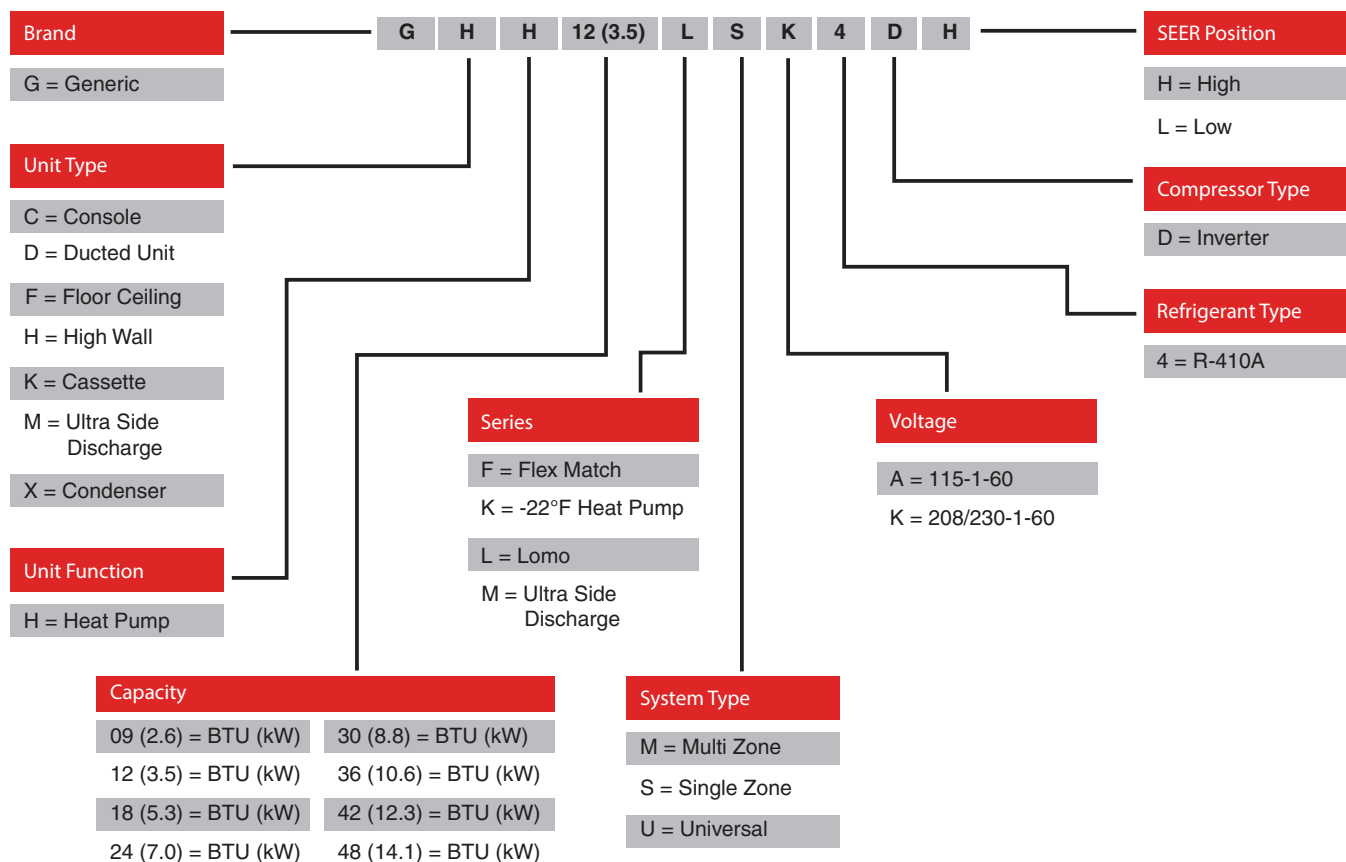

Inverter-Driven Mini-Split Systems

All inverter-driven mini-split systems include three DC motors which may help these units qualify for local rebates.

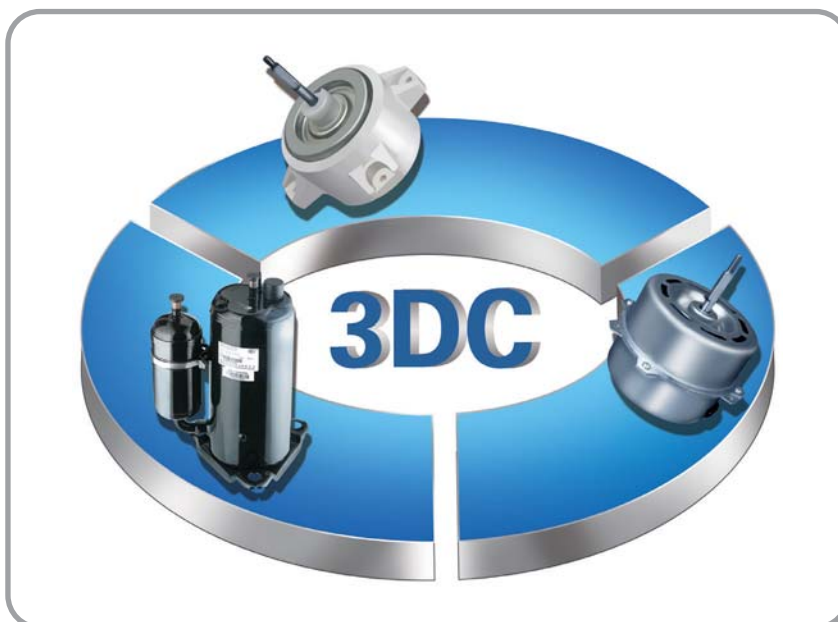

Select Your Size

Load Calculation

Always perform a load calculation before selecting products.



WRC4 Optional Wired Remote Controller Single Zone Wall Hung



WLRC4F Remote Single Zone Wall Hung

Partners Choice
SKU Number 1009614

Partners Choice
SKU Number 1013845



Inverter
R-410A

Single-Zone Heat Pump Available Sizes 9K to 36K BTU

Features	208/230V 1-Phase						115V 1-Phase	
	9K	12K	18K	24K	30K	36K	9K	12K
Up to 30 SEER/-22°F Heating	•	•	•					
Up to 23 SEER/-4°F Heating	•	•	•	•		•		
16 SEER/-4°F Heating	•	•	•	•	•	•	•	•

Piping for Single-Zone Systems

Piping Rules 23 SEER Single Zone

Outdoor Model		GXH9(2.6)LSK4DH	GXH12(3.5)LSK4DH	GXH18(5.3)LSK4DH	GXH24(7.0)LSK4DH	GXH36(10.6)LSK4DH
Indoor Model		GHH9(2.6)LUK4DH	GHH12(3.5)LUK4DH	GHH18(5.3)LUK4DH	GHH24(7.0)LUK4DH	GHH36(10.6)LUK4DH
Liquid Pipe	in.	1/4"	1/4"	1/4"	1/4"	1/4"
Suction Pipe	in.	3/8"	1/2"	5/8"	5/8"	5/8"
Maximum Pre-Charged Length	ft.	25	25	25	25	25
Refrigerant Additional Charge	oz./ft.	0.2	0.2	0.2	0.5	0.5
Maximum Height Difference	ft.	33	33	33	33	33
Maximum Total Line Length	ft.	49	66	82	82	98

Piping Rules 16 SEER Single Zone (Covers 115V and 230V)

Outdoor Model		GXH9(2.6)LSK4DL	GXH12(3.5)LSK4DL	GXH18(5.3)LSK4DL	GXH24(7.0)LSK4DL	GXH30(8.8)LSK4DL	GXH36(10.6)LSK4DL
Indoor Model		GHH9(2.6)LSK4DL	GHH12(3.5)LSK4DL	GHH18(5.3)LSK4DL	GHH24(7.0)LSK4DL	GHH30(8.8)LSK4DL	GHH36(10.6)LSK4DL
Liquid Pipe	in.	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
Suction Pipe	in.	3/8"	3/8"	1/2"	5/8"	5/8"	5/8"
Pre-Charged Length	ft.	25	25	25	25	25	25
Gas Additional Charge	oz./ft.	0.2	0.2	0.2	0.5	0.5	0.5
Maximum Height Difference	ft.	33	33	33	33	33	33
Maximum Total Line Length	ft.	49	66	82	82	98	98

Connection Piping Chart

Models may vary. Check chart for specific models.

Heat Pump

Heat Pump			GXH12(3.5)LSA4DL	GXH12(3.5)LSK4DL	GXH18(5.3)LSK4DL	GXH24(7.0)LSK4DL	GXH30(8.8)LSK4DL	GXH36(10.6)LSK4DL
Connection Pipe Specifications	Outside Diameter of Liquid Pipe	in.	1/4in.					
	Outside Diameter of Gas Pipe	in.	1/2in.			5/8in.		
	Minimum Pipe Length (do not go below)	ft.	10ft.					
	Add Length (add refrigerant over this length)	ft.	25ft.					
	Gas Additional Charge	oz./ft.	0.2oz./ft.			0.5oz./ft.		
	Maximum Height (do not exceed)	ft.	33ft.					
	Maximum Pipe Length (do not exceed)	ft.	49ft.		82ft.		98ft.	

30 Series Heat Pump Models



WLRC7 Remote



**Partners Choice SKU
Number 1017707**

Up to 30.5 SEER - 9K to 18K BTU

Single-Zone Heat Pump, operation to -22°F Heating



R-410A

Model		Indoor Unit	GHH09(2.6)KSK4DH	GHH12(3.5)KSK4DH	GHH18(5.2)KSK4DH
		Outdoor Unit	GXH09(2.6)KSK4DH	GXH12(3.5)KSK4DH	GXH18(5.2)KSK4DH
Power Supply	Rated Voltage	V~	208/230		
	Rated Frequency	Hz	60		
	Phases	--	1		
Cooling Capacity		Btu/h	9000	12000	18000
Heating Capacity		Btu/h	9000	13000	19000
Maximum Over Current Protection		A	15	20	30
Minimum Current (MCA)		A	12	13	19
SEER/HSPF/EER/COP		--	30.5/10.5/15.79/14.29	23.0/10.5/12.77/10.66	21.0/10.5/12.5/10.56
Airflow Volume		CFM	411/382/353/323/ 294/235/205	470/441/411/382/353/ 294/264	529/500/470/441/411/ 353/323
Indoor Unit					
Sound Pressure Level		dB (A)	41/38/34/30/26/24/22	42/39/35/31/27/25/23	48/43/39/35/31/28/26
Dimension (L x H x D)		inch	37.7 × 12.6 × 8.1	37.8 × 12.6 × 8.1	
Dimension of Carton Box (L x H x D)		inch	40.9 × 15.7 × 12.5		
Net Weight		lb	30.9		
Gross Weight		lb	37.5		
Outdoor Unit					
Sound Pressure Level		dB (A)	53	55	59
Dimension (W x H x D)		inch	35.4 × 23.4 × 14.8	35.4 × 23.5 × 14.8	38.6 × 31.1 × 16.8
Dimension of Carton Box (L x H x D)		inch	37.2 × 16.4 × 24.8		42.5 × 19.1 × 33.1
Net Weight		lb	99.2	97.0	141.1
Gross Weight		lb	105.8	103.6	152.2
Refrigerant		--	R-410A		
Refrigerant Charge		oz	49.4		70.6
Length		ft	25		
Gas Additional Charge		oz/ft	0.2		0.5
Piping Connection	Suction	inch	1/2"		5/8"
	Liquid	inch	1/4"		
Maximum Distance Height		ft	33		
Maximum Distance Length		ft	49	66	82
Partners Choice					
Line Set SKU Number with Wire			05-0202		1016619

Note: Line Sets 25 feet or less require no additional refrigerant.

23 Series Heat Pump Models



WLRC4F Remote



Partners Choice

SKU Number 1013845

Up to 23 SEER - 9K to 36K BTU

Single-Zone Heat Pump, -4°F Heating



R-410A

Model		Indoor Unit	GHH09(2.6)LUK4DH	GHH12(3.5)LUK4DH
		Outdoor Unit	GXH09(2.6)LSK4DH	GXH12(3.5)LSK4DH
Function			Cooling/Heating	
Capacity	Cooling	Btu/h	9000	12000
	Heating	Btu/h	11000	13000
SEER/HSPF/EER/COP		--	23/10.5/14.29/10.78	22/10.1/12.5/11.82
Power Supply		Ph-V-Hz	1-208/230-60	
Maximum Over Current Protection		A	15	
Minimum Current (MCA)		A	9	
Airflow Volume	Indoor	CFM	376/288/241/171	400/288/241/171
Indoor Unit				
Sound Pressure Level	Indoor	dB(A)(SH/H/M/L)	43/39/35/29	45/39/35/29
Outline Dimension	WxHxD	mm	845 x 289 x 209	
		inch	33.26 x 11.37 x 8.28	33.26 x 11.37 x 8.23
Package Dimension	WxHxD	mm	921 x 379 x 281	
		inch	36.26 x 11.06 x 14.92	36.26 x 11.06 x 14.9
Net Weight/Gross Weight	Indoor	kg	10/12	
		lb	22/26.5	
Outdoor Unit				
Sound Pressure Level	Outdoor	dB(A)	53	54
Piping Connection	Suction	inch (mm)	3/8 (9.52)	1/2 (12)
	Liquid	inch (mm)	1/4 (6)	
Outline Dimension	WxHxD	mm	848 x 540 x 320	848 x 592 x 320
		inch	33.38 x 23.30 x 12.59	33.39 x 23.31 x 12.59
Package Dimension	WxHxD	mm	881 x 595 x 363	881 x 645 x 363
		inch	34.68 x 14.9 x 23.43	34.68 x 14.29 x 25.39
Net Weight/Gross Weight	Outdoor	kg	35.5/38	39/42
		lb	78.3/83.8	86/92.6
Maximum Total Line Length		ft	49	66
Partners Choice				
Line Set SKU Number with Wire			05-0200	05-0202

Note: Line Sets 25 feet or less require no additional refrigerant.

23 Series Heat Pump Models

Up to 23 SEER - 9K to 36K BTU (continued)

Single-Zone Heat Pump, -4°F Heating



R-410A

Model		Indoor Unit	GHH18(5.3)LUK4DH	GHH24(7.0)LUK4DH	GHH36(10.6)LUK4DH
		Outdoor Unit	GXH18(5.3)LSK4DH	GXH24(7.0)LSK4DH	GXH36(10.6)LSK4DH
Function			Cooling/Heating		
Capacity	Cooling	Btu/h	18000	22000	33600
	Heating	Btu/h	19800	23000	34600
SEER/HSPF/EER/COP		--	20/10/12.5/11.5		18/9/8.2/9.11
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	25	30	30
Minimum Current (MCA)		A	16	20	24
Airflow Volume	Indoor	CFM	530/488/412/335	706/647/588/530	736
Indoor Unit					
Sound Pressure Level	Indoor	dB(A)(SH/H/M/L)	47/43/40/39	48/44/40/36	52/48/43/35
Outline Dimension	WxHxD	mm	970 x 300 x 224	1078 x 325 x 242	1350x326x253
		inch	38.19 x 11.81 x 8.82	42.44 x 12.79 x 9.68	53.2x12.8x10.0
Package Dimension	WxHxD	mm	1041 x 383 x 320	1148 x 413 x 350	1441x421x358
		inch	40.98 x 15.08 x 12.59	45.19 x 16.26 x 13.78	56.7x16.6x14.1
Net Weight/Gross Weight	Indoor	kg	12.5/15.5	15.5/19	19/23.5
		lb	27.6/34.2	34.2/41.9	41.9/51.8
Outdoor Unit					
Sound Pressure Level	Outdoor	dB(A)	55	59	62
Piping Connection	Suction	inch (mm)	5/8 (16)		
	Liquid	inch (mm)	1/4 (6)		
Outline Dimension	WxHxD	mm	955 x 700 x 396	980 x 790 x 427	
		inch	37.59 x 27.56 x 15.59	38.58 x 31.10 x 16.81	38.6 x 31.1 x 16.8
Package Dimension	WxHxD	mm	1029 x 750 x 458	1083 x 488 x 855	1083 x 855 x 488
		inch	40.51 x 29.53 x 18.03	42.63 x 19.21 x 33.66	42.6 x 19.2 x 33.6
Net Weight/Gross Weight	Outdoor	kg	48/52.5	64.5/69.5	73/77
		lb	105.8/115.8	142.2/153.2	161/169.8
Maximum Total Line Length		ft	82	82	98
Partners Choice					
Line Set SKU Number with Wire			1016619		

Note: Line Sets 25 feet or less require no additional refrigerant.

16 Series Heat Pump Models

16 SEER - 9K to 36K BTU

Single-Zone Heat Pump, -4°F Heating



R-410A

Model		Indoor Unit	GHH09(2.6)LSA4DL	GHH12(3.5)LSA4DL	GHH09(2.6)LSK4DL	GHH12(3.5)LSK4DL
		Outdoor Unit	GXH09(2.6)LSA4DL	GXH12(3.5)LSA4DL	GXH09(2.6)LSK4DL	GXH12(3.5)LSK4DL
Function			Cooling/Heating			
Capacity	Cooling	Btu/h	9000	12000	9000	12000
	Heating	Btu/h	9600	13000	9500	13000
SEER/HSPF/EER/COP		--	16/9/10/11.88	16/9/9.23/10.4	16/9/10/11.88	16/9/9.23/10.4
Power Supply		Ph-V-Hz	1-115-60		1-208/230-60	
Maximum Over Current Protection		A	25	30	15	
Minimum Current (MCA)		A	17	20	9	
Airflow Volume	Indoor	CFM	317	400	317	400
Indoor Unit						
Sound Pressure Level	Indoor	dB(A)(SH/H/M/L)	42/38/32/28	43/39/35/29	43/38/34/28	45/39/35/29
Outline Dimension	WxHxD	mm	790 x 275 x 200	845 x 289 x 209	790 x 275 x 200	845 x 289 x 209
		inch	31.1 x 10.8 x 7.8	33.3 x 11.4 x 8.3	31.1 x 10.8 x 7.9	33.3 x 11.4 x 8.2
Package Dimension	WxHxD	mm	866 x 367 x 271	921 x 379 x 281	866 x 367 x 271	921 x 379 x 281
		inch	34.1 x 14.4 x 10.7	36.3 x 14.9 x 11.1	34.1 x 14.4 x 10.7	36.1 x 15 x 11
Net Weight/Gross Weight	Indoor	kg	9/11	10.5/12.5	9/11	10.5/12.5
		lb	19.8/24.3	29/31.5	19.8/24.3	23.2/27.6
Outdoor Unit						
Sound Pressure Level	Outdoor	dB(A)	51		52	53
Piping Connection	Suction	inch (mm)	3/8 (9.52)			
	Liquid	inch (mm)	1/4 (6)			
Outline Dimension	WxHxD	mm	848 x 540 x 320		776 x 540 x 320	
		inch	33.4 x 21.3 x 12.6		30.6 x 21.2 x 12.6	
Package Dimension	WxHxD	mm	881 x 363 x 595	881 x 595 x 363	823 x 595 x 358	
		inch	34.7 x 14.3 x 23.4	34.7 x 23.4 x 14.3	34.7 x 14.3 x 23.4	34.7 x 23.4 x 14.3
Net Weight/Gross Weight	Outdoor	kg	27/29.5	29/31.5	30/32.5	32/34.5
		lb	59.5/65	63.9/69.5	66.2/71.7	70.6/76.1
Maximum Height		ft	33			
Maximum Length		ft	49	66	49	66
Partners Choice						
Remote Control - WLRC4F			1013845			
Line Set SKU Number with Wire			05-0200			

Note: Line Sets 25 feet or less require no additional refrigerant.

16 Series

Heat Pump Models

16 SEER - 9K to 36K BTU (continued)

Single-Zone Heat Pump, -4°F Heating



R-410A

Model		Indoor Unit	GHH18(5.3)LSK4DL	GHH24(7.0)LSK4DL	GHH30(8.8)LSK4DL	GHH36(10.6)LSK4DL
		Outdoor Unit	GXH18(5.3)LSK4DL	GXH24(7.0)LSK4DL	GXH30(8.8)LSK4DL	GXH36(10.6)LSK4DL
Function			Cooling/Heating			
Capacity	Cooling	Btu/h	18000	22000	28000	33600
	Heating	Btu/h	19000	23000	28400	34600
SEER/HSPF/EER/COP		--	16/9/9.37/9.5	16/9/9.73/10	16/8.2/10.37/10.14	16/8.2/8.62/9.11
Power Supply		Ph-V-Hz	1-208/230-60			
Maximum Over Current Protection		A	25		30	40
Minimum Current (MCA)		A	16		20	24
Airflow Volume	Indoor	CFM	470	760	706/618/0/530/0/412/0	736/647/0/530/0/412/0
Indoor Unit						
Sound Pressure Level	Indoor	dB(A)(SH/H/M/L)	46/42/39/36	48/44/40/36	56/53/46/41	
Outline Dimension	WxHxD	mm	970 x 300 x 224	1078 x 325 x 242	1350 x 326 x 253	
		inch	38.2 x 11.8 x 8.8	42.4 x 12.8 x 9.6	53.15 x 12.835 x 9.961	
Package Dimension	WxHxD	mm	1041 x 383 x 320	1148 x 413 x 350	1441 x 421 x 358	
		inch	41 x 15 x 12.6	45 x 16.1 x 13.2	56.732 x 16.575 x 14.094	
Net Weight/Gross Weight	Indoor	kg	12.5/15.5	17/20.5	19/26	
		lb	27.6/34.2	37.5/45.2	41.9/57.3	
Outdoor Unit						
Sound Pressure Level	Outdoor	dB(A)	56	59	62	65
Piping Connection	Suction	inch (mm)	1/2 (12)	5/8 (16)		
	Liquid	inch (mm)	1/4 (6)			
Outline Dimension	WxHxD	mm	955 x 700 x 396		980 x 790 x 427	
		inch	37.6 x 27.5 x 15.6		38.583 x 31.102 x 16.811	
Package Dimension	WxHxD	mm	1029 x 750 x 458		1083 x 488 x 855	
		inch	40.5 x 18 x 29.5		42.638 x 19.213 x 33.661	
Net Weight/Gross Weight	Outdoor	kg	43.5/48	50/54.5	70/74	73/77
		lb	95.9/105.8	110.2/120.1	154.4/163.2	161.0/169.8
Maximum Height		ft	33			
Maximum Length		ft	82		98	
Partners Choice						
Remote Control			WLRC4F (Partners Choice SKU 1013845)		RC (Partners Choice SKU 1007701)	
Line Set SKU Number with Wire			05-0202		1016619	

Note: Line Sets 25 feet or less require no additional refrigerant.

Gibson®

Pro Series

Light Commercial Single-Zone Heat Pump Systems

Large Capacity Single-Zone Heat Pump Systems - 18K - 48K BTU - Up to 20 SEER

System is single-zone (one condenser to one indoor unit) with 3 different types of indoor unit choices.



- Highly reliable compressor which is capable of operating under extreme conditions.
- Dual ambient temperature sensor design delivers precision temperature monitoring.
- Power delay control design dramatically reduces start-up current.

Key Features	
Maximum # of Indoor Units	1 to 1 match
Maximum Pipe Length ft./m	164ft./50m
Ph-V-Hz	1-208/230-60
Cooling/Heating Range F(C)	0°F - 118.4°F/0°F - 75.2°F

Pro Series

Light Commercial Single-Zone Heat Pump Systems

Ducted Unit

- Flexible design for installation, the air return can be either from the bottom or rear, as well as the alternative condensate connections.
- Optimized air duct design improves the performance and lowers noise.

Cassette Type

- Built in condensate pump standard with increased lift of 1000mm (39 inches).
- Special low noise fan design.
- Adjustable swing angle design for cooling and heating mode provides better comfort.

Floor/Ceiling Type

- 3-D air flue design.
- Easy replacement of motor and fan blade thanks to clamp block propeller design.
- Different swing angle design for cooling and heating mode provides better comfort.

Pro Series Line Set Sizing Information


Outdoor Unit Model	Outdoor Unit SKU	Indoor Unit Model	Indoor Unit SKU	"Liquid" Pipe	Gas Pipe
GXH18(5.3)USV4DH	1009444	GDU18(5.3)USV4DH	1009450	1/4"	1/2"
		GKU18(5.3)USV4DH	1009462		
		GFU18(5.3)USV4DH	1009456		
GXH24(7.0)USV4DH	1009445	GDU24(7.0)USV4DH	1009451	3/8"	5/8"
		GKU24(7.0)USV4DH	1009463		
		GFU24(7.0)USV4DH	1009457		
GXH36(10.6)USV4DH	1009447	GDU36(10.6)USV4DH	1009453		
		GKU36(10.6)USV4DH	1009465		
		GFU36(10.6)USV4DH	1009459		
GXH48(14.1)USV4DH	1009449	GDU48(14.1)USV4DH	1009455		
		GKU48(14.1)USV4DH	1009467		
		GFU48(14.1)USV4DH	1009461		


Pro Series Light Commercial Single-Zone Heat Pump Systems

Pro Series Lineup - one to one match-up.



R-410A

Capacity Index (Btu/h)		18K	24K
Outdoor Unit		 GXH18(5.3)USV4DH	 GXH24(7.0)USV4DH
Indoor Unit	Ducted	 GDU18(5.3)USV4DH	 GDU24(7.0)USV4DH
	Cassette	 GKU18(5.3)USV4DH	 GKU24(7.0)USV4DH
	Floor/Ceiling	 GFU18(5.3)USV4DH	 GFU24(7.0)USV4DH

Capacity Index (Btu/h)		36K	48K
Outdoor Unit		 GXH36(10.6)USV4DH	 GXH48(14.1)USV4DH
Indoor Unit	Ducted	 GDU36(10.6)USV4DH	 GDU48(14.1)USV4DH
	Cassette	 GKU36(10.6)USV4DH	 GKU48(14.1)USV4DH
	Floor/Ceiling	 GFU36(10.6)USV4DH	 GFU48(14.1)USV4DH

Pro Series Light Commercial Single-Zone Heat Pump Systems

Heat Pump - 18K to 48K BTU


R-410A

Model		Outdoor Unit	GXH18(5.3)USV4DH		
		Indoor Unit	GDU18(5.3)USV4DH	GKU18(5.3)USV4DH	GFU18(5.3)USV4DH
Function			Ducted	Cassette	Floor Ceiling
Capacity					
Cooling		Btu/h	17100		
Heating		Btu/h	18800	18400	19100
SEER/HSPF/EER/COP		--	16.0/9.5/11/11.35		
Electrical Data/Refrigerant Charge					
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	25		
Minimum Current (MCA)		A	17		
Refrigerant Charge Volume		oz/kg	49.4/1.4		
Indoor Unit					
Airflow Volume		CFM	585	445	585
		m3/h	1000	760	1000
External Static Pressure	Rated Inch	WC	.1	—	
	Maximum Inch	WC	.12	—	
Sound Pressure Level (H/M/L)		dB(A)	39/36/28	46/44/37	42/38/32
Outline Dimension	WxDxH	inch	40.83 x 28.39 x 10.47	26.18 x 23.46 x 9.45	40.03 x 27.56 x 8.86
		mm	1037 x 721 x 266	665 x 596 x 240	1220 x 700 x 225
Package Dimension	WxDxH	inch	44.21 x 31.42 x 12.72	30.43 x 28.86 x 11.81	52.87 x 32.40 x 12.40
		mm	1123 x 798 x 323	773 x 733 x 300	1343 x 823 x 315
Net Weight/Gross Weight	Indoor	lbs	72.75/83.78	44.09/52.91	85.98/105.82
		kg	33.0/38.0	20.0/24.0	39.0/48.0
Panel					
Outline Dimension	WxDxH	inch		26.38 x 26.38 x 1.97	
		mm	—	670 x 670 x 50	—
Package Dimension	WxDxH	inch		30.04 x 30.04 x 4.13	
		mm	—	763 x 763 x 105	—
Net Weight/ Gross Weight	Panel	lbs		7.72/11.02	
		kg	—	3.5/5.0	—
Outdoor Unit					
Sound Pressure Level (H/M/L)		dB(A)	56/—/—		
Outline Dimension	WxDxH	inch	37.60 x 15.59 x 27.56		
		mm	955 x 396 x 700		
Package Dimension	WxDxH	inch	40.51 x 18.03 x 29.53		
		mm	1029 x 458 x 750		
Net Weight/ Gross Weight	Outdoor	lbs	105.82/114.64		
		kg	48.0/52.0		
Connecting Pipe Diameter					
Outdoor Diameter	Suction Pipe	inch (mm)	1/2 (12)		
	Liquid Pipe	inch (mm)	1/4 (6)		
Maximum Distance	Height/Length	ft (m)	164 (50)		
Partners Choice					
Line Set 25 Feet SKU Number with Wire			05-0202		

Note: Line Sets 25 feet or less require no additional refrigerant.

Gibson®

Pro Series Light Commercial Single-Zone Heat Pump Systems

Heat Pump - 18K to 48K BTU (continued)


R-410A

Model		Outdoor Unit	GXH24(7.0)USV4DH		
		Indoor Unit	GDU24(7.0)USV4DH	GKU24(7.0)USV4DH	GFU24(7.0)USV4DH
Function			Ducted	Cassette	Floor Ceiling
Capacity					
Cooling		Btu/h	23800		
Heating		Btu/h	27200		
SEER/HSPF/EER/COP		--	16.0/10/10.65/11.5		
Electrical Data/Refrigerant Charge					
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	40		
Minimum Current (MCA)		A	24		
Refrigerant Charge Volume		oz/kg	77.6/2.2		
Indoor Unit					
Airflow Volume		CFM	820	765	705
		m3/h	1400	1300	1200
External Static Pressure	Rated Inch	WC	.1	—	
	Maximum Inch	WC	.3	—	
Sound Pressure Level (H/M/L)		dB(A)	46/44/40	46/42/38	48/46/40
Outline Dimension	WxDxH	inch	50.35 x 21.97 x 10.55	36.10 x 33.07 x 9.45	48.03 x 27.56 x 8.86
		mm	1279 x 558 x 268	917 x 840 x 240	1220 x 700 x 225
Package Dimension	WxDxH	inch	53.07 x 23.50 x 11.14	45.20 x 37.72 x 13.39	52.87 x 32.40 x 12.40
		mm	1348 x 597 x 283	1148 x 958 x 340	1343 x 823 x 315
Net Weight/Gross Weight	Indoor	lbs	74.96/85.98	59.52/83.78	88.18/110.23
		kg	34.0/39.0	27.0/38.0	40.0/50.0
Panel					
Outline Dimension	WxDxH	inch		37.48 x 37.48 x 2.36	
		mm	—	952 x 952 x 60	—
Package Dimension	WxDxH	inch		40.67 x 40.87 x 5.24	
		mm	—	1033 x 1038 x 133	—
Net Weight/ Gross Weight	Panel	lbs		15.43/24.25	
		kg	—	7.0/11.0	—
Outdoor Unit					
Sound Pressure Level (H/M/L)		dB(A)	57/—/—		
Outline Dimension	WxDxH	inch	38.58 x 16.81 x 31.10		
		mm	980 x 427 x 790		
Package Dimension	WxDxH	inch	42.64 x 19.21 x 33.66		
		mm	1083 x 488 x 855		
Net Weight/ Gross Weight	Outdoor	lbs	152.12/163.14		
		kg	69.0/74.0		
Connecting Pipe Diameter					
Outdoor Diameter	Suction Pipe	inch (mm)	5/8 (16)		
	Liquid Pipe	inch (mm)	3/8 (9.52)		
Maximum Distance	Height/Length	ft (m)	164 (50)		
Partners Choice					
Line Set 25 Feet SKU Number with Wire			05-0204		

Note: Line Sets 25 feet or less require no additional refrigerant.

Pro Series Light Commercial Single-Zone Heat Pump Systems

Heat Pump - 18K to 48K BTU (continued)


R-410A

Model		Outdoor Unit	GXH36(10.6)USV4DH		
		Indoor Unit	GDU36(10.6)USV4DH	GKU36(10.6)USV4DH	GFU36(10.6)USV4DH
Function			Ducted	Cassette	Floor Ceiling
Capacity					
Cooling		Btu/h	34000		
Heating		Btu/h	41000		
SEER/HSPF/EER/COP		--	16.0/9/10.35/10.9		
Electrical Data/Refrigerant Charge					
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	45		
Minimum Current (MCA)		A	29		
Refrigerant Charge Volume		oz/kg	123.5/3.5		
Indoor Unit					
Airflow Volume		CFM	175	1095	1115
		m3/h	2000	1860	1900
External Static Pressure	Rated Inch	WC	.148	—	
	Maximum Inch	WC	.4	—	
Sound Pressure Level (H/M/L)		dB(A)	52/48/44	49/46/43	53/51/46
Outline Dimension	WxDxH	inch	48.27 x 30.51 x 11.42	36.10 x 33.07 x 12.60	55.90 x 27.56 x 9.65
		mm	1226 x 775 x 290	917 x 840 x 320	1420 x 700 x 245
Package Dimension	WxDxH	inch	52.68 x 34.53 x 12.01	45.20 x 37.72 x 16.54	60.94 x 32.60 x 13.58
		mm	1338 x 877 x 305	1148 x 958 x 420	1548 x 828 x 345
Net Weight/Gross Weight	Indoor	lbs	101.41/116.85	70.55/97.00	105.82/123.50
		kg	46.0/53.0	32.0/44.0	48.0/56.0
Panel					
Outline Dimension	WxDxH	inch		37.48 x 37.48 x 2.36	
		mm	—	952 x 952 x 60	—
Package Dimension	WxDxH	inch		40.67 x 40.87 x 5.24	
		mm	—	1033 x 1038 x 133	—
Net Weight/ Gross Weight	Panel	lbs		15.43/24.25	
		kg	—	7.0/11.0	—
Outdoor Unit					
Sound Pressure Level (H/M/L)		dB(A)	63/—/—		
Outline Dimension	WxDxH	inch	43.58 x 17.32 x 43.31		
		mm	1107 x 440 x 1100		
Package Dimension	WxDxH	inch	45.59 x 19.41 x 48.62		
		mm	1158 x 493 x 1235		
Net Weight/ Gross Weight	Outdoor	lbs	205.03/222.67		
		kg	93.0/101.0		
Connecting Pipe Diameter					
Outdoor Diameter	Suction Pipe	inch (mm)	5/8 (16)		
	Liquid Pipe	inch (mm)	3/8 (9.52)		
Maximum Distance	Height/Length	ft (m)	164 (50)		
Partners Choice					
Line Set 25 Feet SKU Number with Wire			05-0204		

Note: Line Sets 25 feet or less require no additional refrigerant.

Pro Series Light Commercial Single-Zone Heat Pump Systems

Heat Pump - 18K to 48K BTU (continued)


R-410A

Model		Outdoor Unit	GXH48(14.1)USV4DH		
		Indoor Unit	GDU48(14.1)USV4DH	GKU48(14.1)USV4DH	GFU48(14.1)USV4DH
Function			Ducted	Cassette	Floor Ceiling
Capacity					
Cooling		Btu/h	48000		
Heating		Btu/h	54500		
SEER/HSPF/EER/COP		--	16.0/9/9.3/10.55		
Electrical Data/Refrigerant Charge					
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	70		
Minimum Current (MCA)		A	45		
Refrigerant Charge Volume		oz/kg	141.1/4.0		
Indoor Unit					
Airflow Volume		CFM	1470	1350	
		m3/h	2500	2300	
External Static Pressure	Rated Inch	WC	.2	—	
	Maximum Inch	WC	.5	—	
Sound Pressure Level (H/M/L)		dB(A)	53/49/45	52/47/41	55/50/46
Outline Dimension	WxDxH	inch	52.76 x 29.53 x 13.78	35.83 x 35.83 x 11.42	66.93 x 27.56 x 9.65
		mm	1340 x 750 x 350	910 x 910 x 290	1700 x 700 x 245
Package Dimension	WxDxH	inch	56.02 x 32.95 x 17.91	40.28 x 39.09 x 14.76	71.97 x 32.60 x 13.58
		mm	1423 x 837 x 455	1023 x 993 x 375	1828 x 828 x 345
Net Weight/Gross Weight	Indoor	lbs	123.50/143.30	94.80/110.23	130.07/149.91
		kg	56.0/65.0	43.0/50.0	59.0/68.0
Panel					
Outline Dimension	WxDxH	inch		40.95 x 40.95 x 2.56	
		mm	—	1040 x 1040 x 65	—
Package Dimension	WxDxH	inch		44.76 x 44.76 x 5.51	
		mm	—	1137 x 1137 x 140	—
Net Weight/ Gross Weight	Panel	lbs		17.64/26.46	
		kg	—	8.0/12.0	—
Outdoor Unit					
Sound Pressure Level (H/M/L)		dB(A)	59/—/—		
Outline Dimension	WxDxH	inch	37.71 x 16.22 x 53.11		
		mm	958 x 412 x 1349		
Package Dimension	WxDxH	inch	41.06 x 17.83 x 59.06		
		mm	1043 x 453 x 1500		
Net Weight/ Gross Weight	Outdoor	lbs	231.49/253.53		
		kg	105.0/115.0		
Connecting Pipe Diameter					
Outdoor Diameter	Suction Pipe	inch (mm)	5/8 (16)		
	Liquid Pipe	inch (mm)	3/8 (9.52)		
Maximum Distance	Height/Length	ft (m)	164 (50)		
Partners Choice					
Line Set 25 Feet SKU Number with Wire			05-0204		

Note: Line Sets 25 feet or less require no additional refrigerant.

Pro Series Light Commercial Single-Zone Heat Pump Systems

Control System Lineup

Controlling System	Product Series	Ducted Type	Cassette Type	Floor Ceiling Type
Wireless Remote Control	WLRC2 (Pro Series) Partners Choice 1007702	●	●	●
Wired Control	WRC2 (Pro Series) Partners Choice 1008355	●	●	●

Note: ● standard ● optional

Heat Pump Models


High-Efficiency Quiet Fan

Gibson's transparent axial fan is resistant to high temperature and operates quietly.




High-Temp-Resistant PCB

Fireproof metal casting and temperature-resistant printed circuit board allow trouble-free operation up to 185° F (85° C).

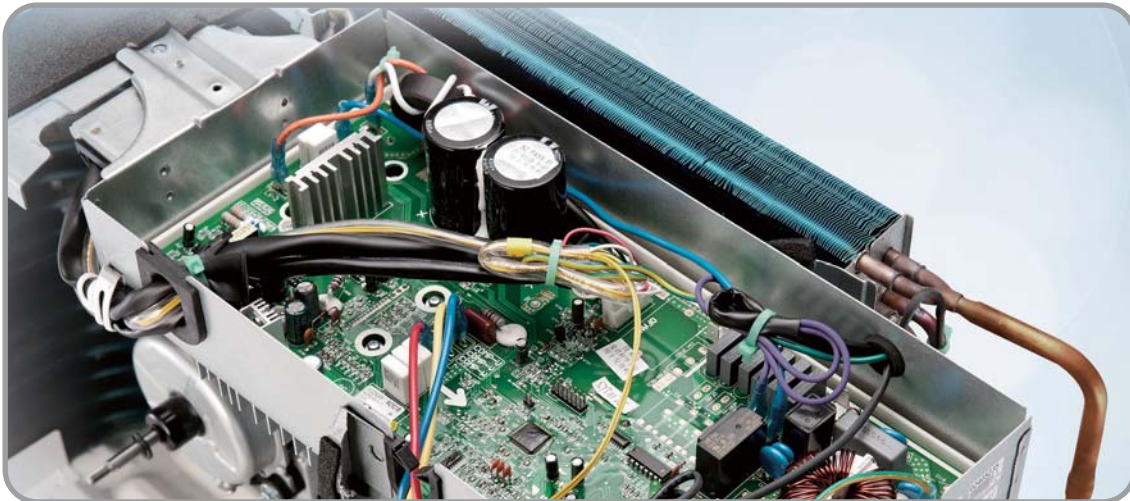

Integrated Evaporator

Compact design minimizes indoor unit size while greatly enhancing heat exchange capability.

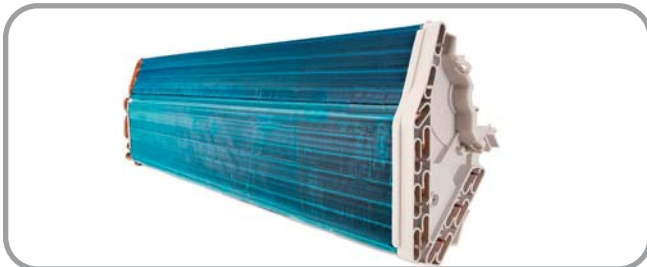

Integrated Design

Integrated rear base and water tray design avoid water leakage and reduce noise.




Heat Pump Models

Intelligent Defrosting

Maximize heating comfort with shorter defrosting time. Traditional defrosting works by setting time, e.g., defrosting process is on for 10 minutes at each 50 minute interval.

Gibson Intelligent Defrosting is only performed when needed, which reduces energy waste by eliminating the unnecessary defrosting process.

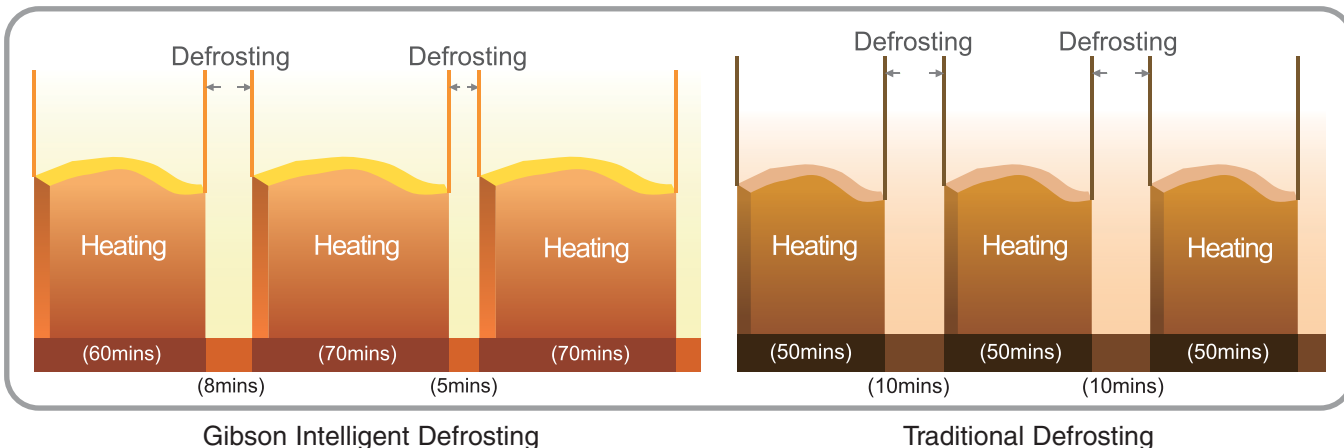

Functions for Low Ambient Temperature

5°F (-15°C) Cooling - Reliable operation at 5°F (-15°C) cooling. As the outdoor temperature changes, the frequency of compressor and the speed of fan adjusts accordingly.

-4°F (-20°C) Heating - Reliable operation at -4°F (-20°C) heating is supported by Gibson's electrical heating chassis, preheating technology and system modulation.

Cold Air Prevention

Fan delay allows the copper pipe to be heated in advance, so the air will not be blown out before it reaches the set temperature.



Multi-Zone Systems



Multi-Zone Heat Pump Condensers

18K to 42K BTU – Up to 22 SEER



R-410A

Mix and match with indoor units to make up to 124 different system combinations.

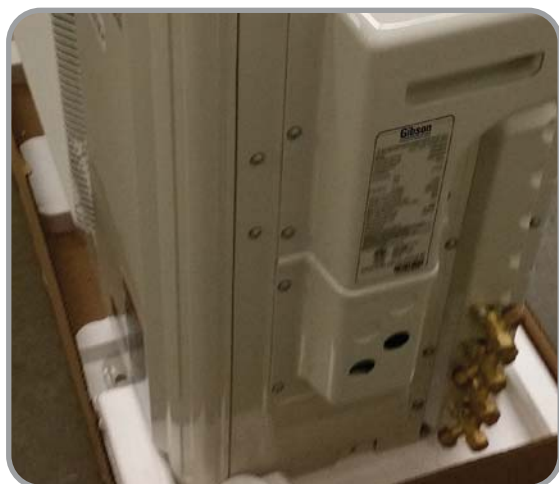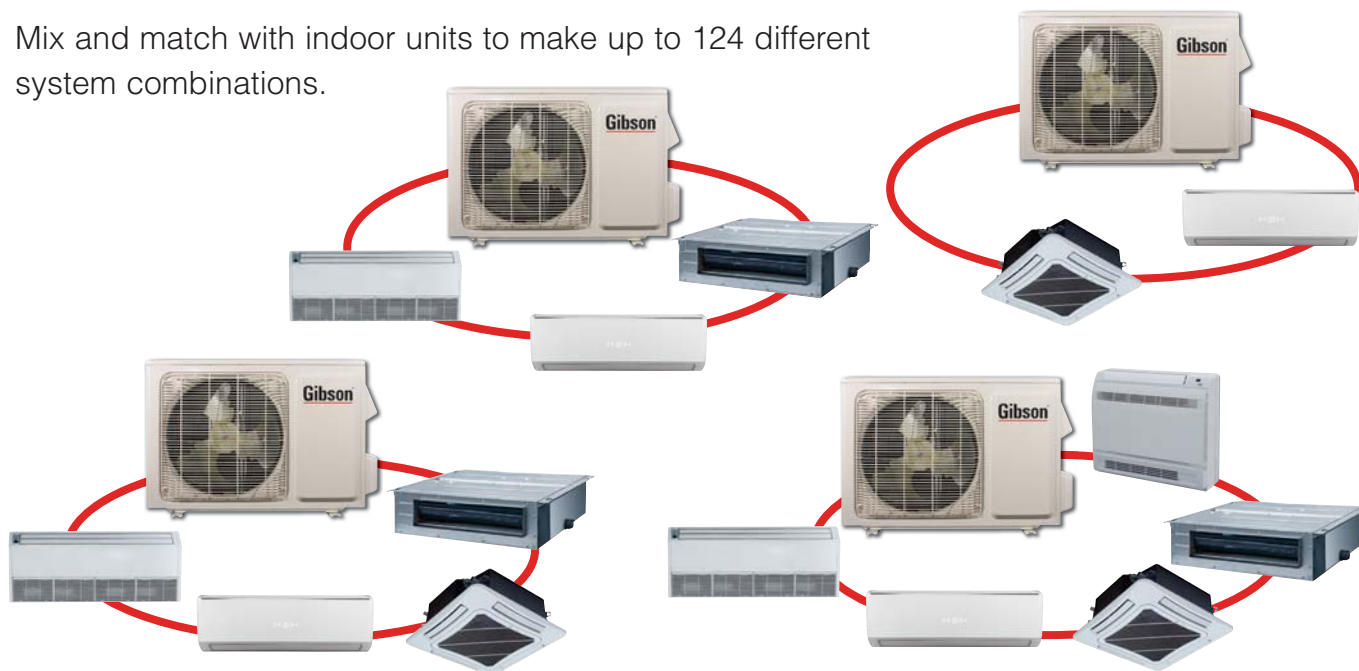

Model		GXH18(5.3)FMK4DH	GXH24(7.0)FMK4DH	GXH30(8.8)FMK4DH	GXH36(10.6)FMK4DH	GXH42(12.3)FMK4DH
Maximum # of Indoor Units		1 to 2	2 to 3	2 to 4	2 to 5	2 to 5
# of Service Valves		2 sets	3 sets	4 sets	5 sets	5 sets
Power Supply	Ph-V-Hz	1-208/230-60				
Cooling/Heating Range	F(C)	23~118°F (-5~48°C)/-4~81°F (-20~27°C)				
Connectable Capacity		50% to 135% of the outdoor unit rating				

Multi-Zone Systems

Multi-Zone Indoor Units

9K to 24K BTU – Up to 22 SEER



High Wall



Ducted



Cassette




Console



Floor/Ceiling

High Wall Unit	Ducted Unit	4-Way Cassette Unit	Console Unit	Floor/Ceiling Unit
GHH09(2.6)LUK4DH	GDH09(2.6)FMK4DH	N/A	GCH09(2.6)FMK4DH	GFH09(2.6)FMK4DH
GHH12(3.5)LUK4DH	GDH12(3.5)FMK4DH	GKH12(3.5)FMK4DH	GCH12(3.5)FMK4DH	GFH12(3.5)FMK4DH
GHH18(5.3)LUK4DH	GDH18(5.3)FMK4DH	GKH18(5.3)FMK4DH	GCH18(5.3)FMK4DH	GFH18(5.3)FMK4DH
N/A	GDH21(6.2)FMK4DH	N/A	N/A	N/A
GHH24(7.0)LUK4DH	GDH24(7.0)FMK4DH	GKH24(7.0)FMK4DH	N/A	GFH24(7.0)FMK4DH

System Piping Information

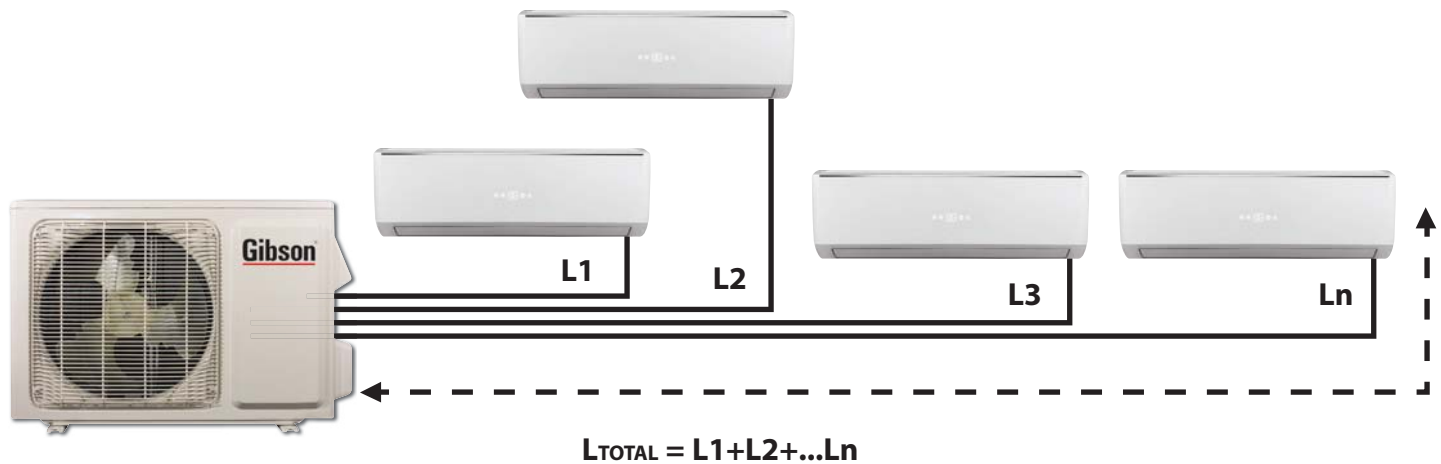


Model Number	Minimum Piping Length Per Indoor Unit (Ln)	Maximum Piping Length Per Indoor Unit (Ln)	Maximum Total Piping Length (LTOTAL)
GXH18(5.3)FMK4DH	10	32.8	65.6
GXH24(7.0)FMK4DH	10	65.6	196.8
GXH30(8.8)FMK4DH	10	82.0	229.7
GXH36(10.6)FMK4DH	10	82.0	246.1
GXH42(12.3)FMK4DH	10	82.0	246.1

“L” is the linear equivalent length of liquid line including elbows

Multi-Zone Systems

System Piping Height Difference Information

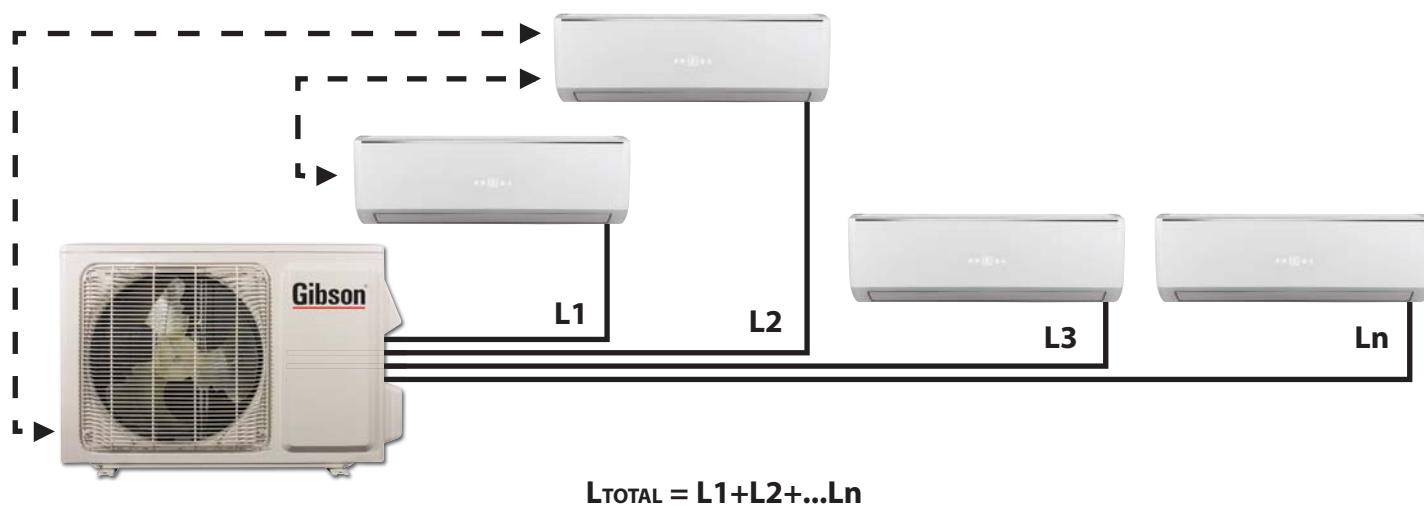

Model Number	Maximum Height Difference Between Indoor and Outdoor Units (H1)	Maximum Height Difference Between Indoor Units (H2)
GXH18(5.3)FMK4DH	32.8	32.8
GXH24(7.0)FMK4DH	32.8	32.8
GXH30(8.8)FMK4DH	49.2	49.2
GXH36(10.6)FMK4DH	49.2	49.2
GXH42(12.3)FMK4DH	49.2	49.2

“H” is the difference in height measured from the piping connections

Easy Installation

Model Number	Precharge Volume in Oz.	Single Indoor Unit Maximum Pipe Length	Add Refrigerant (0.2oz./ft.) If Over	Total System Maximum Pipe Length
GXH18(5.3)FMK4DH	56.4	33.0	33.0	66.0
GXH24(7.0)FMK4DH	77.6	66.0	98.0	197.0
GXH30(8.8)FMK4DH	98.8	82.0	131.0	230.0
GXH36(10.6)FMK4DH	128.8	82.0	131.0	246.0
GXH42(12.3)FMK4DH	128.8	82.0	131.0	246.0


Multi-Zone Systems

Indoor Unit Piping Connection Sizes				
Type	Picture	Model	"Liquid"	Gas
Wall Mounted		GHH09(2.6)LUK4DH	1/4"	3/8"
		GHH12(3.5)LUK4DH	1/4"	1/2"
		GHH18(5.3)LUK4DH	1/4"	5/8"
		GHH24(7.0)LUK4DH	1/4"	5/8"
Ducted		GDH09(2.6)FMK4DH	1/4"	3/8"
		GDH12(3.5)FMK4DH	1/4"	3/8"
		GDH18(5.3)FMK4DH	1/4"	1/2"
		GDH21(6.2)FMK4DH	3/8"	5/8"
		GDH24(7.0)FMK4DH	3/8"	5/8"
Ceiling Cassette		GKH12(3.5)FMK4DH	1/4"	3/8"
		GKH18(5.3)FMK4DH	1/4"	1/2"
		GKH24(7.0)FMK4DH	3/8"	5/8"
Console		GCH09(2.6)FMK4DH	1/4"	3/8"
		GCH12(3.5)FMK4DH	1/4"	3/8"
		GCH18(5.3)FMK4DH	1/4"	1/2"
Floor Ceiling		GFH09(2.6)FMK4DH	1/4"	3/8"
		GFH12(3.5)FMK4DH	1/4"	3/8"
		GFH18(5.3)FMK4DH	1/4"	1/2"
		GFH24(7.0)FMK4DH	3/8"	5/8"

Note: The line set size will be the size of the connection at the indoor unit and a piping adapter is used at the outdoor unit. Example: the GHH24(7.0)LUK4DH will have a 1/4" and 5/8" line set from the indoor unit to the outdoor unit. See adapter information on page 44.

Multi-Zone Design Considerations

2 to 5 Zones - Up to 22 SEER

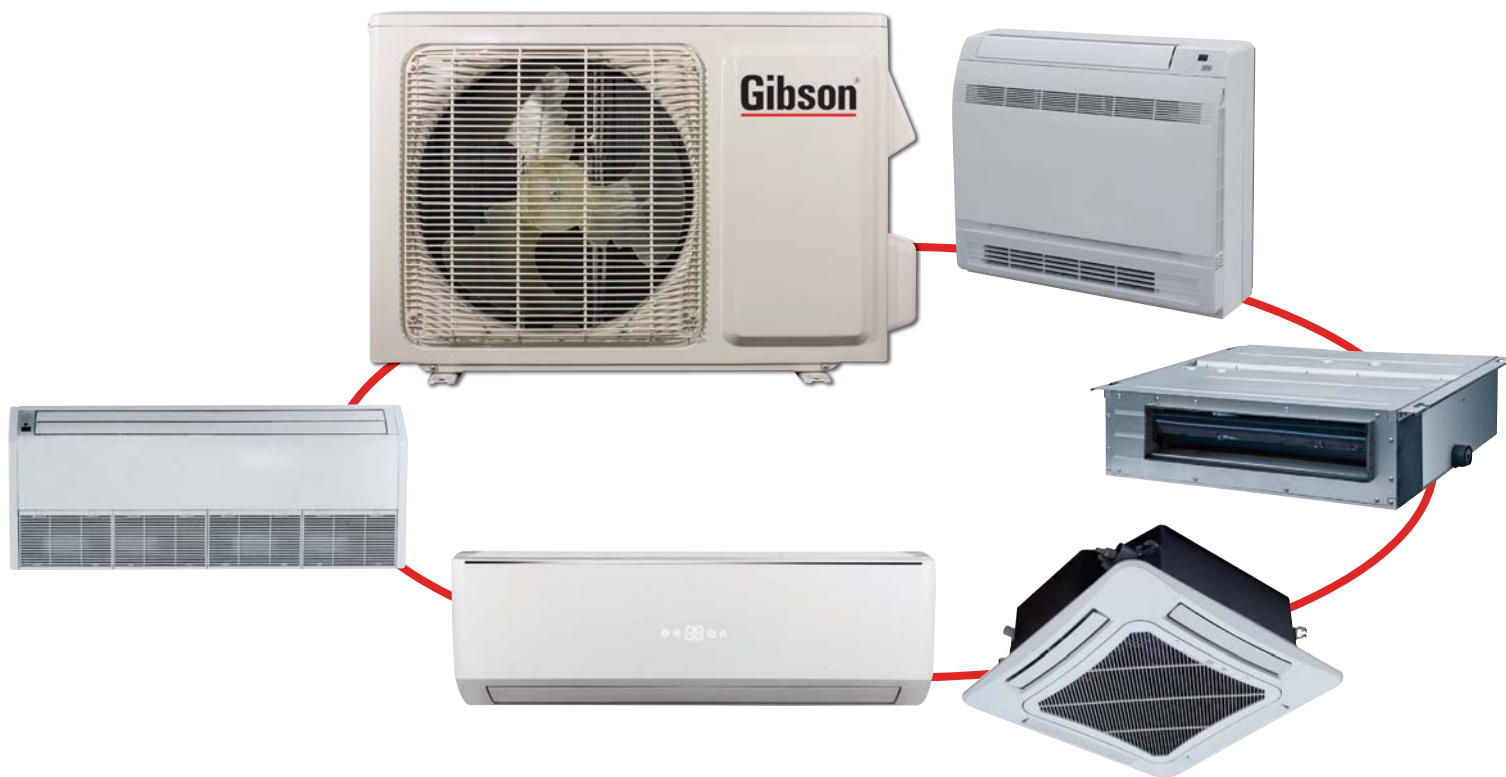

Matching outdoor unit capacity to 100% of the load provides better performance, longer life and room for expansion.

Example: If load is 36K Btu/h, use 36K condenser, not 30K.

Selection Process

STEP 1 - Determine # of zones

STEP 2 - Determine loads for each zone

STEP 3 - Check connectable capacity range

STEP 4 - Select condenser

STEP 5 - Select indoor units staying within connectable capacity range

Configuration 1 - Quick Match Load Reference

Gibson Multi-Zone systems are designed to operate efficiently within connectable capacity ranges from 50% of outdoor unit capacity up to 135% of capacity.

Outdoor Unit Connectable Capacity Ranges

Connectable Capacity Range	50%	135%
GHX18FMK4DH	9K	24K
GHX24FMK4DH	12K	32K
GHX30FMK4DH	15K	41K
GHX36FMK4DH	18K	49K
GHX42FMK4DH	21K	57K*

Indoor Unit Capacities (or options)

	9K	12K	18K	21K	24K
Wall Hung	•	•	•		•
Ducted	•	•	•	•	•
Cassette		•	•		•
Console	•	•	•		
Floor Ceiling	•	•	•		•

Mix and match indoor styles within connectable capacity ranges

Indoor Unit Combination Capacities

Flex Match Indoor Unit Combinations					
Two	K Btu	Three (continued)	K Btu	Four	K Btu
9+9	18	9+9+24	42	9+9+9+9	36
9+12	21	9+12+12	33	9+9+9+12	39
9+18	27	9+12+18	39	9+9+9+18	45
9+21	30	9+12+21	42	9+9+9+21	48
9+24	33	9+12+24	45	9+9+9+24	51
12+12	24	9+18+18	45	9+9+12+12	42
12+18	30	9+18+21	48	9+9+12+18	48
12+21	33	9+18+24	51	9+9+12+21	51
12+24	36	9+21+21	51	9+9+12+24	54
18+18	36	9+21+24	54	9+12+12+12	45
18+21	39	12+12+12	36	9+12+12+18	51
18+24	42	12+12+18	42	9+12+12+21	54
21+21	42	12+12+21	45	12+12+12+12	48
21+24	45	12+12+24	48	12+12+12+18	54
24+24	48	12+18+18	48	Five	K Btu
Three	K Btu	12+18+21	51	9+9+9+9+9	45
9+9+9	27	12+18+24	54	9+9+9+9+12	48
9+9+12	30	12+21+21	54	9+9+9+9+18	54
9+9+18	36	18+18+18	54	9+9+9+12+12	51
9+9+21	39	—	—	9+9+12+12+12	54

* Combinations of 57K are reachable, but not recommended

Configuration 2 - Condenser Zone Range

Multi-Zone Indoor Unit Combinations - Zone Range


		2	2 to 3	2 to 4	2 to 5	2 to 5			2	2 to 3	2 to 4	2 to 5	2 to 5
Indoor Combinations		Condenser Range					Indoor Combinations		Condenser Range				
9+9	18	18K	24K	30K	36K	42K	9+18+18	45			36K	42K	
9+12	21						12+12+21	45					
12+12	24						9+9+9+18	45					
9+18	27						9+12+12+12	45					
9+9+9	27						9+9+9+9+9	45					
9+21	30						24+24	48					
12+18	30						9+18+21	48					
9+9+12	30						12+12+24	48					
9+24	33						12+18+18	48					
12+21	33						9+9+9+21	48					
9+12+12	33						9+9+12+18	48					
12+24	36						12+12+12+12	48					
18+18	36						9+9+9+9+12	48					
9+9+18	36						9+18+24	51					
12+12+12	36						9+21+21	51					
9+9+9+9	36						12+18+21	51					
18+21	39						9+9+9+24	51					
9+9+21	39						9+9+12+21	51					
9+9+18	39						9+12+12+18	51					
9+12+18	39						9+9+9+12+12	51					
9+9+9+12	39						9+21+24	54					
18+24	42						12+18+24	54					
21+21	42						12+21+21	54					
9+9+24	42						18+18+18	54					
9+12+21	42						9+9+12+24	54					
12+12+18	42						9+12+12+21	54					
9+9+12+12	42						12+12+12+18	54					
21+24	45						9+9+9+9+18	54					
9+12+24	45						9+9+12+12+12	54					

Multi-Zone Matrix

Multi-Zone systems allow you to mix and match indoor units of any available style with outdoor units according to the color matching charts.

Up to 22 SEER

Outdoor Unit Line Up Allowable Combinations

GXH18(5.3)FMK4DH		One Indoor Unit	Two Indoor Units	
5 Combinations  For use with any matching color listed at right 9 or 12		9	9+9	
		12	9+12	
			12+12	
GXH24(7.0)FMK4DH		Two Indoor Units	Three Indoor Units	
8 Combinations  For use with any matching color listed at right 9, 12, or 18		9+9	9+9+9	
		9+12	9+9+12	
		9+18		
		9+21		
		12+12		
	12+18			
GXH30(8.8)FMK4DH		Two Indoor Units	Two Indoor Units	Three Indoor Units
20 Combinations  For use with any matching color listed at right 9, 12, 18, 21, or 24		9+9	12+24	9+9+24
		9+12	18+18	9+12+12
		9+18	18+21	9+12+18
		9+21	Three Indoor Units	Four Indoor Units
		9+24	9+9+9	9+9+9+9
		12+12	9+9+12	9+9+9+12
		12+18	9+9+18	
		12+21	9+9+21	
GXH36(10.6)FMK4DH		Two Indoor Units	Three Indoor Units	Three Indoor Units
41 Combinations  For use with any matching color listed at right 9, 12, 18, 21, or 24		9+9	9+9+9	12+18+18
		9+12	9+9+12	Four Indoor Units
		9+18	9+9+18	9+9+9+9
		9+21	9+9+21	9+9+9+12
		9+24	9+9+24	9+9+9+18
		12+12	9+12+12	9+9+9+21
		12+18	9+12+18	9+9+12+12
		12+21	9+12+21	9+9+12+18
		12+24	9+12+24	9+12+12+12
		18+18	9+18+18	12+12+12+12
		18+21	9+18+21	Five Indoor Units
		18+24	12+12+12	9+9+9+9+9
		21+21	12+12+18	9+9+9+9+12
		21+24	12+12+21	
		24+24	12+12+24	
GXH42(12.3)FMK4DH		Two Indoor Units	Three Indoor Units	Four Indoor Units
56 Combinations  For use with any matching color listed at right 9, 12, 18, 21, or 24		9+9	9+9+24	9+9+9+9
		9+12	9+12+12	9+9+9+12
		9+18	9+12+18	9+9+9+18
		9+21	9+12+21	9+9+9+21
		9+24	9+12+24	9+9+9+24
		12+12	9+18+18	9+9+12+12
		12+18	9+18+21	9+9+12+18
		12+21	9+18+24	9+9+12+21
		12+24	9+21+21	9+9+12+24
		18+18	9+21+24	9+12+12+12
		18+21	12+12+12	9+12+12+18
		18+24	12+12+18	9+12+12+21
		21+21	12+12+21	12+12+12+12
		21+24	12+12+24	Five Indoor Units
		24+24	12+18+18	9+9+9+9+9
		Three Indoor Units	12+18+21	9+9+9+9+12
		9+9+9	12+18+24	9+9+9+9+18
		9+9+12	12+21+21	9+9+9+12+12
		9+9+18	18+18+18	9+9+12+12+12
		9+9+21		

Indoor Unit Line Up

High Wall Unit						
GHH09(2.6)LUK4DH						
GHH12(3.5)LUK4DH						
GHH18(5.3)LUK4DH						
GHH24(7.0)LUK4DH						
Available in:		Match condenser by color				
9,000	9,000	9,000	9,000	9,000	9,000	
12,000	12,000	12,000	12,000	12,000	12,000	
18,000		18,000	18,000	18,000	18,000	
24,000			24,000	24,000	24,000	

Ducted Unit						
GDH09(2.6)FMK4DH						
GDH12(3.5)FMK4DH						
GDH18(5.3)FMK4DH						
GDH21(6.2)FMK4DH						
GDH24(7.0)FMK4DH						
Available in:		Match condenser by color				
9,000	9,000	9,000	9,000	9,000	9,000	
12,000	12,000	12,000	12,000	12,000	12,000	
18,000		18,000	18,000	18,000	18,000	
21,000			21,000	21,000	21,000	
24,000			24,000	24,000	24,000	

4-Way Cassette Unit						
GKH12(3.5)FMK4DH						
GKH18(5.3)FMK4DH						
GKH24(7.0)FMK4DH						
Available in:		Match condenser by color				
12,000	12,000	12,000	12,000	12,000	12,000	
18,000		18,000	18,000	18,000	18,000	
24,000			24,000	24,000	24,000	

Console Unit						
GCH09(2.6)FMK4DH						
GCH12(3.5)FMK4DH						
GCH18(5.3)FMK4DH						
Available in:		Match condenser by color				
9,000	9,000	9,000	9,000	9,000	9,000	
12,000	12,000	12,000	12,000	12,000	12,000	
18,000		18,000	18,000	18,000	18,000	

Floor/Ceiling Unit						
GFH09(2.6)FMK4DH						
GFH12(3.5)FMK4DH						
GFH18(5.3)FMK4DH						
GFH24(7.0)FMK4DH						
Available in:		Match condenser by color				
9,000	9,000	9,000	9,000	9,000	9,000	
12,000	12,000	12,000	12,000	12,000	12,000	
18,000		18,000	18,000	18,000	18,000	
24,000			24,000	24,000	24,000	

Using combinations other than directed is expressly prohibited.
Contact a licensed HVAC contractor.

Multi-Zone - Product Specifications

Heat Pump Condenser Outdoor Unit 18K - 48K

Up to 22 SEER, -4°F Heating



Model	Heat Pump		GXH18(5.3)FMK4DH	GXH24(7.0)FMK4DH	GXH30(8.8)FMK4DH
Capacity	Cooling	Btu/h	18000	26000	29000
	Heating	Btu/h	19000	29000	31600
SEER/HSPF/EER/COP			22.0/9/10.91/11.84	20.5/10.2/9.5/12.52	21/10.2/12.01/12.79
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	25	35	30
Minimum Current (MCA)		A	15	21	19
Refrigerant Charge Volume		lb (kg)	3.5 (1.6)	4.9 (2.2)	6.2 (2.8)
Sound Pressure Level		dB(A)	56	59	
Dimension (WxDxH)	Outline	inch	37 x 16 x 28	39 x 17 x 31	
	Package	inch	41 x 18 x 30	43 x 19 x 34	
Net Weight/Gross Weight		lb (kg)	114/123 (52/56)	153/164 (69.5/74.5)	145/154 (66/70)
Connecting Pipe Diameter	Suction	inch (mm)	3/8 (9.52)		
	Liquid	inch (mm)	1/4 (6)		
Maximum Drive Indoor Unit Number		Unit	2	3	4

Model	Heat Pump		GXH36(10.6)FMK4DH	GXH42(12.3)FMK4DH
Capacity	Cooling	Btu/h	34000	39000
	Heating	Btu/h	42500	45000
SEER/HSPF/EER/COP			21/10.2/12.15/12.69	21/10.2/10.43/12.33
Power Supply		Ph-V-Hz	1-208/230-60	
Maximum Over Current Protection		A	30	
Minimum Current (MCA)		A	21	24
Refrigerant Charge Volume		lb (kg)	8.0 (3.65)	
Sound Pressure Level		dB(A)	61	
Dimension (WxDxH)	Outline	inch	43 x 17 x 43	
	Package	inch	46 x 19 x 48	
Net Weight/Gross Weight		lb (kg)	198/216 (90/98)	
Connecting Pipe Diameter	Suction	inch (mm)	3/8 (9.52)	
	Liquid	inch (mm)	1/4 (6)	
Maximum Drive Indoor Unit Number		Unit	5	

Size Line Sets by Indoor Unit

All service valves on Multi-Zone condensers are 1/4" x 3/8". You must size up at condenser to accommodate indoor unit pipe sizes. Example: Indoor pipe is 1/4" x 1/2", use an adapter at condenser and run 1/2" pipe from condenser to indoor unit.

Multi-Zone Series Valve Adapters

Multi-Zone units include line set adapters for use at the outdoor service valves. Used when indoor unit connectors are larger and take precedence.

Model BTU	Supplied Adapters	Size	Partners Choice
18k	1	3/8 to 1/2	1017000 – 3/8 to 5/8
24k	2	3/8 to 1/2	1017001 – 3/8 to 1/2
30k	8	(2) 3/8 to 5/8, (4) 3/8 to 1/2, (2) 1/4 to 3/8	1017002 – 1/4 to 3/8
36k	8	(2) 3/8 to 5/8, (4) 3/8 to 1/2, (2) 1/4 to 3/8	
42k	9	(3) 3/8 to 5/8, (4) 3/8 to 1/2, (2) 1/4 to 3/8	



Indoor Unit - Product Specifications

Wall-Mounted Type Indoor Unit



Model			GHH09(2.6)LUK4DH	GHH12(3.5)LUK4DH	GHH18(5.3)LUK4DH	GHH24(7.0)LUK4DH
Capacity	Cooling	Btu/h	9000	12000	18000	22000
	Heating	Btu/h	11000	13000	19790	23000
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)			
Airflow Volume		m ³ /h	520/470/430/370	570/470/430/370	850/780/650/550	1000/800/700/600
		CFM	306/277/253/218	355/277/253/218	500/459/383/324	589/471/412/353
Sound Pressure Level (H/M/L/SL)		dB(A)	42/38/35/32	44/39/36/33	49/44/40/35	53/45/41/37
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)	1/2 (12)	5/8 (16)	
	Liquid	inch (mm)	1/4 (6)			
Dimension (WxHxD)	Outline	inch	32 x 7 x 11		37 x 8 x 12	40 x 12 x 9
	Package	inch	36 x 15 x 10		40 x 11 x 16	42 x 16 x 13
Net Weight/Gross Weight		lb (kg)	22/28 (10/12.5)		28/35 (13/16)	30/37 (13.5/17)
Partners Choice						
Line Set SKU Number with Wire			05-0200	05-0202	1016619	

Floor/Ceiling Type Indoor Unit



Model			GFH09(2.6)FMK4DH	GFH12(3.5)FMK4DH	GFH18(5.3)FMK4DH	GFH24(7.0)FMK4DH
Capacity	Cooling	Btu/h	8533	11900	17000	22780
	Heating	Btu/h	9500	13100	18700	27200
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)			
Airflow Volume		m ³ /h	650		950	1250
		CFM	383		559	736
Sound Pressure Level (H/L)		dB(A)	40/36		45/40	48/44
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)		1/2 (12)	5/8 (16)
	Liquid	inch (mm)	1/4 (6)			3/8 (9.52)
Dimension (WxHxD)	Outline	inch	48 x 28 x 9			
	Package	inch	53 x 32 x 12			
Net Weight/Gross Weight		lb (kg)	88/110 (40/50)			99/119 (45/54)
Partners Choice						
Line Set 25 Feet SKU Number with Wire			05-0200		05-0202	05-0204

Note: Line Sets 25 feet or less require no additional refrigerant.

Indoor Unit - Product Specifications

Cassette Type Indoor Unit



Model				GKH12(3.5)FMK4DH	GKH18(5.3)FMK4DH	GKH24(7.0)FMK4DH
Capacity	Cooling		Btu/h	12000	14400	22800
	Heating		Btu/h	13000	16000	27400
Power Supply			Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)		
Airflow Volume			m ³ /h	600		1180
			CFM	353		694
Sound Pressure Level (H/M/L)			dB(A)	46/44/42		39/37/35
Connecting Pipe	Suction		inch (mm)	3/8 (9.52)	1/2 (12)	5/8 (16)
	Liquid		inch (mm)	1/4 (6)		3/8 (9.52)
Main Body	Dimension (WxDxH)	Outline	inch	22 x 22 x 9		33 x 33 x 9
		Package	inch	34 x 29 x 13		38 x 38 x 13
Panel	Net Weight/Gross Weight		lb (kg)	39/50 (18/23)		62/77 (28.0/35.0)
	Dimension (WxDxH)	Outline	inch	25 x 25 x 2		37 x 37 x 2
		Package	inch	29 x 26 x 4		41 x 40 x 5
Net Weight/Gross Weight			lb (kg)	5.5/8 (2.5/3.65)		14/22 (6.5/10)
Partners Choice						
Line Set 25 Feet SKU Number with Wire				05-0200	05-0202	05-0204

Console Type



Model			GCH09(2.6)FMK4DH	GCH12(3.5)FMK4DH	GCH18(5.3)FMK4DH
Capacity	Cooling	Btu/h	9000	12000	18000
	Heating	Btu/h	9500	13000	19800
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)		
Airflow Volume		m ³ /h	500	600	650
		CFM	294	353	383
Sound Pressure Level (H/L)		dB(A)	40/38/36/33/30/27/25	42/40/38/37/35/32/27	48/46/44/41/37/35/32
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)		1/2 (12)
	Liquid	inch (mm)	1/4 (6)		
Dimension (WxHxD)	Outline	inch	28 x 8 x 24		
	Package	inch	31 x 11 x 27		
Net Weight/Gross Weight		lb (kg)	33/40 (15/18)		
Partners Choice					
Line Set 25 Feet SKU Number with Wire			05-0200		05-0202

Note: Line Sets 25 feet or less require no additional refrigerant.

Indoor Unit - Product Specifications

Ducted Type Indoor Unit



Model			GDH09(2.6)FMK4DH	GDH12(3.5)FMK4DH	GDH18(5.3)FMK4DH
Capacity	Cooling	Btu/h	8500	11900	15300
	Heating	Btu/h	9500	13100	18700
Power Supply		Ph-V-Hz	1-208/230-60		
Airflow Volume		m ³ /h	450	550	700
		CFM	265	324	412
Sound Pressure Level (H/L)		dB(A)	37/31	39/32	41/33
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)		1/2 (12)
	Liquid	inch (mm)	1/4 (6)		
Dimension (WxHxD)	Outline	inch	27.5 x 24 x 8		35 x 24 x 8
	Package	inch	35 x 29 x 12		44 x 29 x 12
Net Weight/Gross Weight		lb (kg)	49/60 (22/27)	51/64 (23/29)	60/79 (27/36)
Partners Choice					
Line Set SKU Number with Wire			05-0200		05-0202

Model			GDH21(6.2)FMK4DH	GDH24(7.0)FMK4DH
Capacity	Cooling	Btu/h	20400	23800
	Heating	Btu/h	22600	27400
Power Supply		Ph-V-Hz	1-208/230-60	
Airflow Volume		m ³ /h	1000	
		CFM	588.5	
Sound Pressure Level (H/L)		dB(A)	42/34	
Connecting Pipe	Suction	inch (mm)	5/8 (16)	
	Liquid	inch (mm)	3/8 (9.52)	
Dimension (WxHxD)	Outline	inch	43 x 24 x 8	
	Package	inch	52 x 29 x 12	
Net Weight/Gross Weight		lb (kg)	68/90 (31/41)	
Partners Choice				
Line Set 25 Feet SKU Number with Wire			05-0204	

Note: Line Sets 25 feet or less require no additional refrigerant.

Multi-Zone System Controls

Control Lineup

Controlling System	Product Series		Wall Mounted Type	Ducted Type	Cassette Type	Floor Ceiling Type	Console Type
Wireless Remote Control	WRC-RD (Wireless Remote Kit for Ducted Style) Partners Choice 1007707			●			
	WLRC4F (Single Zone 23 SEER and Multi-Zone Systems) Partners Choice 1013845		●				
	WLRC3 (Multi-Zone) Partners Choice 1007703			●	●	●	
	WLRC6 (Multi-Zone) Partners Choice 1008357						●
Wired Control	WRC3 (Multi-Zone) Partners Choice 1007706			●	●	●	
	WRC4 (Single Zone 23 SEER and Multi-Zone Systems) Partners Choice 1009614		●				

Note: ● standard ● optional

Partners Choice Accessories

SKU	DESCRIPTION	PHOTO
EZ-PULL LINESETS		
1014038	LINESET 1/4X3/8X20' 1/2" INS EZ-PULL W/NUT (WHITE INSULATION)	
1014039	LINESET 1/4X3/8X30' 1/2" INS EZ-PULL W/NUT (WHITE INSULATION)	
1014040	LINESET 1/4X3/8X50' 1/2" INS EZ-PULL W/NUT (WHITE INSULATION)	
1014041	LINESET 1/4X5/8X20' 1/2" INS EZ-PULL W/NUT (WHITE INSULATION)	
1014042	LINESET 1/4X5/8X30' 1/2" INS EZ-PULL W/NUT (WHITE INSULATION)	
1014043	LINESET 1/4X5/8X50' 1/2" INS EZ-PULL W/NUT (WHITE INSULATION)	
DUCTLESS LINESETS		
01-1480	LINESET 1/4X3/8X25' 3/8" INS W/NUTS (BLACK INSULATION)	
01-1481	LINESET 1/4X3/8X50' 3/8" INS W/NUTS (BLACK INSULATION)	
01-1482	LINESET 1/4X1/2X25' 3/8" INS W/NUTS (BLACK INSULATION)	
01-1483	LINESET 1/4X1/2X50' 3/8" INS W/NUTS (BLACK INSULATION)	
1007534	LINESET 1/4X5/8X25' 3/8" INS W/NUTS (BLACK INSULATION)	
1007535	LINESET 1/4X5/8X50' 3/8" INS W/NUTS (BLACK INSULATION)	
01-1484	LINESET 3/8X5/8X25' 3/8" INS W/NUTS (BLACK INSULATION)	
01-1485	LINESET 3/8X5/8X50' 3/8" INS W/NUTS (BLACK INSULATION)	
DUCTLESS LINESETS		
05-0200	LINESET 1/4X3/8X25' 1/2" INS W/NUTS 14G 4W WIRE (BLACK INSULATION)	
05-0202	LINESET 1/4X1/2X25' 1/2" INS W/NUTS 14G 4W WIRE (BLACK INSULATION)	
1016619	LINESET 1/4X5/8X25' 1/2" INS W/NUTS 14G 4W WIRE (BLACK INSULATION)	
05-0204	LINESET 3/8X5/8X25' 1/2" INS W/NUTS 14G 4W WIRE (BLACK INSULATION)	
05-0203	LINESET 1/4X1/2X50' 1/2" INS W/NUTS 14G 4W WIRE (BLACK INSULATION)	
EZ PULL INSUL COPPER TUBE COILS		
1014044	1/4X1/2X164' EZ PULL INSUL COPPER TUBE (WHITE INSULATION)	
1014045	3/8X1/2X164' EZ PULL INSUL COPPER TUBE (WHITE INSULATION)	
1014046	1/2X1/2X164' EZ PULL INSUL COPPER TUBE (WHITE INSULATION)	
1014047	3/4x1/2x164' EZ PULL INSUL COPPER TUBE (WHITE INSULATION)	
1014048	5/8X1/2X164' EZ PULL INSUL COPPER TUBE (WHITE INSULATION)	
FLEXIBLE REFRIGERANT LINE		
1014054	NOKINK FLEXIBLE REFRIG CONNECTOR BETWEEN LINESET AND EVAPORATOR 1/4"X36"	
1014055	NOKINK FLEXIBLE REFRIG CONNECTOR BETWEEN LINESET AND EVAPORATOR 3/8"X36"	
1014056	NOKINK FLEXIBLE REFRIG CONNECTOR BETWEEN LINESET AND EVAPORATOR 1/2"X36"	
1014057	NOKINK FLEXIBLE REFRIG CONNECTOR BETWEEN LINESET AND EVAPORATOR 5/8"X36"	
CONDENSER PADS		
01-1486	COND PAD 18X38X3 PLASTIC	
01-0734	COND PAD 24X24X3 PLASTIC	
01-0749	COND PAD 36X48X3 PLASTIC	
DISCONNECT BOXES		
01-0709	DISCONNECT BOX, 60 AMP NF	
01-0710	DISCONNECT BOX, 30 AMP FUSED	
01-0711	DISCONNECT BOX, 60 AMP FUSED	
01-0768	DISCONNECT BOX, 60 AMP, NF, ECONOMY	
ELECTRICAL WHIPS		
01-0796	WIRE WHIP 1/2"X4' #10 WIRE NON METALLIC	
01-0797	WIRE WHIP 1/2"X6' #10 WIRE NON METALLIC	
01-0798	WIRE WHIP 3/4"X4' #8 WIRE NON METALLIC	
01-0799	WIRE WHIP 3/4"X6' #8 WIRE NON METALLIC	

Partners Choice Accessories

SKU	DESCRIPTION	PHOTO
CONDENSATE PUMPS		
1003243	MINI SPLIT CONDENSATE PUMP 120V 60HZ (MS602ULC)	
05-0600	MINI ORANGE ASPEN PUMP KIT 100V-250V 30K BTU SPLIT PUMP	
05-0604	MINI ORANGE ASPEN PUMP KIT 100V-250V 60K BTU SPLIT PUMP	
MOUNTING BRACKETS		
1003280	WALL CONDENSER BRACKET 300 LB (WBB300)	
1014051	"MIGHTY BRACKET" MINI SPLIT INSTALLATION TOOL	
MINI SPLIT POWER WIRE		
1003396	MINI SPLIT CABLE 14/4 STRANDED 600V 50'	
1003397	MINI SPLIT CABLE 14/4 STRANDED 600V 250'	
1014049	STRANDED PLENUM CABLE 18/2 CL2P 250'	
1014050	STRANDED PLENUM CABLE 18/2 CL2P 500'	
1014058	SHEILED CABLE 50' 4/C 14GA MINI SPLIT INTERCONNECT CABLE	
MINI SPLIT DRAIN HOSE		
1014059	UNINSULATED DRAIN HOSE 5/8"X20' 16MM	
1014060	INSULATED DRAIN HOSE 5/8"X65' COIL INSULATED 14MM	
01-1468	DRAIN HOSE PLASTIC 3/4" 100'	
REFRIGERANT		
REFR410A	REFRIGERANT R410A 25LB CYLINDER	
BRASS ADAPTER MINI SPLIT CONDENSER		
1014072	BRASS ADAPTER 5/16" FEMALE X 1/4" SAE MALE 55 DEGREE BEND AND SWIVAL NUT	
1014073	BRASS ADAPTER 5/16" FEMALE X 1/4" SAE MALE VALVE CORE IN ADAPTER	
ESSENTIAL MINI SPLIT TOOLS		
1014071	TORQUE WRENCH 7-IN-1 WITH 6 INTERCHANGEABLE HEADS	
1016628	BLACKMAX BFT850 45° FLARING TOOL	
1016629	BLACKMAX FTXSG FLARE SIZE GAUGE	
??????	VACCUM PUMP	
1014066	MINISPLIT A/C TOOL KIT R-410A (TLB410A)	
	REFRIGERANT CHARGING SCALE	
LINESET COVER KITS		
1014063	LINESET COVER KIT - IVORY 12'...KIT INCLUDES DUCTING 4' LONG (3)...COUPLERS (2)...WALL INLET (1)...END FITTING (1)...90 DEGREE FLAT ELL (1).....4 1/2"	
1017037	LD 4.5" 45 Degree In Vert Elbow IV122 6/CS	
1017038	LD 4.5" 45 Degree In Vert Elbow IV122 6/CS	
1017039	LD 4.5" Duct 8FT Length IV122 6/CS	

Partners Choice Accessories

SKU	DESCRIPTION	PHOTO
LINESET COVER KITS continued		
1017040	LD 4.5" Coupler IV122 6/CS	
1017044	LD 4.5" Wall Inlet IV122 6/CS	
1017045	LD 4.5" End Fitting IV122 6/CS	
MISCELLANEOUS		
1014053	CONDENSER RISERS, PLAROCK 4" RISERS 18" L	
1014052	ADJUSTABLE WALL SLEEVE 3" X 5"-7"	
1014061	CONDENSATE TRAP, WATERLESS TRAP 5/8"	
05-0608	CONDENSATE OVERFLOW SAFTEY SWITCH FOR MINI SPLITS (SS610E)	
1003263	SURGE PROTECTOR ICM517	
1006953	MINI SPLIT UV LIGHT 115V	
1006954	MINI SPLIT UV LIGHT 208/230V	
1006955	REPLACEMENT LAMP FOR MINI-UV LIGHT	
1017033	ISOLATION BALL VALVE 1/4" - SWEAT	



Standing behind your Investment

Gibson ductless mini-split systems offer a 5-Year limited parts warranty. Compressors carry a 7-Year warranty. To learn more about our product warranties, ask your Gibson contractor.



ENERGY STAR Partner Certificate



AHRI 210-240 Heat
Pump Certificate



American and Canadian
ETL

Gibson[®]

gibsonhvac.com

Gibson is a registered trademark used under license from Gibson International Company, U.S.A.
Specifications and illustrations subject to change without notice and without incurring obligation.
All trademarks are the property of their respective organizations.

Printed in U.S.A. © Nortek Global HVAC, LLC 2021. All Rights Reserved.

415E-0421