

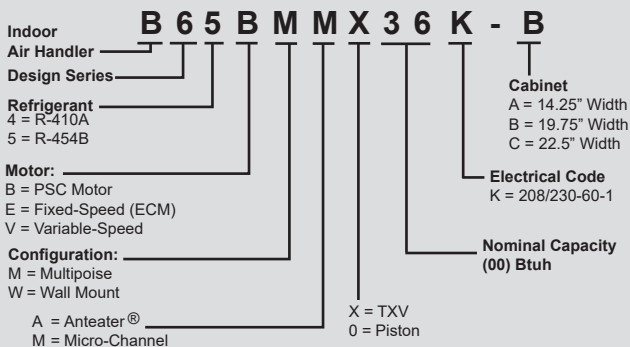
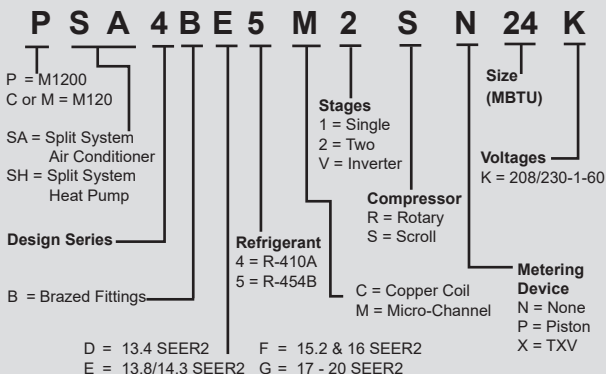


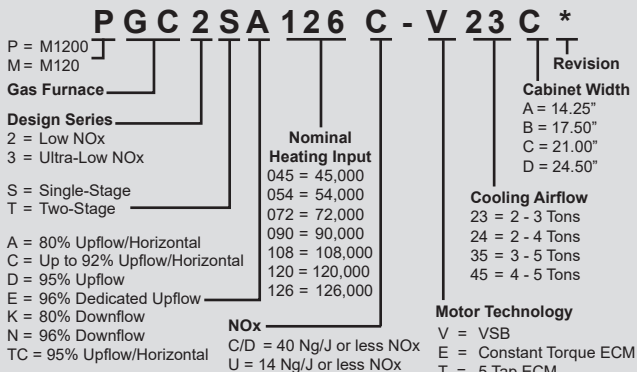

SERIAL NUMBER INTERPRETER

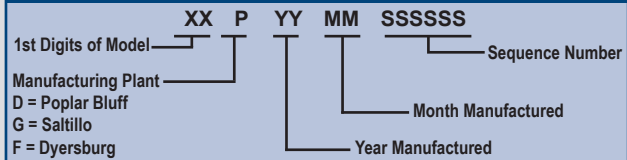

R 10 4 G D 0 48 K 096 C *

Application
PPG = M1200 Packaged Gas/Electric
R = M120 Packaged Gas/Electric

Design Series
6,8 = Convertible Sideshot/Downshot
10 = SEER2 Convertible Sideshot/Downshot

Refrigerant
4 = R-410A
G = Gas/Electric
H = 95% AFUE

Nominal Cooling Capacity
48 = 48,000 Btuh

Efficiency
D = 13.4 SEER2

Heating Capacity (000) Btuh Input

Electrical Code
K = 208/230-1-60

Revision
C = U.S./Canadian Approved
X = NOx Approved

P 9 5 R D 0 3 6 K

Application
P = M120 Packaged Air Conditioner
PPH = M1200 Packaged Heat Pump
Q = M120 Packaged Heat Pump

Design Series
6,8 = Convertible Sideshot/Downshot
7 = Horizontal Supply/Return
9 = SEER2 Horizontal Supply/Return
10 = SEER2 Convertible Sideshot/Downshot

Refrigerant
4 = R-410A
5 = R-454B

Nominal Capacity (00) Btuh

Efficiency
D = 13.4 SEER2

Duct Configuration
R = Round Duct
S = Rectangular Duct

Electrical Code
K = 208/230-1-60

C 7 5 B A M 0 3 6 C - A

Evaporator Coil

Design Series
6 = Tube and Fin
7 = Micro-Channel

Refrigerant
4 = R-410A
5 = R-454B

Fitting Configuration
B = Brazed Fittings
Q = Quick Connect Fittings

A = "A" Vertical
H = Horizontal Multipoise

Flow Control
X = TXV
0 = Orifice

Cabinet Identifier
A = 14.25" Width
B = 17.5" Width
C = 21" Width
D = 24.5" Width

C = Cased Coil
U = Uncased Coil

Nominal Capacity (00) Btuh

A or " - " = Fin & Tube
M = Micro-Channel

H 8 HK - 015 H - 1 1 *

Application Heater

Design Series
3 = P or Q Packaged
8 = B6, UL Update

Configuration
HK = Heater Kit

Nominal kW
015 = 15 kW

Number of Circuit Breakers

Electrical Code
H = 240 -1-60

Style
(Blank or alpha character)

Number of Stages

H K 1 - 015 H - 1 1 A

Heater Kit

(P,Q) 95

Nominal kW
015 = 15 kW

Number of Circuit Breakers

Electrical Code
H = 240 -1-60

Style
(Blank or alpha character)

Number of Stages

