

FRIGIDAIRE®

FRIGIDAIRE

Delivering Comfort

WITH THE **FSA3BF SERIES** OF AIR CONDITIONERS

Table of Contents

2 CONTRACTOR SUPPORT

3 PRODUCT FEATURES & BENEFITS

4 TECHNICAL SPECIFICATIONS

- MODEL ID CODES
- AIR CONDITIONER OUTDOOR SECTION DIMENSIONS
- AIR DISCHARGE ALLOWS ADEQUATE CLEARANCE FOR AIRFLOW

5 PHYSICAL AND ELECTRICAL SPECIFICATIONS/OUTDOOR UNITS AND ACCESSORIES

6 SYSTEM COOLING CAPACITIES

7 COOLING EXPANDED RATINGS WITH VARIABLE SPEED BLOWER

FRIGIDAIRE



THE FRIGIDAIRE®

TOTAL PACKAGE™

Designed with contractors in mind. Frigidaire HVAC equipment is designed with the contractor in mind. Each unit is equipped with features designed to make them easier to install and service, reducing time spent on each job while ensuring peak performance and safety.



EASY TO
Service



EASY TO
Install



FSA3BF Series

Extra-High Efficiency Air Conditioner | Up to 15.2 SEER2 Residential System | 2 - 5 Ton Capacity

The FSA3BF Series of air conditioners offers exceptional performance.

The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.

Easy to

Service

Easy to

Install

① REMOVABLE SIDE PANELS

Side panels can be easily removed and replaced without removing the top grill.

② EASY TO CLEAN COIL

All aluminum coils provide high corrosion resistance. Innovative design decreases unit weight and refrigerant requirements.

③ GALVANIZED STEEL EXTERIOR

Powder-coated paint and gloss finish eliminates sharp edges and reduces scratching.

④ QR CODES

QR codes on each unit link directly to the product's technical literature, eliminating the need to search for relevant documentation when working on the unit.


⑤ INCLUDED FILTER DRIER

Liquid line filter drier included with unit, field installed.

⑥ LONG WIRING LEADS

Easy to service fan motors.

MODEL ID CODES

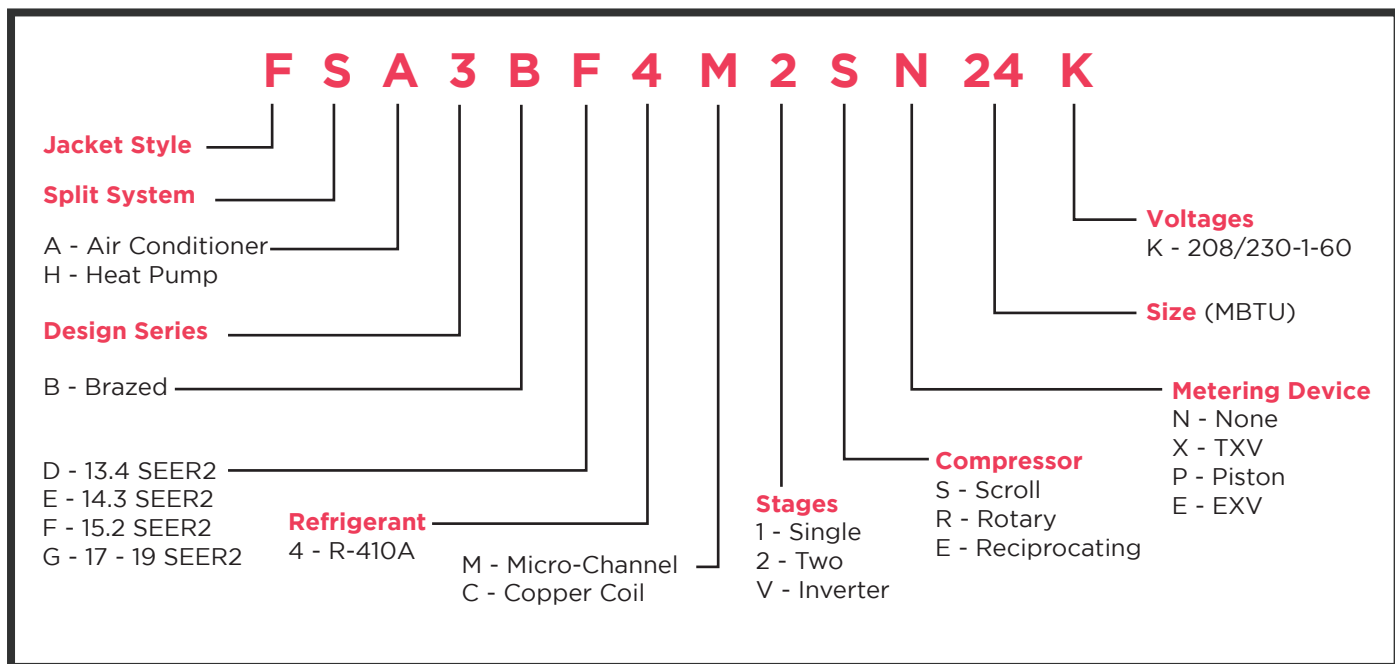

AIR CONDITIONER OUTDOOR SECTION DIMENSIONS

FSA3BF	24K	36K	48K	60K
H	29.5	45.5	45.5	45.5
W	31.75	31.75	31.75	31.75
D	31.75	31.75	31.75	31.75

**AIR DISCHARGE ALLOWS
ADEQUATE CLEARANCE
FOR AIR FLOW**



PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

Up to 15.2 SEER2 — Extra-High Efficiency — Single Phase

Model Number FSA3BF4M			2SN24K	2N36K	2SN48K	2SN60K
Electrical Data	Volts-Cycles-Phase (1)		208/230-60-1			
	Delay Fuse Maximum (2)		25	30	45	60
	Minimum Circuit Ampacity		14.5	19.1	28.0	34.6
Component Data	Fan Motor	HP	1/8	1/4	1/3	1/3
	Compressor Data	LRA	62.9	84.2	122.1	158.0
Refrigerant suction line O.D. NOTE: Liquid line is 3/8" O.D. for entire length.		0-24 ft.	3/4"	3/4"	7/8"	7/8"
		25-39 ft.	3/4"	3/4"	7/8"	7/8"
		40-75 ft.	3/4"	3/4"	7/8"	1-1/8" (3)
Approximate Shipping Weight (lbs.)			153	208	240	246
Sound Rating dBA			71	76	76	76

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 1-1/8" to 7/8" reducer from line to unit.

ACCESSORIES

Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

High Wind Tie-Down Kits - <http://miamitech.com/products/metal/cutdnortek.html>

Low Ambient Kit - 918837

Cantilever Mounting Kit - 1018671

Four mounting corner post/panel split system design to cantilever mounts.

SYSTEM COOLING CAPACITIES

Up to 15.2 SEER2 — Extra-High Efficiency — Single Phase

Outdoor Unit	Indoor Unit	Cooling Capacity	SEER2	EER2	Indoor Rated CFM	Minimum CFM	DTC
FSA3BF4M2SN24K	C74B(A,H)MX36C-B	23400	14.3	11.7	750	565	Yes
FSA3BF4M2SN36K	C74B(A,H)MX36C-B	35000	14.3	11.7	1050	790	Yes
FSA3BF4M2SN36K	C74B(A,H)MX36C-C	35000	14.3	11.7	1050	790	No
FSA3BF4M2SN48K	C74B(A,H)MX48C-C	47000	14.3	11.7	1595	1195	Yes
FSA3BF4M2SN48K	C74B(A,H)MX48C-D	47000	14.3	11.7	1595	1195	No
FSA3BF4M2SN60K	C74B(A,H)MX60C-C	55000	14.3	11.7	1600	1200	Yes
FSA3BF4M2SN60K	C74B(A,H)MX60C-D	55000	14.3	11.7	1600	1200	No

Outdoor Unit	Indoor Unit + Furnace	Cooling Capacity	SEER2	EER2	Indoor Rated CFM	Minimum CFM	DTC
FSA3BF4M2SN24K	C74B(A,H)MX24C-A + FG7T(*)-V(*)A(*)	23000	15.2	12.0	745	500	No
FSA3BF4M2SN24K	C74B(A,H)MX24C-B + FG7T(*)-V(*)B(*)	23000	15.2	12.0	800	535	No
FSA3BF4M2SN36K	C74B(A,H)MX36C-B + FG7T(*)-V(*)B(*)	35000	15.2	12.0	1120	750	No
FSA3BF4M2SN36K	C74B(A,H)MX36C-C + FG7T(*)-V(*)C(*)	35000	15.2	12.0	1155	775	No
FSA3BF4M2SN48K	C74B(A,H)MX48C-C + FG7T(*)-V(*)C(*)	47000	15.2	12.0	1505	1035	No
FSA3BF4M2SN48K	C74B(A,H)MX48C-D + FG7T(*)-V(*)D(*)	47000	15.2	12.0	1500	1005	No
FSA3BF4M2SN60K	C74B(A,H)MX60C-C + FG7T(*)-V(*)C(*)	56000	15.2	12.0	1600	1065	No
FSA3BF4M2SN60K	C74B(A,H)MX60C-D + FG7T(*)-V(*)D(*)	56000	15.2	12.0	1755	1175	No

Outdoor Unit	Indoor Unit	Cooling Capacity	SEER2	EER2	Indoor Rated CFM	Minimum CFM	DTC
FSA3BF4M2SN24K	B64VMMX24K-A	23000	15.2	12.0	800	535	No
FSA3BF4M2SN24K	B64VMMX24K-B	23000	15.2	12.0	855	565	No
FSA3BF4M2SN36K	B64VMMX36K-B	35000	15.2	12.0	1200	800	No
FSA3BF4M2SN48K	B64VMMX48K-C	47000	15.2	12.0	1550	1050	No
FSA3BF4M2SN60K	B64VMMX60K-C	55500	15.2	12.0	1600	1090	No

DTC = Designated Tested Combination

Air handlers and coils used in tables are designed and manufactured by Nordyne, LLC.

See current AHRI Directory for certified combinations and ratings. www.ahridirectory.org

COOLING EXPANDED RATINGS

WITH VARIABLE SPEED BLOWER

FSA3BF4M2SN24K + C74B(A,H)MX24C-A + G7T-A High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
750	80	62	25.3	21.5	1.42	24.1	21.1	1.53	23.0	20.5	1.68	21.9	20.1	1.84	20.6	19.5	2.02	18.9	18.5	2.21
	80	67	27.4	18.0	1.40	26.0	17.4	1.53	25.3	17.1	1.67	24.1	16.6	1.84	22.8	16.0	2.03	21.0	15.2	2.21
	80	72	29.5	14.4	1.40	28.1	13.9	1.52	27.3	13.6	1.67	26.2	13.2	1.83	24.8	12.6	2.02	22.7	11.8	2.21
	75	62	25.2	18.3	1.42	24.1	17.8	1.53	22.9	17.2	1.68	21.8	16.5	1.84	20.6	15.9	2.02	18.8	15.0	2.2
	75	67	27.3	14.8	1.40	26.2	14.3	1.53	25.2	13.8	1.67	24.0	13.3	1.84	22.6	12.7	2.02	20.9	12.0	2.21
800	80	62	25.5	22.0	1.43	24.3	21.6	1.55	23.2	21.3	1.69	22.1	20.8	1.86	20.8	20.1	2.04	19.2	19.2	2.23
	80	67	27.7	18.4	1.42	26.6	17.9	1.55	25.5	17.6	1.69	24.3	17.0	1.86	23.0	16.4	2.04	21.2	15.6	2.23
	80	72	29.8	14.7	1.41	28.5	14.3	1.54	27.6	13.9	1.69	26.4	13.4	1.85	25.0	12.8	2.04	22.9	12.0	2.23
	75	62	25.5	18.7	1.44	24.3	18.2	1.55	23.2	17.7	1.69	22.0	17.1	1.86	20.8	16.4	2.03	19.0	15.4	2.22
	75	67	27.6	15.0	1.42	26.5	14.5	1.55	25.4	14.1	1.69	24.2	13.6	1.86	22.8	13.0	2.04	21.0	12.2	2.23
860	80	62	25.8	22.7	1.46	24.6	22.4	1.57	23.5	22.0	1.72	22.3	21.4	1.88	21.0	20.6	2.06	19.5	19.5	2.25
	80	67	28.0	19.0	1.44	26.8	18.4	1.57	25.8	18.1	1.72	24.6	17.5	1.89	23.2	16.9	2.07	21.3	16.1	2.25
	80	72	30.1	15.1	1.44	28.7	14.5	1.56	27.8	14.1	1.71	26.7	13.6	1.88	25.2	13.1	2.06	23.1	12.3	2.25
	75	62	25.8	19.3	1.46	24.5	18.8	1.57	23.4	18.3	1.72	22.3	17.5	1.88	21.0	16.9	2.06	19.3	16.1	2.25
	75	67	28.0	15.3	1.44	26.8	14.9	1.57	25.7	14.4	1.72	24.4	13.9	1.88	23.0	13.2	2.07	21.2	12.4	2.25

FSA3BF4M2SN24K + C74B(A,H)MX24C-A + G7T-A Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
500	80	62	18.7	15.5	0.93	17.7	15.0	1.03	16.8	14.5	1.15	16.0	14.1	1.30	15.0	13.7	1.46	13.8	13.2	1.62
	80	67	20.5	13.3	0.89	19.5	12.9	1.00	18.6	12.5	1.14	17.8	12.1	1.29	16.7	11.7	1.44	15.3	11.1	1.60
	80	72	22.2	10.9	0.86	21.2	10.5	0.98	20.2	10.1	1.11	19.4	9.8	1.26	18.3	9.4	1.42	16.9	8.8	1.59
	75	62	18.6	13.2	0.93	17.6	12.8	1.03	16.8	12.3	1.15	15.9	11.9	1.30	14.9	11.4	1.46	13.7	10.8	1.62
	75	67	20.4	11.0	0.89	19.4	10.6	1.01	18.5	10.2	1.14	17.7	9.8	1.29	16.6	9.4	1.45	15.2	8.8	1.61
535	80	62	18.9	15.9	0.96	17.9	15.4	1.06	17.0	14.9	1.19	16.1	14.5	1.34	15.1	14.2	1.49	13.8	13.5	1.66
	80	67	20.7	13.6	0.92	19.6	13.1	1.04	18.8	12.7	1.17	17.9	12.4	1.32	16.8	11.9	1.48	15.4	11.3	1.64
	80	72	22.4	11.0	0.90	21.4	10.6	1.02	20.3	10.2	1.15	19.5	9.9	1.30	18.4	9.5	1.45	17.0	8.9	1.62
	75	62	18.8	13.5	0.96	17.8	13.0	1.06	16.9	12.6	1.19	16.0	12.2	1.34	15.0	11.7	1.49	13.8	11.2	1.66
	75	67	20.6	11.2	0.92	19.6	10.7	1.04	18.7	10.3	1.17	17.8	9.9	1.32	16.7	9.5	1.48	15.2	8.9	1.64
575	80	62	19.0	16.3	1.01	18.0	15.8	1.11	17.1	15.3	1.24	16.2	15.0	1.38	15.2	14.6	1.54	13.9	13.9	1.70
	80	67	20.8	13.9	0.97	19.8	13.4	1.09	18.9	13.0	1.22	18.0	12.6	1.37	16.9	12.2	1.53	15.4	11.5	1.69
	80	72	22.5	11.1	0.95	21.5	10.7	1.06	20.4	10.3	1.19	19.6	10.0	1.34	18.5	9.5	1.50	17.0	9.0	1.67
	75	62	19.0	13.8	1.01	17.9	13.2	1.11	17.0	12.9	1.24	16.1	12.4	1.38	15.1	11.9	1.54	13.8	11.3	1.71
	75	67	20.7	11.3	0.97	19.7	10.8	1.09	18.8	10.4	1.22	17.9	10.0	1.37	16.8	9.6	1.53	15.3	8.9	1.69

E.D.B. = Entering dry bulb

E.W.B. = Entering wet bulb

T.C. = Total Capacity

S.C. = Sensible Capacity

kW = Kilo Watts

COOLING EXPANDED RATINGS

WITH VARIABLE SPEED BLOWER (CONTINUED)

FSA3BF4M2SN36K + C74B(A,H)MX36C-B + G7T-B High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1000	80	62	38.4	32.5	2.22	36.5	31.6	2.42	34.6	30.7	2.64	32.6	29.8	2.91	30.5	28.8	3.24	28.3	27.6	3.62
	80	67	42.1	27.1	2.23	40.1	26.4	2.42	37.9	24.9	2.63	36.0	24.7	2.87	33.9	23.6	3.16	31.5	22.7	3.52
	80	72	46.1	22.3	2.24	44.0	21.5	2.43	41.8	20.6	2.63	39.6	19.6	2.86	37.3	18.8	3.13	34.9	17.8	3.45
	75	62	38.3	27.6	2.22	36.4	26.6	2.42	34.6	25.7	2.64	32.6	24.8	2.91	30.5	23.8	3.24	28.4	22.5	3.64
	75	67	41.8	22.4	2.23	39.9	21.5	2.42	37.9	20.6	2.63	35.9	19.7	2.87	34.0	18.9	3.16	31.5	17.8	3.51
1050	80	62	38.9	33.3	2.23	37.0	32.5	2.42	35.0	31.6	2.65	32.9	30.6	2.92	30.8	29.5	3.24	28.7	28.2	3.62
	80	67	42.5	27.7	2.24	40.4	27.1	2.43	38.4	26.1	2.63	36.3	25.3	2.88	34.1	24.2	3.17	31.8	23.3	3.52
	80	72	46.6	22.7	2.25	44.3	21.8	2.44	42.1	20.9	2.64	39.9	20.0	2.87	37.6	19.2	3.14	35.2	18.2	3.45
	75	62	38.7	28.1	2.23	36.9	27.2	2.42	34.9	26.3	2.65	32.9	25.4	2.92	30.9	24.4	3.24	28.7	22.8	3.64
	75	67	42.3	22.8	2.24	40.3	21.9	2.43	38.3	21.0	2.63	36.2	20.1	2.88	34.3	19.3	3.16	31.8	18.2	3.51
1120	80	62	39.4	34.5	2.24	37.4	33.6	2.43	35.4	32.7	2.65	33.4	31.7	2.92	31.2	30.5	3.24	29.2	28.9	3.63
	80	67	43.1	28.5	2.24	40.9	27.9	2.43	38.9	27.0	2.64	36.8	26.1	2.88	34.6	25.0	3.17	32.2	24.2	3.52
	80	72	47.2	23.2	2.26	45.1	22.4	2.44	42.6	21.4	2.65	40.4	20.6	2.88	37.8	19.5	3.14	35.5	18.7	3.46
	75	62	39.3	29.0	2.24	37.3	28.1	2.43	35.3	27.2	2.65	33.4	26.2	2.92	31.2	25.2	3.25	29.0	23.6	3.64
	75	67	42.8	23.3	2.24	40.8	22.4	2.43	38.6	21.3	2.64	36.7	20.6	2.88	34.5	19.7	3.17	32.2	18.7	3.52

FSA3BF4M2SN36K + C74B(A,H)MX36C-B + G7T-B Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
670	80	62	27.2	22.8	1.30	25.8	22.1	1.48	24.4	21.3	1.71	22.9	20.2	1.99	21.3	19.9	2.30	19.4	18.9	2.66
	80	67	29.7	19.4	1.27	28.2	18.7	1.44	26.9	18.1	1.64	25.4	17.3	1.87	23.7	16.7	2.16	21.8	15.9	2.49
	80	72	32.8	16.1	1.24	31.0	15.4	1.41	29.4	14.7	1.61	27.9	14.1	1.82	26.2	13.4	2.08	24.3	12.8	2.36
	75	62	27.2	19.3	1.30	25.7	18.6	1.48	24.3	18.0	1.71	22.8	17.2	1.99	21.2	16.6	2.31	19.2	15.7	2.66
	75	67	29.6	16.0	1.27	28.1	15.3	1.44	26.7	14.8	1.64	25.3	14.1	1.87	23.6	13.4	2.16	21.7	12.5	2.50
705	80	62	27.5	23.4	1.30	26.1	22.6	1.49	24.7	22.0	1.72	23.2	21.3	1.99	21.5	20.4	2.31	19.6	19.4	2.66
	80	67	30.1	19.8	1.28	28.6	19.1	1.45	27.1	18.5	1.64	25.6	17.8	1.88	24.0	17.1	2.17	22.1	16.4	2.50
	80	72	33.1	16.3	1.25	31.4	15.7	1.42	29.7	14.9	1.62	28.1	14.3	1.83	26.4	13.7	2.08	24.5	13.0	2.37
	75	62	27.4	19.8	1.31	26.0	19.0	1.49	24.6	18.2	1.72	23.0	17.7	1.99	21.3	17.0	2.31	19.4	16.1	2.67
	75	67	30.0	16.3	1.28	28.4	15.6	1.45	27.0	15.0	1.65	25.5	14.4	1.88	23.8	13.6	2.17	21.9	12.9	2.50
750	80	62	27.9	24.1	1.32	26.4	23.4	1.50	25.0	22.7	1.73	23.4	21.9	2.00	21.8	21.1	2.32	20.0	20.1	2.67
	80	67	30.5	20.4	1.29	28.9	19.7	1.46	27.5	18.9	1.66	26.0	18.1	1.89	24.2	17.6	2.18	22.3	16.9	2.51
	80	72	33.5	16.7	1.26	31.7	15.9	1.43	30.0	15.2	1.63	28.4	14.6	1.85	26.6	14.0	2.10	24.7	13.2	2.38
	75	62	27.8	20.2	1.32	26.4	19.5	1.50	24.9	19.0	1.73	23.3	18.0	2.01	21.6	17.1	2.33	19.6	16.2	2.69
	75	67	30.4	16.6	1.29	28.8	15.9	1.46	27.3	15.3	1.66	25.8	14.6	1.89	24.0	13.9	2.18	22.1	13.2	2.51

E.D.B. = Entering dry bulb

E.W.B. = Entering wet bulb

T.C. = Total Capacity

S.C. = Sensible Capacity

kW = Kilo Watts

COOLING EXPANDED RATINGS

WITH VARIABLE SPEED BLOWER (CONTINUED)

FSA3BF4M2SN48K + C74B(A,H)MX48C-C + G7T-C High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1415	80	62	49.3	42.0	2.97	47.7	41.4	3.23	45.5	40.1	3.53	43.2	39.1	3.87	40.7	38.0	4.26	38.2	36.7	4.73
	80	67	53.7	35.1	2.99	51.9	34.4	3.25	49.5	33.2	3.55	47.0	32.0	3.89	44.3	30.9	4.28	41.8	29.9	4.73
	80	72	58.8	28.4	3.02	56.2	27.4	3.28	54.0	26.5	3.58	51.2	25.5	3.92	48.4	24.4	4.30	45.3	23.1	4.75
	75	62	49.1	35.2	2.97	47.5	34.5	3.23	45.5	33.8	3.53	43.1	32.7	3.87	40.5	31.3	4.26	38.0	30.0	4.73
	75	67	53.5	28.6	2.99	51.7	27.8	3.25	49.4	26.9	3.55	46.9	25.7	3.88	44.2	24.6	4.28	41.6	23.5	4.73
1480	80	62	49.8	43.2	2.95	48.1	42.5	3.22	46.0	40.6	3.52	43.6	40.3	3.85	41.1	39.0	4.25	38.5	37.6	4.71
	80	67	54.3	35.9	2.98	52.4	35.1	3.24	50.0	33.9	3.54	47.4	32.7	3.87	44.7	31.6	4.26	42.2	30.7	4.72
	80	72	59.4	28.9	3.01	56.8	27.9	3.27	54.5	27.0	3.56	51.7	26.0	3.90	48.8	24.8	4.29	45.9	23.7	4.74
	75	62	49.6	36.0	2.95	48.0	35.5	3.22	45.9	34.6	3.51	43.5	33.4	3.85	40.9	32.1	4.25	38.4	30.7	4.72
	75	67	54.0	29.1	2.97	52.1	28.3	3.24	49.9	27.3	3.53	47.3	26.2	3.87	44.6	25.1	4.26	41.9	24.0	4.72
1505	80	62	50.0	43.4	2.95	48.3	42.8	3.21	46.2	41.4	3.51	43.7	40.7	3.85	41.2	39.4	4.24	38.7	37.8	4.71
	80	67	54.5	36.2	2.97	52.6	35.3	3.24	50.2	34.2	3.53	47.6	33.0	3.87	44.9	31.8	4.26	42.3	31.0	4.71
	80	72	59.6	29.1	3.00	57.0	28.1	3.26	54.7	27.2	3.56	51.8	26.1	3.90	48.9	25.0	4.29	45.8	23.8	4.74
	75	62	49.8	36.3	2.95	48.2	35.8	3.21	46.1	34.9	3.51	43.6	33.7	3.85	41.1	32.4	4.24	38.5	31.1	4.71
	75	67	54.2	29.3	2.97	52.3	28.5	3.23	50.1	27.5	3.53	47.5	26.4	3.87	44.7	25.3	4.26	41.6	23.8	4.71

FSA3BF4M2SN48K + C74B(A,H)MX48C-C + G7T-C Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
950	80	62	35.6	30.6	1.63	34.6	30.1	1.88	33.1	29.4	2.15	31.1	27.7	2.49	28.9	27.4	2.86	26.6	26.1	3.29
	80	67	38.9	25.2	1.61	37.5	24.6	1.85	36.3	24.6	2.12	34.3	23.8	2.42	32.2	22.8	2.77	29.7	21.8	3.19
	80	72	43.6	21.4	1.60	42.0	20.8	1.85	40.1	20.0	2.12	37.9	19.1	2.42	35.6	18.3	2.75	33.0	17.3	3.15
	75	62	35.5	25.9	1.63	34.5	25.4	1.88	33.0	24.7	2.15	31.1	23.8	2.49	28.8	22.7	2.86	26.4	21.6	3.29
	75	67	38.9	21.2	1.61	37.7	20.7	1.85	36.2	20.0	2.12	34.2	19.1	2.43	32.1	18.2	2.77	29.6	17.1	3.19
990	80	62	35.9	31.2	1.64	34.8	30.7	1.88	33.3	30.1	2.16	31.4	29.1	2.49	29.2	28.0	2.86	26.9	26.5	3.29
	80	67	39.4	26.3	1.61	38.1	25.8	1.86	36.5	25.0	2.13	34.6	24.2	2.43	32.4	23.3	2.78	30.0	22.3	3.20
	80	72	43.9	21.7	1.61	42.3	21.1	1.85	40.4	20.3	2.12	38.2	19.4	2.42	35.8	18.5	2.76	33.2	17.5	3.15
	75	62	35.8	26.4	1.64	34.7	25.9	1.89	33.3	25.2	2.16	31.4	24.3	2.49	29.0	23.2	2.87	26.6	22.1	3.30
	75	67	39.2	21.4	1.61	38.0	20.9	1.86	36.4	20.3	2.13	34.5	19.4	2.43	32.3	18.5	2.78	29.8	17.4	3.20
1010	80	62	36.1	31.5	1.64	35.0	31.1	1.89	33.5	30.4	2.17	31.5	29.4	2.50	29.3	28.3	2.87	26.9	27.0	3.30
	80	67	39.3	25.9	1.62	38.0	25.2	1.86	36.7	25.3	2.13	34.7	24.4	2.44	32.6	23.6	2.78	30.1	22.5	3.20
	80	72	44.1	21.8	1.61	42.5	21.2	1.86	40.5	20.4	2.13	38.3	19.6	2.43	35.9	18.7	2.77	33.4	17.6	3.16
	75	62	36.0	26.6	1.64	34.9	26.1	1.89	33.4	25.5	2.17	31.5	24.5	2.49	29.1	23.4	2.87	26.7	22.3	3.30
	75	67	39.4	21.6	1.62	38.2	21.1	1.86	36.6	20.4	2.13	34.4	19.3	2.44	32.4	18.6	2.78	29.9	17.5	3.20

E.D.B. = Entering dry bulb

E.W.B. = Entering wet bulb

T.C. = Total Capacity

S.C. = Sensible Capacity

kW = Kilo Watts

COOLING EXPANDED RATINGS

WITH VARIABLE SPEED BLOWER (CONTINUED)

FSA3BF4M2SN60K + C74B(A,H)MX60C-C + G7T-C High Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1480	80	62	58.4	48.1	3.53	56.4	47.4	3.87	54.4	46.4	4.27	51.8	45.1	4.79	48.8	43.4	5.41	45.7	41.5	6.09
	80	67	63.7	40.6	3.56	61.3	39.5	3.89	59.1	38.6	4.27	56.4	37.5	4.71	53.5	36.2	5.24	50.4	34.6	5.90
	80	72	70.7	33.8	3.63	68.0	32.7	3.97	65.0	31.5	4.35	61.8	30.2	4.77	58.0	28.7	5.27	55.0	27.5	5.89
	75	62	58.2	41.0	3.52	56.4	40.2	3.87	54.3	39.2	4.27	51.8	37.9	4.80	48.7	36.4	5.41	45.6	34.7	6.09
	75	67	63.4	33.6	3.56	61.0	32.5	3.88	58.9	31.6	4.27	56.2	30.4	4.71	53.4	29.2	5.23	49.8	27.5	5.89
1545	80	62	59.0	49.3	3.51	57.2	48.3	3.85	54.9	47.6	4.25	52.3	46.1	4.78	49.4	44.7	5.38	46.2	42.8	6.07
	80	67	64.3	41.5	3.54	61.9	40.5	3.87	59.6	39.4	4.25	57.0	38.1	4.69	54.0	36.6	5.22	50.9	35.4	5.88
	80	72	71.4	34.4	3.61	68.7	33.3	3.95	65.7	32.1	4.33	62.4	30.7	4.75	59.0	29.4	5.26	55.5	28.0	5.87
	75	62	58.8	41.8	3.50	56.8	41.0	3.85	54.9	40.1	4.25	52.3	38.8	4.78	49.2	37.4	5.38	46.0	35.5	6.06
	75	67	64.1	34.2	3.54	61.6	33.1	3.87	59.5	32.2	4.25	56.8	31.0	4.69	53.9	29.7	5.22	50.3	28.1	5.87
1595	80	62	59.5	50.1	3.49	57.5	49.5	3.83	55.4	48.5	4.23	52.7	46.2	4.75	49.8	45.6	5.35	46.6	43.6	6.04
	80	67	64.8	42.1	3.52	62.4	41.1	3.85	60.0	39.9	4.24	57.4	39.0	4.67	54.4	37.5	5.20	51.2	36.1	5.86
	80	72	72.0	34.9	3.59	69.2	33.8	3.93	66.1	32.5	4.31	62.9	31.1	4.74	59.0	29.7	5.24	55.8	28.5	5.85
	75	62	59.3	42.3	3.49	57.4	41.8	3.83	55.3	40.8	4.23	52.7	39.6	4.75	49.6	38.0	5.36	46.4	36.1	6.04
	75	67	64.6	34.6	3.52	62.1	33.5	3.85	59.9	32.6	4.23	57.2	31.4	4.67	54.2	30.1	5.20	51.0	28.6	5.86

FSA3BF4M2SN60K + C74B(A,H)MX60C-C + G7T-C Low Speed

O.D.T			65°F			75°F			85°F			95°F			105°F			115°F		
CFM	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
990	80	62	42.0	34.9	1.99	40.2	34.1	2.28	38.5	33.2	2.61	36.4	32.2	2.98	34.2	31.2	3.40	31.8	30.1	3.87
	80	67	45.5	29.0	1.97	43.6	28.0	2.26	42.0	27.9	2.58	39.9	27.1	2.94	37.5	26.0	3.35	35.0	24.9	3.81
	80	72	50.3	24.5	1.95	48.2	23.7	2.24	45.9	22.8	2.56	43.6	21.9	2.92	41.0	20.8	3.32	38.3	19.8	3.77
	75	62	41.9	29.8	1.99	40.2	29.0	2.29	38.4	28.1	2.61	36.4	27.1	2.98	34.1	26.1	3.40	31.6	25.0	3.87
	75	67	45.7	24.6	1.97	43.8	23.8	2.26	41.9	22.9	2.58	39.8	22.0	2.94	37.4	21.1	3.35	34.8	19.8	3.81
1035	80	62	42.4	35.7	2.01	40.6	34.8	2.30	38.7	33.9	2.63	36.7	32.9	3.00	34.5	31.9	3.42	32.0	30.7	3.88
	80	67	46.3	30.2	1.98	44.4	29.3	2.28	42.3	28.5	2.6	40.1	27.6	2.96	37.4	25.4	3.37	35.1	25.3	3.82
	80	72	50.7	24.9	1.97	48.5	24.0	2.26	46.2	23.1	2.58	43.9	22.1	2.94	41.3	21.1	3.33	38.5	20.1	3.79
	75	62	42.2	30.4	2.01	40.4	29.5	2.30	38.6	28.6	2.63	36.6	27.6	3.00	34.4	26.7	3.41	31.9	25.5	3.88
	75	67	46.0	24.8	1.98	44.2	24.1	2.28	42.2	23.3	2.6	40.1	22.4	2.96	37.7	21.3	3.37	35.0	20.1	3.83
1070	80	62	42.6	36.3	2.02	40.8	35.3	2.31	38.9	34.4	2.64	36.9	33.5	3.01	34.7	32.5	3.43	32.2	31.2	3.89
	80	67	46.5	30.6	2.00	44.6	29.7	2.29	42.5	28.9	2.61	40.4	28.0	2.97	37.9	26.8	3.38	35.3	25.7	3.84
	80	72	51.0	25.1	1.98	48.8	24.2	2.27	46.5	23.3	2.59	44.2	22.3	2.95	41.5	21.3	3.35	38.7	20.3	3.80
	75	62	42.5	30.9	2.02	40.8	29.9	2.32	38.8	29.0	2.64	36.8	28.1	3.01	34.2	25.6	3.44	32.0	25.8	3.90
	75	67	46.3	25.1	2.00	44.5	24.3	2.29	42.5	23.4	2.61	40.3	22.6	2.97	37.8	21.4	3.38	35.2	20.4	3.84

E.D.B. = Entering dry bulb E.W.B. = Entering wet bulb T.C. = Total Capacity S.C. = Sensible Capacity kW = Kilo Watts

GENERAL TERMS OF LIMITED WARRANTY

Nordyne, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.



DISCOVER Comfort

GET STARTED AT FRIGIDAIREHVAC.COM



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (06/24)

FRIGIDAIRE is a registered trademark of Electrolux Home Products Inc. and used under a license from Electrolux Home Products, Inc.

© Nordyne, LLC 2024. All Rights Reserved.

973F-0624



FRIGIDAIRE®

