



THERMOSTATS and Accessories

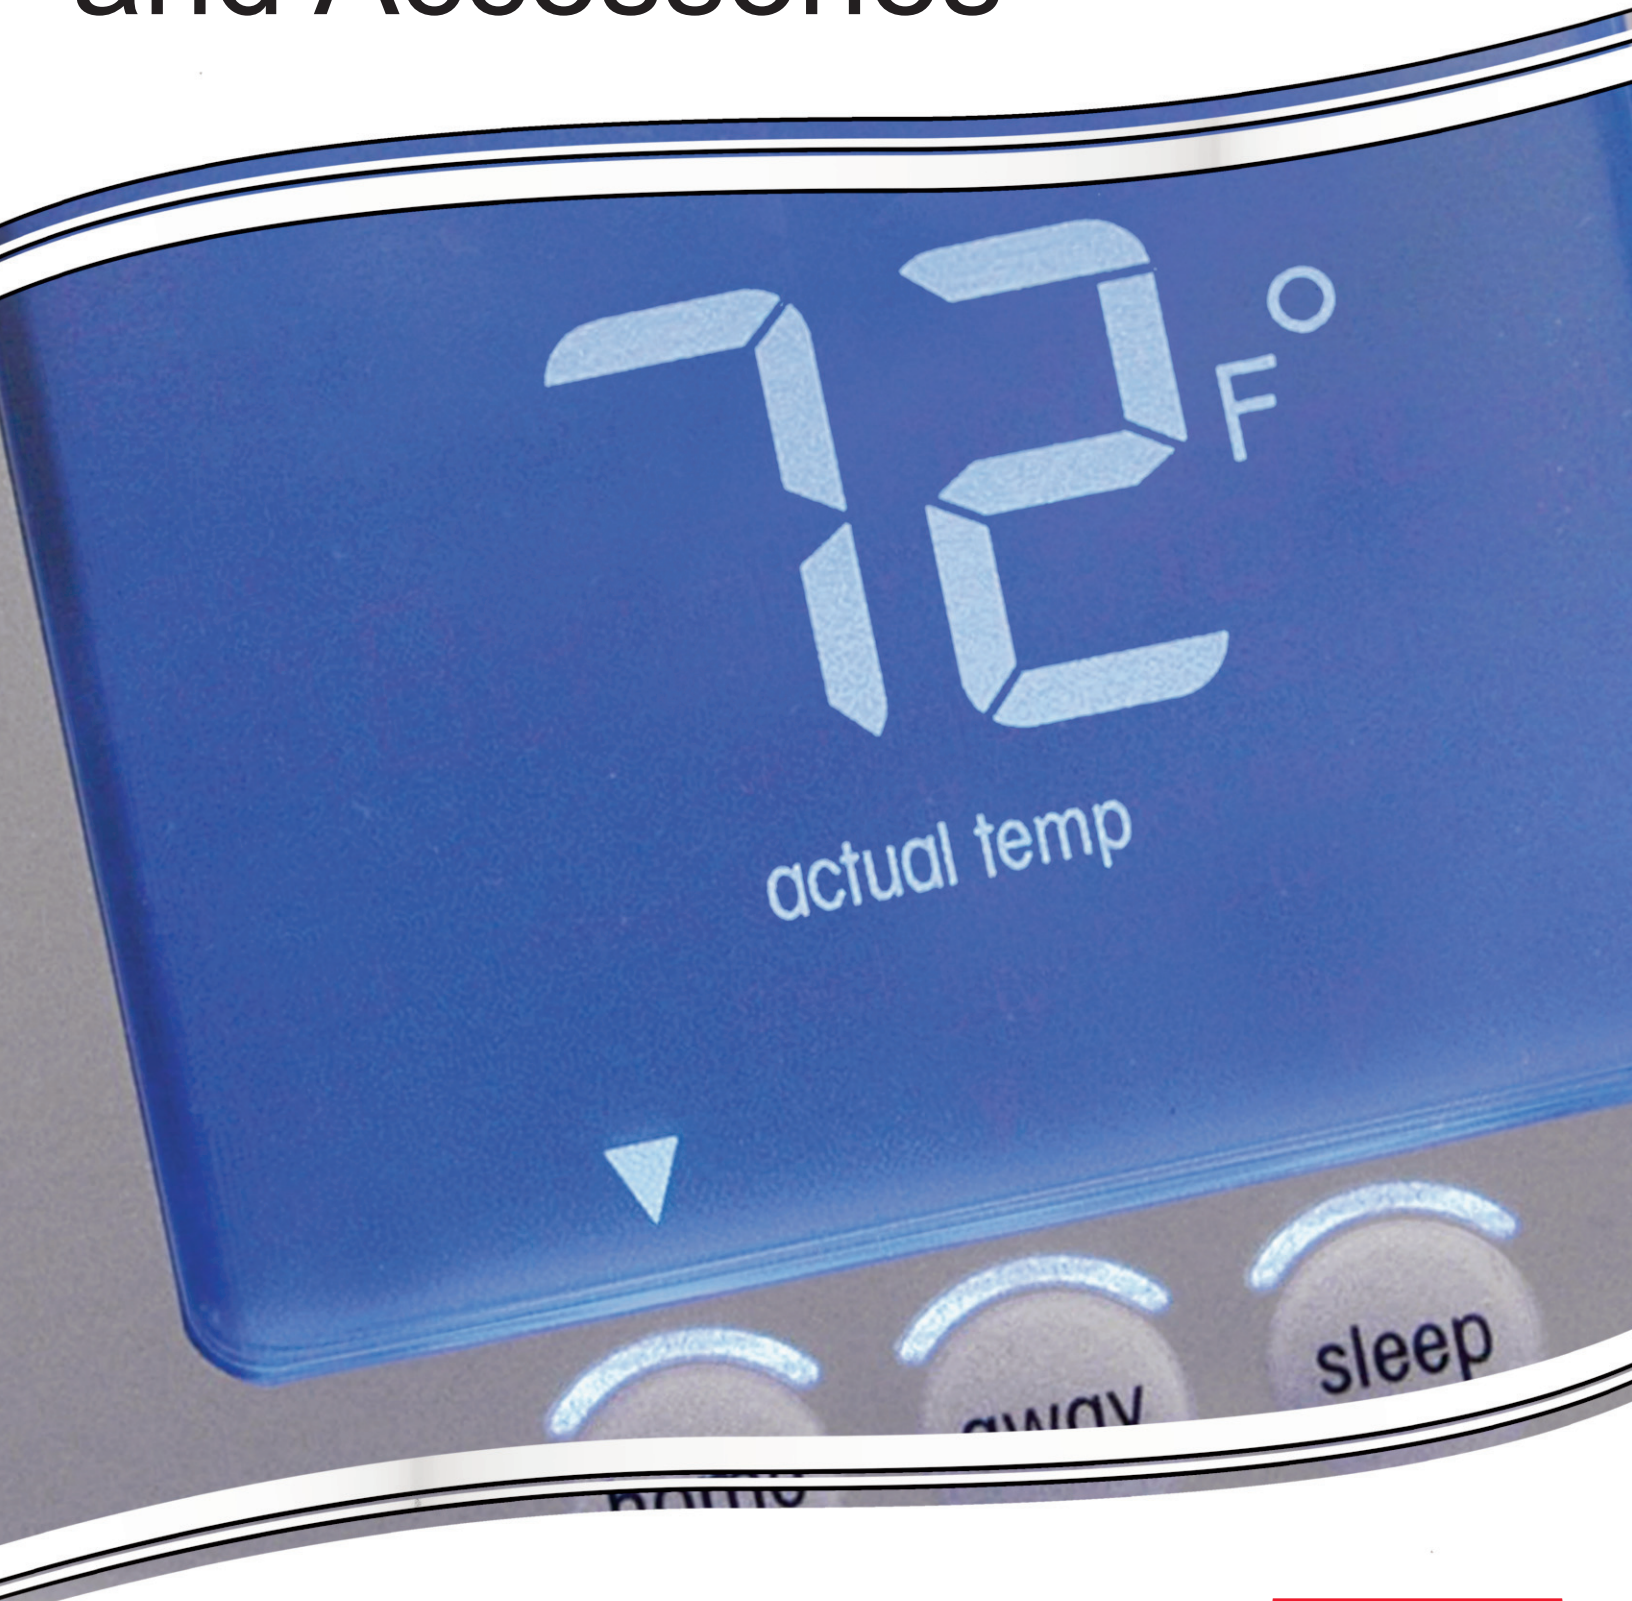

Replacement Components
Carrier

bryant
Heating & Cooling Systems

Thermostat Table Of Contents



RNC Thermostats - Builder, Construction
Programmable, Non-Programmable and Heat Pump3 - 4




Base Model Thermostats - Entry
Programmable, Non-Programmable and Heat Pump 5 - 6



Deluxe Thermostats - Sleek Design, Many Options
Programmable, Non-Programmable and Heat Pump7 - 8

Nomenclature

BRYANT® BRANDED THERMOSTAT MODEL NUMBER NOMENCLATURE

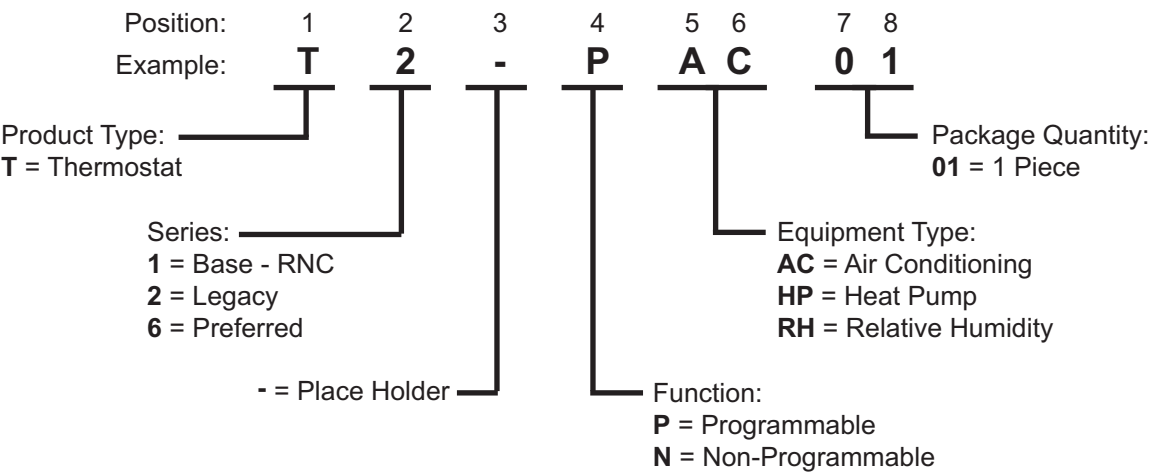


RNC Thermostats

Bryant® Legacy™ T1-PAC, T1-PHP, T1-NAC, T1-NHP



**RNC Programmable
Thermostat**



**RNC Non- Programmable
Thermostat**

These RNC thermostats consists of programmable and non-programmable air conditioner and heat pump controls. These units feature non-mercury, non-lead based electronic controls built into a subtle, slim plastic enclosure.

Features

Both Programmable and Non-Programmable Models

- Non-volatile memory to retain settings during a power outage
- English/Metric units selection
- Modes include Off, Cool, Heat and Eheat (emergency heat on heat pump models only)
- Auxiliary heat indicator (heat pump models only)

Programmable Models

- 5-2 days programmable
- Operation with batteries optional

Air Conditioner Control

- 1-stage heat / 1-stage cool

Heat Pump Control

- 2-stage heat / 1-stage cool

Specifications

Physical Characteristics

Programmable Thermostat Dimensions: 3.6"H x 5.5"W x 1.0"D

Non-Programmable Thermostat Dimensions: 2.7"H x 4.3"W x 0.9"D

Electrical

- Input volts/amps: 24VAC, 3 VA

Environment

- Operating temperature/Relative humidity: 32°F (0°C) to 104°F (40°C), 95% RH non-condensing
- Storage temperature/Relative humidity: -40°F (-40°C) to 134°F (57°C), 95% RH non-condensing

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

RNC Thermostats



Bryant® Legacy™ T1-PAC01-A, T1-PHP01-A, T1-NAC01-A, T1-NHP01-A

RNC Thermostat Model Comparison

Brand	Ordering Model Number	Programmable	Non-Programmable	Equipment Type		
				AC	HP	RH
Bryant	T1-NAC01-A	-	X	X	-	-
Bryant	T1-NHP01-A	-	X	-	X	-
Bryant	T1-PAC01-A	X	-	X	-	-
Bryant	T1-PHP01-A	X	-	-	X	-

AC = Air Conditioning

HP = Heat Pump

RH = Relative Humidity

Parts and Accessories


- TX-MBP01— Medium decorative backplate for T1-PAC, T1-PHP, P700U-21PHP
- TX-SBP01 — Small decorative backplate for T1-NAC, T1-NHP, P700U-21NHP

Base Thermostats

Bryant® Legacy™ T2-NAC01-A, T2-NAC01-A, T2-NAC01-A, T2-PHP01-A



**Base Programmable
Thermostat**



**Base Non-Programmable
Thermostat**

These Base Series of thermostats consists of programmable and non-programmable air conditioner and heat pump controls. These units feature non-mercury, non-lead based electronic controls built into a subtle, slim plastic enclosure.

Features

Both Programmable and Non-Programmable Models

- Continuous display back-lighting configurable
- Auto changeover available
- Non-volatile memory to retain settings during a power outage
- Optional battery operation
- English/Metric units selection
- Keypad lockout
- RC / RH power compatible
- Configurable setpoint limits

Programmable Models

- Touch-N-Go™ programmability
- 5-2 or All Days programmable
- 4 or 2 periods per day selectable
- Battery Backup

Air Conditioner Control

- 1-stage heat / 1-stage cool

Heat Pump Control

- 3-stage heat / 2-stage cool

Specifications

Physical Characteristics

- Programmable Thermostat Dimensions: 5.2"H x 5.2"W x 1.2"D
- Non-Programmable Thermostat Dimensions: 4.1"H x 5.1"W x 1.1"D

Electrical

- Input volts/amps: 24VAC, 3 VA, RC/RH compatible

Environment

- Operating temperature/Relative humidity: 32°F (0°C) to 104°F (40°C), 95% RH non-condensing
- Storage temperature/Relative humidity: -40°F (-40°C) to 134°F (57°C), 95% RH non-condensing

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

Base Thermostats



Bryant® Legacy™ T2-NAC01-A, T2-NAC01-A, T2-NAC01-A, T2-PHP01-A

Base Thermostat Model Comparison

Brand	Ordering Model Number	Programmable	Non-Prommable	Equipment Type		
				AC	HP	RH
Bryant	T2-NAC01-A	-	X	X	-	-
Bryant	T2-NHP01-A	-	X	-	X	-
Bryant	T2-PAC01-A	X	-	X	-	-
Bryant	T2-PHP01-A	X	-	-	X	-

AC = Air Conditioning

HP = Heat Pump

RH = Relative Humidity

Parts and Accessories

- TX-LBP01 — Large decorative backplate for T2-PAC, T2-PHP
- TX-MBP01 — Medium decorative backplate for T2-NAC, T2-NHP

Deluxe Thermostats

Bryant® Preferred™ T6-NRH01-B, T6-NHP01-A, T6-PHP01-A, T6-PRH01-B



**Deluxe Programmable
Thermostat**



**Deluxe Non- Programmable
Thermostat**

These Deluxe thermostats consists of programmable and non-programmable air conditioner, heat pump and Thermidistatt controls. These units feature non-mercury, non-lead based electronic controls built into a subtle, slim plastic enclosure.

Features

Programmable and Non-Programmable Models

Outdoor Air Temperature (OAT) sensor option

- Auto changeover available
- Battery free
- Non-volatile memory to retain settings during a power outage
- Keypad lockout
- English/Metric units selection
- Filter/UV light/Humidifier pad replacement indicators
- Continuous display back-lighting configurable
- Hybrid Heat compatible
- RC/RH power compatible
- 2-wire communicating installation option

Programmable Models

- ExP™ expansion port* for use with future enhancements and/ or features
- Programmable with personal computer**
- 7, 5-2, All Days programmable
- 4 or 2 periods per day programmability
- Programmable fan by period
- Vacation mode controls temperature and humidity
- Remote room sensor option
- Adjusts automatically for Daylight Savings Time

Non-Programmable models

- Touch-N-Go™ programmability

Air Conditioner Control

- 1-stage heat / 1-stage cool

Heat Pump Control

- 3-stage heat / 2-stage cool

Thermidistat Control

- Heat pump 2-stage or Hybrid Heat 3-stage heat / 2-stage cooling with humidity control
- Humidity display
- Humidify output for direct control of humidifier
- Dehumidify output for variable-speed blowers
- Hybrid Heat compatible

* ExP accessory (expansion port and memory card) sold separately

** Requires ExP accessory

Deluxe Thermostats



Bryant® Preferred™ T6-NRH01-B, T6-NHP01-A, T6-PHP01-A, T6-PRH01-B

Specifications

Physical Characteristics

Programmable Thermostat

- Dimensions: 5.2"H x 5.2"W x 1.3"D
- Battery Backup

Non-Programmable Thermostat

- Dimensions: 5.2"H x 5.2"W x 1.3"D

Electrical

- Input volts/amps: 24VAC, 3 VA, RC/RH compatible

Environment

- Operating temperature/Relative humidity: 32°F (0°C) to 104°F (40°C), 95% RH non-condensing
- Storage temperature/Relative humidity: -40°F (-40°C) to 134°F (57°C), 95% RH non-condensing

Wiring Requirements

Standard 18 to 22 gauge, local wiring codes supercede.

Deluxe Thermostat Model Comparison

Brand	Ordering Model Number	Programmable	Non-Programmable	Equipment Type		
				AC	HP	RH
Bryant	T6-NHP01-A	-	X	-	X	-
Bryant	T6-NRH01-A	-	X	-	-	X
Bryant	T6-PHP01-A	X	-	-	X	-
Bryant	T6-PRH01-B	X	-	-	-	X

AC = Air Conditioning

HP = Heat Pump

RH = Relative Humidity

Parts and Accessories

- TSTATXXSEN01-RC† — Outdoor air temperature sensor
- TP-EXP — ExP Expansion Memory Port
- TX-LBP01 — Large decorative backplate for T6 series

- TX-2WR05 — 2-wire harness
- ZONECC0RRS01 — Remote room temperature sensor

† The outdoor air temperature sensor must be used with the Thermostat control in a Hybrid Heat system.