


Daikin One Touch Smart Thermostat



Training Module TRC-10

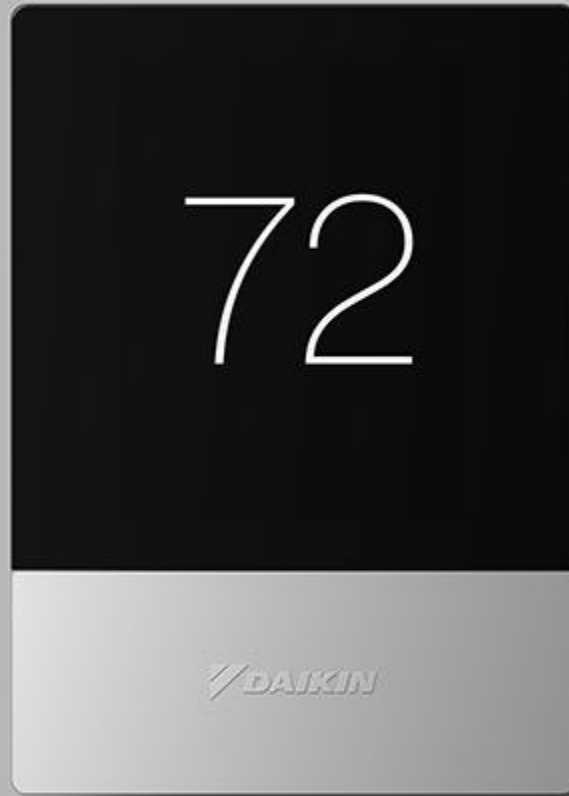

Disclaimer

This material provides technical information that is to only be used by appropriately trained and certified HVAC-R installers and technicians who have agreed to the terms and conditions available here at <https://www.daikincity.com/DaikinCityB2BTermsOfUse.html>. If you have not agreed to these terms and conditions, you may not use or view this material, and you assume responsibility for any injury or property, system or equipment damage which may result. If you have agreed to these terms, you also agree, by viewing or using this material, that this material, by its nature, cannot include a discussion of everything necessary to effect a proper installation or repair of HVAC-R equipment, nor can it address every possible scenario or environment a technician or installer may encounter. Accordingly, this material should not be considered as recommendations for best practices and will not be considered installation or repair instructions to the extent of any conflict with Daikin- or Goodman-issued manuals and specifications, or industry standards and regulations. Each installer or technician remains fully responsible for ensuring proper installation or repair of the HVAC-R equipment being worked on, and you remain fully responsible for any injury or property, system or equipment damage which may result from your installation. ©2026 Daikin Comfort Technologies North America, Inc., all rights reserved; recording, copying, or distribution of this material is prohibited without express written permission from Daikin.

®/™ 2026 Amana. Manufactured under license by Daikin Comfort Technologies North America, Inc. Limited warranty provided by the manufacturer.

Agenda

Daikin *One* Touch smart thermostat

System Configurations Touch

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning

Dealer Navigation

Homeowner Navigation


SkyportHome Mobile App

Daikin One Touch thermostat

- Premium control that provides optimal comfort.
- The high-resolution touch screen supports tactile-based interactions.
- Navigating to each screen is done by tapping an icon.
- Designed to regulate and communicate with Daikin communicating HVAC equipment.
- The user will be able to control the indoor unit remotely through the SkyportHome app.



SkyportHome

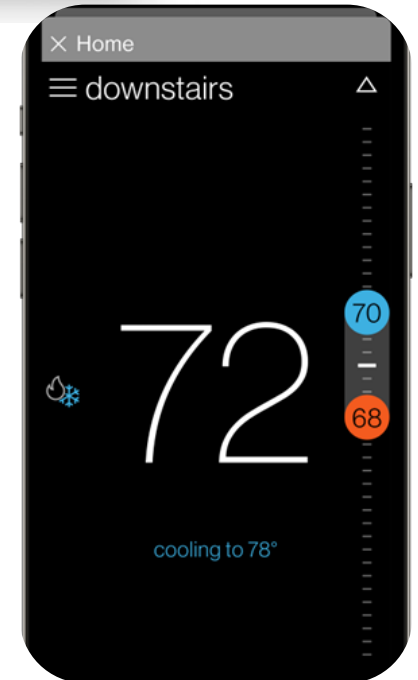

DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Daikin One Touch thermostat


- Offers two-way communication when combined with:
 - Daikin *FIT* system; air conditioners and heat pumps, residential inverters; air conditioners and heat pumps, and two stage system; air conditioners and heat pumps.
 - Also includes the Daikin *One* ecosystem which provide an integrated solution for temperature control and air quality.
 - Daikin *One* home air monitor (recommend adding the MERV 15 filter)
- Serves as a cloud-connected hub and controller for communicating HVAC systems.




DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Daikin One+ Interface

- The high-resolution touch screen supports tactile-based interactions.
- Navigating to each screen is done by tapping an icon.

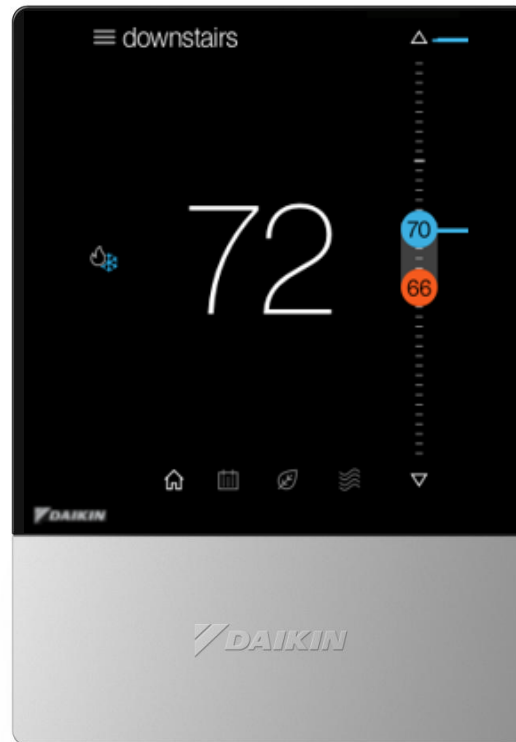

- Daikin *One Touch* messaging updates, confirms, and informs about selections you make during set-up and operation.
- There are four types of messages:
 - Status
 - Alerts
 - Reminders and Prompts
 - Learn more/tips

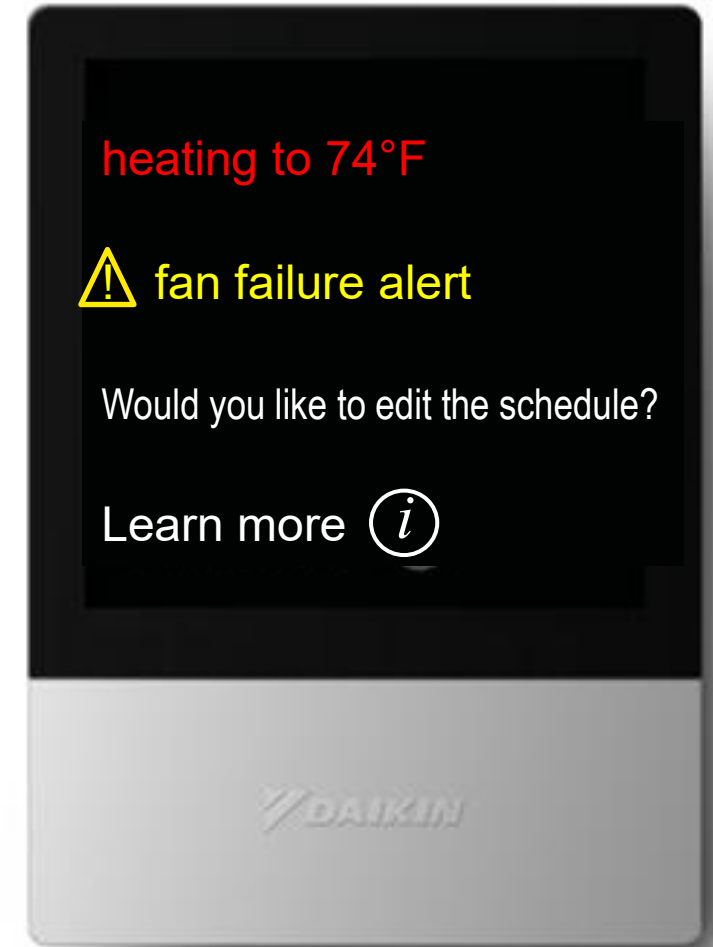

Note: Alerts have priority over all other messages in the system.

Daikin One Touch - Quick Reference Card

- Quick reference cards are packaged with the thermostat to help answer questions during the installation and commissioning.


Dealers

Install the thermostat

Use the two included screws to secure the terminal plate to the wall. After connecting the wires, hook the top edge of the thermostat onto the holes on the top edge of the terminal plate. Rotate the thermostat down until it snaps into place. Once connected to power, follow the on-screen instructions.

Begin Setup

Use begin setup to customize settings and ensure the system is properly configured and ready for homeowners to use.



Terminal plate Screws Thermostat

Attach the thermostat to the terminal plate and snap into place

Get help at dealer.daikinone.com/resources

Dealers

Commission the system

After connecting to power, follow the on-screen instructions.

Quick Setup

Use quick setup when you need to get the HVAC equipment running as soon as possible. Once the site is more comfortable, you can complete the full setup.

Full Setup

Use full setup (shown on right) to customize settings and ensure the system is properly configured and ready for homeowners to use.

Get help at www.daikinone.com/smart_thermostats/oneplus/pros



Homeowners

Install the mobile app

Monitor and control your HVAC system from across the room, or from across the country.



Available on the App Store and Google Play.



<https://daikincomfort.com/products/cloud-services-apps/homeowner>

Learn more about your smart thermostat

Find additional information about how your smart thermostat works and download the Homeowner Guide.



daikinone.com/onetouch



← Scanning the bar code on the **bottom left** corner will link you to the Daikin One Touch information.

<https://daikinone.com/professionals/resources#touch>

Agenda

Daikin *One* Touch smart thermostat

System Configurations

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning

Dealer Navigation

Homeowner Navigation

SkyportHome Mobile App

Valid System Configurations

Communicating Indoor

- Air handler.
- Furnace.
- EEV coil.

Communicating Outdoor

- Heat pump.
- Air Conditioning.

Non-communicating Indoor

- Furnace
 - Utilizing a D24V Gateway

Non-communicating Outdoor*

- 24V single-stage condenser.



*Added equipment.

Agenda

Daikin *One* Touch smart thermostat

System Configurations

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning

Dealer Navigation


Homeowner Navigation

SkyportHome Mobile App

Installing Daikin *One* Touch thermostat



DO NOT Install the thermostat where it can be affected by:

- Drafts or dead spots behind doors and in corners.
- Hot or cold air from ducts or ceiling fans.
- Radiant heat from the sun or appliances.
- Concealed pipes and chimneys.
- Unheated (uncooled) areas such as an outside wall.

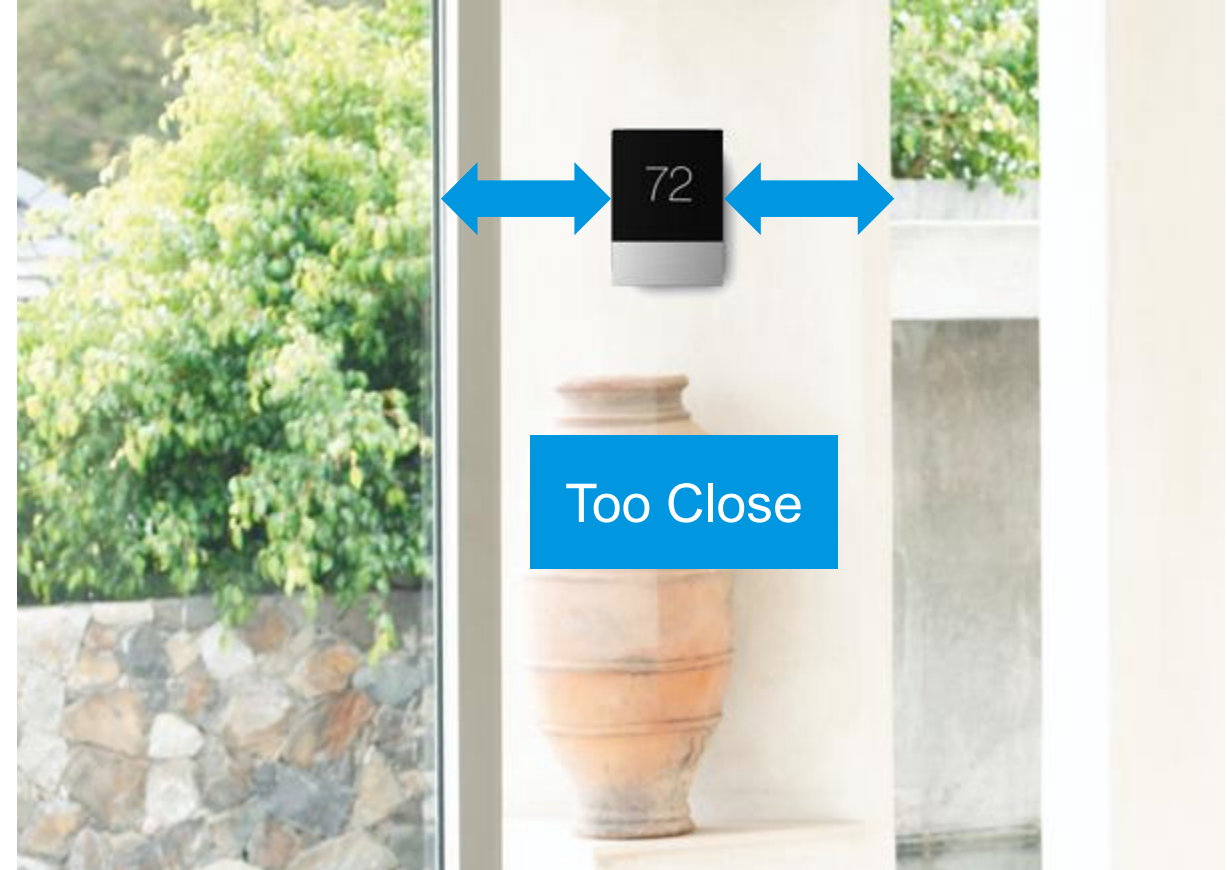


Installing Daikin *One* Touch thermostat

- Mount the thermostat to be
 - Leveled.
 - Approximately 5' from the floor.
 - On an interior wall using the included screws.
- Attach the thermostat to the top of terminal plate and snap into place

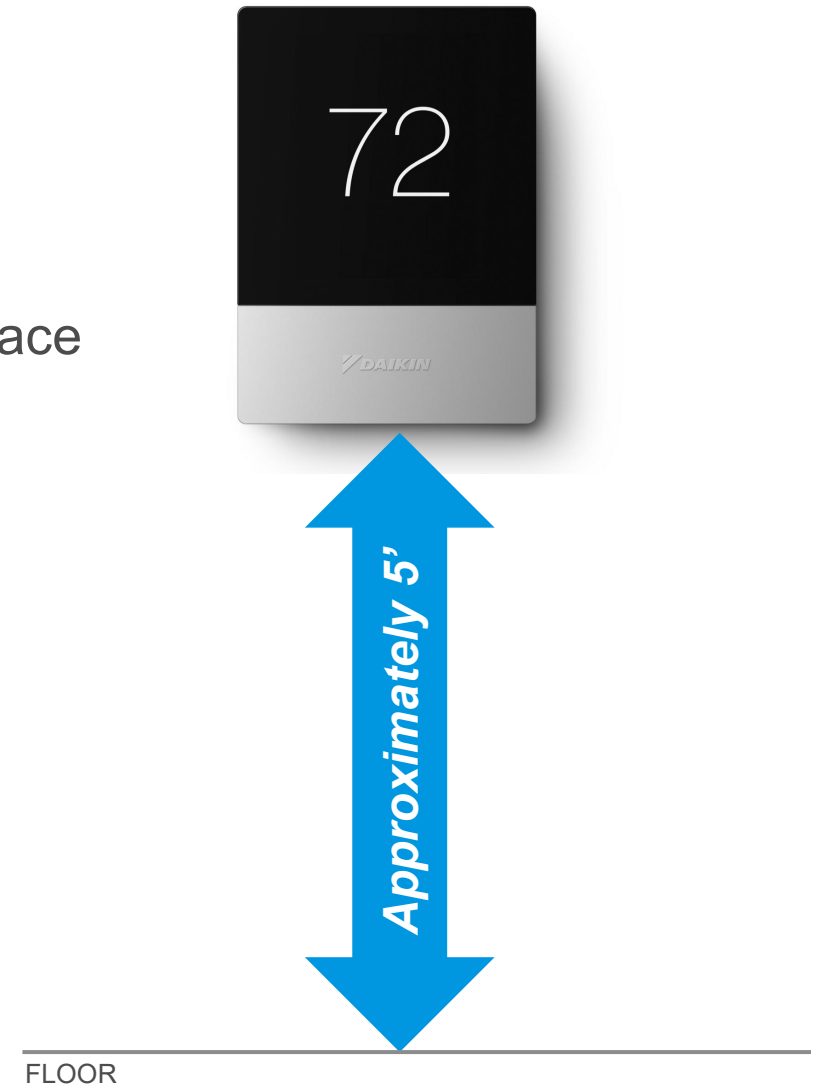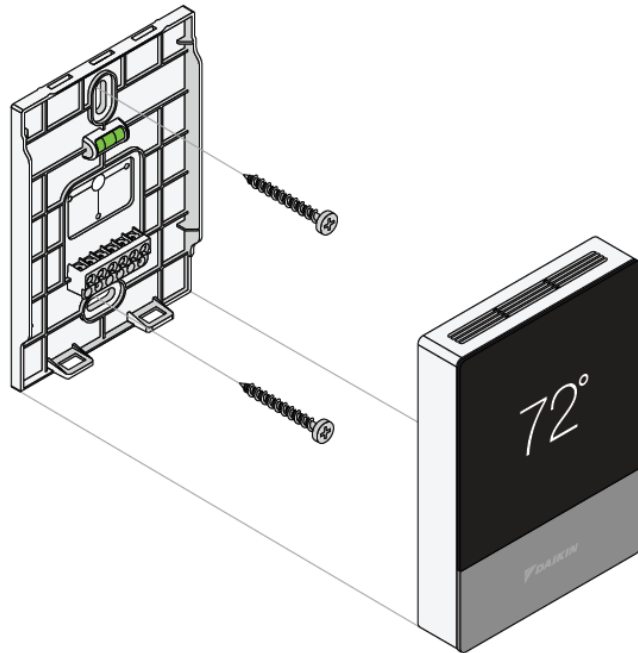

Installing Daikin *One Touch* thermostat

- Maximum wire distance between the Daikin *One Touch* and the indoor unit should not exceed **125 feet using 18-gauge wire**.
- Check for proper voltage before and after wiring is installed.**
 - 0.6VDC between Data 1 and 2
- Wiring communicating indoor unit to communicating outdoor units.
 - Connect **1, 2, C and R** from the **Daikin *One Touch***, to **1, 2, C and R** at the **indoor** unit.
 - Connect wires **1 and 2** from the **indoor** unit to **1 and 2** at the **outdoor** unit.
- Note:** The Daikin *One Touch* is labeled **1, 2, C, R**. **If wired incorrectly, you will receive a communication error, or your equipment may not be recognized and displayed.**

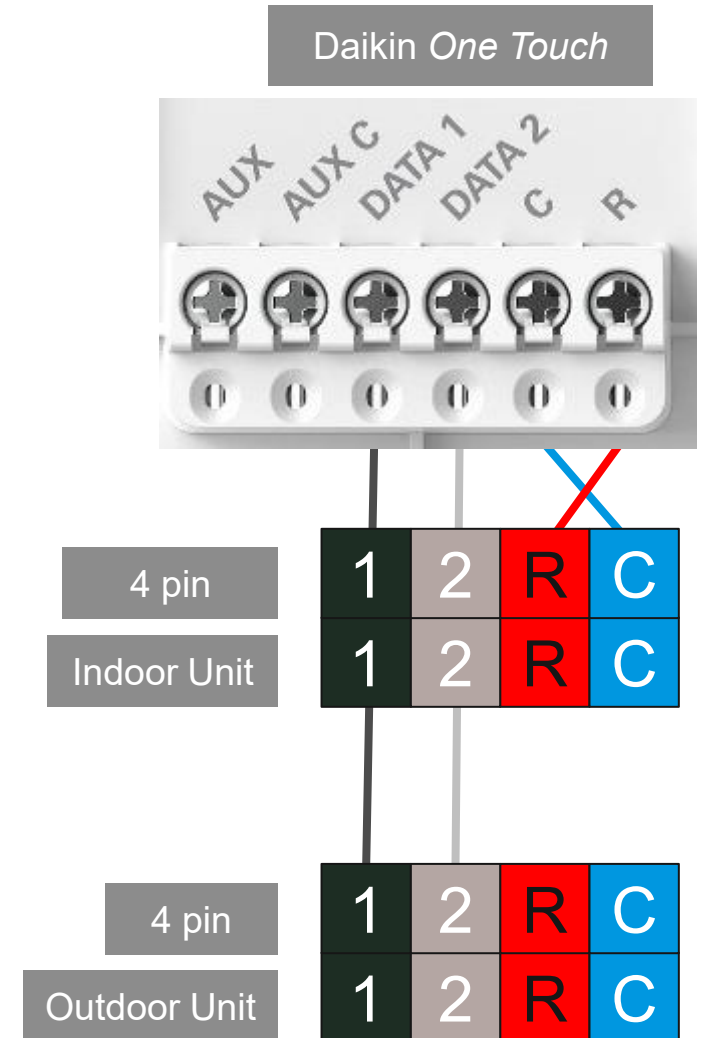


DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.


Installing Daikin One Touch thermostat

Wiring thermostat to communicating systems

- Communicating indoor units with a 4-pin connector supplied, will match 1, 2, R, C on the 4 pin with 1, 2, R, C on the indoor PCB.
- Communicating outdoor units with a 4-pin connector supplied, will match 1, 2 on the 4 pin with 1, 2 on the outdoor PCB.
- **Note:** The Daikin Touch is labeled 1, 2, C, R. **If wired incorrectly, you will receive a communication error, or your equipment may not be recognized and displayed.**

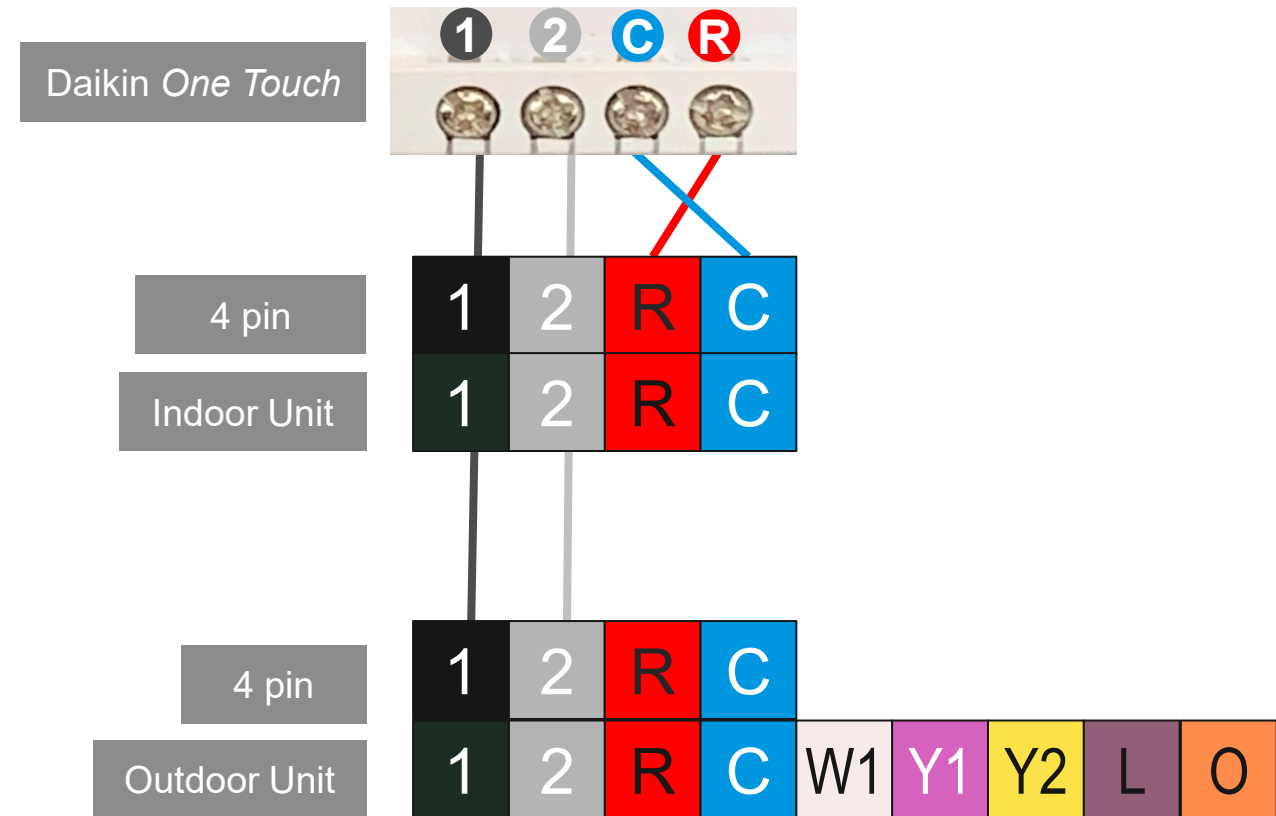

- The thermostats Aux outputs are dry contacts that close the connection to turn on the Aux equipment.
- A 24V AC control signal must be routed through one of the aux contacts of the thermostat.

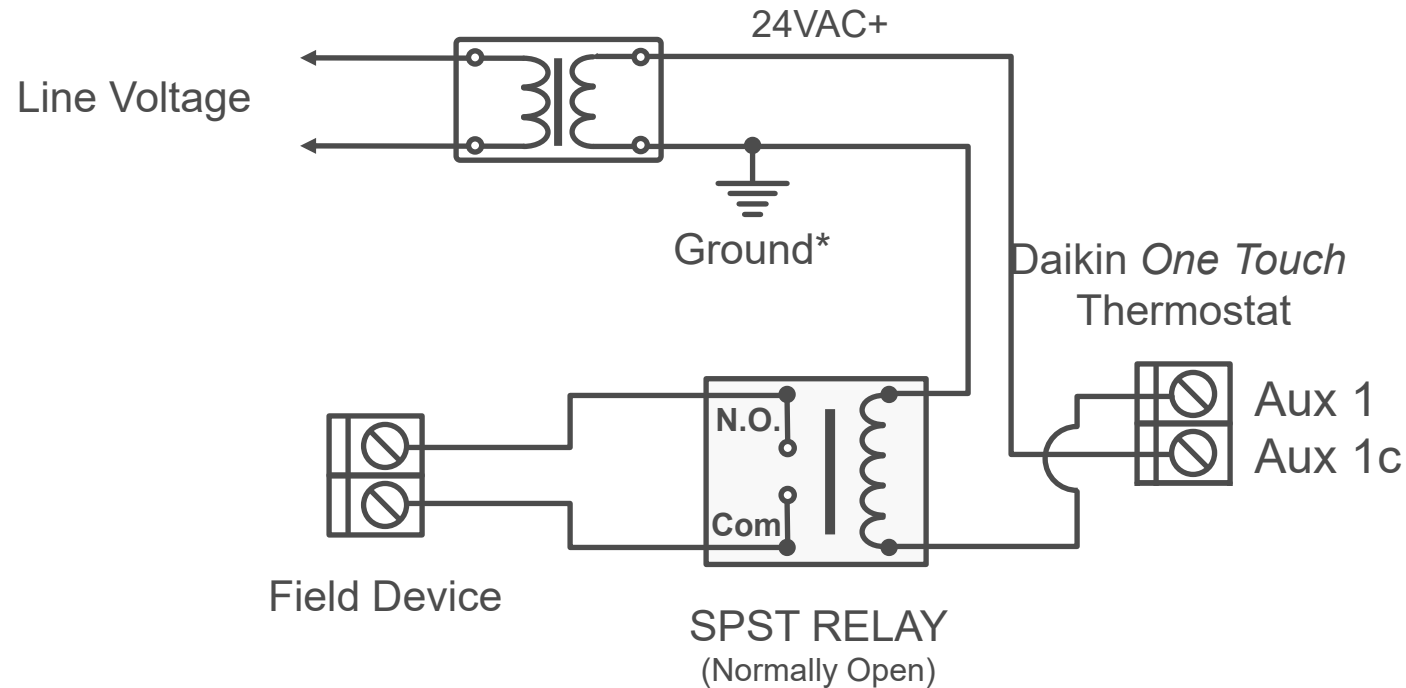

*The terminals are selected in the Daikin *One* installer wizard.

Note: It is recommended to use a minimum of 18-gauge wire. Maximum operating length of wire is 125 ft.

Agenda

Daikin *One* Touch smart thermostat

System Configurations

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning

Dealer Navigation

Homeowner Navigation

SkyportHome Mobile App

SkyportCare – How to Invite Team Member (Dealer Employee)

1. To add a Team Member to your *SkyportCare* account, please click the “Add Member” link in the Team Member widget.
2. Enter the first name, last name, email address, and select their role* (Access level).

***Admin role can add/delete/edit both Team Members and Customers, and the Technician Role (Tech) can only add new customers**



1

The screenshot shows the SkyportCare Dashboard. The 'Team Members' widget at the bottom right contains the following data:

Role	Count	Action
1 administrator	1	→
5 technicians	5	→
1 installer	1	→
1 invited members	1	→

Below the table is the text: "Manage your team members by selecting 'Organization' in the upper right menu." and a button labeled "Add Member".

2

The screenshot shows the SkyportCare Dashboard with the "Add Member" modal form open. The form contains the following fields:

- First Name: John
- Last Name: Doe
- Email Address: john@example.com
- Role: Admin (selected from a dropdown menu)

At the bottom of the form are "Cancel" and "Invite Member" buttons.

SkyportCare – How to Accept Invitation

1. The invited team member will receive an email invitation along with a password to login to *SkyportCare*
2. Employee will then return to <https://skyportcare.daikincomfort.com> and enter their email address and password provided in the email. (See next slide)

1

Join SkyportCare

Hi {{dealerName}},

Daikin Comfort Technologies would like to invite you to join SkyportCare, which connects your customers with internet connected Daikin, Amana® brand, and Goodman equipment to you and your business. SkyportCare can be accessed on your desktop computer, smart phone, or tablet, and when your customer's systems are connected you will be able to:

- Access performance insights and runtime data on systems
- Receive system alerts and reminders for service, maintenance, and error alerts
- Remotely view and edit (with homeowner permission) thermostat and system settings
- Be alerted if any of your customers connected to SkyportCare sell their home, so you can introduce your maintenance program to the new homeowners
- Generate and access commissioning reports on installed systems

To create your account please click the link below and follow the instructions to create an account. You will need a registration code to finish setting up your account, **your unique registration code is, {{0000000000}}**.

To accept this invitation, please click the button below or paste this URL into your browser: <https://skyportcare.daikincomfort.com/>.

If you need any additional help, contact your TSM.


Accept Invitation

Thanks for participating,

SkyportCare Team

Password found here.

2

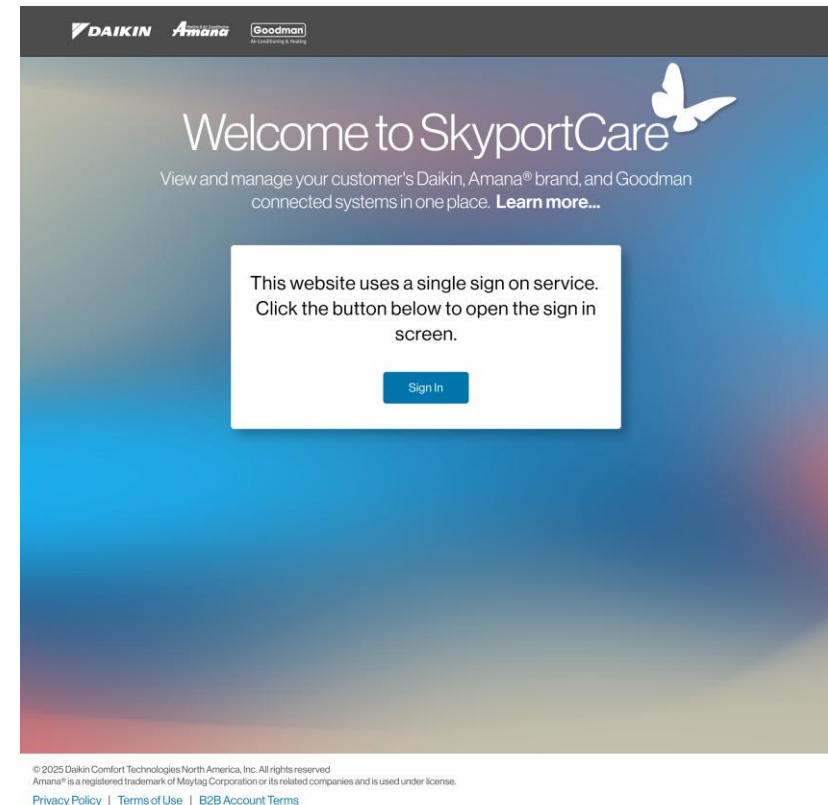

SkyportCare – How to Accept Invitation

3. Enter your email address here.
4. Enter the password provided in your invitation email here.

3

Support Center

Sign In

Email *

Next

[Forgot Password?](#)

[Create Account](#)

[Privacy Policy](#) [B2B Terms](#)

Powered By Daikin

4

Support Center

Welcome

ABCheatingandcooling@email.com

Password *

Next

[Forgot Password?](#)

[Back to login](#)


[Privacy Policy](#) [B2B Terms](#)

Powered By Daikin

SkyportCare: Initial Login

5. Upon your login, new users are directed to the “What’s New!” page which highlights recent feature releases, news, and updates.
6. The employee can navigate into *SkyportCare* by clicking on the Dashboard, Customers, or Map navigation icons on the left-hand navigation menu.

5

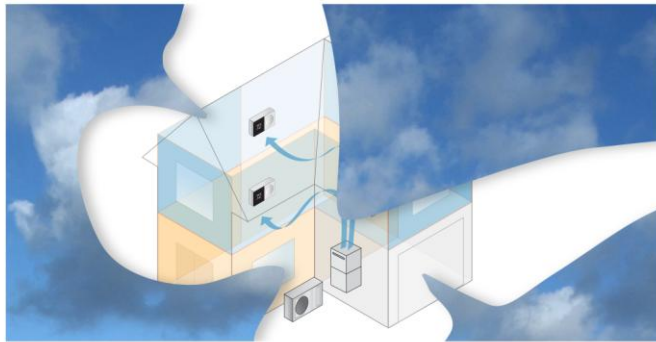

Welcome to the NEW SkyportCare!

Daikin & Amana Cloud Services have gotten a refresh and are now SkyportCare! SkyportCare gives you a single portal to access all Daikin brands (Daikin, Amana, & Goodman), and the ability to commission and service systems using any of our communicating thermostats.

All the customers you had connected to your company on Cloud Services are visible in SkyportCare and existing license durations will not be interrupted. SkyportCare provides the same functionality you have come to know and expect from Cloud Services, just with a slightly different look.

6



Dashboard

System Access

72 adjust settings	
22 monitor	
4 no access	
7 offline	

Alerts

B0 - Fan Failure Error	→
Now	
E7 - System Error	→
Now	
Loss of charge	→
Now	

< 1 of 3 >

Reminders

2 active reminders	→
4 within 30 days	→
12 within 60 days	→
31 within 90 days	→

System Health



Customers

15 active customers	→
6 invited customers	→
4 license updates needed	→

At anytime, you can invite existing customers using their SkyportHome mobile app account.

[Add Customer](#)

Team Members

1 administrator	→
5 technicians	→
1 installer	→
1 invited members	

Manage your team members by selecting "Organization" in the upper right menu.

[Add Member](#)





© 2025 Daikin Comfort Technologies North America, Inc. All rights reserved.
Amana® is a registered trademark of Maytag Corporation or its related companies and is used under license.

[What's New](#) | [Help](#) | [Privacy Policy](#) | [Terms of Use](#) | [B2B Account Terms](#)

SkyportCare – Quality Install


- Download the *SkyportCare* app. from your respective app. store.
- You need to create an account to log in
 - This account will need to be tied to the dealer account registered with *SkyportCare*
 - If you do not have an account, click the create account link and follow the process to create an account before getting started.
- Quality Install enables the technician to modify profile settings, run commissioning tests and verify charge through the app.

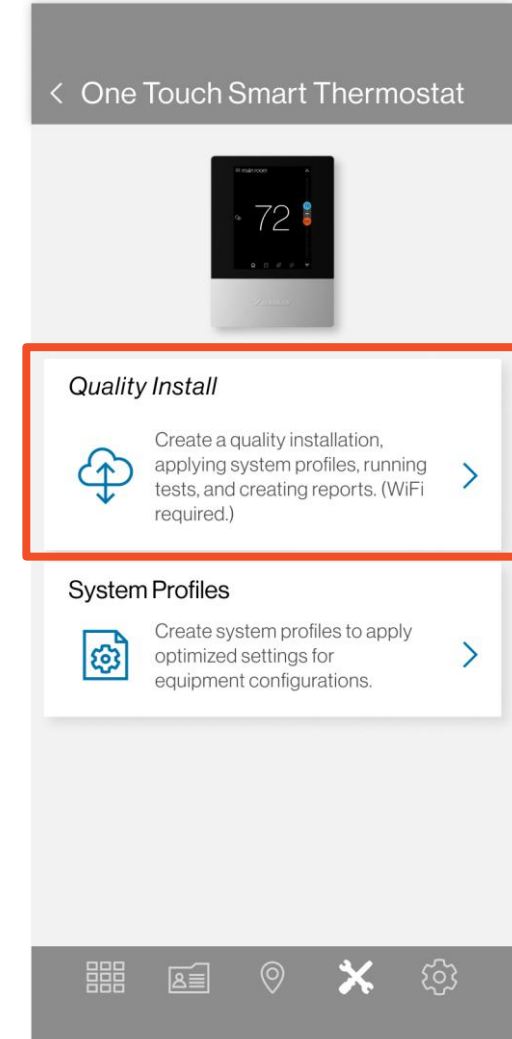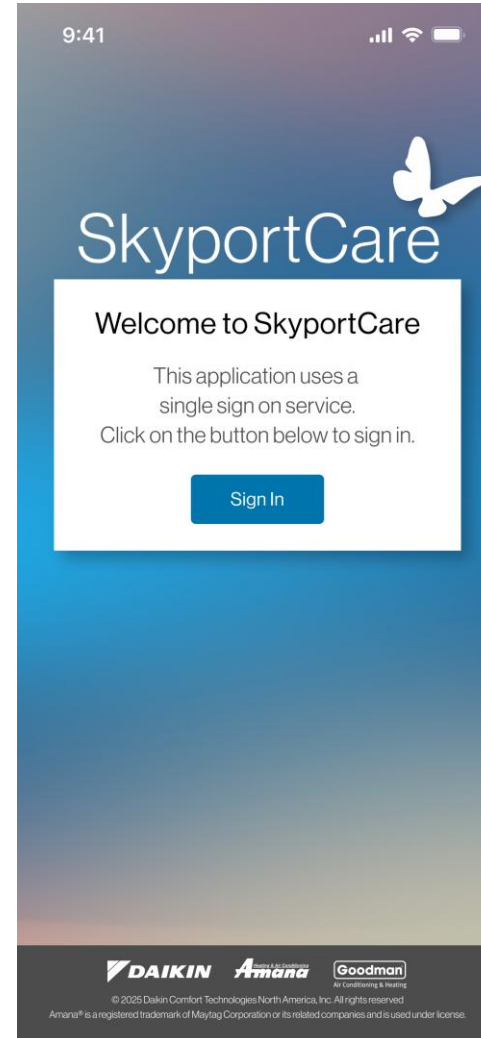

DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Create A Job Based On Location

- Every job needs the location details.
- Click on the “+” sign to add location details and continue.
 - The user can use their GPS location to automatically fill in the address.
 - Or type in address manually

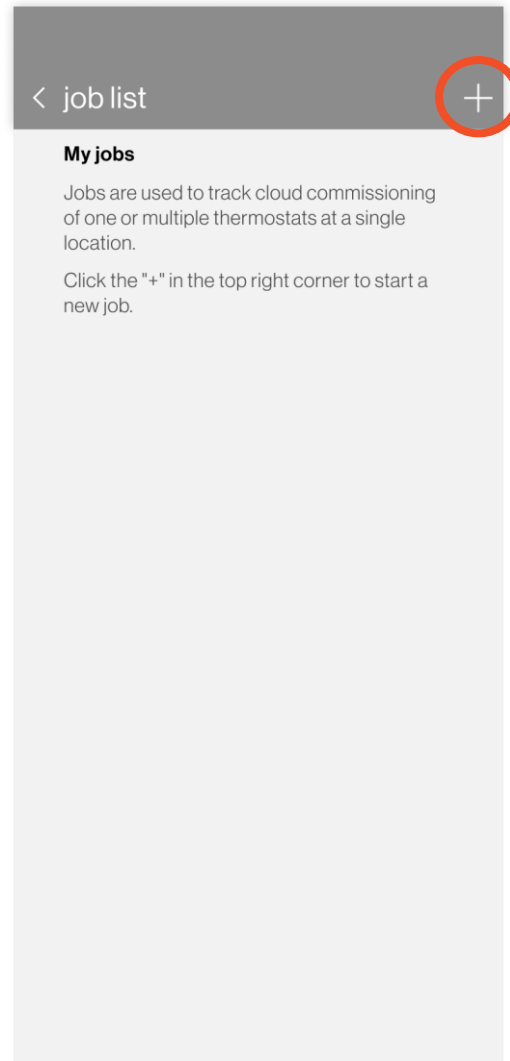


< job list

My jobs

Jobs are used to track cloud commissioning of one or multiple thermostats at a single location.

Click the "+" in the top right corner to start a new job.

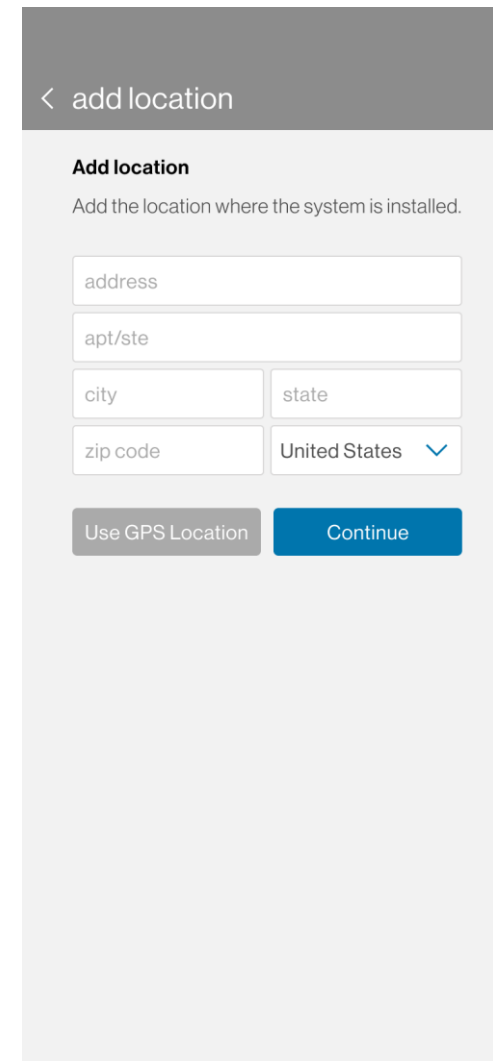

< add location

Add location

Add the location where the system is installed.


address

apt/ste

city state

zip code United States

Use GPS Location Continue

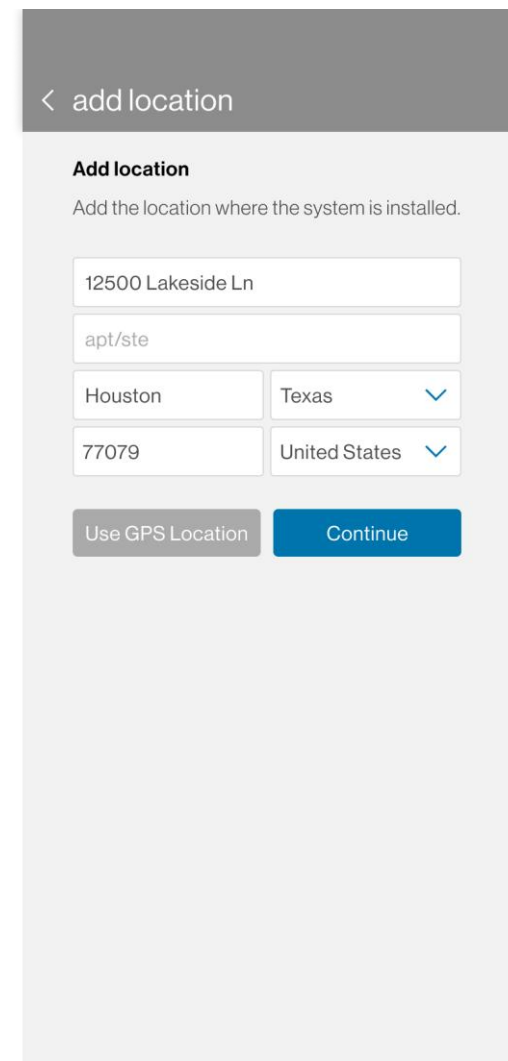

< add location

Add location

Add the location where the system is installed.

12500 Lakeside Ln

apt/ste




Houston Texas

77079 United States

Use GPS Location Continue




Add Thermostat To Job And Configure For Zoning If Needed

- Add thermostat by tapping on + in top right corner then scanning the 2D bar code or entering thermostat DKN(S) # manually.
 - The 2D bar code is found on the terminal subbase.
 - DKN # is found by navigating through the thermostat setting menus.
- Zone board configuration can be seen by sliding the toggle button to the right.
 - If a thermostat is connected to a zone board and not zone one, then equipment info will not be available.

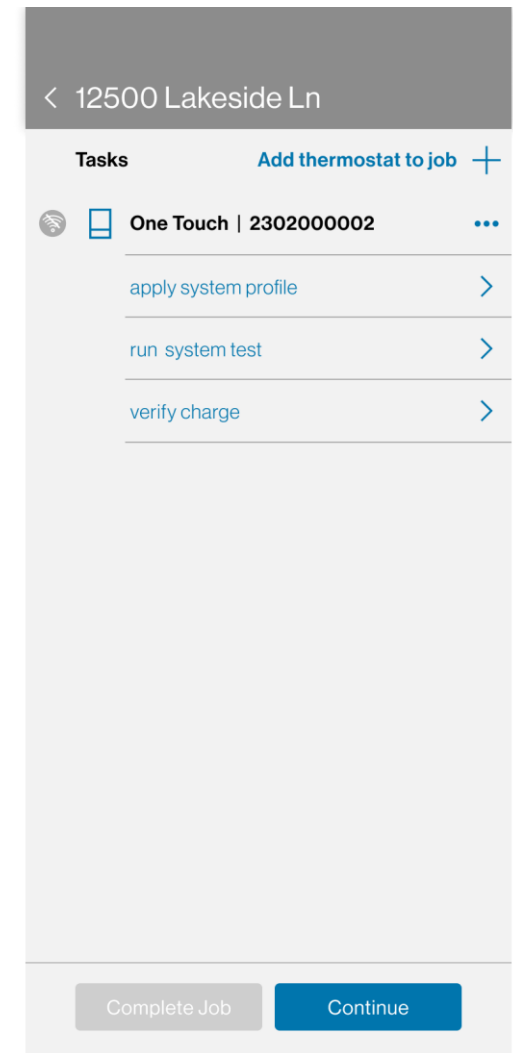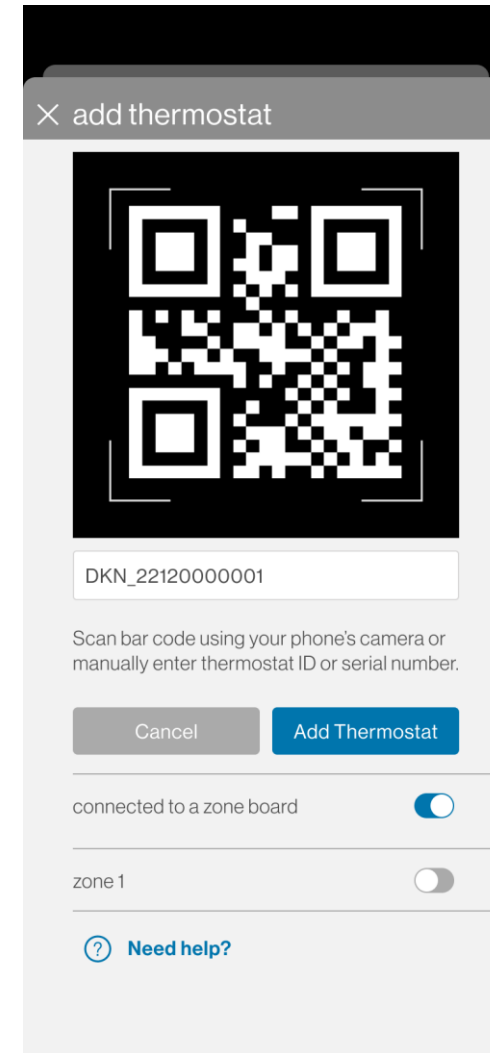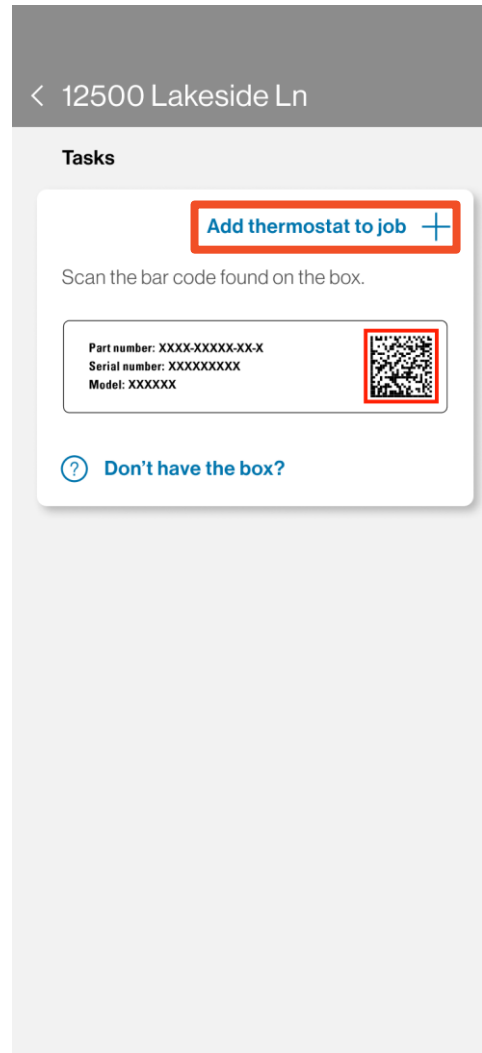

Connect The Thermostat To Wi-Fi



- On selection of any task, internet connection will need to be verified before the user can continue setup.
 - If the Wi-Fi icon is grey, the system is not connected to Wi-Fi.
- To connect to Wi-Fi, first click on “apply system profile”
- On the thermostat, in the 5-step commissioning process, navigate to the communication option.
 - Check the "use Wi-Fi" option
 - Select network
 - Enter password
 - Once connected to internet: "Daikin One Cloud" will show connected.
 - In the app press "Continue".

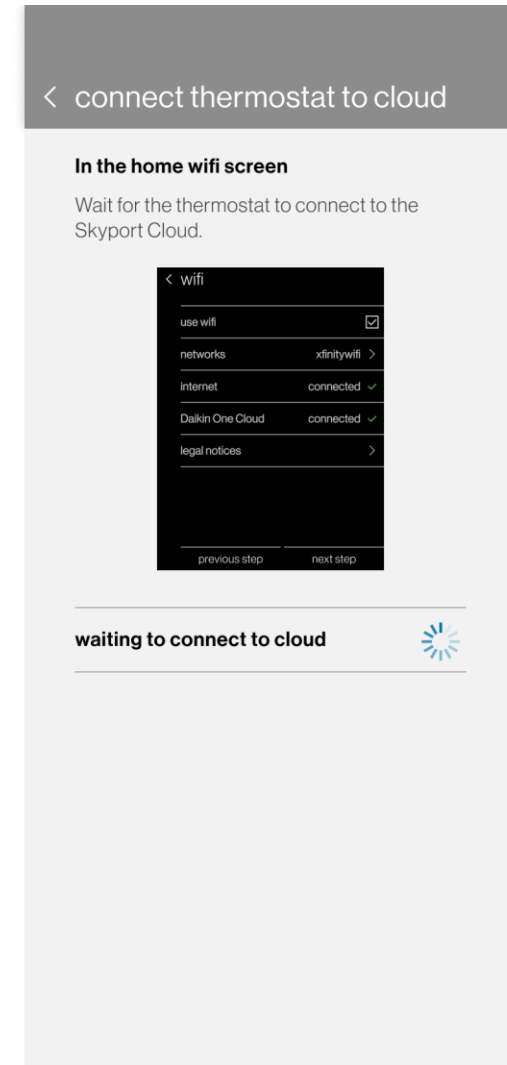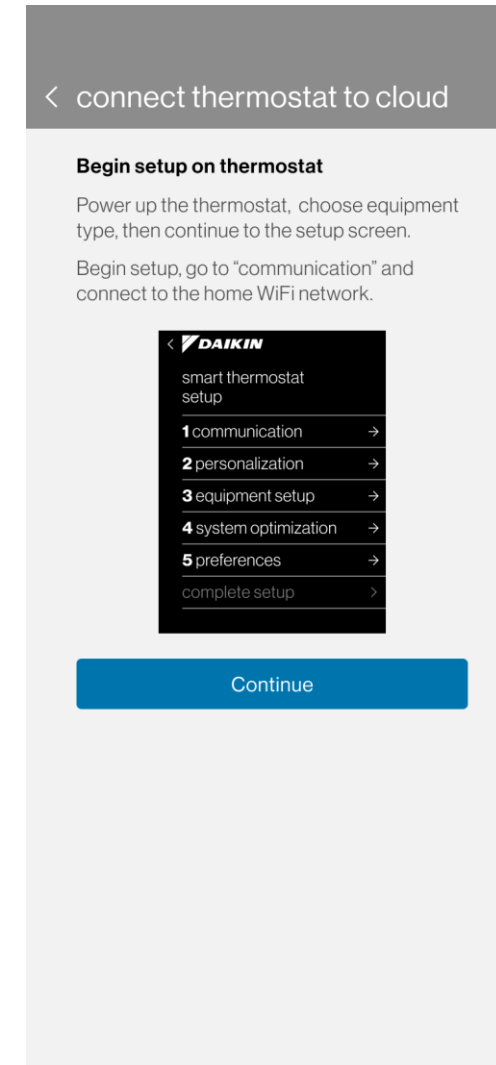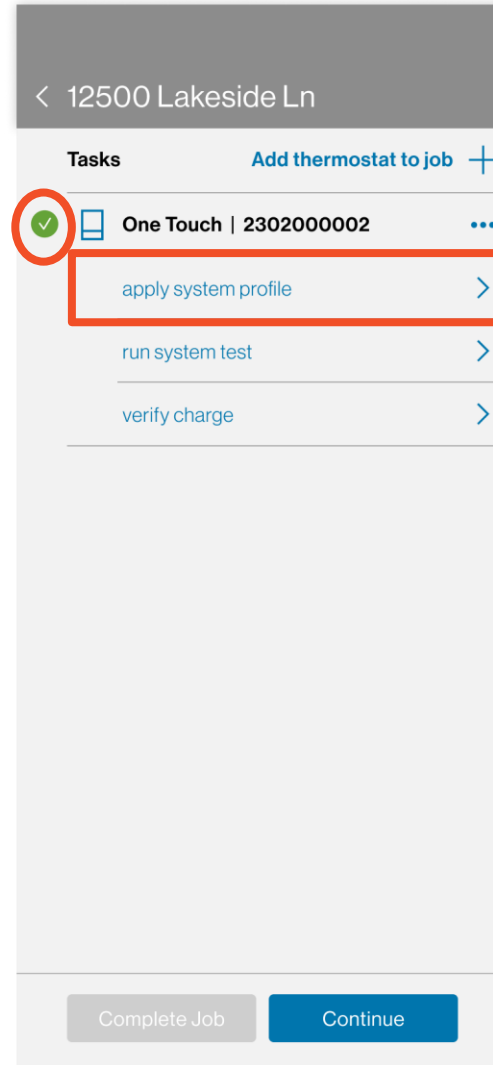

Connect To Home Wi-Fi




- Once the thermostat is connected to Wi-Fi, following the “Cloud Commissioning” process, the app will automatically request access.
 - The user will then confirm the access on the thermostat UI.
 - The app will receive the confirmation and automatically move the user to the selected task.

Note: If the thermostat starts to update, please allow for the update to complete before continuing.

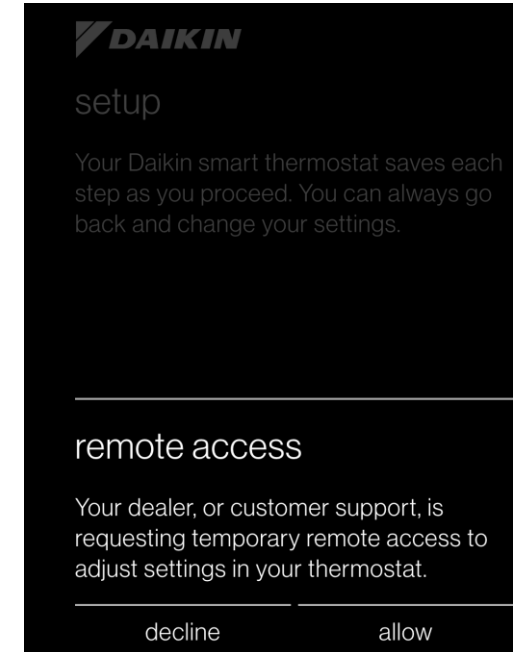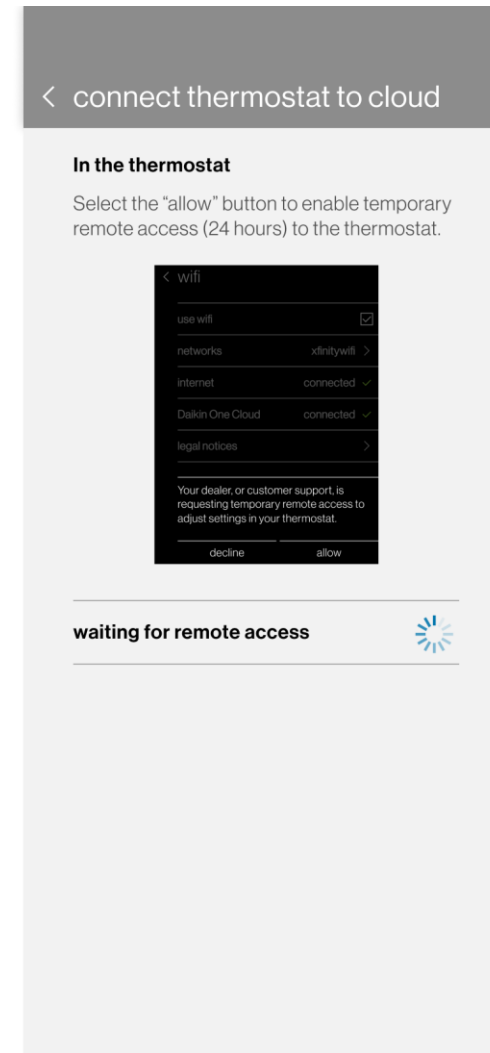

Apply System Profile

- A list of the connected equipment will be populated once connected to Wi-Fi.
 - Verify equipment, then continue to view thermostat profile options.
 - Once connected to Wi-Fi, the green  icon will be displayed. If access is expired, then the user will see the no access icon .

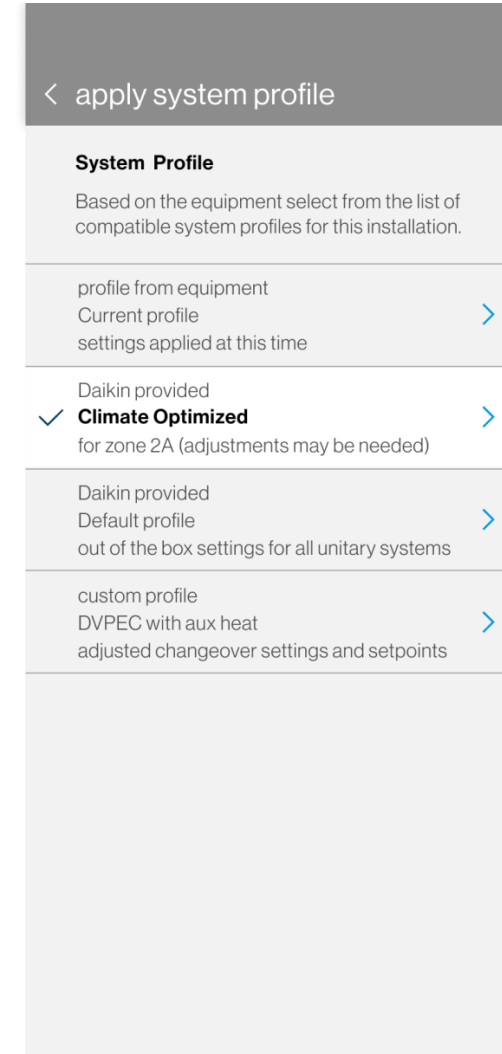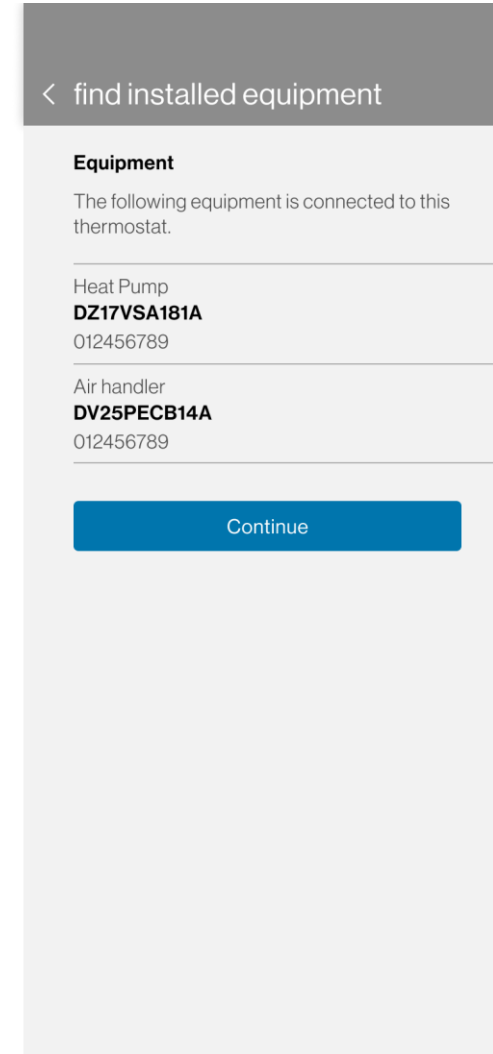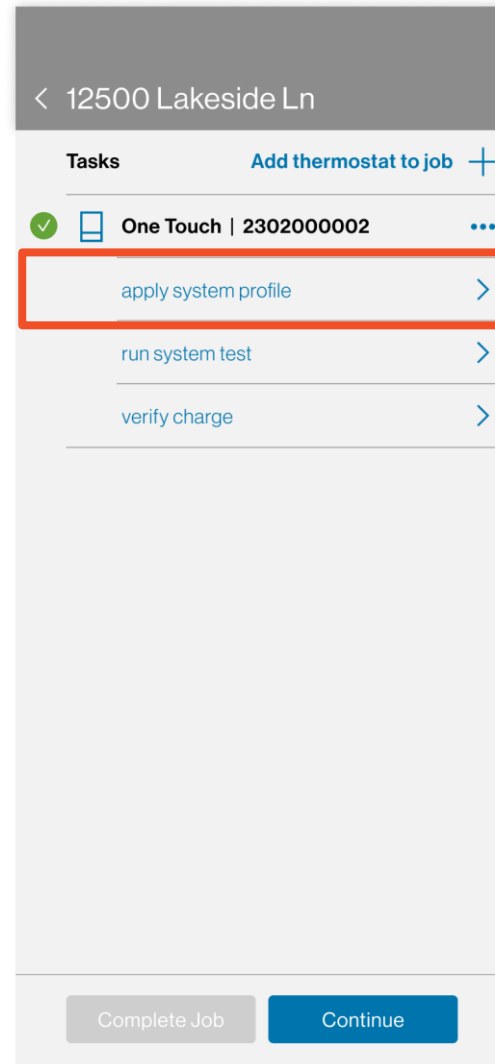

Apply System Profile (continued)

- You can select and or modify any profile to send to the thermostat.
 - Make edits as needed, then tap “Send to Thermostat”
- NOTE: Modifying the profile does not affect the default profile

< apply system profile

System Profile

Based on the equipment select from the list of compatible system profiles for this installation.

profile from equipment

Current profile

settings applied at this time

>

Daikin provided

✓ **Climate Optimized**

for zone 2A (adjustments may be needed)

>

Daikin provided

Default profile

out of the box settings for all unitary systems

>

custom profile

DVPEC with aux heat

adjusted changeover settings and setpoints

>

< apply system profile

Climate Optimized

Q

Search

device name

main room

>

Display

language

english

>

degree units

fahrenheit

>

use large font

use light bar

screen saver

off

>

Date & Time

time zone

Pacific

>

use 24-hour time format

Away

away temperatures

58° / 82°

>

Send to Thermostat

Run System Test

- Running system test will prompt the user to calculate the charge before running the test.
 - Measure total line set length, then select liquid and suction line diameter before calculating required trim charge.
 - Input the actual charge weighed in.

< 12500 Lakeside Ln

Tasks [Add thermostat to job](#) +

✓ One Touch | 2302000002 ...

✓ profile: Climate Optimized >

run system test >

verify charge >

Complete Job Continue

< system test

Charge by line set length


The outdoor unit is shipped with a predetermined factory charge level.

Before starting the test it is recommended to calculate the line length and diameter to get the total recommended refrigerant weight.

Calculate

Daikin cloud commissioning supports installation practices detailed in the equipment installation manual. Refer to this system's IOM for questions on proper installation.

× calculate charge



Enter the total line set length and diameter to get the recommended refrigerant weight.

total line set length:
length feet

liquid line diameter:
3/8 inches

suction line diameter:
3/4 inches

Calculate

< system test

Charge by line set length

Required trim charge **24 oz.**

Add refrigerant up to recommended weight into the liquid line.

How much weight did you add?


weight oz.



Recalculate Continue




Run System Test

- Verify service valves are open.
 - Tap “Run Test.”
 - Users can leave the screen while the test is running and return as needed.
 - System test is required for inverter systems.
 - If the test has not been completed an error code "11" will be generated.
 - Error code "11" will clear once the test is complete.

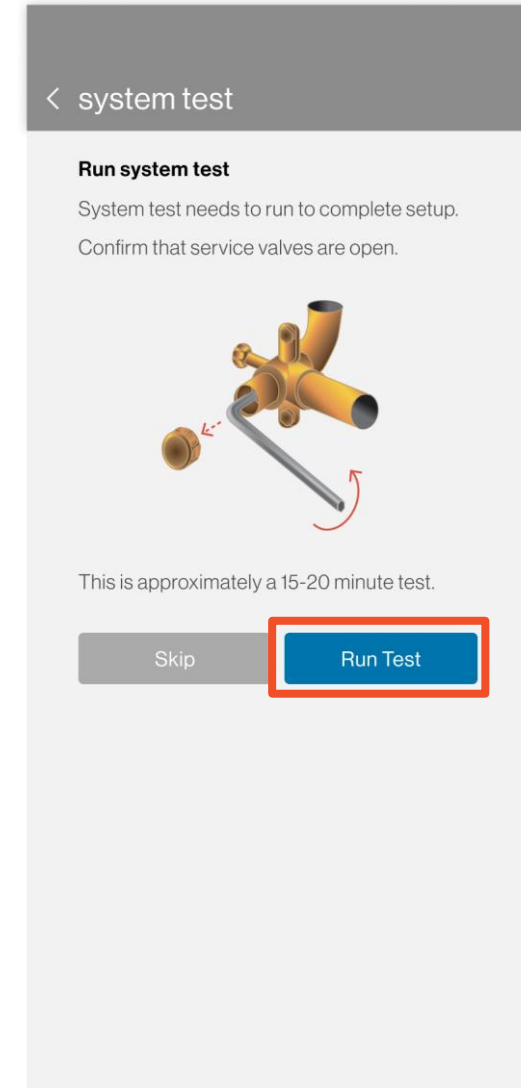


Run System Charge Verification

- Recommended charge to be added to meet required charge displayed.
- Once system stabilizes and is running at full speed, the calculated subcool will be displayed.
 - Allow up to 5 min delay between gauge reading and app. verification.
 - Stopping the verification will generate a report.

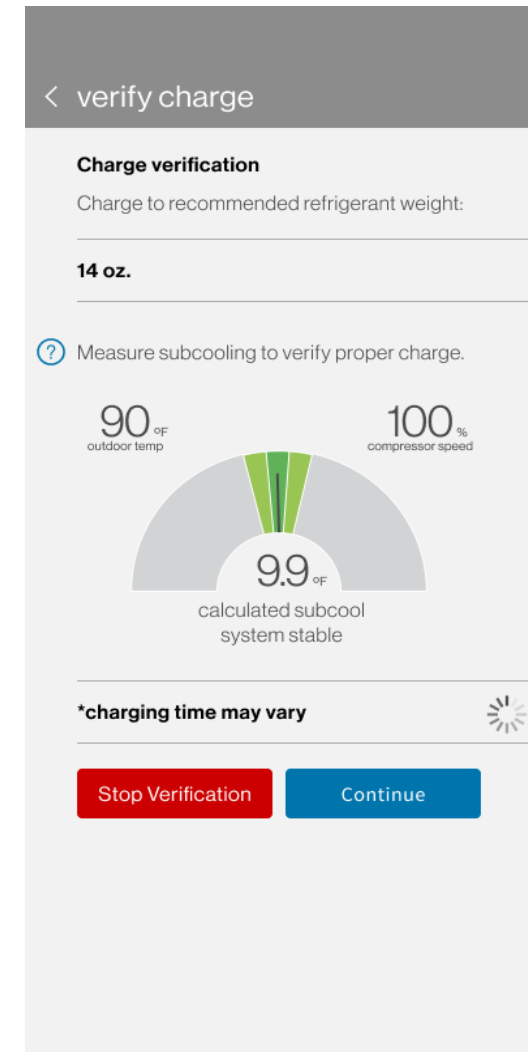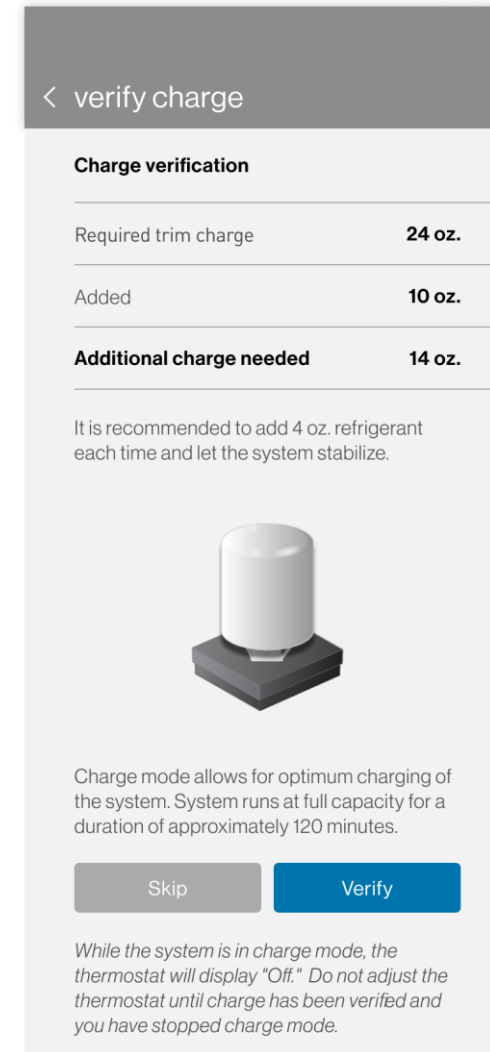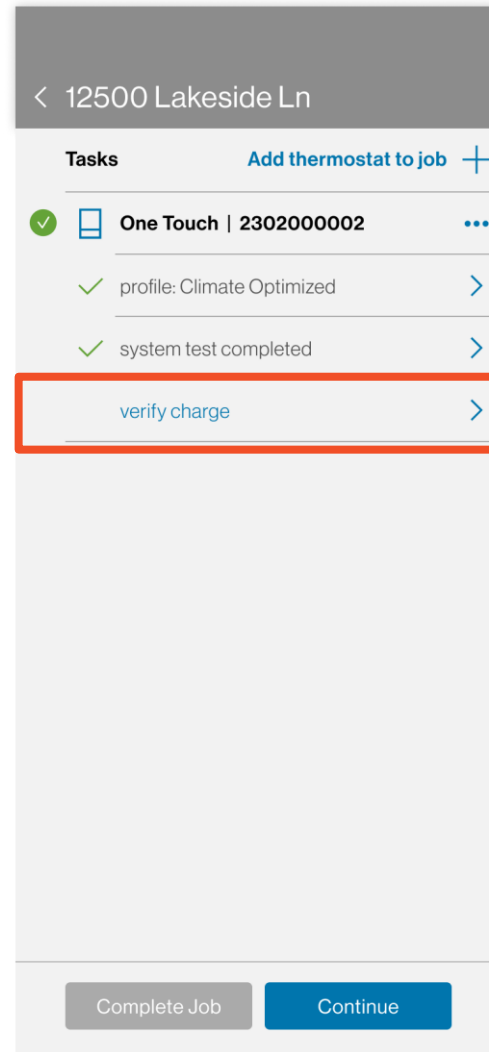

Complete Setup

- After all steps are complete, the user will be able to share a commissioning report before completing the job.
 - One can be sent to homeowner
 - One can be sent to dealer

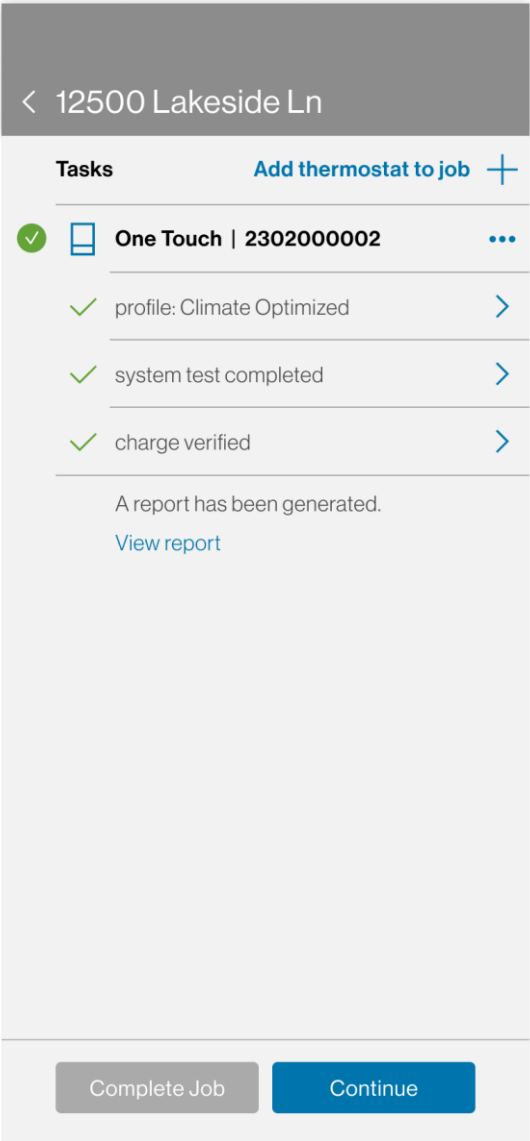

Agenda

Daikin *One Touch* smart thermostat

System Configurations

Installing Daikin *One Touch* smart thermostat

SkyportCare


Commissioning

Dealer Navigation

Homeowner Navigation




SkyportHome Mobile App

- Begin set-up walks installers through the entire commissioning process to ensure the system is configured properly and ready for the homeowner to use.
 - Enables random access to any setting.
 - Remembers settings as they are entered.
 - Individual may stop and restart as needed.
- The screens are populated based on the model numbers of the equipment, matched to a database of device configuration settings.

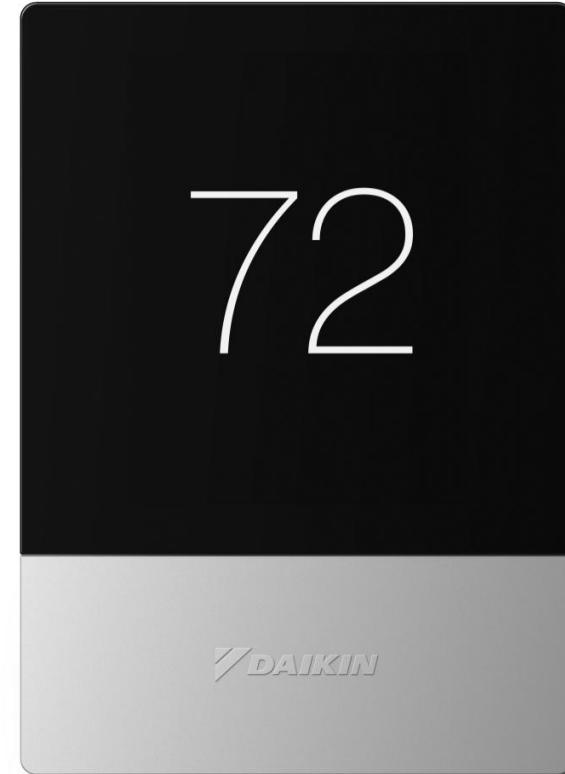

Commissioning Five Step Set-up Process

- The welcome screen displays preferences to choose from.
- Begin set-up starts commissioning process to configure the system.
- Select Unitary (default) before moving to the setup screen.
- Selecting setup options allows you to factory reset the thermostat.
- Version of the thermostat is displayed on the learn more screen.

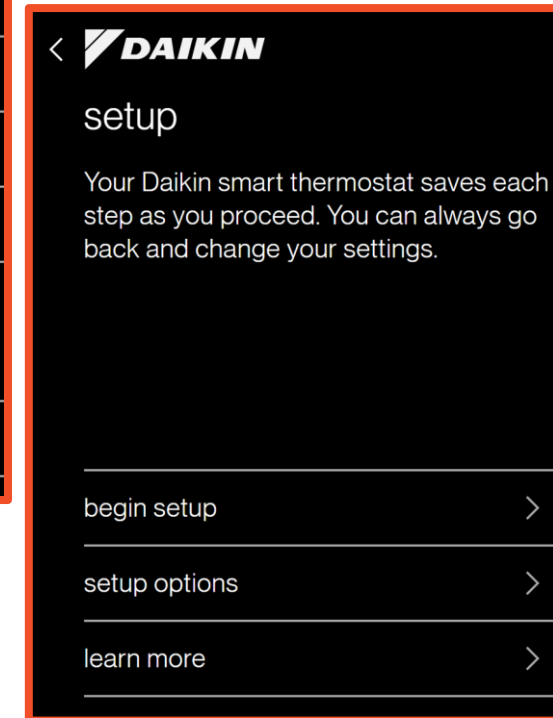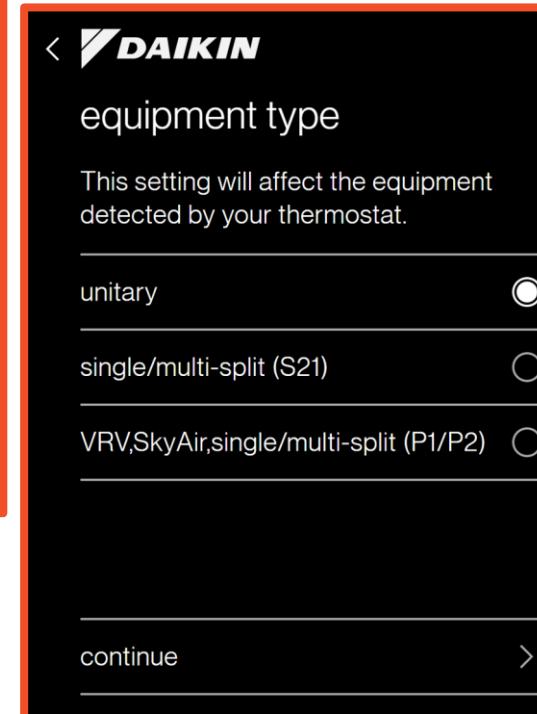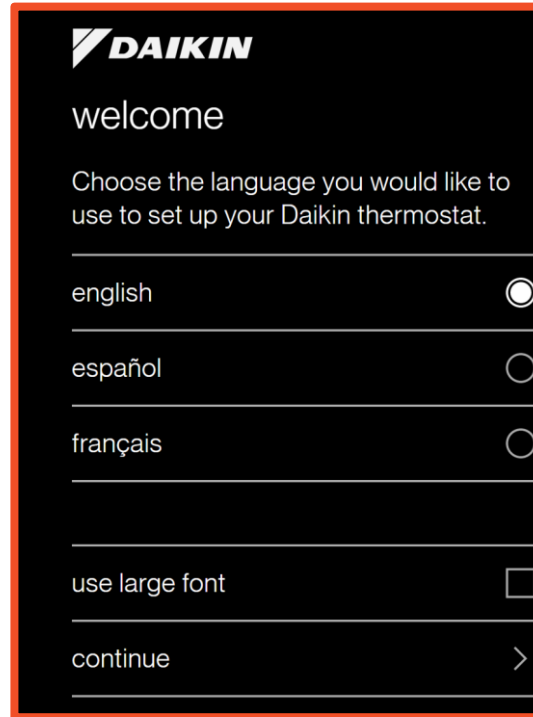

Start-up


- Tapping begin set-up starts the five step set-up process:

- Communication.
- Personalization.
- Equipment Set-up.
- System Optimization.
- Preferences.

Note: All steps must be completed and reviewed before completing set-up to ensure the system is configured properly and ready for the homeowner to use.



For detailed menu settings

daikincomfort.com

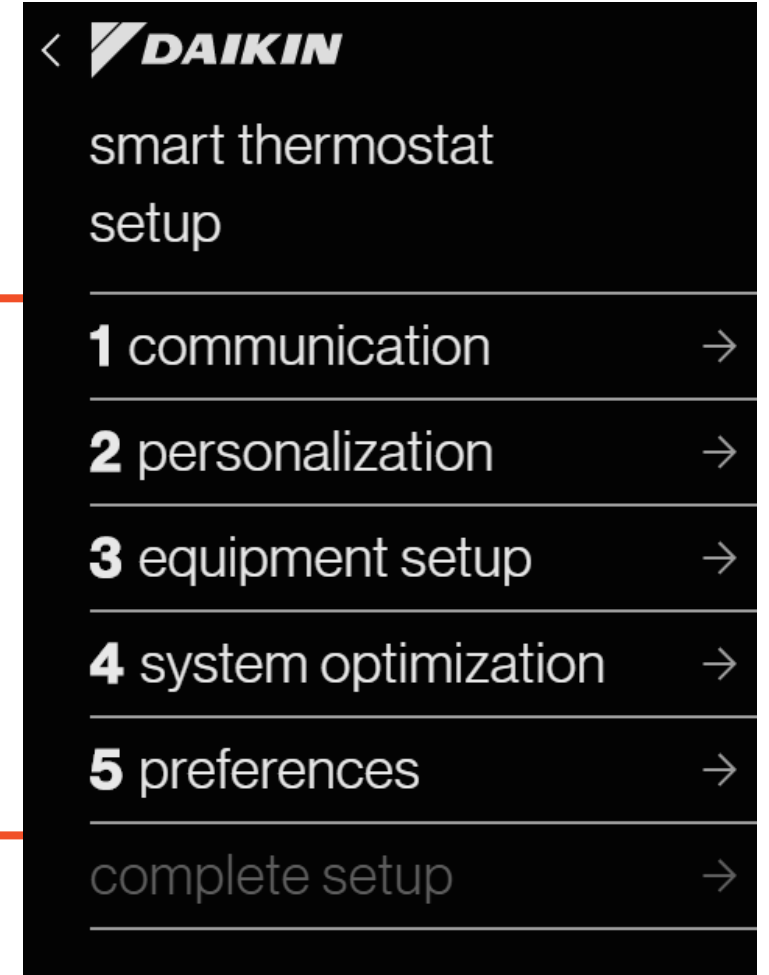



Step 1 - Communication

- Configures Communication Networks.
- Select home Wi-Fi to search for networks.
- With Wi-Fi configured, the system can check the software version and update software to the latest version automatically.
- Note:
 - Wireless router must be password protected.
 - Compatible with 5Ghz routers which supports 2.4Ghz
 - Equipment type displays the equipment selected on start up.

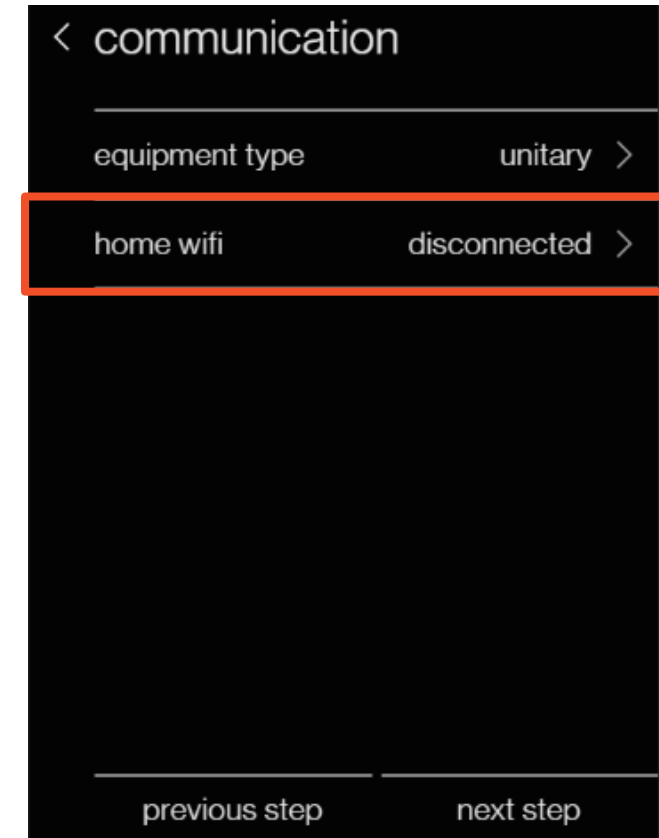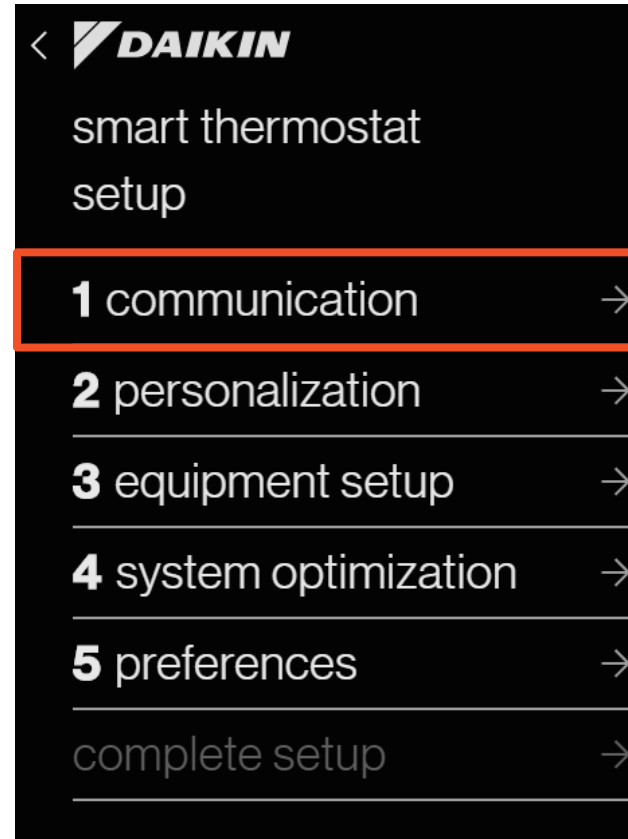



Step 2 - Personalization

- Tapping the personalization tab allows you to edit default information.
- Personalization displays:
 - Language.
 - Large font selection.
 - Date & Time.
 - If Wi-Fi is connected, date & time sets automatically.
 - Thermostat Name.
 - Degree Units.
- Note: A green check mark appears next to items reviewed from the set-up menu.

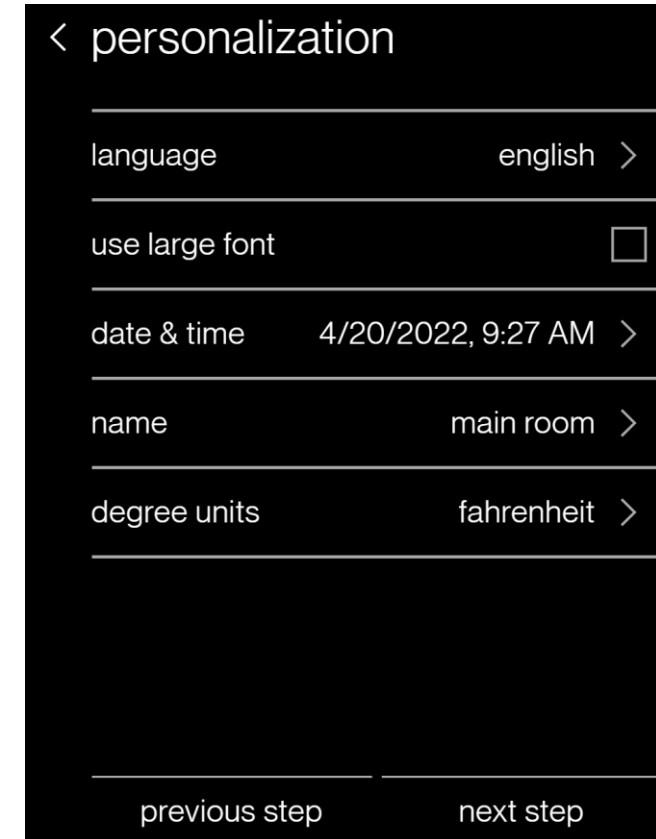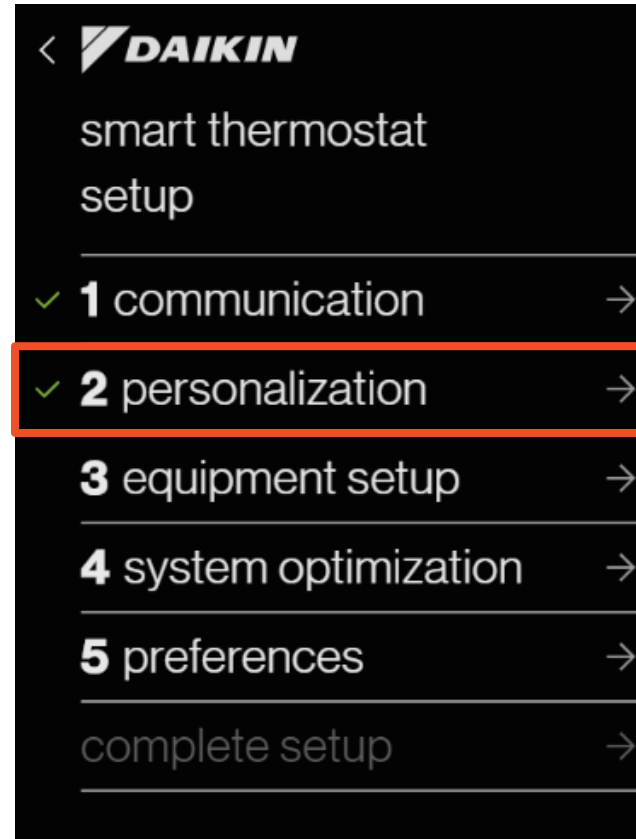

Step 3 - Equipment Set-up

- Displays equipment found by searching the communication network, or by adding/removing equipment and accessories from the preset list.
- The unit that is identified determines the list of configurations that will be displayed
 - View unit Specifications.
 - Configure
 - Cool settings
 - Heat Settings
 - Heat Pump Settings
 - Humidifier Relay
 - Aux alarm
 - Heater Kit

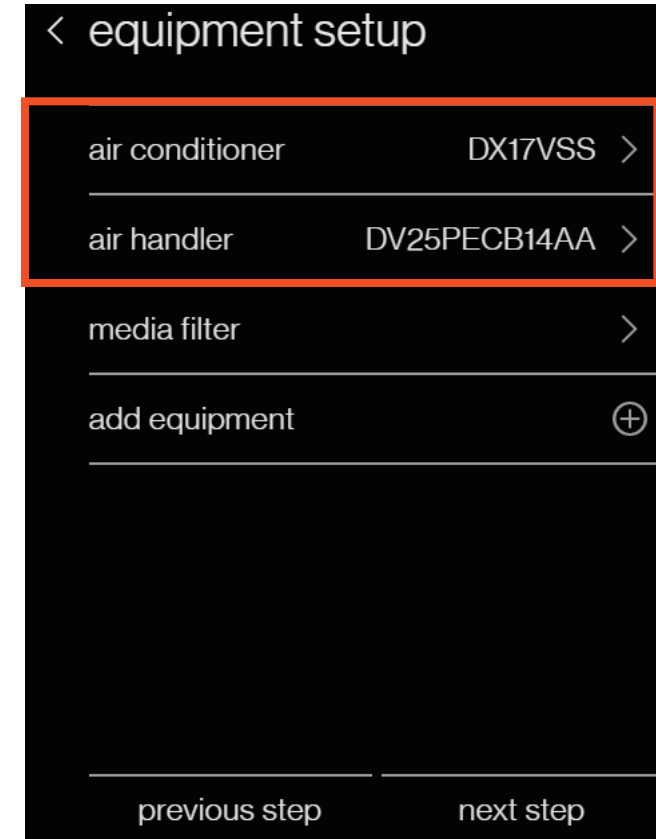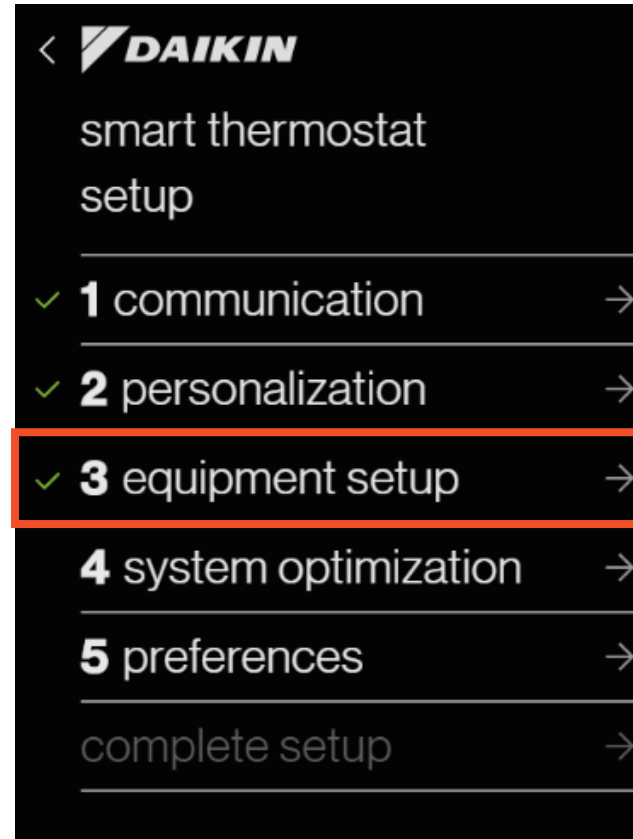

Added Equipment

- The Daikin One Touch smart thermostat is compatible with multiple accessories.
 - Air quality sensor
 - Humidifier
 - Dehumidifier
 - You can install the humidifier and dehumidifier by using aux 1 or 2
 - Recommend using an isolation relay between auxiliary device and thermostat.
 - UV Bulb
 - Electronic Filter
 - HEPA filter
 - EWC Zone Board.

Humidifier



Air Quality Sensor



EWC Zone Board






Dehumidifier



DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Add Equipment – Auxiliary Heat

- Selecting add equipment will allow you to configure an auxiliary heat source.

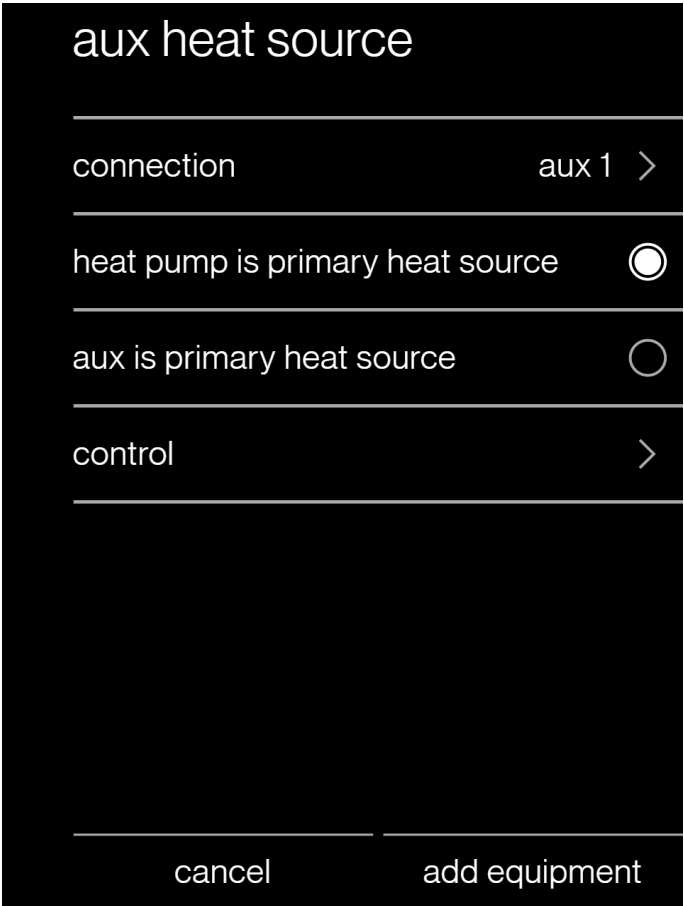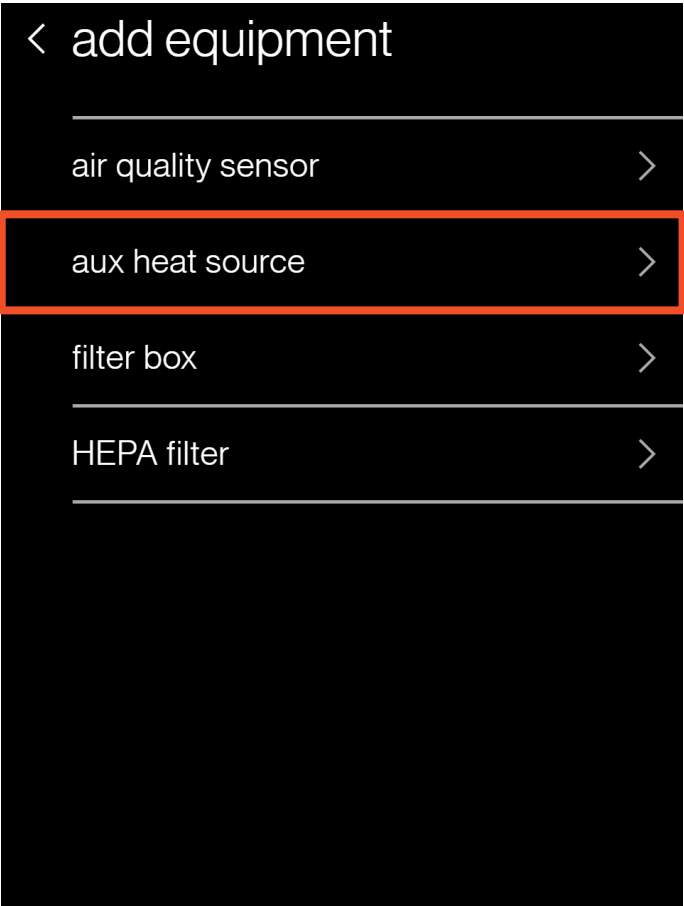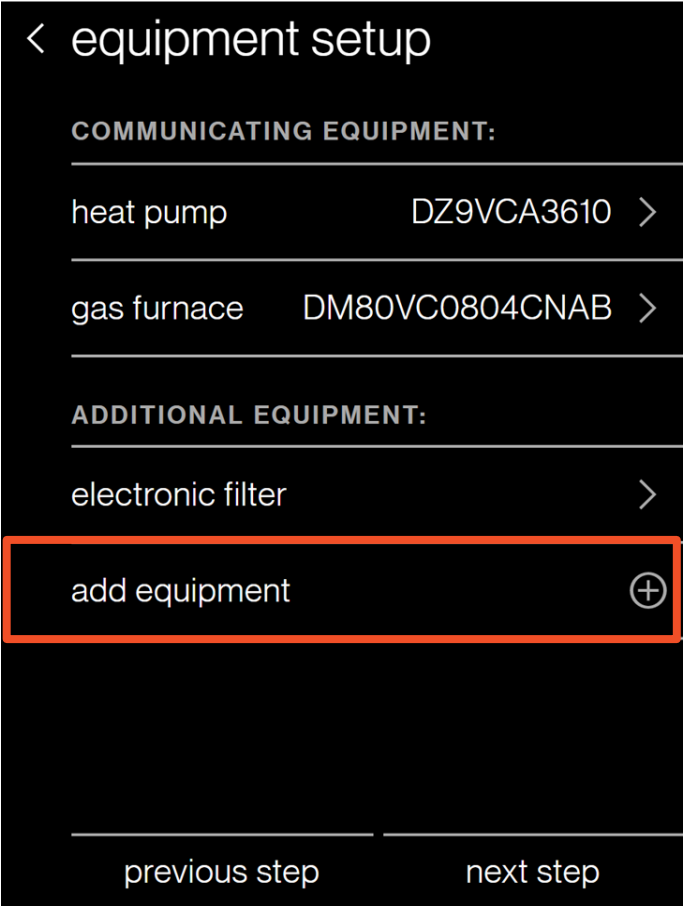



***Aux heat source is the only option for an AC only outdoor unit.**

DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Secondary Heat Settings

- The control section will allow you to adjust settings such as lockouts and secondary heat activation temperature.

*** Emergency Heat mode** will appear as a system mode when connected to heat pump units and can be used to directly turn on the aux heat source if enabled.

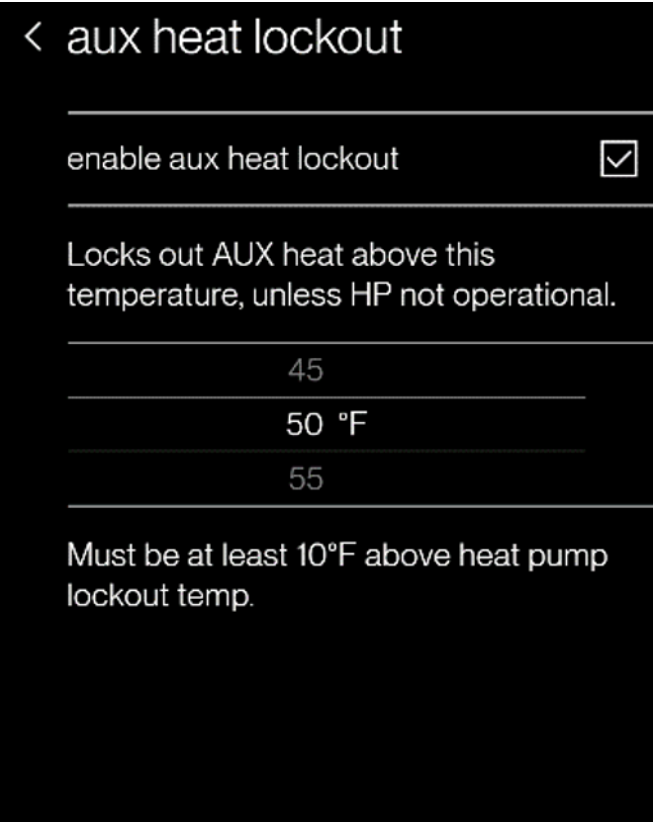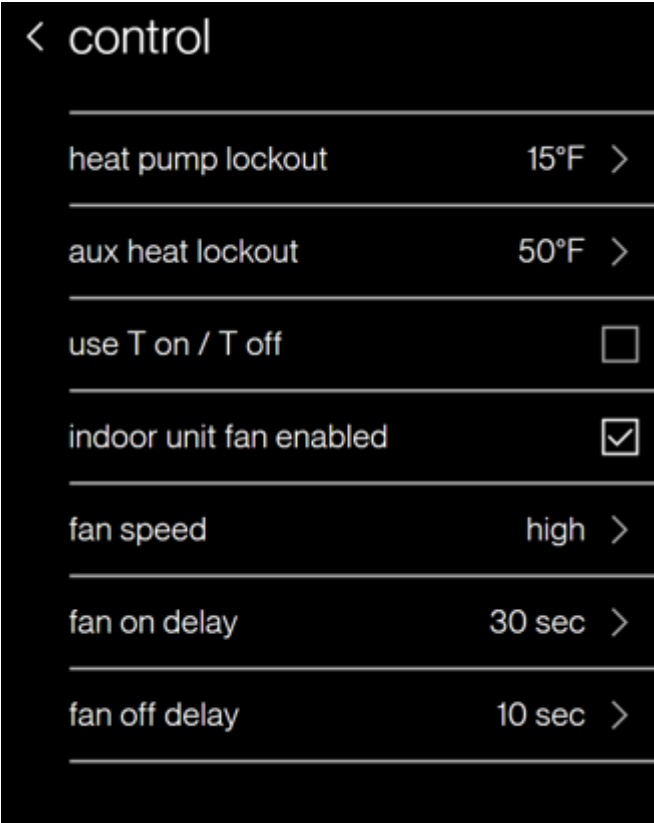

T on/T off Control

- T on and T off provide an alternative control method to have the main AC/heat pump control the aux heat source using its PI control algorithm.
- T on/T off is the only control option for AC- only outdoor units
 - If the indoor unit is a gas furnace, or is an air handler with a heater strip, these heat sources will be controlled around the heat setpoint by the demand-based algorithm.
 - The aux heat source will be controlled independently.

< control

heat pump lockout 15°F >

aux heat lockout disabled >

use T on / T off ☒

T on / T off -3°F / 1°F >

indoor unit fan enabled ☐

< T on / T off

These temperature differentials from the heat setpoint control when aux heater will turn on and off.

Turn on temperature differential:

-4

-3 °F

Turn off temperature differential:

0


1 °F

Turn off temp must be at least 3°F above


- When heat pump is the primary heat source:
 - Heat pump lockout temperatures are adjustable from -20°F to 65°F in 5°F increments. (default 15°F)
 - Auxiliary heat lockout temperatures are adjustable from -10°F to 75°F in 5°F increments. (default 50°F)

Auxiliary heat demand:

- T on differential is adjustable from -7°F to -3°F in 1°F increments (default -3°F)
- T off differential is adjustable from -4°F to 1°F in 1°F increments (default 1°F)

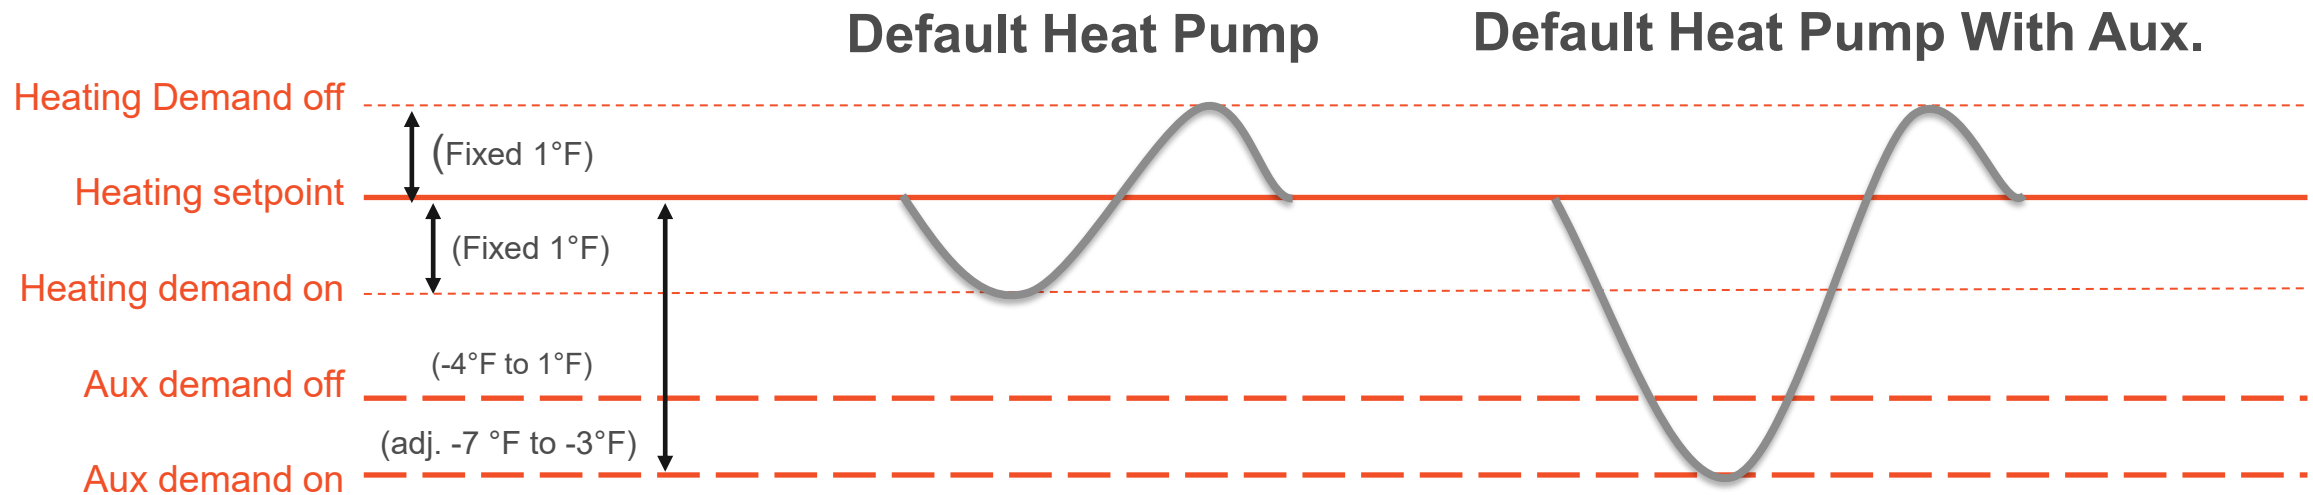

- When auxiliary heat is the primary heat source:
 - Heat pump lockout temperatures are adjustable from -20°F to 65°F in 5°F increments. (default 15°F)
 - Setpoint differential can be set at -9°F, -7°F, -4°F, and -2°F (default -2°F)
 - Heat pump demand:
 - T on differential can be set at -1°F or -2°F (default -1°F)
 - T off differential 1°F fixed


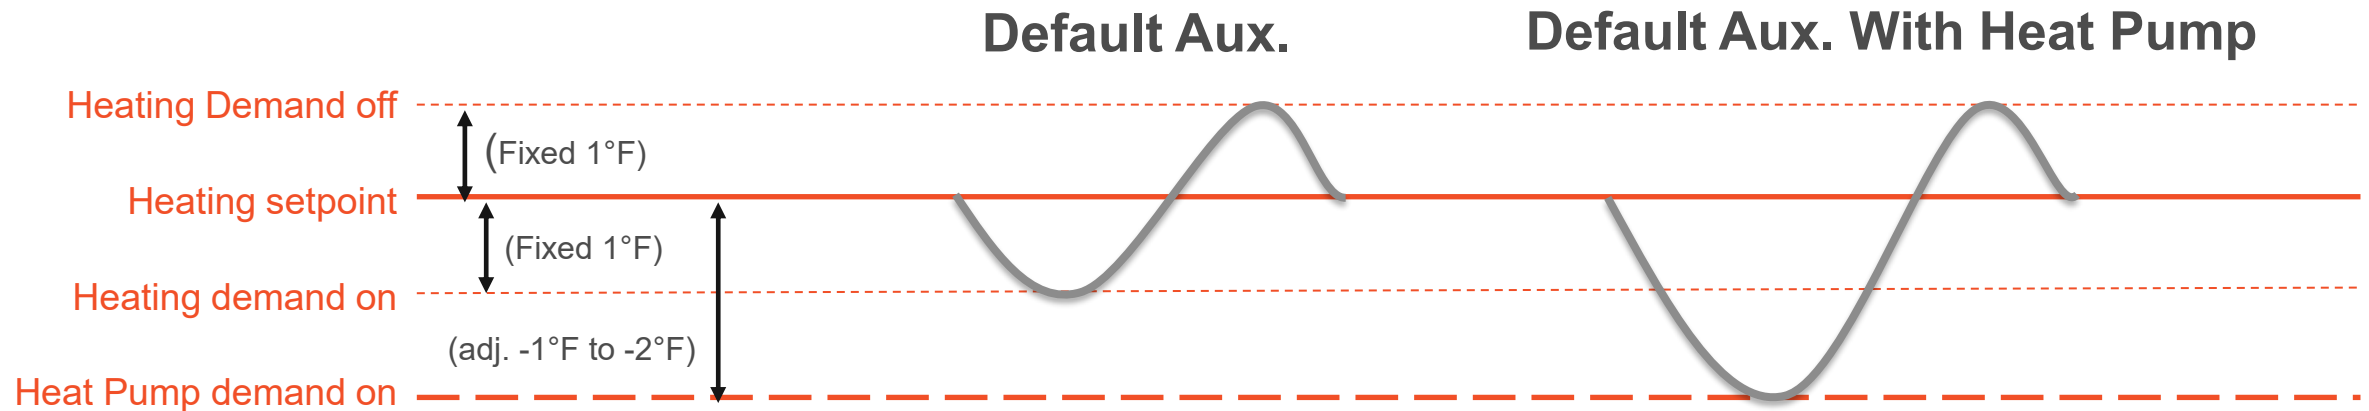


Step 4 – System Optimization

- System optimization displays:
 - System test.
 - Inverters only.**
 - Charge verification mode.
 - Inverters only.**
 - Optional test.
 - Error history.
 - Logs alerts with an error code.
 - White = not critical**
 - Yellow = critical**
 - Calibrate the thermostat for temperature and humidity
 - For more information on this process scan QR code





- Status.
 - Allows you to see current system run data

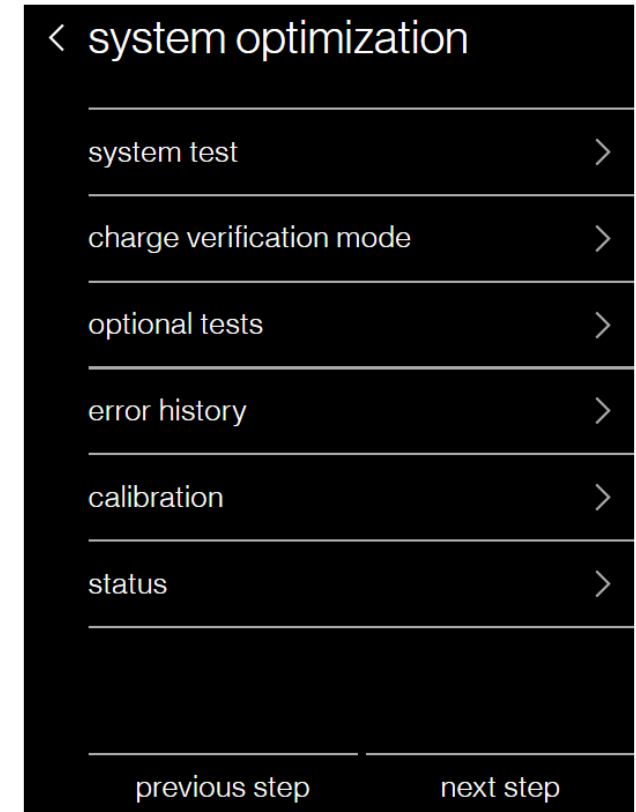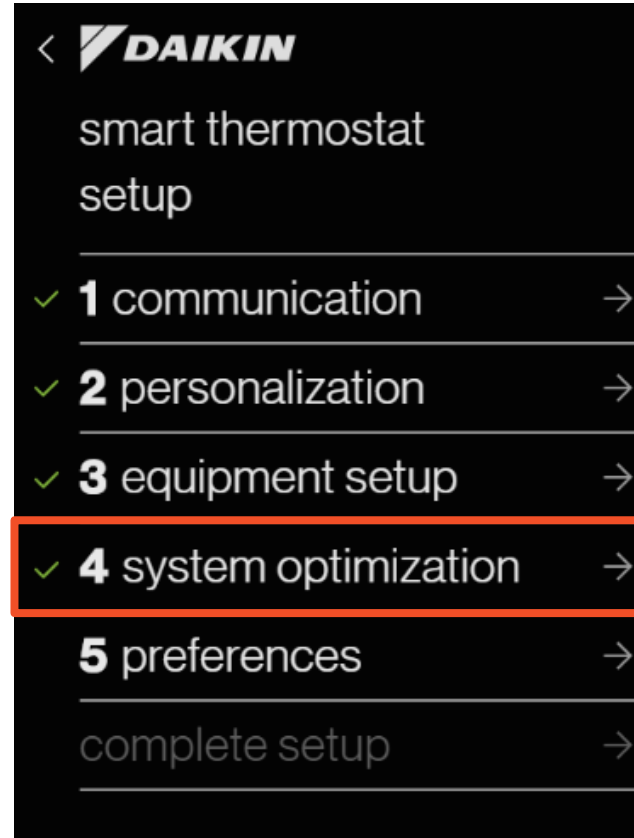



System Test

- The system test should be run for the **inverter units** before proceeding to complete set-up.
- To proceed through the set-up process, the system test needs to be completed without any errors.
- When the tests are completed, the run test screen is displayed.
 - System test is complete only when display code E11 notice clears from the seven segment LED display on the heat pump or air conditioner.

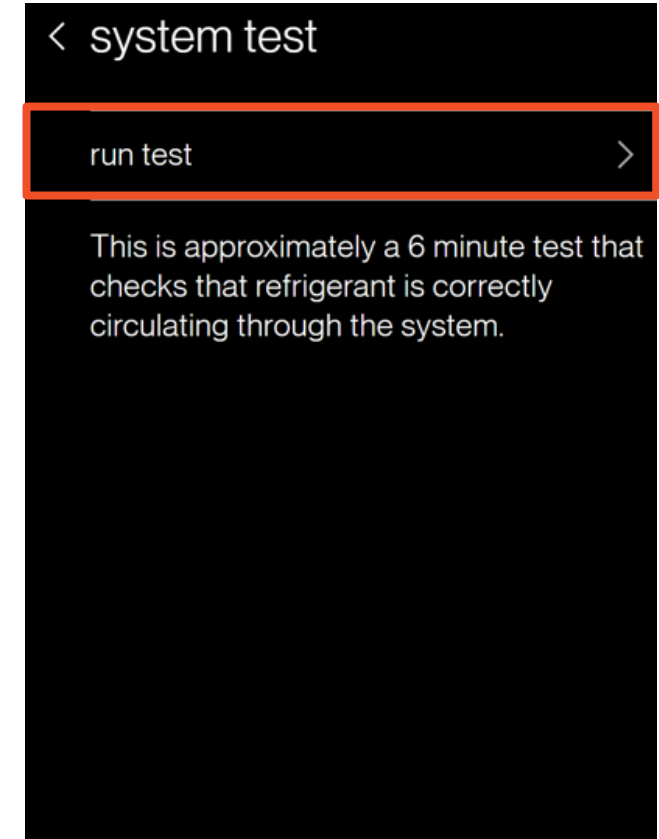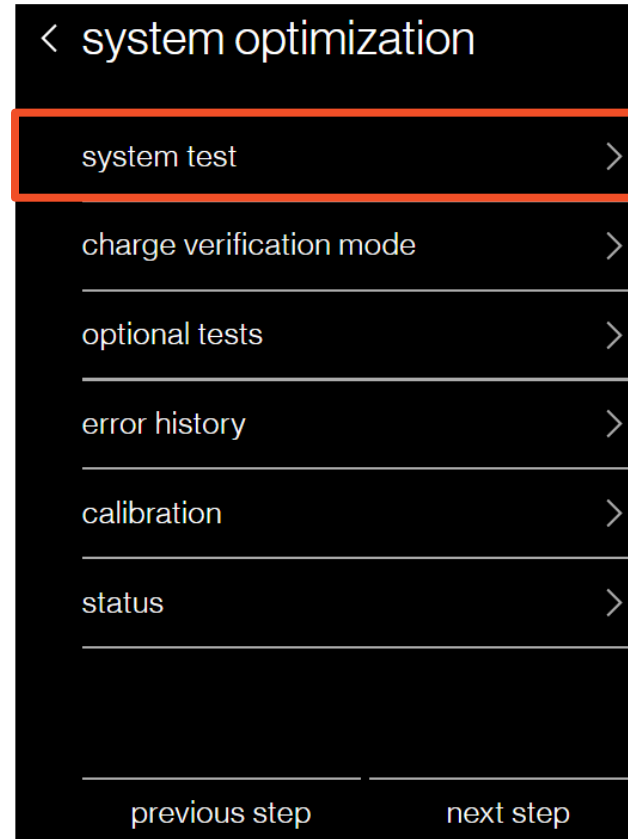




Charge Verification Mode

- Selecting charge verification mode allows for a steady system operation for approximately 1-2 hours to allow for refrigerant charging of the system via the suction charge port.
- The system will stop when the “stop test” button is pressed or once the test is complete
- **Note:** For proper charging of a system, please see equipment installation manual.

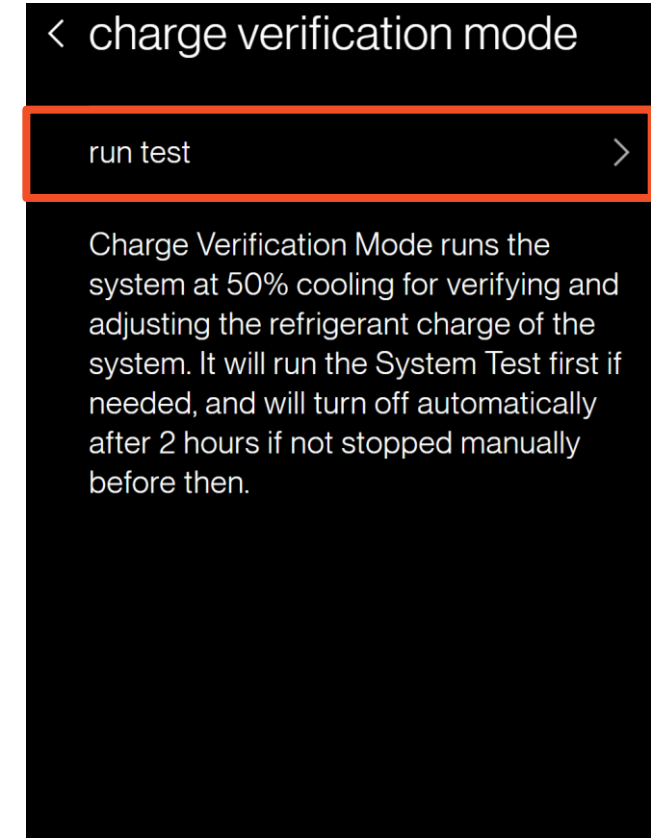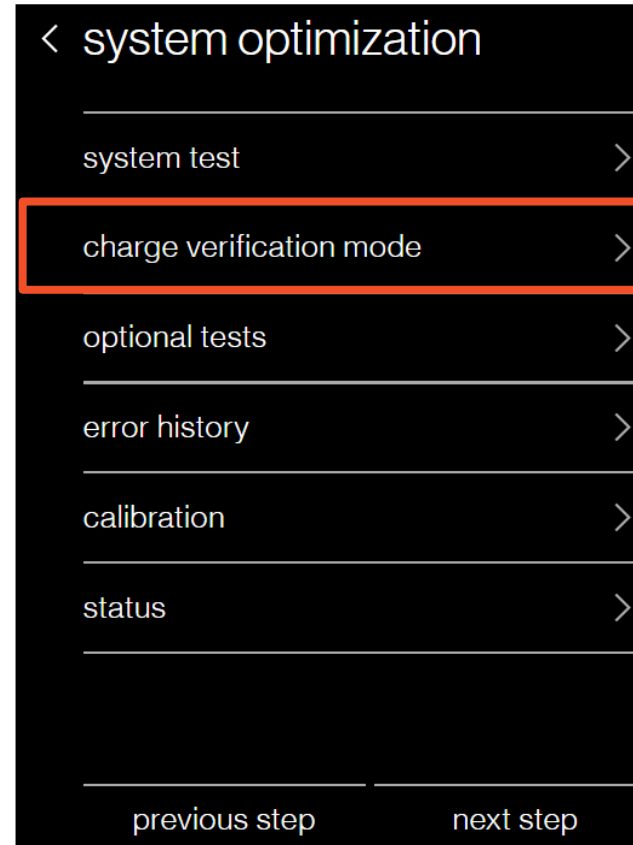

Optional Tests



- Optional tests display a stop test button while test is running.

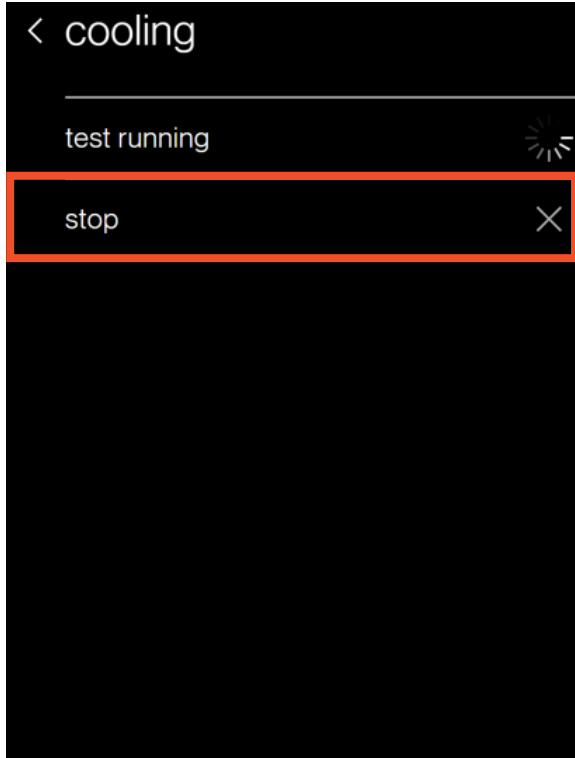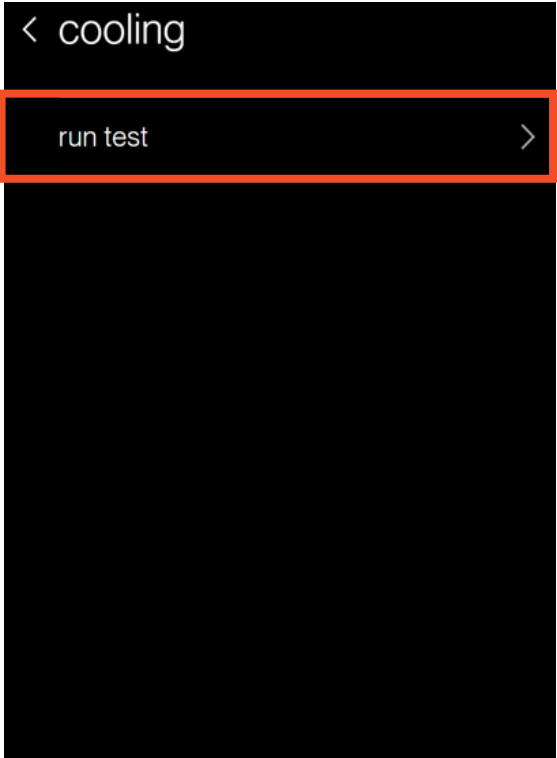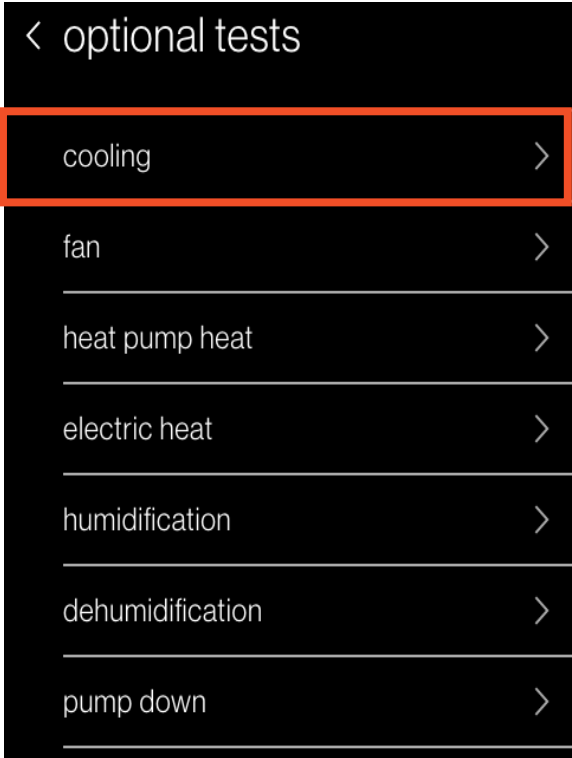

Note: Thermostat will only display tests that the system can perform.



Status

- The status menu displays data pertaining to the selected equipment.
- The scrollable list can be accessed any time by returning to the installer set-up screen.

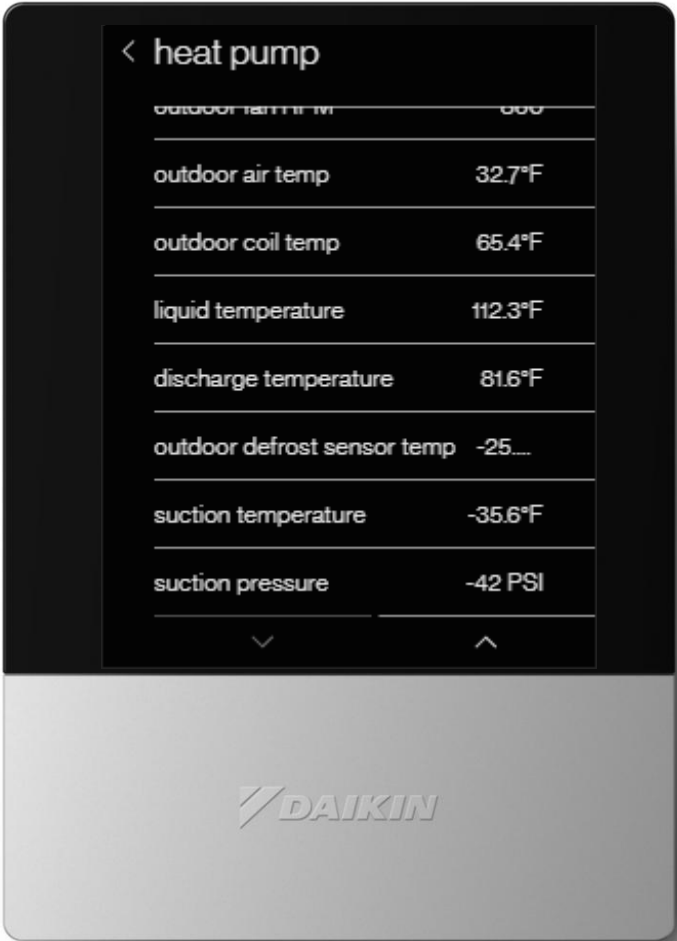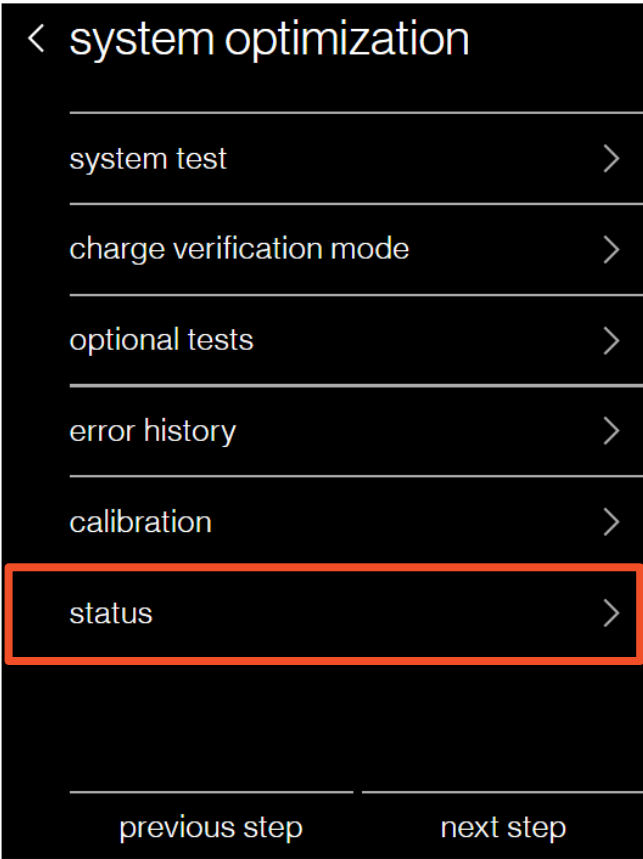



Step 5 - Preferences

- There are four preference settings to choose from in order to optimize your systems performance.
 - Cool/Heat
 - House settings
 - Dealer information
 - Reminders
- **Note:** Changing preferences is not required, but reminders and dealer contact information should be inputted.

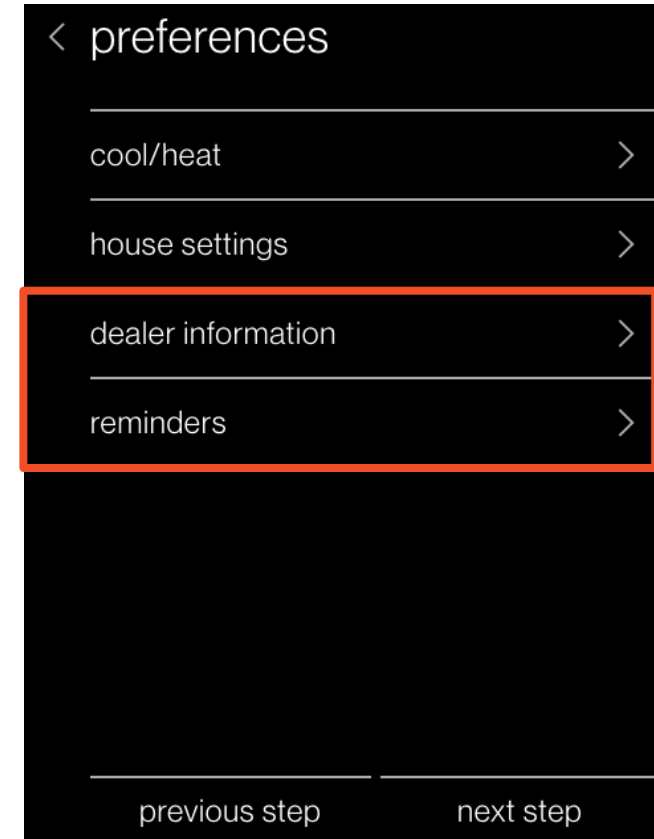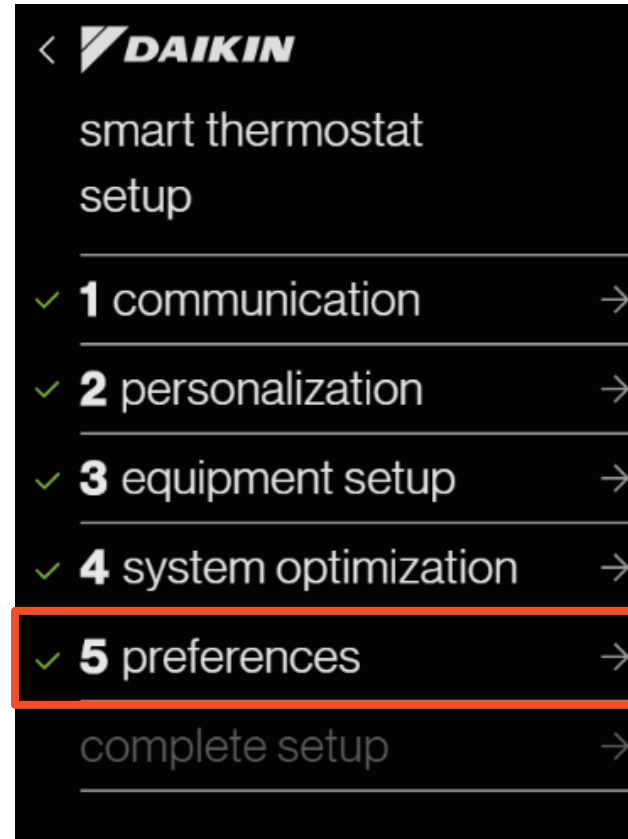



Dealer information

- Selecting allows you to enter and review the dealer's information.
- This information will be displayed to the homeowner on the thermostat home screen if an error with the system develops.

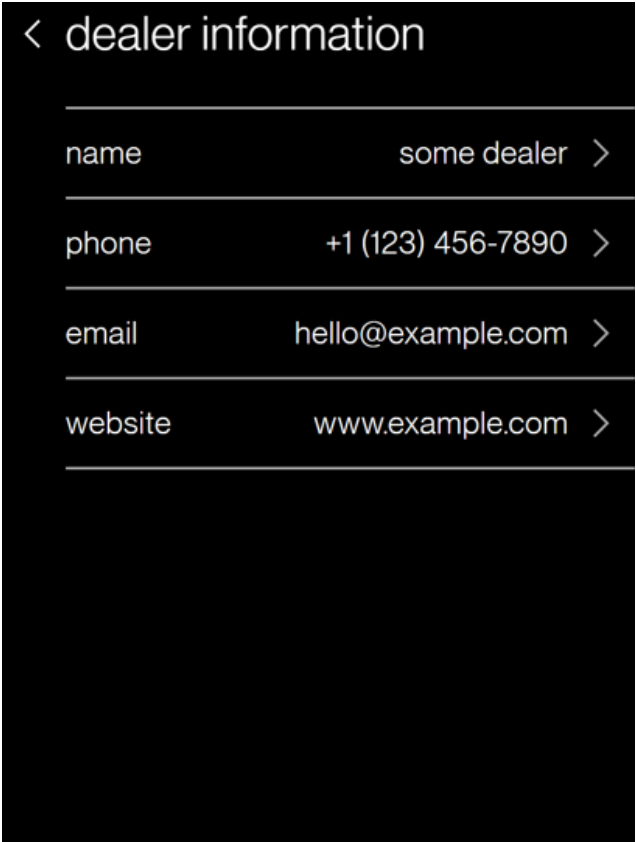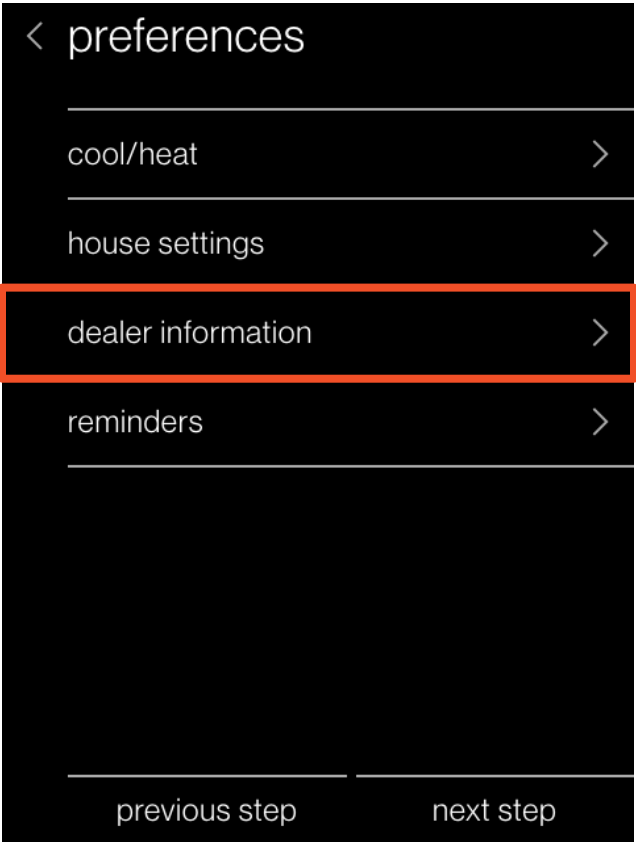

Reminders


- The number of reminders are based on the installed equipment with accessories.
- Once the equipment has been added, a 1 to 24-month service reminder can be selected depending on the installed equipment.

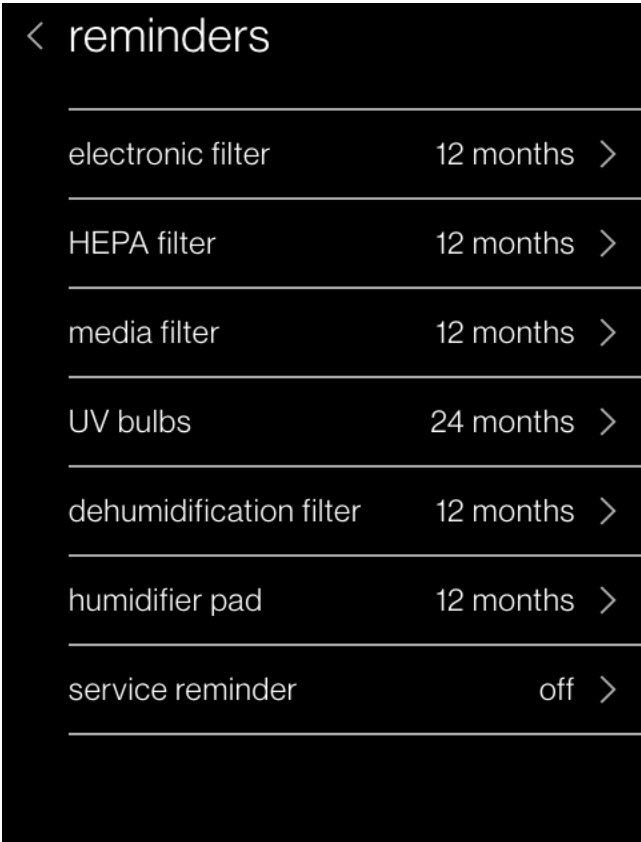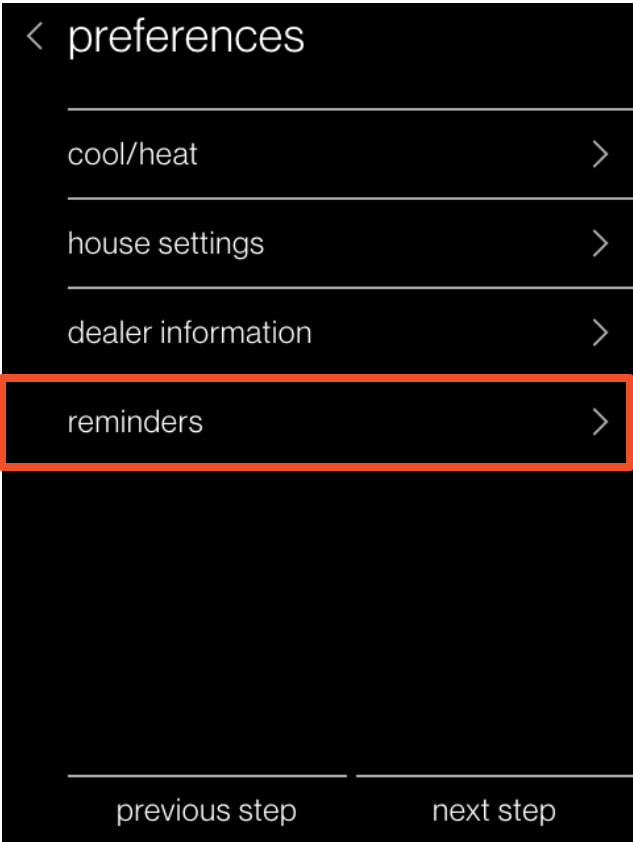

Final step - Complete set-up

- Selecting complete set-up will conclude the full set-up of the thermostat and display normal mode for you to navigate and verify settings.
- The checkmarks displayed besides each step let you know what steps have been completed.

Reminder: All steps must be reviewed before completing full set-up.

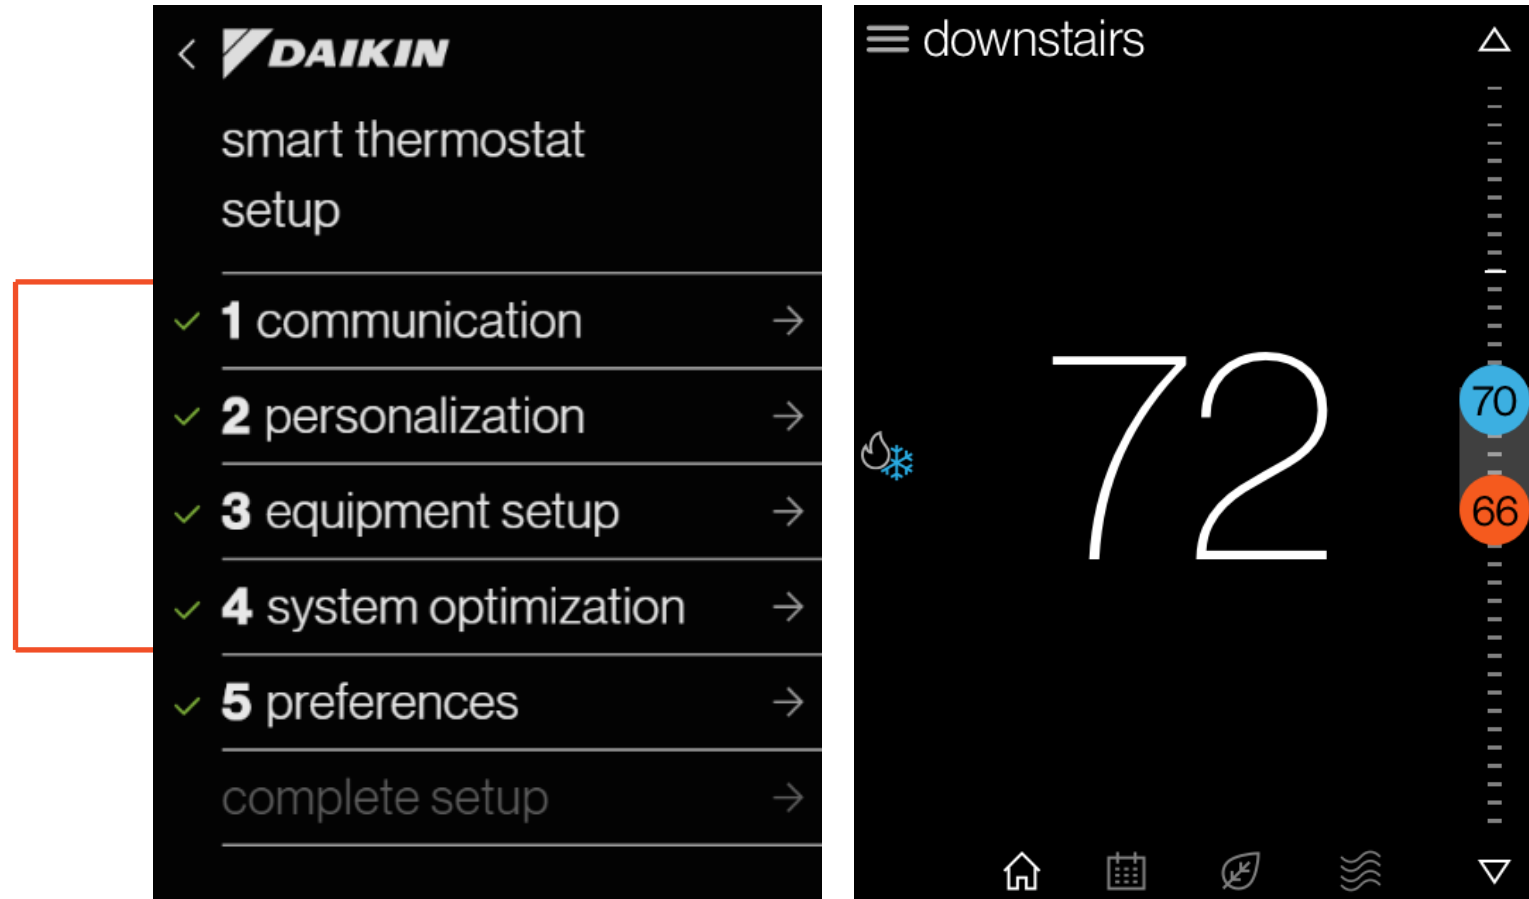

Agenda

Daikin *One* Touch smart thermostat

System Configurations

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning





Dealer Navigation

Homeowner Navigation

SkyportHome Mobile App





Dealer edit

- Navigating to **dealer edit** will allow you to access or revisit the installer set-up screen.
- Advanced adjustments to the Daikin *One Touch* will be made here.

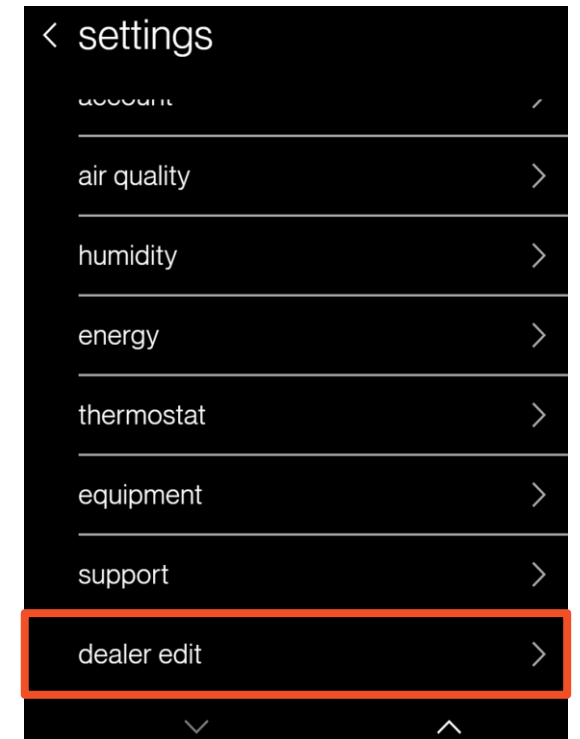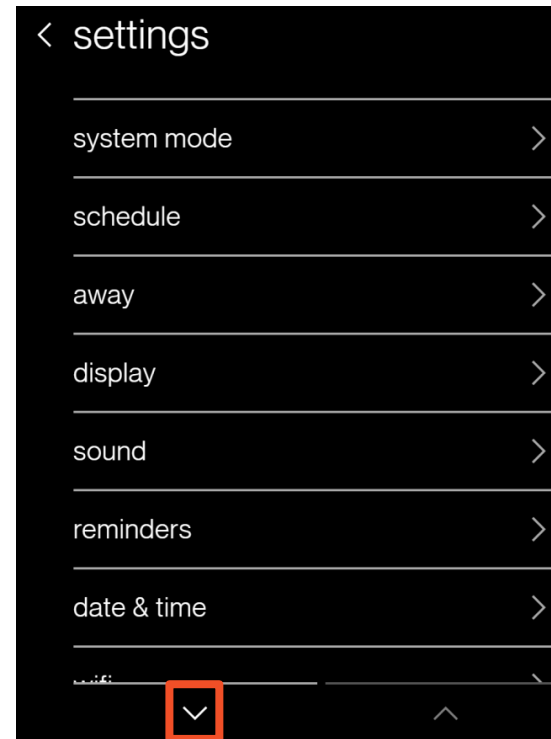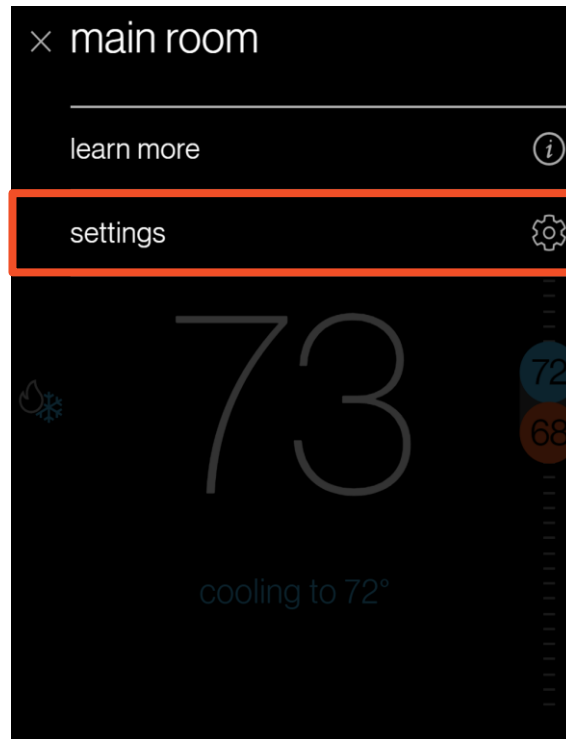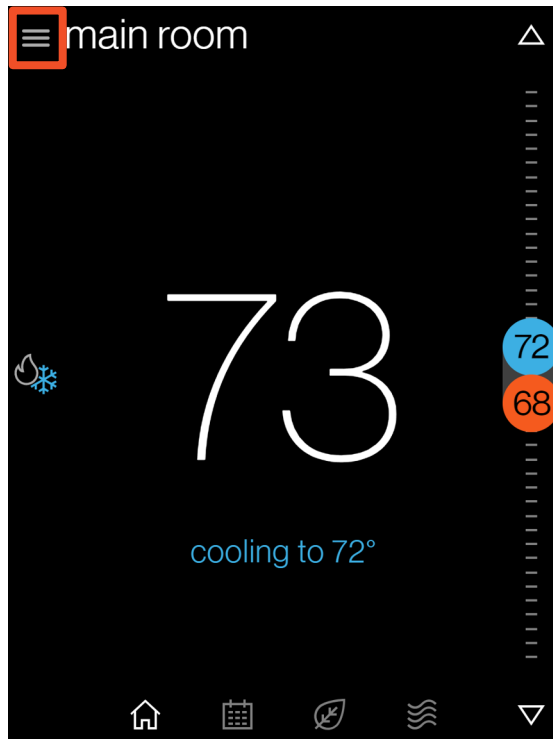

Dealer Navigation

- Acknowledging the “continue” prompt enables you to access the dealer edit screen.
- Press the information icon in the top right corner. It will display the installer code. Get the code and close the screen by pressing the “X”.
- Insert code into the dealer edit screen and press the unlock thermostat button.

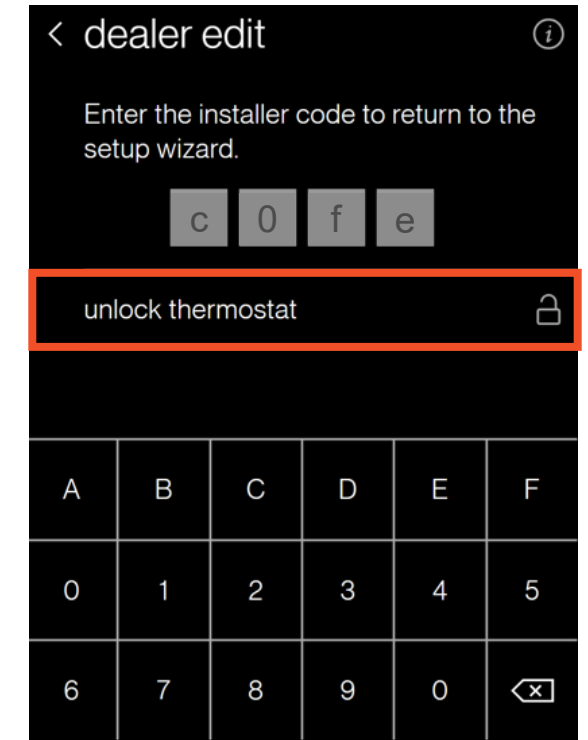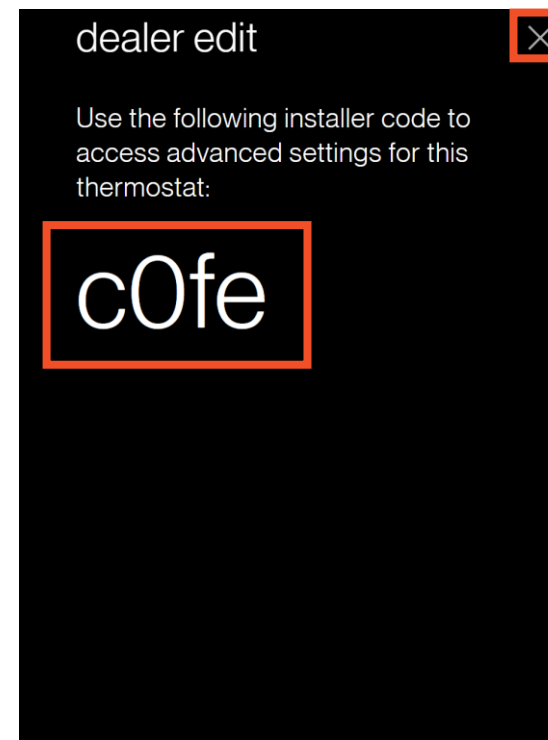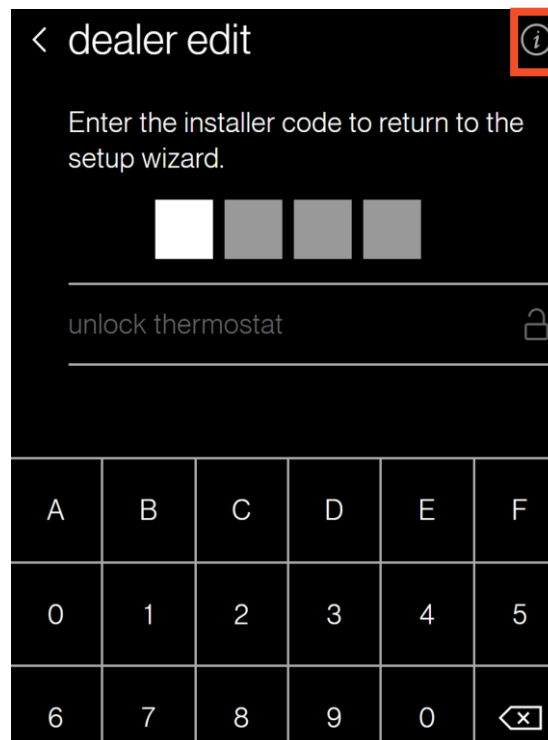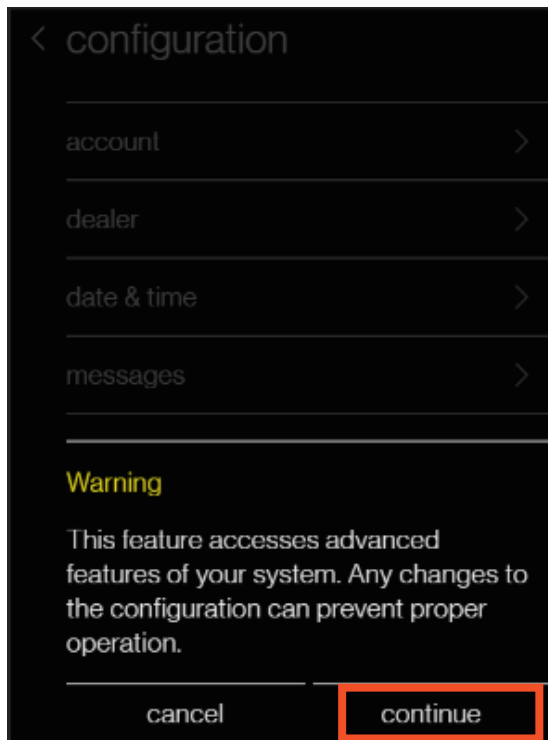

Agenda

Daikin *One* Touch smart thermostat

System Configurations

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning


Dealer Navigation

Homeowner Navigation

SkyportHome Mobile App


Normal mode

- Normal mode allows you to view messaging, temperature, and access settings to adjust parameters placed by the installer.
- Navigating is accomplished by tapping the icons.

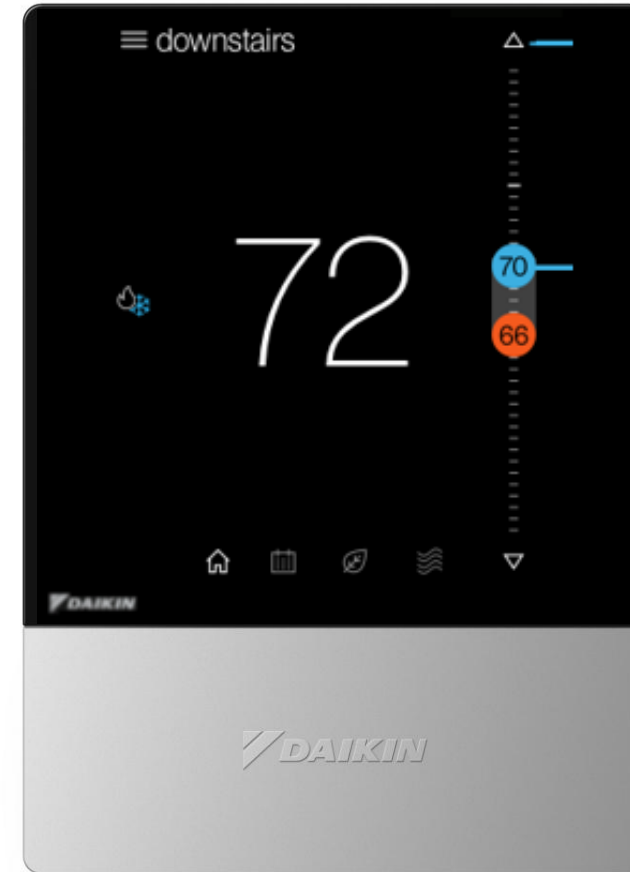


Adjust control

- Tapping the system mode icon allows you to select:
 - Auto. (cool & heat)
 - Cool.
 - Heat.
 - Off.
 - Emergency heat. (heat pump only)
- Tapping the arrow icons will adjust setpoints that are displayed. You can also slide the setpoints to the desired temperature.

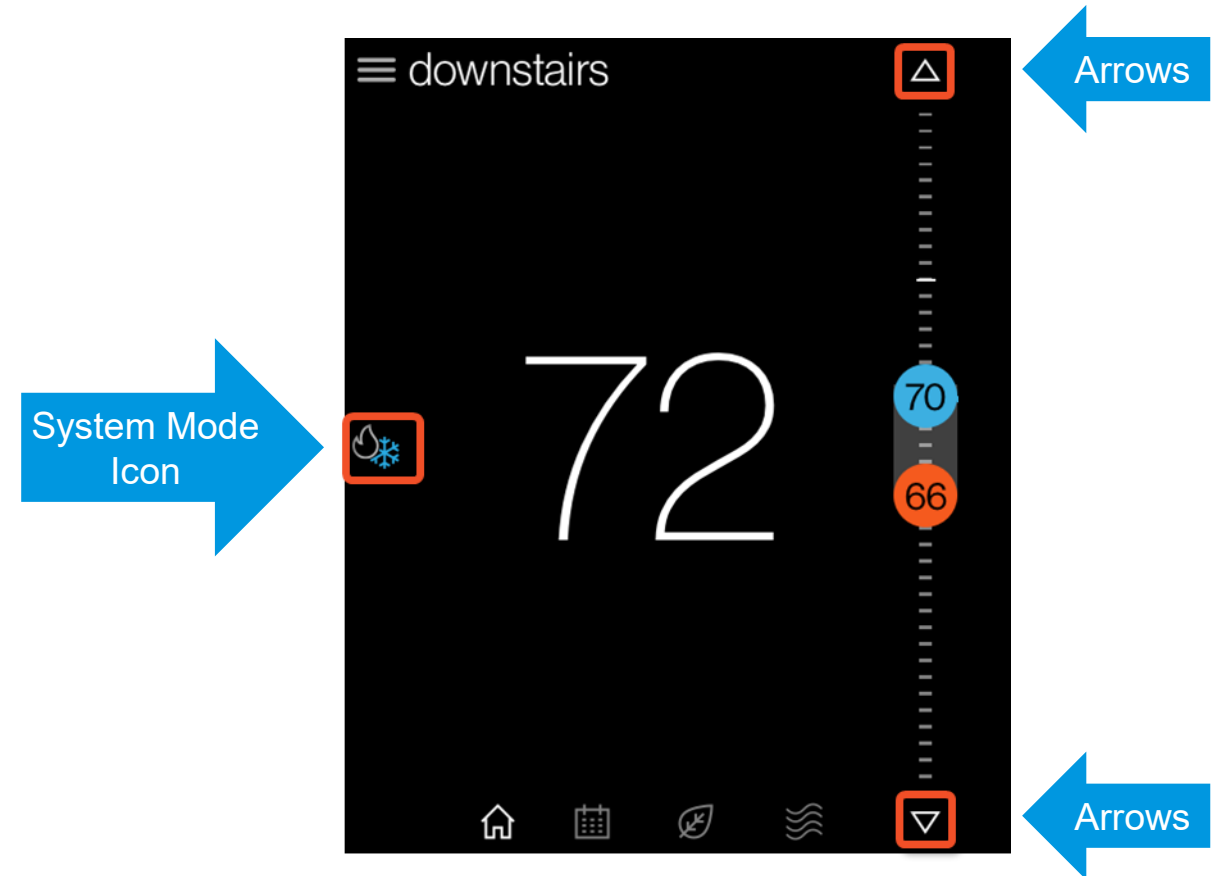

Schedule

- The schedule is presented as 7 days, displaying one day at a time, with 24 hours fitting on the screen.
- You can use the drop-down menu or swipe to enable schedule editing.
- Copy and paste is a feature that makes scheduling seamless.
- **Note:** Unlike other screens, scheduling requires saving edits before exiting the mode.

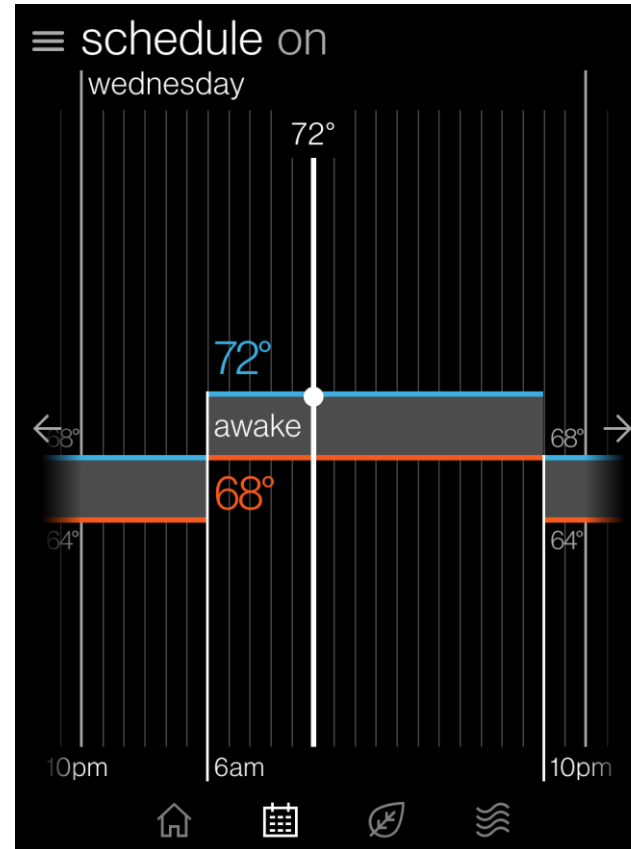

tuesday

awake
6:00 am 68°/72°

sleep
10:00 pm 64°/68°

copy day



to:

s m t w t f s

cancel paste



Away

- The away screen displays the current state (on/off) and the away cooling/heating setpoints used when away is on.
 - on/off is selected from drop down menu.
- User can change the values of the setpoints by dragging the numbers or the comfort range up and down.
- With the mobile application, enabling geo-fencing will automatically switch to away mode when outside the radius.
 - Settings must be configured in the mobile application.

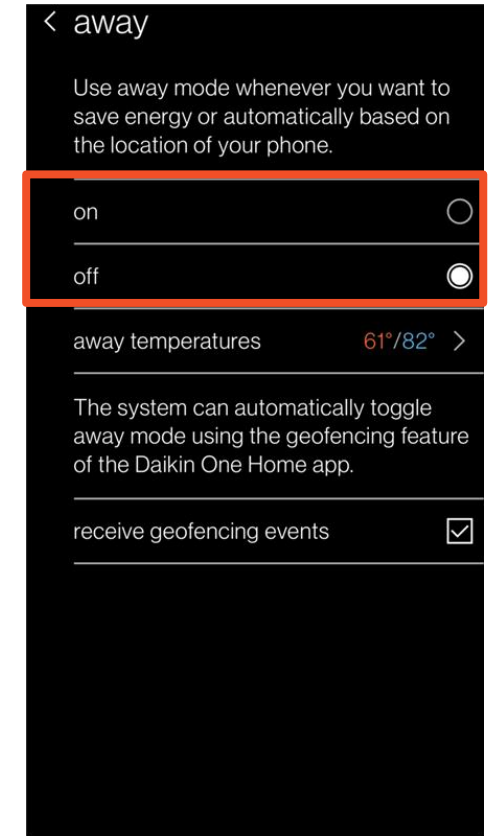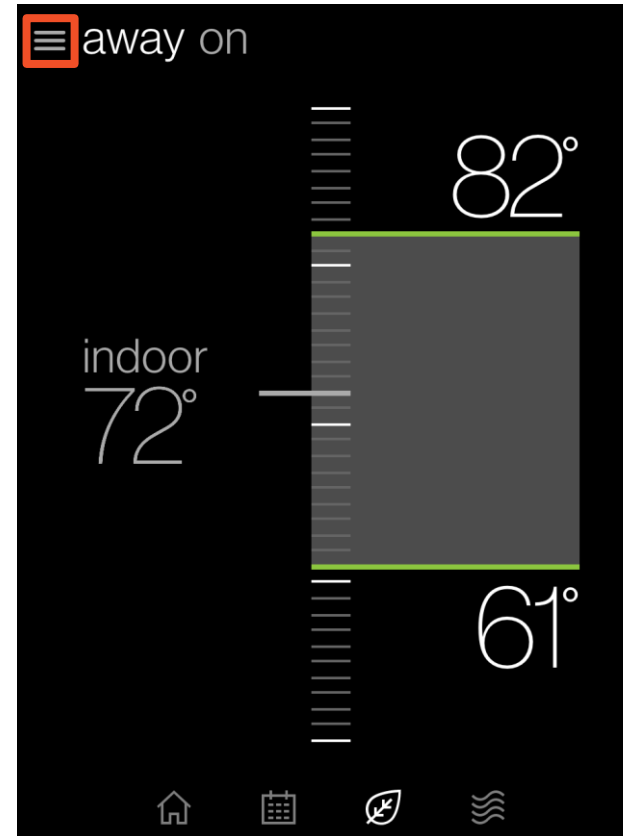

Air quality

- The air quality screen displays **indoor air** quality levels, **outdoor air** quality, and **weather** (when connected to the internet and paired with the app.)
- If air quality sensors **are not** installed, indoor air quality is based on filter life cycle and humidity values.
- Selecting indoor air quality from the air quality screen allows you to access **one clean** and **air quality history**.
 - **One clean** runs the fan, at high speed for three hours, to circulate and filter the indoor air.

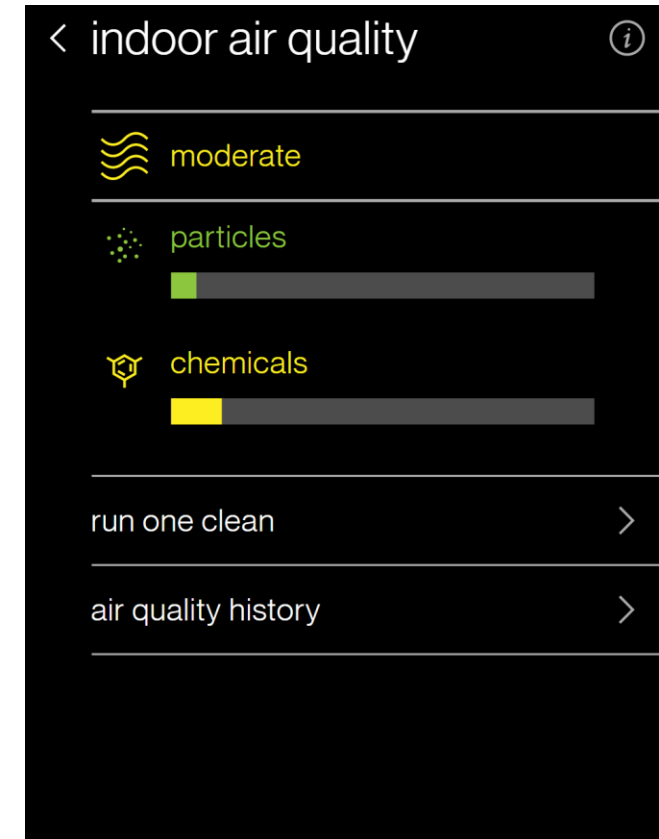
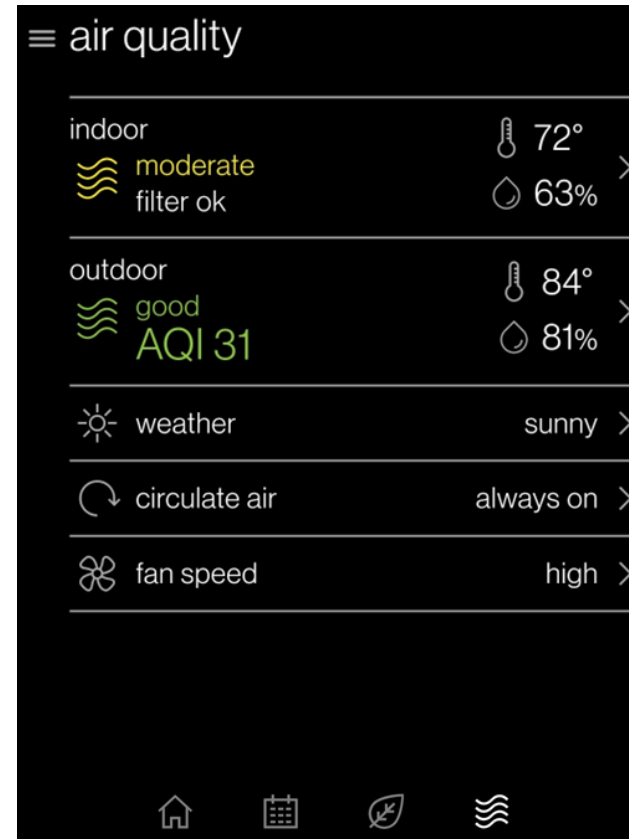


Settings

- Settings will give you access to additional supporting features:

- System Mode
- Schedule
- Reminders
- Set date & time

*Select the down arrow for more options

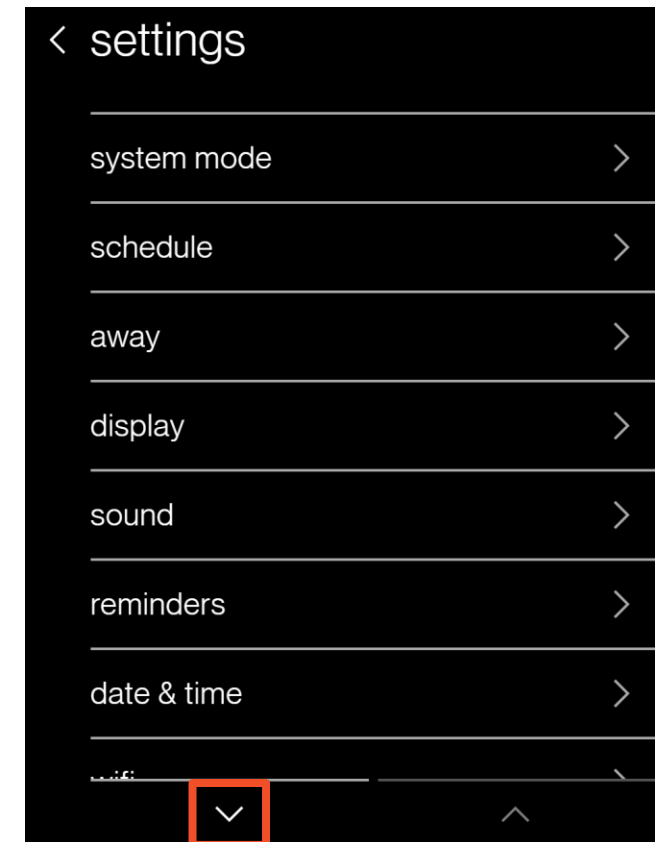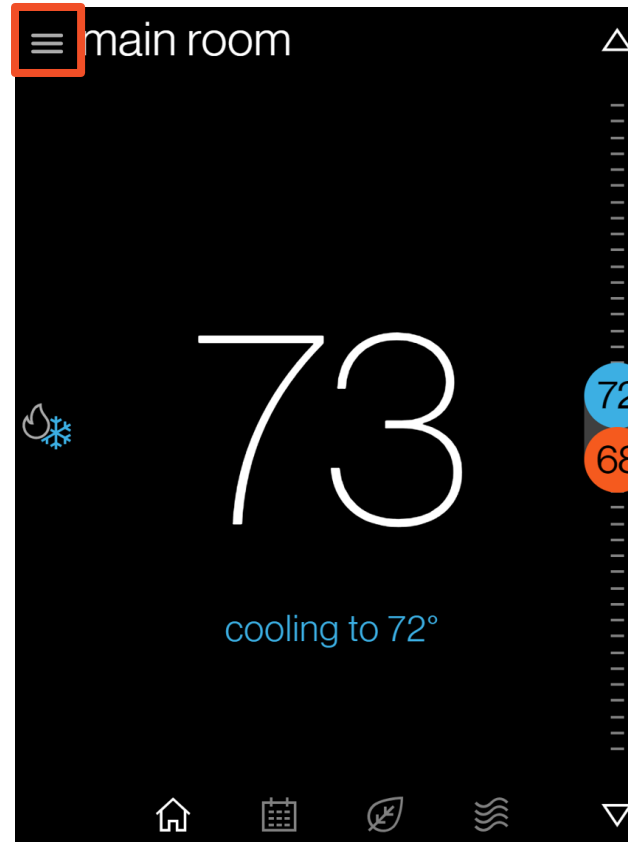

Agenda

Daikin *One* Touch smart thermostat

System Configurations

Installing Daikin *One* Touch smart thermostat

SkyportCare

Commissioning

Dealer Navigation

Homeowner Navigation

SkyportHome Mobile App


Account set-up

- Setting up an account is a five-step process.
 1. Downloading the application from your IOS or Android application store.
 2. Creating the account.
 3. Confirming your account.
 4. Adding the thermostats' location.
 5. Connecting the app to the thermostat.

Note: A mobile device, the **Daikin One Touch** connected to **Wi-Fi** that is wired to a **communicating system**, and a valid **email address** is needed to create a mobile account.






SkyportHome

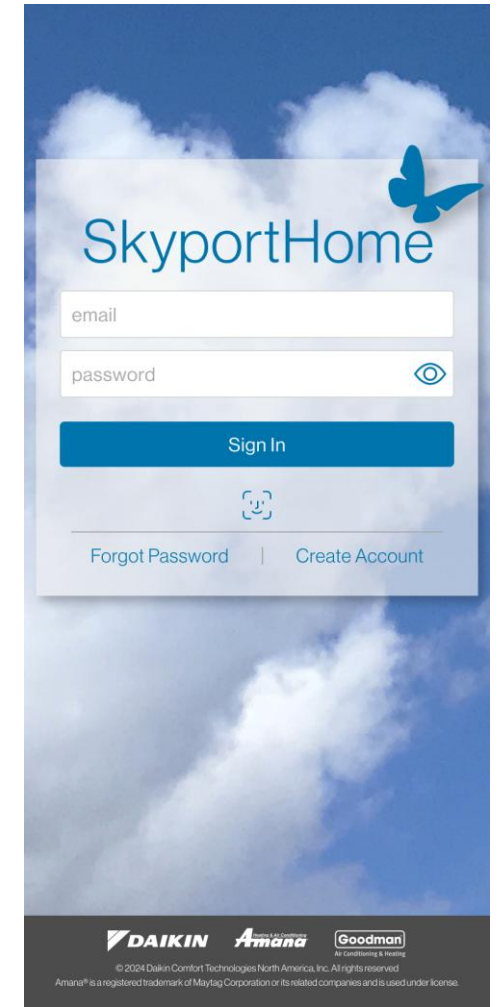

DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

Create the account

- Tapping Create Account at the bottom right corner of the login screen will start the process.
- Before agreeing, read the terms and service, privacy statement, and other notices.
- Fill in your name, valid email address, and password.
- Select Next.

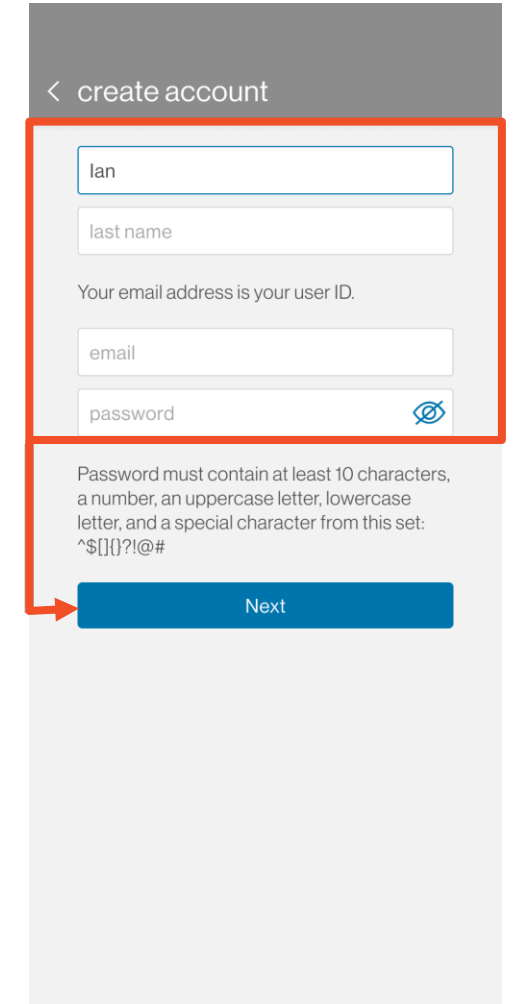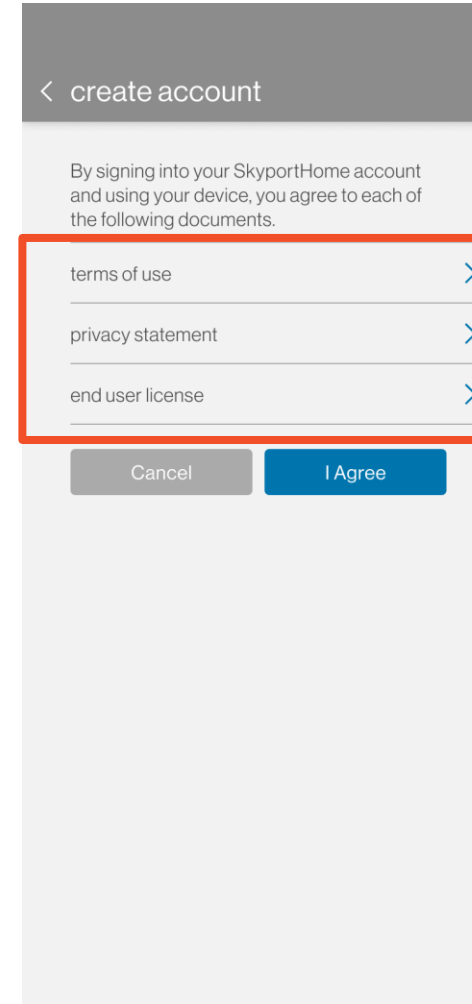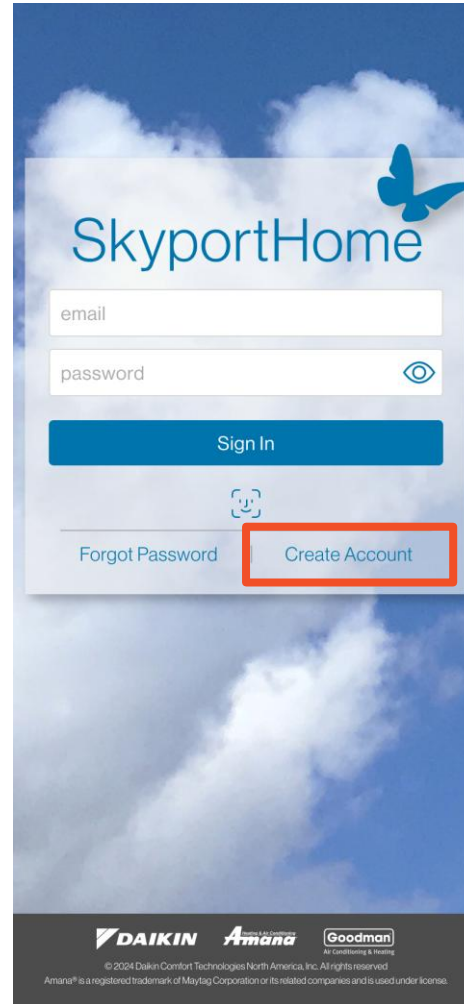

Confirming the account



- You will be prompted to access the **email address** you provided when creating the account.
- A welcome email will appear in your inbox providing a six-digit code.
- Entering the **six-digit** code on your phone app. will allow you to continue.
-

The image displays two side-by-side screenshots of the 'create account' screen in the SkyportHome Mobile App. Both screens have a grey header with a back arrow and the text '< create account'. The main content area is light grey and contains the following text: 'You will soon receive a welcome email from Daikin Comfort Technologies with a code to confirm your email address.' and 'You will need to enter the code to the field below to complete account creation and to login to your account.' Below this text is a row of six white input boxes. In the left screenshot, the boxes are empty. In the right screenshot, each box contains the digit '0'. Below the input boxes is a blue link labeled 'resend code'. At the bottom of each screen is a blue button labeled 'Confirm Code'. In the right screenshot, this button is highlighted with a red rectangular border.

Adding the thermostats location VIA GPS or Manually

To add location VIA GPS:



- The Add Location screen will appear on your app screen. Press the “Add Location” button.
- Select to Allow Once or Allow While Using App.
- Follow the prompts on the app.
- Select Don't Allow if entering manually.

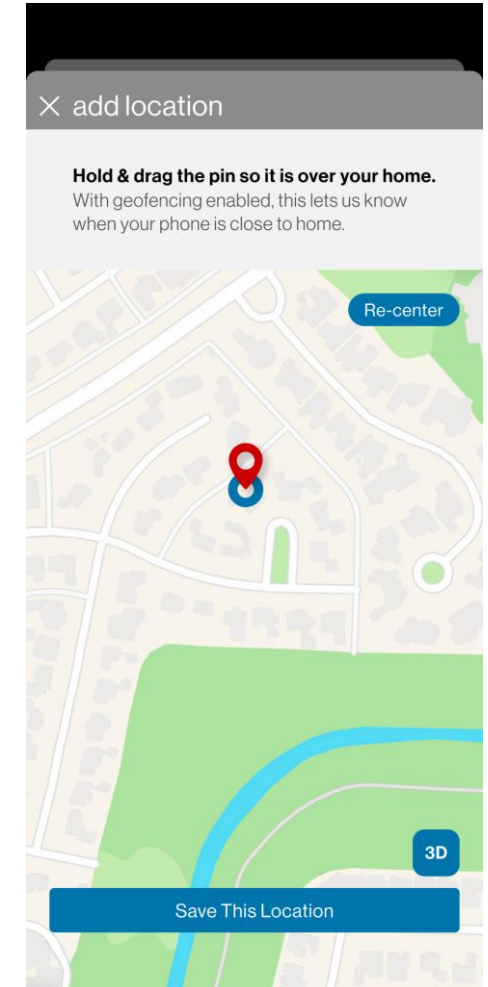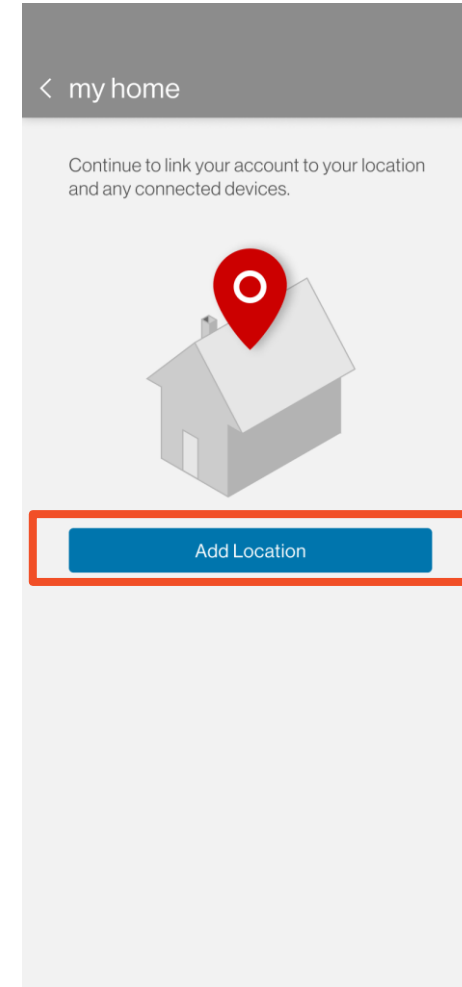

Adding the thermostats' location via GPS or Manually




To add location Manually:

- The Add Location screen will appear on your app screen. Press the “Add Location” button.
- Select Don't Allow.
- Enter location information.
- Select next.
- Drag the pin over your location on the map.
- Save The Location.

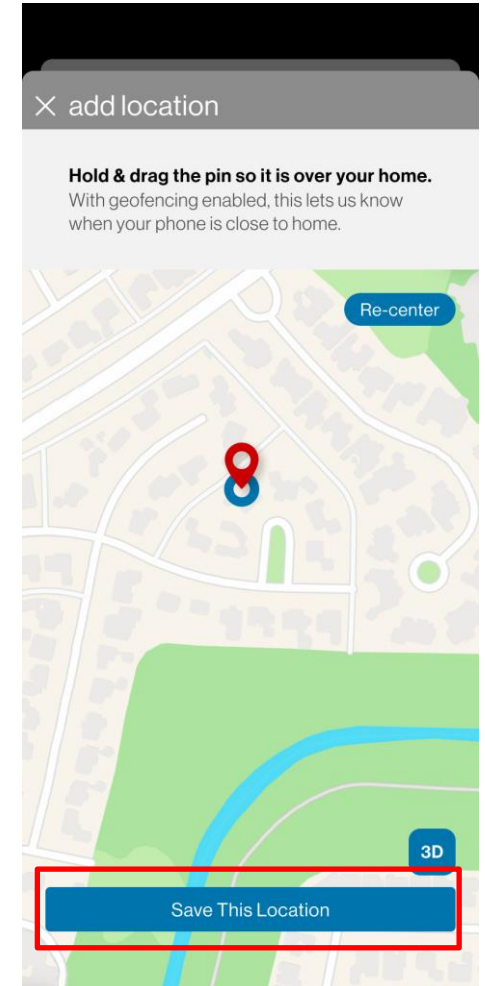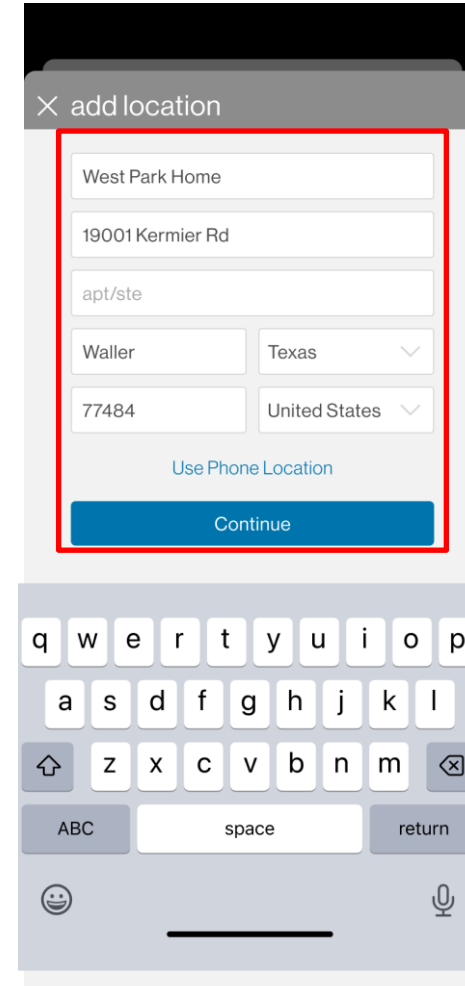


Connecting the App to the thermostat


- Select Add Device
- Press the dropdown menu and select which thermostat you have.
- With Wi-Fi enabled on your thermostat, go to the main screen drop down menu and select settings/account.
- Type the six-digit code displayed on your thermostat into the space provided on the mobile app.
- Tap Add. The app will display your thermostat.

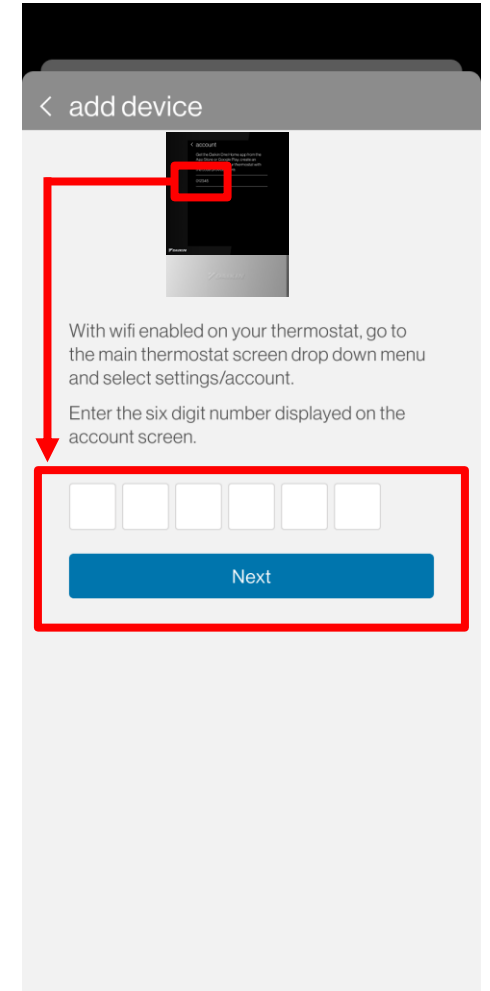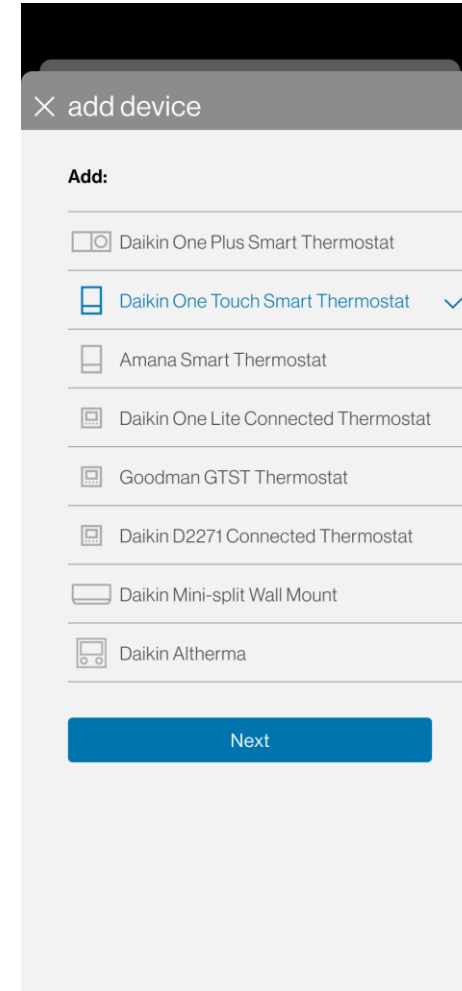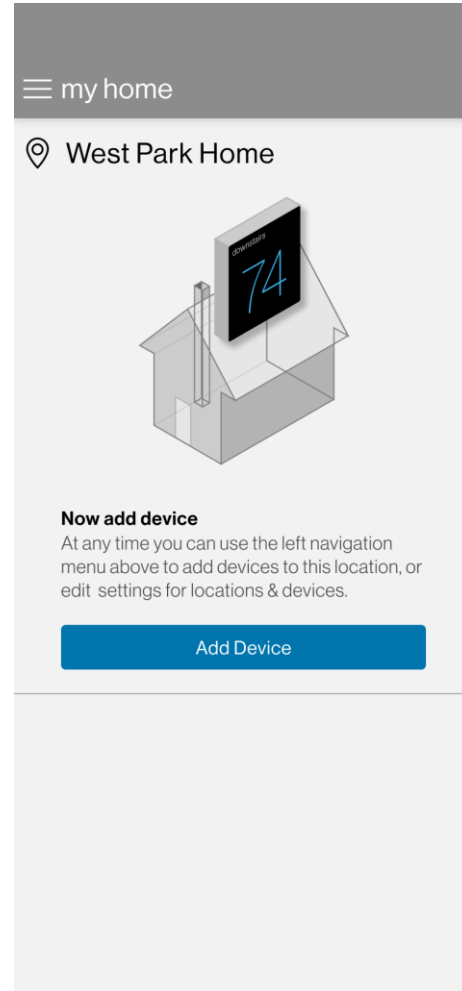



Resources

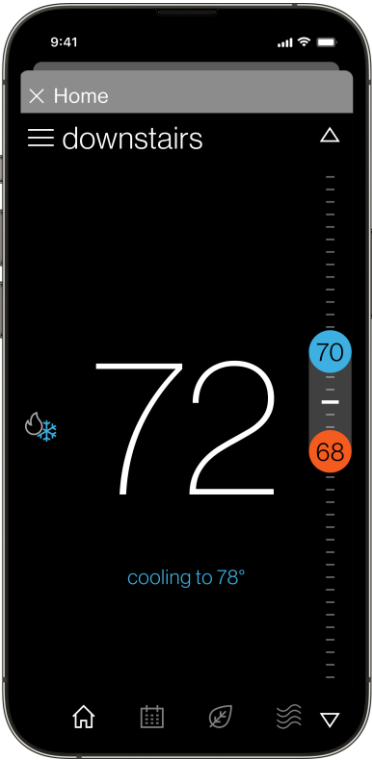

■ IOS

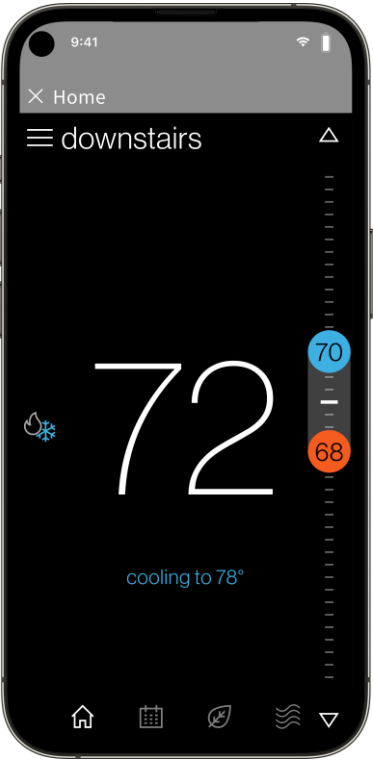

■ Android

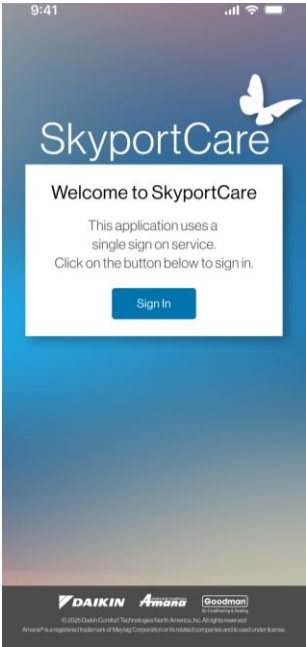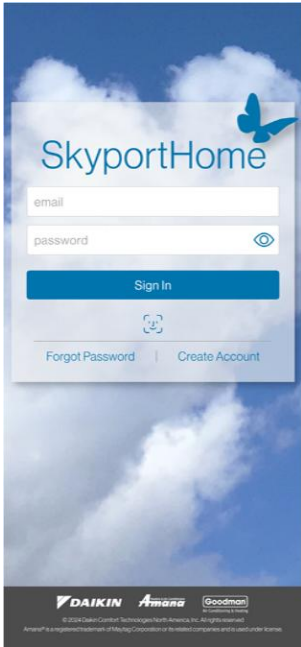

For additional information, Please visit the link below:
<https://daikincomfort.com/products/cloud-services-apps/cloud-services---apps-homeowner>



For additional information, Visit the link below:
<https://daikinone.com/professionals/resources#touch>



DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.

