


80 Series thermostats

*Thermostats that
fit every customer.*

The 80 Series thermostats are the perfect fit for every application with universal, conventional and heat pump models. The standard footprint makes replacements and upgrades easier than ever without leaving visible marks on the wall from the old thermostat.

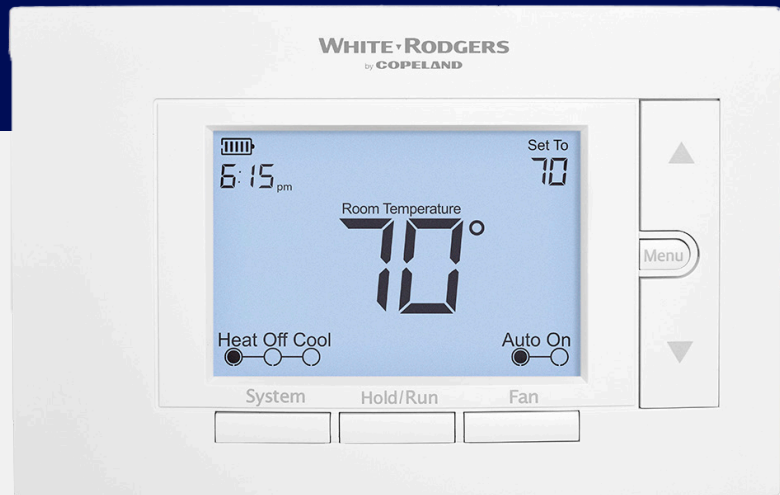

Easy installation

All models are easy to install & set-up with a built-in level and universal back plate for more opportunities for upgrades in the future.



Large, backlit display

Modern design with a large, easy-to-read screen with a bright backlit display.



Advanced features

Temperature limits and keypad lockout are standard on every model. Select models feature auto changeover, filter change reminders, dual fuel control and selectable programming.



Proven performance

Over 75 years of experience along with our $\pm 1^\circ$ temperature accuracy guarantee.



Circulating fan

Air circulation may improve indoor air quality by helping to regulate temperature and prevent buildup of particles.

How do you benefit?



Contractor branding

Get the next service call by placing your company information directly on the thermostat. Customize your 80 Series thermostats at ProContractorBranding.com.



Training

Free, self-guided training courses available through Education Central or contact your Territory Manager to set up training at your location or at select wholesalers.



Support

Customer and technical support is available seven days a week at 888-725-9797. 5 year limited warranty for HVAC professionals.



80 Series thermostats

Specifications

Electrical rating

Battery power: mV to 30 VAC
Hardwire: 20 to 30 VAC
NEC Class II, 50/60 Hz

Setpoint range

45°F to 99°F (7°C to 37°C)

Accessories

Wallplate: F61-2663 (6-3/4" x 4-1/2")
Thermostat guard: F29-0198

Display temperature range

32°F to +99°F (0°C to 37°C)

Rated differentials (@ 6°F/HR)

Heat (conventional gas/oil/elect):
Cool (central air):
Heat pump (heat and cool):
Heat pump (aux):

Fast	Med	Slow
0.5°F	0.75°F	1.9°F
0.9°F	1.2°F	1.7°F
0.9°F	1.2°F	1.7°F
0.5°F	0.75°F	1.9°F

Operating ambient

32°F to +105°F
(0°C to +41°C)

Operating humidity

90% non-condensing max

Terminal load

Staging models: 1.5 A per terminal
2.5 A per maximum all terminals combined
Single stage models: 1.0 A per terminal
1.5 A per maximum all terminals combined

Shipping temperature

-20°F to +150°F
(-29°C to +65°C)

Thermostat dimensions

3-3/4"H x 6"W x 1-1/8"D

Terminal designations

Universal: 1F85U-42PR / 1F85U-42NP / 1F85U-22PR / 1F85U-22NP

Heat pump: 1F83H-21PR / 1F83H-21NP

Conventional & heat pump, single stage: 1F83C-11PR / 1F83C-11NP



Model	Program Option				Maximum stages heat/cool		Applications			Power source		Selectable performance features				Comfortable and convenience features				
Model Number	7 Day	5+1+1 Day	Non-Programmable	Program Periods per Day	Conventional	Heat Pump	Gas/Oil/Electric	3 Wire Zone Valve	Millivolt Compatible	Battery	Hardwired (24V)	Auto Changeover	EMR/ Early Start Program	Temperature Setpoint Limits Adjustable Max./Min.	Dual Fuel Control (L)-Logic(O)-Outdoor Sensor	Circulating Fan	Filter Change Reminder	Keypad Lockout	Continuous Backlight w/ Common Wire	Permanent Memory
1F85U-42PR	7	5+1+1	0	4,2,0	2/2	4/2	•	•	•	•	•	•	•	•	L	•	•	•	•	•
1F85U-42NP			0	0	2/2	4/2	•	•	•	•	•	•		•	L	•		•	•	•
1F85U-22PR	7	5+1+1	0	4,2,0	2/2	2/1	•	•	•	•	•	•	•	•	L	•	•	•	•	•
1F85U-22NP			0	0	2/2	2/1	•	•	•	•	•	•		•	L	•		•	•	•
1F83H-21PR	7	5+1+1	0	4,0		2/1	•			•	•		•	•	L		•	•	•	•
1F83H-21NP			0	0		2/1	•			•	•			•	L			•	•	•
1F83C-11PR	7	5+1+1	0	4,0	1/1	1/1	•		•	•	•		•	•			•	•	•	•
1F83C-11NP			0	0	1/1	1/1	•		•	•	•			•				•	•	•

The White-Rodgers mobile app:

Answers at your fingertips, with your smartphone or tablet.

- ✓ Latest cross reference
- ✓ Installation instructions
- ✓ Spec sheets
- ✓ Product selection



WHITE RODGERS
by **COPELAND**