

TECHNICAL GUIDE

TECHNICAL GUIDE

LX SERIES

SPLIT SYSTEM

AIR CONDITIONERS

13 SEER - R-410A - 1 PHASE

1.5 TO 5 NOMINAL TON

MODELS: RAC13L18 TO 60



Due to continuous product improvement, specifications are subject to change without notice.

Visit us on the web at

www.simplygettingthejobdone.com

Additional rating information can be found at

www.ahridirectory.org

WARRANTY SUMMARY*

Standard 5-year limited parts warranty.

Standard 5-year limited compressor warranty.

Extended 10-year limited parts and compressor warranty when product is registered online within 90 days of purchase for replacement or closing for new home construction.

*Does not apply to R-22 models, 3-Phase models, or Internet sales.

See Limited Warranty certificate in the *User's Information Manual* for details.

DESCRIPTION

The RAC13L models are optimized for the 13 SEER Regional Minimum Efficiency in the North US and Canada, and are specifically designed to be matched with our residential indoor coils, furnaces, and air handlers to provide a complete system solution.

FEATURES

- **Easier Installation** - Independent panels provide quick access for unit setup. Installation time is reduced by easy power and control wiring access. Options are provided for indoor piston or TXV. The factory installed filter-drier and factory charge for a 15-ft lineset means less time spent brazing and charging the system. The small base dimension and reduced unit clearances make for easier retrofits.
- **Durable Finish** - The coated steel wire fan guard, coated external fasteners, and pre-treated G90-equivalent galvanized steel chassis components resist corrosion and rust creep. Powdercoat paint further protects external panels.
- **Louvered Coil Protection** - Two stamped steel louvered panels protect the coil from mechanical damage.
- **Quality Coils** - The high efficiency microchannel aluminum coil is manufactured using an improved material system providing reliable performance and small unit size.
- **Protected Compressor** - Compressors are protected internally by a high-pressure relief valve and a temperature sensor, and externally by the system high-pressure switch. The liquid line filter-drier is factory installed to protect the compressor against moisture and debris.
- **Environmentally Friendly** - CFC-free R-410A refrigerant delivers environmentally friendly performance with zero ozone depletion.
- **Top Discharge** - Warm air is blown up, away from the structure and any landscaping, allowing compact location on multi-unit applications.
- **Agency Listed** - Safety certified by CSA to UL 1995/CSA 22.2. Performance certified to ANSI/AHRI Standard 210/240 in accordance with the Unitary Small Equipment certification program.

LIST OF SECTIONS

DESCRIPTION	1
FEATURES.....	1
NOMENCLATURE	2
PHYSICAL AND ELECTRICAL DATA	3
DIMENSIONS	3
SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS - N COIL	4
SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS - A COIL.....	5
CHARGING.....	5
COOLING CAPACITY - With Air Handler Coils.....	6
COOLING CAPACITY - Upflow, Downflow, and Horizontal Furnaces and Coils (Coil Only Ratings)	8
COOLING CAPACITY - With High Efficiency Motor Furnaces ..	11
APPLICATIONS AND ACCESSORIES	32
SOUND POWER RATINGS	32
MECHANICAL SPECIFICATIONS.....	33
TYPICAL INSTALLATION	34
TYPICAL FIELD WIRING.....	35
ALTERNATIVE INSTALLATION CLEARANCES	35
PERFORMANCE DATA - 1.5 TON	36
PERFORMANCE DATA - 2 TON	39
PERFORMANCE DATA - 2.5 TON	43
PERFORMANCE DATA - 3 TON	46
PERFORMANCE DATA - 3.5 TON	50
PERFORMANCE DATA - 4 TON	54
PERFORMANCE DATA - 5 TON	57

NOMENCLATURE

BRAND	R	R = OTC Factory Branded G = Guardian
PRODUCT TYPE	AC	AC = Air Conditioner
NOMINAL SERIES EFFICIENCY AND STAGING	13	13 = 13 SEER/1-Stage (US Northern Region)
CABINET AND CONNECTION TYPE	L	L = New Chassis Louvered/Sweat Connect
NOMINAL UNIT CAPACITY (MBH)	36	18 = 1.5 ton 42 = 3.5 ton 24 = 2 ton 48 = 4 ton 30 = 2.5 ton 60 = 5 ton 36 = 3 ton
REFRIGERANT	B	B = R-410A
VOLTAGE (Voltage-Phase-Hertz)	2	2 = 208/230-1-60
GENERATION (MAJOR REVISION)	1	1 = 1st Gen 2 = 2nd Gen etc.
FACTORY OPTION	S	S = Standard (No Options)
STYLE LETTER (MINOR REVISION) NOT USED FOR ORDERING	A	A = Style A B = Style B etc.

PHYSICAL AND ELECTRICAL DATA

Model		RAC13L18B2 3S	RAC13L24B2 4S	RAC13L30B2 3S	RAC13L36B2 4S	RAC13L42B2 4S	RAC13L48B2 3S	RAC13L60B2 3S
Unit supply voltage		208-230 V, 1 ϕ , 60 Hz						
Normal voltage range ¹ (V)		187 to 252						
Minimum circuit ampacity (A)		12.9	11.4	18.4	19.8	21.1	28.5	29.1
Maximum overcurrent device (A) ²		20	15	30	30	35	50	50
Minimum overcurrent device (A) ³		15	15	20	20	25	30	30
Compressor	Type ⁴	Scroll	Rotary	Scroll	Scroll	Scroll	Scroll	Scroll
	Rated load (A)	9.7	8.4	14.1	14.7	15.9	21.8	22.2
	Locked rotor (A)	46.0	53.0	73.0	75.0	112.3	117.0	127.9
Crankcase heater		No	No	No	No	No	No	No
Factory external discharge muffler		No	No	No	No	No	No	No
Hard start kit required with TXV ⁵		No	No	No	No	No	No	No
Hard start kit part number (S1-2SA067****)		21806	22006	10106	10106	10206	10106	10206
Fan diameter (in.)		18	18	18	18	22	22	22
Fan motor	Rated HP	1/8	1/8	1/8	1/4	1/4	1/4	1/4
	Rated load (A)	0.80	0.80	0.80	1.50	1.30	1.30	1.30
	Nominal RPM	1075	1075	1075	1100	850	850	850
	Nominal CFM	1950	1950	2150	2575	2925	3225	3350
Coil	Face area (sq ft)	9.78	9.78	11.07	12.37	13.83	13.83	17.37
	Rows deep	1	1	1	1	1	1	1
	Fins per inch	23	23	23	23	23	23	23
Liquid refrigeration piping outdoor (field installed)		3/8	3/8	3/8	3/8	3/8	3/8	3/8
Vapor refrigeration piping outdoor (field installed) ⁶		3/4	3/4	3/4	3/4	7/8	7/8	1 1/8†
Unit charge (lb - oz) ⁷		2 - 13	3 - 7	3 - 10	3 - 12	4 - 6	4 - 8	5 - 1
Charge (oz/ft)		0.62	0.62	0.62	0.62	0.67	0.67	0.75
Operating weight (lb)		125	130	140	165	175	165	190

1. Rated in accordance with AHRI Standard 110-2012, utilization range A.

2. Dual element fuses or HACR circuit breaker. Maximum allowable overcurrent protection.

3. Dual element fuses or HACR circuit breaker. Minimum recommended overcurrent protection.


4. Rotary compressor models are limited to an equivalent length of refrigeration piping of 100 ft with no exceptions.

5. Refer to the Hard Start Kit Accessory Installation Manual for the hard start kit part number for each model. The hard start kit is a field installed accessory.

6. For applications with non-standard vapor line sizes, refer to the APPLICATIONS AND ACCESSORIES section in the Technical Guide.

7. The unit charge is correct for the outdoor unit, smallest matched indoor unit, and 15 ft of refrigerant tubing. For tubing lengths other than 15 ft, add or subtract the amount of refrigerant, using the difference in actual refrigeration piping length (not the equivalent length) multiplied by the per foot value.

† The adapter fitting must be field installed for the required 1 1/8 in. refrigeration piping.

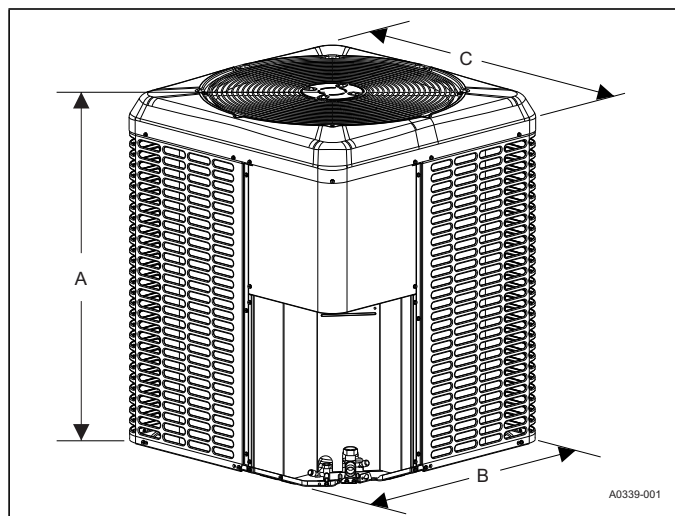

DIMENSIONS

Unit Model	Dimensions (in.)			Refrigerant Connection Service Valve Size	
	A	B	C	Liquid	Vapor
RAC13L18B23S	26 3/4	24	24	3/8	3/4
RAC13L24B24S	26 3/4	24	24		
RAC13L30B23S	30	24	24		
RAC13L36B24S	33 1/4	24	24		
RAC13L42B24S	30	29 1/4	29 1/4	3/8	7/8
RAC13L48B23S	30	29 1/4	29 1/4		7/8†
RAC13L60B23S	36 1/4	29 1/4	29 1/4		

† Adapter fitting must be field installed for the required 1 1/8 in. line set.

Notes:

- All dimensions are in inches and are subject to change without notice.
- The overall height is from the bottom of the base pan to the top of the fan guard.
- The overall length and width include screw heads.

SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS - N COIL

Outdoor unit	RAC13L18B23 S	RAC13L24B24 S	RAC13L30B23 S	RAC13L36B24 S	RAC13L42B24 S	RAC13L48B23 S	RAC13L60B23 S
Required indoor metering device ^{1,2}	0.049 / BH1	0.057 / BH1	0.061 / BA1	0.070 / BA1	0.075 / BC1	0.077 / BC1	0.084 / BD1
Indoor unit ^{3,4,5}	Additional charge (oz)						
RFCX18BP	0	—	—	—	—	—	—
RFCX24BP	3	0	—	—	—	—	—
RFCX30BP	—	7	2	—	—	—	—
RFCX36BP	—	—	—	0	—	—	—
RFCX36CP	—	—	2	2	—	—	—
RFCX37CP	—	—	—	5	—	—	—
RFCX42CP	—	—	—	—	0	—	—
RFCX48CP	—	—	—	5	2	0	—
RFCX48DP	—	—	—	—	2	0	—
RFCX60(CP,DP)	—	—	—	—	—	2	0
RFCX18BE	0	—	—	—	—	—	—
RFCX24BE	3	0	—	—	—	—	—
RFCX30BE	8	5	0	—	—	—	—
RFCX36(BE,CE)	—	7	2	0	—	—	—
RFCX42CE	—	—	—	5	2	—	—
RFCX48(CE,DE)	—	—	—	5	2	0	—
RFCX60CE	—	—	—	—	9	2	0
RFCX60DE	—	—	—	—	29 oz TXV only	22 oz TXV only	20 oz TXV only
CF/CM/CU18(A,B)	0	—	—	—	—	—	—
CF/CM/CU24(A,B)	3	0	—	—	—	—	—
CF/CM/CU30(A,B,C)	8	5	0	—	—	—	—
CF/CM/CU36(A,B,C,D)	10	7	2	0	—	—	—
CF/CM/CU42(B,C,D)	—	11	2	2	0	—	—
CF/CM/CU48(C,D)	—	—	—	5	2	0	—
CF/CM/CU60(C,D)	—	—	—	—	9	2	0
CF/CM64D	—	—	—	—	29 oz TXV only	22 oz TXV only	20 oz TXV only
Note: Some of the combinations shown in this table require Advanced Main Air Circulating Fan indoor product. For approved coil only matches, refer to the <i>COOLING CAPACITY - Upflow, Downflow, and Horizontal Furnaces and Coils (Coil Only Ratings)</i> table in the <i>Technical Guide</i> .							

1. For applications requiring a TXV, use S1-1TVM*** series kit.
2. Approved orifice(s) shipped with the outdoor unit.
3. Systems matched with furnaces or air handlers not equipped with blower-off delays may require blower time delay.
4. Do not use CF coils in horizontal applications.
5. Charge adders shown above do not indicate that coils are rated for every application. Refer to the performance data tables in the *Technical Guide* for actual performance for specified system matches. Obtain certified system ratings from www.ahridirectory.org.

SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS - A COIL

Outdoor unit	RAC13L18B23 S	RAC13L24B24 S	RAC13L30B23 S	RAC13L36B24 S	RAC13L42B24 S	RAC13L48B23 S	RAC13L60B23 S
Required indoor metering device ^{1,2}	BA1	BA1	BA1	BC1	BC1	BC1	BC1
Indoor unit ^{3,4,5}	Additional charge (oz)						
XAF/XAH/XAUA18A	0	-	-	-	-	-	-
XAF/XAH/XAUA24B	2	0	-	-	-	-	-
XAF/XAH/XAUB30C	-	3	0	-	-	-	-
XAF/XAH/XAUB36D	-	-	6	0	-	-	-
XAF/XAH/XAUC42E	-	-	-	2	0	-	-
XAF/XAH/XAUC48F	-	-	-	-	2	0	-
XAF/XAH/XAUC60G	-	-	-	-	-	5	0
XAF/XAH/XAUD60G	-	-	-	-	-	5	0
XAF/XAH/XAUD60H	-	-	-	-	-	-	6
XAF/XAHB24B	2	0	-	-	-	-	-
XAF/XAHC30C	-	3	0	-	-	-	-
XAF/XAHC36D	-	-	6	0	-	-	-
XAF/XAHC60H	-	-	-	-	-	-	6
XAF/XAHD42E	-	-	-	2	0	-	-
XAF/XAHD48F	-	-	-	-	2	0	-
XAFA30D	-	-	6	-	-	-	-
XAFB18A	0	-	-	-	-	-	-
XAFB36E	-	-	-	2	-	-	-

Note: Some of the combinations shown in this table require Advanced Main Air Circulating Fan indoor product. For approved coil only matches, refer to the *COOLING CAPACITY - Upflow, Downflow, and Horizontal Furnaces and Coils (Coil Only Ratings)* table in the *Technical Guide*.

1. For applications that require a TXV, use S1-1TVM*** series kit.
2. A TXV kit must be used with these indoor units to obtain system performance.
3. Systems matched with furnaces or air handlers not equipped with blower-off delays may require blower time delay.
4. Do not use XAF/XAU coils in horizontal applications. Do not use XAH coils in upflow/downflow applications.
5. Charge adders shown above do not indicate that coils are rated for every application. Refer to the performance data tables in the *Technical Guide* for actual performance for specified system matches. Obtain certified system ratings from www.ahridirectory.org.

CHARGING

1. Check the factory unit charge listed on the unit nameplate to verify the refrigerant charge for the outdoor unit, the smallest matched indoor unit, and the 15 ft of interconnecting refrigeration piping.
2. Verify the indoor metering device and additional charge required for the specific matched indoor unit in the system using the table above.
3. Add additional charge for the amount of interconnecting refrigeration piping greater than 15 ft at the rate specified in the *Physical and electrical data* table.
4. For installations requiring additional charge, weigh in refrigerant for the specific matching indoor unit and actual refrigeration piping length.
5. After weighing in the charge adders for the matched indoor unit and refrigeration piping, verify the system operation against the temperatures and pressures in the charging chart for the outdoor unit. Locate the charging charts on the outdoor unit and also in the *Service Data Application Guide* on www.simplygettingthejob-done.com. Follow the subcool or superheat charging procedure in the *Installation Manual* according to the type of indoor metering device in the system, and allow 10 min after each charge adjustment for the system operation to stabilize. Record the charge adjustment made to match the charging chart.
6. Permanently stamp the unit nameplate with the **total system charge** defined as follows: total system charge = base charge (as shipped) + charge adder for matched indoor unit + charge adder for actual refrigeration piping length + charge adjustments to match the charging chart.

COOLING CAPACITY - With Air Handler Coils

UNIT MODEL	AIR HANDLER		COIL MODEL ¹	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B23S	RFCX18BE06MP22	17.5	—	650	17.9	14.9	15.00	12.75
RAC13L18B23S	RFCX24BE08MP22	17.5	—	625	18.0	14.7	15.00	12.75
RAC13L18B23S	RFCX30BE10MP22	17.5	—	600	18.0	14.4	15.00	12.75
RAC13L18B23S	RFCX18BP06MP22	17.5	—	650	17.6	14.6	13.50	11.50
RAC13L18B23S	RFCX24BP08MP22	17.5	—	675	17.6	15.0	13.50	11.50
RAC13L18B23S	ME08BN21	17.5	CF/CM18B	575	17.7	13.9	15.00	12.75
RAC13L18B23S	ME08BN21	17.5	CF/CM24B	575	17.8	14.0	15.00	12.75
RAC13L18B23S	ME08BN21	17.5	CF/CM30B	600	18.0	14.4	15.00	12.75
RAC13L18B23S	ME08BN21	17.5	CF/CM36B	575	18.0	14.1	15.00	12.75
RAC13L18B23S	ME12BN21	17.5	CF/CM18B	675	18.0	15.2	15.00	12.75
RAC13L18B23S	ME12BN21	17.5	CF/CM24B	675	18.0	15.4	15.00	12.75
RAC13L18B23S	ME12BN21	17.5	CF/CM30B	675	18.0	15.0	15.00	12.75
RAC13L18B23S	ME12BN21	17.5	CF/CM36B	675	18.0	15.0	15.00	12.75
RAC13L18B23S	ME12CN21	21.0	CF/CM24C	600	17.9	14.2	15.00	12.75
RAC13L18B23S	ME12CN21	21.0	CF/CM30C	600	18.0	14.4	15.00	12.75
RAC13L18B23S	ME12CN21	21.0	CF/CM36C	600	18.0	14.3	15.00	12.75
RAC13L24B24S	RFCX24BE08MP22	17.5	—	825	24.0	19.6	14.50	12.50
RAC13L24B24S	RFCX30BE10MP22	17.5	—	900	24.0	20.8	14.75	12.50
RAC13L24B24S	RFCX36BE12MP22	17.5	—	850	24.0	20.4	14.75	12.50
RAC13L24B24S	RFCX36CE12MP22	21.0	—	800	24.0	19.8	15.00	12.50
RAC13L24B24S	RFCX24BP08MP22	17.5	—	675	23.6	17.4	13.00	11.50
RAC13L24B24S	RFCX30BP10MP22	17.5	—	850	24.0	20.0	13.50	11.50
RAC13L24B24S	ME08BN21	17.5	CF/CM24B	800	24.0	19.3	14.50	12.50
RAC13L24B24S	ME08BN21	17.5	CF/CM30B	800	24.0	20.0	14.75	12.50
RAC13L24B24S	ME08BN21	17.5	CF/CM36B	800	24.0	19.9	14.75	12.50
RAC13L24B24S	ME08BN21	17.5	CF42B	775	24.0	19.5	14.75	12.50
RAC13L24B24S	ME12BN21	17.5	CF/CM24B	875	24.0	20.3	14.75	12.50
RAC13L24B24S	ME12BN21	17.5	CF/CM30B	875	24.0	20.5	15.00	12.50
RAC13L24B24S	ME12BN21	17.5	CF/CM36B	875	24.0	20.9	15.00	12.50
RAC13L24B24S	ME12BN21	17.5	CF42B	850	24.0	20.5	15.00	12.50
RAC13L24B24S	ME12CN21	21.0	CF/CM24C	850	24.0	20.0	14.75	12.50
RAC13L24B24S	ME12CN21	21.0	CF/CM30C	850	24.0	20.5	15.00	12.50
RAC13L24B24S	ME12CN21	21.0	CF/CM36C	850	24.0	20.5	15.00	12.50
RAC13L24B24S	ME12CN21	21.0	CF/CM42C	850	24.0	20.5	15.00	12.50
RAC13L24B24S	ME14DN21	24.5	CF/CM36D	875	24.0	20.9	15.00	12.50
RAC13L24B24S	ME14DN21	24.5	CF/CM42D	875	24.0	20.9	15.00	12.50
RAC13L24B24S	ME16CN21	21.0	CF/CM24C	925	24.0	19.4	14.50	12.50
RAC13L24B24S	ME16CN21	21.0	CF/CM30C	925	24.0	21.3	15.00	12.50
RAC13L24B24S	ME16CN21	21.0	CF/CM36C	925	24.0	21.5	15.00	12.50
RAC13L24B24S	ME16CN21	21.0	CF/CM42C	925	24.0	21.6	15.00	12.50
RAC13L30B23S	RFCX30BE10MP22	17.5	—	875	28.8	21.8	14.00	12.25
RAC13L30B23S	RFCX36BE12MP22	17.5	—	825	28.8	21.2	14.25	12.25
RAC13L30B23S	RFCX36CE12MP22	21.0	—	975	29.6	23.2	14.50	12.50
RAC13L30B23S	RFCX30BP10MP22	17.5	—	825	28.8	23.6	13.00	11.50
RAC13L30B23S	RFCX36CP12MP22	21.0	—	1125	29.6	24.6	13.00	11.50
RAC13L30B23S	ME08BN21	17.5	CF/CM30B	875	28.8	21.8	14.00	12.25
RAC13L30B23S	ME08BN21	17.5	CF/CM36B	900	29.2	22.2	14.25	12.25
RAC13L30B23S	ME08BN21	17.5	CF42B	875	29.2	22.0	14.25	12.25
RAC13L30B23S	ME12BN21	17.5	CF/CM30B	850	28.8	21.6	14.25	12.25
RAC13L30B23S	ME12BN21	17.5	CF/CM36B	850	29.0	21.4	14.50	12.50
RAC13L30B23S	ME12BN21	17.5	CF42B	850	29.0	21.6	14.50	12.50
RAC13L30B23S	ME12CN21	21.0	CF/CM30C	1000	29.4	23.2	14.50	12.50
RAC13L30B23S	ME12CN21	21.0	CF/CM36C	1000	29.6	23.4	14.50	12.50

COOLING CAPACITY - With Air Handler Coils (Continued)

UNIT MODEL	AIR HANDLER		COIL MODEL ¹	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L30B23S	ME12CN21	21.0	CF/CM42C	825	29.0	21.2	14.50	12.50
RAC13L30B23S	ME14DN21	24.5	CF/CM36D	1025	29.8	24.0	14.75	12.50
RAC13L30B23S	ME14DN21	24.5	CF/CM42D	1025	29.8	24.0	14.75	12.50
RAC13L30B23S	ME16CN21	21.0	CF/CM30C	900	29.0	22.2	14.25	12.25
RAC13L30B23S	ME16CN21	21.0	CF/CM36C	900	29.4	22.2	14.50	12.50
RAC13L30B23S	ME16CN21	21.0	CF/CM42C	900	29.4	22.4	14.50	12.50
RAC13L36B24S	RFCX36BE12MP22	17.5	—	1100	35.6	27.0	13.75	12.00
RAC13L36B24S	RFCX36CE12MP22	21.0	—	1175	36.0	27.8	14.25	12.25
RAC13L36B24S	RFCX42CE14MP22	21.0	—	1150	36.0	27.9	14.25	12.25
RAC13L36B24S	RFCX48CE16MP22	21.0	—	1050	36.0	26.7	14.50	12.25
RAC13L36B24S	RFCX48DE16MP22	24.5	—	1050	36.0	26.7	14.50	12.25
RAC13L36B24S	RFCX36BP12MP22	17.5	—	1150	35.4	27.4	13.00	11.25
RAC13L36B24S	RFCX36CP12MP22	21.0	—	1125	35.4	27.0	13.00	11.25
RAC13L36B24S	RFCX48CP16MP22	21.0	—	1300	36.0	29.0	13.00	11.25
RAC13L36B24S	ME12BN21	17.5	CF/CM36B	1050	35.6	26.6	14.00	12.00
RAC13L36B24S	ME12BN21	17.5	CF42B	1050	36.0	26.4	14.00	12.00
RAC13L36B24S	ME12CN21	21.0	CF/CM36C	1000	35.4	25.9	14.25	12.25
RAC13L36B24S	ME12CN21	21.0	CF/CM42C	1000	35.8	25.9	14.25	12.25
RAC13L36B24S	ME12CN21	21.0	CF/CM48C	1000	35.8	26.1	14.50	12.25
RAC13L36B24S	ME14DN21	24.5	CF/CM36D	1200	36.0	28.6	14.50	12.25
RAC13L36B24S	ME14DN21	24.5	CF/CM42D	1025	35.8	26.6	14.50	12.25
RAC13L36B24S	ME14DN21	24.5	CF/CM48D	1025	36.0	26.4	14.75	12.25
RAC13L36B24S	ME16CN21	21.0	CF/CM36C	1100	35.8	27.2	14.25	12.25
RAC13L36B24S	ME16CN21	21.0	CF/CM42C	1100	36.0	27.5	14.25	12.25
RAC13L36B24S	ME16CN21	21.0	CF/CM48C	1100	36.0	27.7	14.50	12.25
RAC13L36B24S	ME20DN21	24.5	CF/CM36D	1275	36.0	29.3	14.50	12.25
RAC13L36B24S	ME20DN21	24.5	CF/CM42D	1275	36.0	29.2	14.50	12.25
RAC13L36B24S	ME20DN21	24.5	CF/CM48D	1275	36.0	29.4	14.75	12.25
RAC13L42B24S	RFCX42CE14MP22	21.0	—	1350	41.5	32.1	14.00	12.00
RAC13L42B24S	RFCX48CE16MP22	21.0	—	1425	42.0	33.6	14.25	12.25
RAC13L42B24S	RFCX48DE16MP22	24.5	—	1475	42.0	34.3	14.50	12.50
RAC13L42B24S	RFCX60CE20MP23	21.0	—	1425	41.5	32.6	14.00	12.00
RAC13L42B24S	RFCX60DE20MP22	24.5	—	1350	42.0	32.9	14.25	12.50
RAC13L42B24S	RFCX48CP16MP22	21.0	—	1300	41.0	31.3	13.00	11.50
RAC13L42B24S	RFCX48DP16MP22	24.5	—	1475	41.5	33.4	13.00	11.50
RAC13L42B24S	RFCX60DP20MP24	24.5	—	1550	41.0	33.6	13.00	11.00
RAC13L42B24S	ME12CN21	21.0	CF/CM42C	1225	41.0	30.6	14.25	12.25
RAC13L42B24S	ME12CN21	21.0	CF/CM48C	1225	41.5	31.0	14.25	12.25
RAC13L42B24S	ME12CN21	21.0	CF/CM60C	1225	41.0	30.4	14.25	12.25
RAC13L42B24S	ME14DN21	24.5	CF/CM42D	1200	41.0	30.5	14.50	12.25
RAC13L42B24S	ME14DN21	24.5	CF/CM48D	1375	42.0	32.5	14.25	12.25
RAC13L42B24S	ME14DN21	24.5	CF/CM60D	1200	41.0	30.3	14.50	12.25
RAC13L42B24S	ME14DN21	24.5	CF/CM64D	1200	42.0	30.8	14.25	12.75
RAC13L42B24S	ME16CN21	21.0	CF/CM42C	1325	41.5	31.9	14.00	12.25
RAC13L42B24S	ME16CN21	21.0	CF/CM48C	1325	41.5	32.0	14.00	12.00
RAC13L42B24S	ME16CN21	21.0	CF/CM60C	1325	41.0	31.1	14.00	12.00
RAC13L42B24S	ME20DN21	24.5	CF/CM42D	1275	41.5	31.3	14.50	12.50
RAC13L42B24S	ME20DN21	24.5	CF/CM48D	1275	41.5	31.5	14.75	12.50
RAC13L42B24S	ME20DN21	24.5	CF/CM60D	1525	42.0	34.2	14.50	12.25
RAC13L42B24S	ME20DN21	24.5	CF/CM64D	1250	42.0	31.7	14.50	12.75
RAC13L48B23S	RFCX48CE16MP22	21.0	—	1425	47.5	35.0	14.25	12.25
RAC13L48B23S	RFCX48DE16MP22	24.5	—	1425	48.0	35.5	14.50	12.25
RAC13L48B23S	RFCX60DE20MP22	24.5	—	1400	48.0	35.0	14.75	12.25
RAC13L48B23S	RFCX48CP16MP22	21.0	—	1300	46.0	32.5	13.25	11.50

COOLING CAPACITY - With Air Handler Coils (Continued)

UNIT MODEL	AIR HANDLER		COIL MODEL ¹	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L48B23S	RFCX48DP16MP22	24.5	—	1475	47.5	35.0	13.00	11.00
RAC13L48B23S	RFCX60DP20MP24	24.5	—	1475	47.5	34.8	13.25	11.25
RAC13L48B23S	ME14DN21	24.5	CF/CM60D	1425	48.0	35.0	14.50	12.25
RAC13L48B23S	ME14DN21	24.5	CF/CM64D	1375	48.0	34.5	14.75	12.25
RAC13L48B23S	ME16CN21	21.0	CF/CM48C	1475	48.0	35.5	14.50	12.25
RAC13L48B23S	ME16CN21	21.0	CF/CM60C	1450	48.0	35.5	14.50	12.25
RAC13L48B23S	ME20DN21	24.5	CF/CM48D	1475	48.0	35.5	14.50	12.25
RAC13L48B23S	ME20DN21	24.5	CF/CM60D	1425	48.0	35.0	14.50	12.25
RAC13L48B23S	ME20DN21	24.5	CF/CM64D	1425	48.0	35.5	14.75	12.25
RAC13L60B23S	RFCX60CE20MP23	21.0	—	1600	56.0	41.0	13.25	11.25
RAC13L60B23S	RFCX60DE20MP22	24.5	—	1550	57.0	41.0	13.25	11.25
RAC13L60B23S	ME16CN21	21.0	CF/CM60C	1575	55.5	40.5	13.50	11.25
RAC13L60B23S	ME20DN21	24.5	CF/CM60D	1700	56.0	41.5	13.50	11.25
RAC13L60B23S	ME20DN21	24.5	CF/CM64D	1675	56.5	42.0	13.50	11.50

Rated in accordance with DOE test procedures (Federal Register 12-27-79 and 3-18-88) and ANSI/AHRI Standard 210/240.

Cooling MBH based on 80°F entering air temperature, 50% RH (Relative Humidity), and rated airflow.

EER (Energy Efficiency Ratio) is the total cooling output in BTUs at 95°F outdoor ambient divided by the total electric power in watt-hours at those conditions.

SEER (Seasonal Energy Efficiency Ratio) is the total cooling output in BTUs during a normal annual usage period for cooling divided by the total electric power input in watt-hours during the same period.

1. CM coils available with a factory installed horizontal drain pan. Refer to the Price pages for specific model number.

— = Not applicable.

COOLING CAPACITY - Upflow, Downflow, and Horizontal Furnaces and Coils (Coil Only Ratings)

UNIT MODEL	COIL		CFM RANGE (MINIMUM- MAXIMUM)	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER ¹	EER
					TOTAL	SENS.		
RAC13L18B23S	CF/CM/CU18A	14.5	450 - 750	600	17.2	13.0	13.00	11.50
RAC13L18B23S	CF/CM/CU18B	17.5	450 - 750	600	17.2	13.8	13.00	11.50
RAC13L18B23S	CF/CM/CU24A	14.5	450 - 750	600	17.4	13.9	13.00	11.50
RAC13L18B23S	CF/CM/CU24B	17.5	450 - 750	600	17.4	13.9	13.00	11.50
RAC13L18B23S	CF/CM/CU30A	14.5	450 - 750	600	17.6	14.1	13.00	11.50
RAC13L18B23S	CF/CM/CU30B	17.5	450 - 750	600	17.6	14.1	13.00	11.50
RAC13L18B23S	CF/CM/CU36B	17.5	450 - 750	600	17.6	14.0	13.25	11.75
RAC13L18B23S	CF/CM/CU36C	21.0	450 - 750	600	17.6	14.0	13.25	11.75
RAC13L18B23S	CF/CM24C	21.0	450 - 750	600	17.4	13.9	13.00	11.50
RAC13L18B23S	CF/CM30C	21.0	450 - 750	600	17.6	14.1	13.00	11.50
RAC13L18B23S	CF/CM36A	14.5	450 - 750	600	17.6	14.0	13.25	11.75
RAC13L18B23S	CF/CM36D	24.5	450 - 750	600	17.6	14.0	13.25	11.75
RAC13L18B23S	XAF/XAUA18A	14.5	450 - 750	600	17.2	13.5	13.00	11.50
RAC13L18B23S	XAF/XAUA24B	14.5	450 - 750	600	17.4	13.5	13.00	11.50
RAC13L18B23S	XAFB18A	17.5	450 - 750	600	17.2	13.5	13.00	11.50
RAC13L18B23S	XAFB24B	17.5	450 - 750	600	17.4	13.5	13.00	11.50
RAC13L18B23S	XAHA18A	14.5	450 - 750	600	17.2	13.5	13.00	11.50
RAC13L18B23S	XAHA24B	14.5	450 - 750	600	17.4	13.5	13.00	11.50
RAC13L18B23S	XAHB24B	17.5	450 - 750	600	17.4	13.5	13.00	11.50
RAC13L24B24S	CF/CM/CU24A	14.5	600 - 1000	800	23.6	16.8	13.00	11.50
RAC13L24B24S	CF/CM/CU24B	17.5	600 - 1000	800	23.6	18.9	13.00	11.50
RAC13L24B24S	CF/CM/CU30A	14.5	600 - 1000	800	23.6	19.3	13.00	11.50
RAC13L24B24S	CF/CM/CU30B	17.5	600 - 1000	800	23.6	19.3	13.00	11.50
RAC13L24B24S	CF/CM/CU36B	17.5	600 - 1000	800	23.8	19.2	13.00	11.50
RAC13L24B24S	CF/CM/CU36C	21.0	600 - 1000	800	23.8	19.2	13.00	11.50
RAC13L24B24S	CF/CM/CU42C	21.0	600 - 1000	800	24.0	19.3	13.00	11.50

COOLING CAPACITY - Upflow, Downflow, and Horizontal Furnaces and Coils (Coil Only Ratings) (Continued)

UNIT MODEL	COIL		CFM RANGE (MINIMUM- MAXIMUM)	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER ¹	EER
					TOTAL	SENS.		
RAC13L24B24S	CF/CM24C	21.0	600 - 1000	800	23.6	18.9	13.00	11.50
RAC13L24B24S	CF/CM30C	21.0	600 - 1000	800	23.6	19.3	13.00	11.50
RAC13L24B24S	CF/CM36A	14.5	600 - 1000	800	23.8	19.2	13.00	11.50
RAC13L24B24S	CF/CM36D	24.5	600 - 1000	800	23.8	19.2	13.00	11.50
RAC13L24B24S	CF/CM42D	24.5	600 - 1000	800	24.0	19.3	13.00	11.50
RAC13L24B24S	CF42B	17.5	600 - 1000	800	24.0	19.3	13.00	11.50
RAC13L24B24S	XAF/XAU424B	14.5	600 - 1000	800	23.6	18.3	13.00	11.50
RAC13L24B24S	XAF/XAUB30C	17.5	600 - 1000	800	23.6	18.9	13.00	11.50
RAC13L24B24S	XAFB24B	17.5	600 - 1000	800	23.6	18.3	13.00	11.50
RAC13L24B24S	XAFC30C	21.0	600 - 1000	800	23.6	18.9	13.00	11.50
RAC13L24B24S	XAHA24B	14.5	600 - 1000	800	23.6	18.3	13.00	11.50
RAC13L24B24S	XAHB24B	17.5	600 - 1000	800	23.6	18.3	13.00	11.50
RAC13L24B24S	XAHB30C	17.5	600 - 1000	800	23.6	18.9	13.00	11.50
RAC13L24B24S	XAHC30C	21.0	600 - 1000	800	23.6	18.9	13.00	11.50
RAC13L30B23S	CF/CM/CU30B	17.5	800 - 1200	1000	28.6	21.4	13.00	11.00
RAC13L30B23S	CF/CM/CU36B	17.5	800 - 1200	1000	29.0	23.0	13.00	11.25
RAC13L30B23S	CF/CM/CU36C	21.0	800 - 1200	1000	29.0	23.0	13.00	11.25
RAC13L30B23S	CF/CM/CU42C	21.0	800 - 1200	1000	29.0	22.8	13.00	11.25
RAC13L30B23S	CF/CM30C	21.0	800 - 1200	1000	28.8	22.8	13.00	11.00
RAC13L30B23S	CF/CM36A	14.5	800 - 1200	900	28.6	21.8	13.00	11.00
RAC13L30B23S	CF/CM36D	24.5	800 - 1200	1000	29.0	23.0	13.00	11.25
RAC13L30B23S	CF/CM42D	24.5	800 - 1200	1000	29.0	22.8	13.00	11.25
RAC13L30B23S	XAF/XAUB30C	17.5	800 - 1200	1000	29.0	22.4	13.00	11.00
RAC13L30B23S	XAF/XAUB36D	17.5	800 - 1200	1000	29.4	22.2	13.00	11.25
RAC13L30B23S	XAFA30D	14.5	800 - 1200	850	28.0	20.4	13.00	11.25
RAC13L30B23S	XAFC30C	21.0	800 - 1200	1000	29.0	22.4	13.00	11.00
RAC13L30B23S	XAFC36D	21.0	800 - 1200	1000	29.4	22.2	13.00	11.25
RAC13L30B23S	XAHB30C	17.5	800 - 1200	1000	29.0	22.4	13.00	11.00
RAC13L30B23S	XAHB36D	17.5	800 - 1200	900	29.2	21.2	13.00	11.25
RAC13L30B23S	XAHC30C	21.0	800 - 1200	1000	29.0	22.4	13.00	11.00
RAC13L30B23S	XAHC36D	21.0	800 - 1200	1000	29.4	22.2	13.00	11.25
RAC13L36B24S	CF/CM/CU36B	17.5	1000 - 1400	1200	35.4	23.6	13.00	11.00
RAC13L36B24S	CF/CM/CU36B	17.5	1000 - 1400	1200	35.4	23.6	13.00	11.00
RAC13L36B24S	CF/CM/CU36C	21.0	1000 - 1400	1200	35.4	28.0	13.00	11.00
RAC13L36B24S	CF/CM/CU42C	21.0	1000 - 1400	1200	35.8	27.6	13.00	11.00
RAC13L36B24S	CF/CM/CU48C	21.0	1000 - 1400	1200	35.8	27.8	13.00	11.25
RAC13L36B24S	CF/CM/CU48D	24.5	1000 - 1400	1200	35.8	27.8	13.00	11.25
RAC13L36B24S	CF/CM36D	24.5	1000 - 1400	1200	35.4	28.0	13.00	11.00
RAC13L36B24S	CF/CM42D	24.5	1000 - 1400	1200	35.8	27.6	13.00	11.00
RAC13L36B24S	CF42B	17.5	1000 - 1400	1200	35.8	27.6	13.00	11.00
RAC13L36B24S	XAF/XAUB36D	17.5	1000 - 1400	1150	35.4	24.0	13.00	11.00
RAC13L36B24S	XAF/XAUC42E	21.0	1000 - 1400	1200	35.8	24.6	13.00	11.00
RAC13L36B24S	XAFB36E	17.5	1000 - 1400	1100	35.6	23.8	13.00	11.00
RAC13L36B24S	XAFC36D	21.0	1000 - 1400	1200	35.4	24.4	13.00	11.00
RAC13L36B24S	XAFD42E	24.5	1000 - 1400	1200	35.8	24.6	13.00	11.00
RAC13L36B24S	XAHC36D	21.0	1000 - 1400	1150	35.4	24.0	13.00	11.00
RAC13L36B24S	XAHC42E	21.0	1000 - 1400	1150	35.8	24.2	13.00	11.00
RAC13L36B24S	XAHD42E	24.5	1000 - 1400	1200	35.8	24.6	13.00	11.00
RAC13L42B24S	CF/CM/CU42C	21.0	1200 - 1600	1400	40.5	29.0	13.00	11.00
RAC13L42B24S	CF/CM/CU42C	21.0	1200 - 1600	1400	40.5	29.0	13.00	11.00

COOLING CAPACITY - Upflow, Downflow, and Horizontal Furnaces and Coils (Coil Only Ratings) (Continued)

UNIT MODEL	COIL		CFM RANGE (MINIMUM- MAXIMUM)	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER ¹	EER
					TOTAL	SENS.		
RAC13L42B24S	CF/CM/CU48C	21.0	1200 - 1600	1400	41.0	32.1	13.00	11.25
RAC13L42B24S	CF/CM/CU48D	24.5	1200 - 1600	1400	41.0	32.1	13.00	11.25
RAC13L42B24S	CF/CM/CU60C	21.0	1200 - 1600	1400	40.5	31.6	13.00	11.25
RAC13L42B24S	CF/CM42D	24.5	1200 - 1600	1400	41.0	32.4	13.00	11.25
RAC13L42B24S	CF/CM64D	24.5	1200 - 1600	1400	42.0	33.1	13.00	11.50
RAC13L42B24S	XAF/XAUC42E	21.0	1200 - 1600	1350	41.0	29.4	13.00	11.25
RAC13L42B24S	XAF/XAUC48F	21.0	1200 - 1600	1400	41.0	29.4	13.00	11.25
RAC13L42B24S	XAFD42E	24.5	1200 - 1600	1400	41.0	29.8	13.00	11.25
RAC13L42B24S	XAFD48F	24.5	1200 - 1600	1400	41.0	29.4	13.00	11.25
RAC13L42B24S	XAHC48F	21.0	1200 - 1600	1400	40.5	29.4	13.00	11.25
RAC13L42B24S	XAHD42E	24.5	1200 - 1600	1275	40.5	28.6	13.00	11.25
RAC13L42B24S	XAHD48F	24.5	1200 - 1600	1400	41.0	29.4	13.00	11.25
RAC13L48B23S	CF/CM/CU48C	21.0	1400 - 1800	1600	46.0	33.5	13.00	11.00
RAC13L48B23S	CF/CM/CU48D	24.5	1400 - 1800	1600	46.0	33.5	13.00	11.00
RAC13L48B23S	CF/CM/CU60C	21.0	1400 - 1800	1600	48.0	36.0	13.00	11.25
RAC13L48B23S	CF/CM/CU60D	24.5	1400 - 1800	1600	48.0	36.0	13.00	11.25
RAC13L48B23S	CF/CM64D	24.5	1400 - 1800	1600	48.0	36.0	13.00	11.25
RAC13L48B23S	XAF/XAUC48F	21.0	1400 - 1800	1525	46.0	32.6	13.00	11.00
RAC13L48B23S	XAF/XAUC60G	21.0	1400 - 1800	1600	47.5	34.2	13.00	11.25
RAC13L48B23S	XAF/XAUD60G	24.5	1400 - 1800	1600	47.5	34.2	13.00	11.25
RAC13L48B23S	XAFD48F	24.5	1400 - 1800	1600	46.0	33.0	13.00	11.00
RAC13L48B23S	XAHC48F	21.0	1400 - 1800	1525	46.0	32.6	13.00	11.00
RAC13L48B23S	XAHC60G	21.0	1400 - 1800	1600	47.5	34.2	13.00	11.25
RAC13L48B23S	XAHD48F	24.5	1400 - 1800	1600	46.0	33.0	13.00	11.00
RAC13L48B23S	XAHD60G	21.0	1400 - 1800	1600	47.5	34.2	13.00	11.25
RAC13L60B23S	CF/CM/CU60C	21.0	1520 - 1920	1725	55.0	41.0	13.00	11.00
RAC13L60B23S	CF/CM/CU60D	24.5	1520 - 1920	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	CF/CM/CU60D	24.5	1520 - 1920	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	CF/CM64D	24.5	1520 - 1920	1725	56.5	42.5	13.00	11.00
RAC13L60B23S	XAF/XAUC60G	21.0	1520 - 1920	1725	55.0	38.0	13.00	11.00
RAC13L60B23S	XAF/XAUD60G	24.5	1520 - 1920	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	XAF/XAUD60H	24.5	1520 - 1920	1725	56.0	38.5	13.00	11.00
RAC13L60B23S	XAFC60H	21.0	1520 - 1920	1725	55.5	38.5	13.00	11.00
RAC13L60B23S	XAHC60G	21.0	1520 - 1920	1725	55.0	38.0	13.00	11.00
RAC13L60B23S	XAHC60H	21.0	1520 - 1920	1725	55.5	38.5	13.00	11.00
RAC13L60B23S	XAHD60G	21.0	1520 - 1920	1600	55.0	37.0	13.00	11.00
RAC13L60B23S	XAHD60H	24.5	1520 - 1920	1700	56.0	38.5	13.00	11.00

For rated condition information, see the *COOLING CAPACITY - With Air Handler Coils* table footnotes.

1. Requires a Blower Time Delay unless a standard furnace is equipped with one.

– = Not Applicable.

Furnaces that are listed individually in the above table use Coil Only Ratings.

COOLING CAPACITY - With High Efficiency Motor Furnaces¹

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B23S	RGF1L040AE12MP12	17.5	CF/CM/CU18B	675	17.8	15.0	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	CF/CM/CU24A	650	18.0	14.8	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	17.5	CF/CM/CU24B	700	18.0	15.5	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	17.5	CF/CM/CU30B	675	17.9	15.3	14.75	12.50
RAC13L18B23S	RGF1L040AE12MP12	17.5	CF/CM/CU36B	700	18.0	15.7	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	CF/CM18A	650	17.7	14.8	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	CF/CM30A	625	17.9	14.6	14.75	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	CF/CM36A	650	18.0	15.0	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	XAF/XAUA18A	650	17.7	14.0	14.75	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	XAF/XAUA24B	625	17.9	13.8	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	17.5	XAFB18A	675	17.8	14.2	14.75	12.50
RAC13L18B23S	RGF1L040AE12MP12	17.5	XAFB24B	675	17.9	14.3	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	XAHA18A	625	17.7	13.7	14.50	12.50
RAC13L18B23S	RGF1L040AE12MP12	14.5	XAHA24B	625	17.9	13.8	15.00	12.50
RAC13L18B23S	RGF1L040AE12MP12	17.5	XAHB24B	650	17.9	14.1	15.00	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	CF/CM/CU24A	725	18.0	15.7	15.00	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	CF/CM18A	725	18.0	15.7	15.00	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	CF/CM30A	725	18.0	15.8	15.00	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	CF/CM36A	725	18.0	16.0	15.00	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	XAF/XAUA18A	725	17.9	14.7	14.50	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	XAF/XAUA24B	725	18.0	14.8	14.75	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	XAHA18A	725	17.9	14.7	14.50	12.50
RAC13L18B23S	RGF1L060AE12MP12	14.5	XAHA24B	725	18.0	14.8	14.75	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	CF/CM/CU18B	725	18.0	15.7	15.00	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	CF/CM/CU24B	725	18.0	15.8	15.00	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	CF/CM/CU30B	725	17.9	15.9	15.00	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	CF/CM/CU36B	725	18.0	15.9	15.00	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	XAFB18A	725	18.0	14.7	14.75	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	XAFB24B	725	18.0	14.8	15.00	12.50
RAC13L18B23S	RGF1L080BE12MP12	17.5	XAHB24B	700	18.0	14.6	14.75	12.50
RAC13L18B23S	RGF1L100BE12MP12	17.5	CF/CM/CU18B	700	17.8	15.4	15.00	12.50
RAC13L18B23S	RGF1L100BE12MP12	17.5	CF/CM/CU30B	725	18.0	15.9	15.00	12.50
RAC13L18B23S	RGF1L100BE12MP12	17.5	CF/CM/CU36B	725	18.0	16.0	15.00	12.50
RAC13L18B23S	RGF1L100BE12MP12	21.0	CF/CM/CU36C	725	18.0	16.0	15.00	12.50
RAC13L18B23S	RGF1L100BE12MP12	21.0	CF/CM30C	725	18.0	15.9	15.00	12.50
RAC13L18B23S	RGF1L100BE12MP12	17.5	XAFB18A	700	17.8	14.4	14.75	12.50
RAC13L18B23S	RGF1L100BE12MP12	17.5	XAFB24B	700	18.0	14.6	15.00	12.50
RAC13L18B23S	RGF1L100BE12MP12	17.5	XAHB24B	700	18.0	14.6	15.00	12.50
RAC13L18B23S	RGF2L080BE12MP11	17.5	CF/CM/CU18B	675	18.0	15.2	15.00	12.75
RAC13L18B23S	RGF2L080BE12MP11	17.5	CF/CM/CU24B	675	18.0	15.4	15.00	12.75
RAC13L18B23S	RGF2L080BE12MP11	17.5	CF/CM/CU30B	675	18.0	15.0	15.00	12.75
RAC13L18B23S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	675	18.0	15.0	15.00	12.75
RAC13L18B23S	RGF2L080BE12MP11	17.5	CF/CM24C	675	18.0	15.4	15.00	12.75
RAC13L18B23S	RGF2L080BE12MP11	17.5	CF/CM30C	675	18.0	15.0	15.00	12.75
RAC13L18B23S	RGF2L080BE12MP11	17.5	XAFB18A	650	17.8	14.0	14.75	12.50
RAC13L18B23S	RGF2L080BE12MP11	17.5	XAFB24B	650	18.0	14.1	15.00	12.50
RAC13L18B23S	RGF2L080BE12MP11	17.5	XAHB24B	650	18.0	14.1	15.00	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU18A	550	17.4	13.4	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU18B	575	17.5	13.8	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU24A	550	17.5	13.5	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU24B	600	17.7	14.1	14.75	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU30A	575	17.6	14.0	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU30B	575	17.7	14.1	14.50	12.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM/CU36B	575	17.7	14.0	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	CF/CM36A	575	17.7	14.0	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	XAF/XAUA18A	550	17.3	12.9	14.25	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	XAF/XAUA24B	550	17.5	13.0	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	17.5	XAFB18A	500	17.0	12.3	14.25	12.50
RAC13L18B23S	RGF19026AE08MP13	17.5	XAFB24B	500	17.3	12.4	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	14.5	XAHA18A	575	17.4	13.2	14.00	12.25
RAC13L18B23S	RGF19026AE08MP13	14.5	XAHA24B	550	17.5	13.0	14.50	12.50
RAC13L18B23S	RGF19026AE08MP13	17.5	XAHB24B	575	17.6	13.3	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	17.5	CF/CM/CU18B	625	17.5	14.3	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	CF/CM/CU24A	600	17.7	14.1	14.75	12.50
RAC13L18B23S	RGF19040AE10MP13	17.5	CF/CM/CU24B	625	17.8	14.4	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	17.5	CF/CM/CU30B	625	17.9	14.5	14.25	12.25
RAC13L18B23S	RGF19040AE10MP13	17.5	CF/CM/CU36B	625	17.8	14.7	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	CF/CM18A	600	17.5	14.1	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	CF/CM30A	600	17.9	14.3	14.25	12.25
RAC13L18B23S	RGF19040AE10MP13	14.5	CF/CM36A	600	17.7	14.2	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	XAF/XAUA18A	600	17.5	13.4	14.25	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	XAF/XAUA24B	600	17.7	13.6	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	17.5	XAFB18A	625	17.5	13.7	14.25	12.50
RAC13L18B23S	RGF19040AE10MP13	17.5	XAFB24B	625	17.7	13.8	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	XAHA18A	600	17.5	13.4	14.25	12.50
RAC13L18B23S	RGF19040AE10MP13	14.5	XAHA24B	600	17.7	13.6	14.50	12.50
RAC13L18B23S	RGF19040AE10MP13	17.5	XAHB24B	625	17.7	13.8	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	CF/CM/CU18B	700	17.7	15.3	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	CF/CM/CU24A	675	18.0	15.1	14.75	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	CF/CM/CU24B	700	17.8	15.4	14.75	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	CF/CM/CU30B	700	17.9	15.7	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	CF/CM/CU36B	700	17.8	15.6	14.75	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	CF/CM18A	675	17.7	14.9	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	CF/CM30A	675	18.0	15.2	14.25	12.25
RAC13L18B23S	RGF19060AE10MP13	14.5	CF/CM36A	675	17.8	15.2	14.75	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	XAF/XAUA18A	675	17.7	14.2	14.25	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	XAF/XAUA24B	675	18.0	14.4	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	XAFB18A	700	17.7	14.5	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	XAFB24B	700	17.8	14.6	14.75	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	XAHA18A	675	17.7	14.2	14.25	12.50
RAC13L18B23S	RGF19060AE10MP13	14.5	XAHA24B	650	17.9	14.1	14.50	12.50
RAC13L18B23S	RGF19060AE10MP13	17.5	XAHB24B	675	17.8	14.4	14.50	12.50
RAC13L18B23S	RGF19060BE12MP13	17.5	XAFB18A	725	17.9	14.7	14.25	12.50
RAC13L18B23S	RGF19060BE12MP13	17.5	XAFB24B	725	18.0	14.9	14.50	12.50
RAC13L18B23S	RGF19060BE12MP13	17.5	XAHB24B	725	18.0	14.9	14.50	12.50
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU18A	675	17.7	15.0	13.75	12.25
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU18B	525	17.3	13.0	14.50	12.75
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU24A	675	17.7	15.1	14.00	12.25
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU24B	525	17.4	13.2	14.75	12.75
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU30A	675	18.0	15.0	13.75	12.50
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU30B	525	17.6	13.4	14.25	12.75
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM/CU36B	525	17.7	13.3	14.50	12.75
RAC13L18B23S	RGF29040AE12MP11	14.5	CF/CM36A	675	18.0	15.0	14.00	12.50
RAC13L18B23S	RGF29040AE12MP11	14.5	XAF/XAUA18A	500	17.1	12.3	14.00	12.25
RAC13L18B23S	RGF29040AE12MP11	14.5	XAF/XAUA24B	500	17.3	12.4	14.25	12.50
RAC13L18B23S	RGF29040AE12MP11	17.5	XAFB18A	500	17.0	12.3	14.00	12.25

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L18B23S	RGF29040AE12MP11	17.5	XAFB24B	500	17.2	12.4	14.25	12.50
RAC13L18B23S	RGF29040AE12MP11	14.5	XAHA18A	500	17.1	12.3	14.00	12.25
RAC13L18B23S	RGF29040AE12MP11	14.5	XAHA24B	500	17.3	12.4	14.25	12.50
RAC13L18B23S	RGF29040AE12MP11	17.5	XAHB24B	500	17.2	12.4	14.25	12.50
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF/CM/CU24A	650	24.0	17.3	14.25	12.25
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF/CM/CU24B	775	24.0	19.0	14.25	12.25
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF/CM/CU30A	725	24.0	18.6	14.25	12.25
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF/CM/CU30B	775	24.0	19.4	14.50	12.50
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF/CM/CU36B	775	24.0	19.5	14.50	12.50
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF/CM36A	725	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF1L040AE12MP12	14.5	CF42B	775	24.0	19.5	14.50	12.50
RAC13L24B24S	RGF1L040AE12MP12	14.5	XAF/XAUA24B	725	24.0	17.5	14.50	12.25
RAC13L24B24S	RGF1L040AE12MP12	17.5	XAF/XAUB30C	775	24.0	18.5	14.50	12.50
RAC13L24B24S	RGF1L040AE12MP12	17.5	XAFB24B	750	24.0	17.7	14.50	12.25
RAC13L24B24S	RGF1L040AE12MP12	14.5	XAHA24B	725	24.0	17.4	14.50	12.25
RAC13L24B24S	RGF1L040AE12MP12	17.5	XAHB24B	750	24.0	17.7	14.50	12.25
RAC13L24B24S	RGF1L040AE12MP12	17.5	XAHB30C	750	24.0	18.2	14.50	12.50
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF/CM/CU24A	725	24.0	18.4	14.25	12.25
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF/CM/CU24B	750	24.0	18.8	14.25	12.25
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF/CM/CU30A	775	24.0	19.4	14.25	12.25
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF/CM/CU30B	825	24.0	20.0	14.50	12.50
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF/CM/CU36B	750	24.0	19.0	14.50	12.50
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF/CM36A	725	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF1L060AE12MP12	14.5	CF42B	750	24.0	19.3	14.50	12.50
RAC13L24B24S	RGF1L060AE12MP12	14.5	XAF/XAUA24B	725	24.0	17.5	14.50	12.25
RAC13L24B24S	RGF1L060AE12MP12	17.5	XAF/XAUB30C	825	24.0	19.1	14.50	12.50
RAC13L24B24S	RGF1L060AE12MP12	17.5	XAFB24B	750	24.0	17.7	14.50	12.25
RAC13L24B24S	RGF1L060AE12MP12	14.5	XAHA24B	725	24.0	17.4	14.50	12.25
RAC13L24B24S	RGF1L060AE12MP12	17.5	XAHB24B	750	24.0	17.7	14.50	12.25
RAC13L24B24S	RGF1L060AE12MP12	17.5	XAHB30C	750	24.0	18.2	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM/CU24B	725	24.0	18.4	14.25	12.25
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM/CU30B	725	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM/CU36B	725	24.0	18.8	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM/CU36C	750	24.0	19.0	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM/CU42C	750	24.0	19.2	14.75	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM24C	750	24.0	18.8	14.25	12.25
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF/CM30C	750	24.0	19.0	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	CF42B	725	24.0	18.9	14.75	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	XAF/XAUB30C	725	24.0	18.0	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	XAFB24B	725	24.0	17.5	14.50	12.25
RAC13L24B24S	RGF1L080BE12MP12	21.0	XAFC30C	725	24.0	18.0	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	17.5	XAHB24B	700	24.0	17.2	14.50	12.25
RAC13L24B24S	RGF1L080BE12MP12	17.5	XAHB30C	700	24.0	17.7	14.50	12.50
RAC13L24B24S	RGF1L080BE12MP12	21.0	XAHC30C	725	24.0	18.0	14.50	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	CF/CM/CU36C	825	24.0	20.4	14.75	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	CF/CM/CU42C	825	24.0	20.0	15.00	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	CF/CM24C	825	24.0	19.8	14.50	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	CF/CM30C	825	24.0	20.0	15.00	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	CF/CM36D	825	24.0	20.4	14.75	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	CF/CM42D	825	24.0	20.2	14.75	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	XAFC30C	800	24.0	18.9	15.00	12.50
RAC13L24B24S	RGF1L080CE16MP12	21.0	XAHC30C	775	24.0	18.5	15.00	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM/CU24B	725	24.0	18.4	14.25	12.25

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM/CU30B	725	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM/CU36B	725	24.0	18.8	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM/CU36C	725	24.0	18.8	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM/CU42C	850	24.0	20.5	14.75	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM24C	725	24.0	18.4	14.25	12.25
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF/CM30C	725	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	CF42B	825	24.0	20.0	14.75	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	XAF/XAUB30C	850	24.0	19.5	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	XAFB24B	700	24.0	17.2	14.50	12.25
RAC13L24B24S	RGF1L100BE12MP12	21.0	XAFC30C	850	24.0	19.5	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	17.5	XAHB24B	700	24.0	17.2	14.50	12.25
RAC13L24B24S	RGF1L100BE12MP12	17.5	XAHB30C	700	24.0	17.6	14.50	12.50
RAC13L24B24S	RGF1L100BE12MP12	21.0	XAHC30C	825	24.0	19.1	14.50	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	CF/CM/CU36C	800	24.0	19.9	14.75	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	CF/CM/CU42C	800	24.0	19.8	15.00	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	CF/CM24C	800	24.0	19.3	14.50	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	CF/CM30C	800	24.0	20.0	14.75	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	CF/CM36D	800	24.0	19.9	14.75	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	CF/CM42D	800	24.0	19.8	14.75	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	XAFC30C	775	24.0	18.5	15.00	12.50
RAC13L24B24S	RGF1L100CE16MP12	21.0	XAHC30C	750	24.0	18.3	14.75	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	CF/CM/CU36C	825	24.0	20.6	15.00	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	CF/CM/CU42C	825	24.0	20.2	15.00	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	CF/CM24C	800	24.0	19.3	14.50	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	CF/CM30C	800	24.0	20.0	14.75	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	CF/CM36D	825	24.0	20.6	14.75	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	CF/CM42D	825	24.0	20.2	14.75	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	XAFC30C	775	24.0	18.5	15.00	12.50
RAC13L24B24S	RGF1L120CE16MP12	21.0	XAHC30C	775	24.0	18.5	15.00	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM/CU24B	775	24.0	19.0	14.25	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM/CU30B	775	24.0	19.4	14.50	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	775	24.0	19.5	14.50	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM/CU36C	850	24.0	20.4	14.50	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM/CU42C	700	24.0	18.4	14.75	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM24C	775	24.0	19.0	14.25	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF/CM30C	775	24.0	19.4	14.50	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	CF42B	750	24.0	19.1	14.75	12.50
RAC13L24B24S	RGF2L080BE12MP11	17.5	XAF/XAUB30C	775	24.0	18.5	14.25	12.25
RAC13L24B24S	RGF2L080BE12MP11	17.5	XAFB24B	750	24.0	17.7	14.25	12.00
RAC13L24B24S	RGF2L080BE12MP11	21.0	XAFC30C	775	23.8	18.5	14.25	12.25
RAC13L24B24S	RGF2L080BE12MP11	17.5	XAHB24B	825	24.0	18.5	14.25	12.00
RAC13L24B24S	RGF2L080BE12MP11	17.5	XAHB30C	825	24.0	19.1	14.25	12.25
RAC13L24B24S	RGF2L080BE12MP11	21.0	XAHC30C	750	23.8	18.2	14.25	12.25
RAC13L24B24S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	700	24.0	18.4	14.75	12.50
RAC13L24B24S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	700	24.0	18.4	14.75	12.50
RAC13L24B24S	RGF2L100CE16MP11	21.0	CF/CM24C	700	24.0	18.1	14.50	12.50
RAC13L24B24S	RGF2L100CE16MP11	21.0	CF/CM30C	700	24.0	18.4	14.75	12.50
RAC13L24B24S	RGF2L100CE16MP11	21.0	CF/CM36D	725	24.0	18.8	14.75	12.50
RAC13L24B24S	RGF2L100CE16MP11	21.0	CF/CM42D	725	24.0	18.9	15.00	12.50
RAC13L24B24S	RGF2L100CE16MP11	21.0	XAFC30C	725	24.0	17.9	14.75	12.25
RAC13L24B24S	RGF2L100CE16MP11	21.0	XAHC30C	725	24.0	18.0	14.75	12.25
RAC13L24B24S	RGF19026AE08MP13	14.5	CF/CM/CU24A	675	24.0	17.6	13.50	11.75
RAC13L24B24S	RGF19026AE08MP13	14.5	CF/CM/CU24B	600	23.8	16.7	13.75	12.00

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L24B24S	RGF19026AE08MP13	14.5	CF/CM/CU30A	675	24.0	17.8	13.75	12.00
RAC13L24B24S	RGF19026AE08MP13	14.5	CF/CM/CU30B	700	24.0	18.2	14.00	12.25
RAC13L24B24S	RGF19026AE08MP13	14.5	CF/CM/CU36B	700	24.0	18.2	14.00	12.25
RAC13L24B24S	RGF19026AE08MP13	14.5	CF/CM36A	675	24.0	17.8	14.00	12.25
RAC13L24B24S	RGF19026AE08MP13	14.5	CF42B	600	24.0	17.0	14.00	12.25
RAC13L24B24S	RGF19026AE08MP13	14.5	XAF/XAUA24B	675	24.0	16.9	13.75	12.00
RAC13L24B24S	RGF19026AE08MP13	17.5	XAF/XAUB30C	700	24.0	17.6	14.00	12.25
RAC13L24B24S	RGF19026AE08MP13	17.5	XAFB24B	675	23.8	17.0	14.00	12.00
RAC13L24B24S	RGF19026AE08MP13	14.5	XAHA24B	650	24.0	16.7	13.75	12.00
RAC13L24B24S	RGF19026AE08MP13	17.5	XAHB24B	675	23.8	16.9	14.00	12.00
RAC13L24B24S	RGF19026AE08MP13	17.5	XAHB30C	675	24.0	17.3	14.00	12.25
RAC13L24B24S	RGF19040AE10MP13	14.5	CF/CM/CU24A	600	23.2	16.5	13.50	11.50
RAC13L24B24S	RGF19040AE10MP13	14.5	CF/CM/CU24B	625	23.6	16.9	13.75	11.75
RAC13L24B24S	RGF19040AE10MP13	14.5	CF/CM/CU30A	600	24.0	16.8	14.00	12.25
RAC13L24B24S	RGF19040AE10MP13	14.5	CF/CM/CU30B	625	24.0	17.2	14.00	12.25
RAC13L24B24S	RGF19040AE10MP13	14.5	CF/CM/CU36B	625	24.0	17.2	14.00	12.25
RAC13L24B24S	RGF19040AE10MP13	14.5	CF/CM36A	675	24.0	17.8	14.00	12.25
RAC13L24B24S	RGF19040AE10MP13	14.5	CF42B	625	24.0	17.3	14.00	12.25
RAC13L24B24S	RGF19040AE10MP13	14.5	XAF/XAUA24B	600	23.6	16.0	13.50	11.75
RAC13L24B24S	RGF19040AE10MP13	17.5	XAF/XAUB30C	625	24.0	16.7	14.25	12.25
RAC13L24B24S	RGF19040AE10MP13	17.5	XAFB24B	625	23.6	16.3	14.00	12.00
RAC13L24B24S	RGF19040AE10MP13	14.5	XAHA24B	600	23.6	16.0	13.50	11.75
RAC13L24B24S	RGF19040AE10MP13	17.5	XAHB24B	625	23.6	16.3	14.00	12.00
RAC13L24B24S	RGF19040AE10MP13	17.5	XAHB30C	625	24.0	16.7	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	CF/CM/CU24A	675	24.0	17.7	13.75	11.75
RAC13L24B24S	RGF19060AE10MP13	14.5	CF/CM/CU24B	700	24.0	18.0	14.00	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	CF/CM/CU30A	675	24.0	17.8	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	CF/CM/CU30B	700	24.0	18.4	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	CF/CM/CU36B	700	24.0	18.2	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	CF/CM36A	675	24.0	18.0	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	CF42B	700	24.0	18.5	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	XAF/XAUA24B	675	24.0	16.9	14.00	12.00
RAC13L24B24S	RGF19060AE10MP13	17.5	XAF/XAUB30C	700	24.0	17.7	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	17.5	XAFB24B	700	24.0	17.2	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	14.5	XAHA24B	650	24.0	16.6	14.00	12.00
RAC13L24B24S	RGF19060AE10MP13	17.5	XAHB24B	675	24.0	16.9	14.25	12.25
RAC13L24B24S	RGF19060AE10MP13	17.5	XAHB30C	675	24.0	17.4	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM/CU24B	750	24.0	18.6	14.00	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM/CU30B	750	24.0	18.9	14.50	12.50
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM/CU36B	750	24.0	19.0	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM/CU36C	750	24.0	19.0	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM/CU42C	750	24.0	19.1	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM24C	750	24.0	18.6	14.00	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF/CM30C	750	24.0	18.9	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	CF42B	725	24.0	18.7	14.50	12.50
RAC13L24B24S	RGF19060BE12MP13	17.5	XAF/XAUB30C	725	24.0	17.9	14.50	12.50
RAC13L24B24S	RGF19060BE12MP13	17.5	XAFB24B	725	24.0	17.4	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	21.0	XAFC30C	725	24.0	17.9	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	XAHB24B	725	24.0	17.4	14.25	12.25
RAC13L24B24S	RGF19060BE12MP13	17.5	XAHB30C	725	24.0	17.9	14.50	12.50
RAC13L24B24S	RGF19060BE12MP13	21.0	XAHC30C	725	24.0	17.9	14.25	12.25
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM/CU24B	800	24.0	19.4	14.25	12.25
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM/CU30B	800	24.0	19.8	14.50	12.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM/CU36B	800	24.0	19.7	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM/CU36C	825	24.0	20.4	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM/CU42C	825	24.0	20.0	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM24C	800	24.0	19.4	14.25	12.25
RAC13L24B24S	RGF19080BE12MP13	17.5	CF/CM30C	825	24.0	20.0	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	CF42B	775	24.0	19.5	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	XAF/XAUB30C	800	24.0	18.8	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	XAFB24B	775	24.0	18.1	14.50	12.25
RAC13L24B24S	RGF19080BE12MP13	21.0	XAFC30C	800	24.0	18.8	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	17.5	XAHB24B	775	24.0	18.1	14.50	12.25
RAC13L24B24S	RGF19080BE12MP13	17.5	XAHB30C	775	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF19080BE12MP13	21.0	XAHC30C	775	24.0	18.6	14.50	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	CF/CM/CU36C	750	24.0	19.0	14.25	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	CF/CM/CU42C	750	24.0	19.2	14.75	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	CF/CM24C	750	24.0	18.8	14.50	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	CF/CM30C	750	24.0	19.0	14.50	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	CF/CM36D	925	24.0	21.3	14.25	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	CF/CM42D	750	24.0	19.2	14.75	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	XAFC30C	725	24.0	18.0	14.50	12.50
RAC13L24B24S	RGF19080CE16MP13	21.0	XAHC30C	875	24.0	19.6	14.50	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	CF/CM/CU36C	800	24.0	19.9	14.50	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	CF/CM/CU42C	800	24.0	19.8	14.75	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	CF/CM24C	775	24.0	19.0	14.25	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	CF/CM30C	800	24.0	20.0	14.50	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	CF/CM36D	800	24.0	19.9	14.50	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	CF/CM42D	800	24.0	19.8	14.75	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	XAFC30C	750	24.0	18.3	14.50	12.50
RAC13L24B24S	RGF19100CE16MP13	21.0	XAHC30C	750	24.0	18.2	14.50	12.50
RAC13L24B24S	RGF29040AE12MP11	14.5	CF/CM/CU24A	675	23.6	17.6	13.50	11.75
RAC13L24B24S	RGF29040AE12MP11	14.5	CF/CM/CU24B	700	24.0	17.8	13.50	11.50
RAC13L24B24S	RGF29040AE12MP11	14.5	CF/CM/CU30A	675	24.0	17.6	13.50	11.75
RAC13L24B24S	RGF29040AE12MP11	14.5	CF/CM/CU30B	700	24.0	18.3	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	14.5	CF/CM/CU36B	700	24.0	18.2	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	14.5	CF/CM36A	675	24.0	17.8	13.50	11.75
RAC13L24B24S	RGF29040AE12MP11	14.5	CF42B	675	24.0	18.0	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	14.5	XAF/XAUA24B	675	24.0	16.9	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	17.5	XAF/XAUB30C	700	24.0	17.7	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	17.5	XAFB24B	675	23.8	16.9	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	14.5	XAHA24B	675	24.0	16.9	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	17.5	XAHB24B	675	23.8	16.9	13.75	12.00
RAC13L24B24S	RGF29040AE12MP11	17.5	XAHB30C	675	24.0	17.4	13.75	12.00
RAC13L30B23S	RGF1L040AE12MP12	14.5	CF/CM36A	825	28.6	19.8	13.75	12.00
RAC13L30B23S	RGF1L040AE12MP12	17.5	XAF/XAUB30C	875	28.8	20.8	13.75	11.75
RAC13L30B23S	RGF1L040AE12MP12	17.5	XAF/XAUB36D	850	29.2	20.6	13.75	11.75
RAC13L30B23S	RGF1L040AE12MP12	14.5	XAFA30D	800	28.0	19.9	13.50	11.75
RAC13L30B23S	RGF1L040AE12MP12	17.5	XAHB30C	850	28.8	20.6	13.75	11.75
RAC13L30B23S	RGF1L040AE12MP12	17.5	XAHB36D	825	29.0	20.2	13.75	11.75
RAC13L30B23S	RGF1L060AE12MP12	14.5	CF/CM36A	825	28.8	19.8	13.75	12.00
RAC13L30B23S	RGF1L060AE12MP12	14.5	CF/CM36A	825	28.8	21.2	13.75	12.00
RAC13L30B23S	RGF1L060AE12MP12	17.5	XAF/XAUB30C	875	28.8	20.8	13.75	11.75
RAC13L30B23S	RGF1L060AE12MP12	17.5	XAF/XAUB36D	850	29.2	20.6	13.75	11.75
RAC13L30B23S	RGF1L060AE12MP12	14.5	XAFA30D	800	28.0	19.9	13.50	11.75
RAC13L30B23S	RGF1L060AE12MP12	17.5	XAHB30C	850	28.8	20.6	13.75	11.75

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L30B23S	RGF1L060AE12MP12	17.5	XAHB36D	825	29.0	20.2	13.75	11.75
RAC13L30B23S	RGF1L080BE12MP12	17.5	XAF/XAUB30C	900	29.2	21.2	14.00	12.00
RAC13L30B23S	RGF1L080BE12MP12	17.5	XAF/XAUB36D	875	29.4	20.8	14.00	12.00
RAC13L30B23S	RGF1L080BE12MP12	21.0	XAFC30C	900	29.0	21.2	13.75	11.75
RAC13L30B23S	RGF1L080BE12MP12	21.0	XAFC36D	875	29.2	20.8	13.75	11.75
RAC13L30B23S	RGF1L080BE12MP12	17.5	XAHB30C	875	29.0	20.8	13.75	12.00
RAC13L30B23S	RGF1L080BE12MP12	17.5	XAHB36D	850	29.2	20.6	14.00	12.00
RAC13L30B23S	RGF1L080BE12MP12	21.0	XAHC30C	875	28.8	20.8	13.75	11.75
RAC13L30B23S	RGF1L080BE12MP12	21.0	XAHC36D	875	29.2	20.8	13.75	11.75
RAC13L30B23S	RGF1L080CE16MP12	21.0	XAFC30C	925	29.4	21.4	14.25	12.25
RAC13L30B23S	RGF1L080CE16MP12	21.0	XAFC36D	900	29.6	21.0	14.25	12.25
RAC13L30B23S	RGF1L080CE16MP12	21.0	XAHC30C	900	29.2	21.2	14.00	12.25
RAC13L30B23S	RGF1L080CE16MP12	21.0	XAHC36D	875	29.4	20.6	14.25	12.25
RAC13L30B23S	RGF1L080CE20MP12	21.0	XAFC36D	1200	30.0	24.2	14.00	12.25
RAC13L30B23S	RGF1L080CE20MP12	21.0	XAHC30C	1200	30.0	24.4	13.75	12.00
RAC13L30B23S	RGF1L080CE20MP12	21.0	XAHC36D	1175	30.0	24.0	14.00	12.00
RAC13L30B23S	RGF1L100BE12MP12	17.5	XAF/XAUB30C	825	28.8	20.4	14.00	12.25
RAC13L30B23S	RGF1L100BE12MP12	17.5	XAF/XAUB36D	800	29.0	20.0	14.25	12.25
RAC13L30B23S	RGF1L100BE12MP12	21.0	XAFC30C	825	28.8	20.4	14.00	12.25
RAC13L30B23S	RGF1L100BE12MP12	21.0	XAFC36D	800	29.0	20.0	14.25	12.25
RAC13L30B23S	RGF1L100BE12MP12	17.5	XAHB30C	800	28.6	20.0	14.00	12.00
RAC13L30B23S	RGF1L100BE12MP12	17.5	XAHB36D	850	29.2	20.6	14.00	12.00
RAC13L30B23S	RGF1L100BE12MP12	21.0	XAHC30C	900	29.0	21.2	14.00	12.00
RAC13L30B23S	RGF1L100BE12MP12	21.0	XAHC36D	800	29.0	20.0	14.00	12.25
RAC13L30B23S	RGF1L100CE16MP12	21.0	XAFC30C	900	29.2	21.2	14.25	12.25
RAC13L30B23S	RGF1L100CE16MP12	21.0	XAFC36D	875	29.6	20.8	14.25	12.25
RAC13L30B23S	RGF1L100CE16MP12	21.0	XAHC30C	900	29.2	21.2	14.00	12.25
RAC13L30B23S	RGF1L100CE16MP12	21.0	XAHC36D	875	29.4	20.6	14.25	12.25
RAC13L30B23S	RGF1L100CE20MP12	21.0	XAFC36D	1200	30.0	24.2	14.00	12.00
RAC13L30B23S	RGF1L100CE20MP12	21.0	XAHC30C	1200	30.0	24.4	13.75	12.00
RAC13L30B23S	RGF1L100CE20MP12	21.0	XAHC36D	1175	30.0	24.0	14.00	12.00
RAC13L30B23S	RGF1L120CE16MP12	21.0	XAFC30C	925	29.4	21.4	14.25	12.25
RAC13L30B23S	RGF1L120CE16MP12	21.0	XAFC36D	900	29.6	21.0	14.25	12.25
RAC13L30B23S	RGF1L120CE16MP12	21.0	XAHC30C	900	29.2	21.2	14.25	12.25
RAC13L30B23S	RGF1L120CE16MP12	21.0	XAHC36D	875	29.6	20.8	14.25	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	CF/CM/CU30B	825	28.6	21.0	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	825	28.8	21.0	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	CF/CM/CU36C	825	28.8	21.0	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	CF/CM/CU42C	825	28.8	21.2	14.25	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	CF/CM30C	825	28.6	21.0	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	CF42B	950	29.4	22.8	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	XAF/XAUB30C	825	28.8	20.4	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	XAF/XAUB36D	800	29.0	20.0	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	21.0	XAFC30C	825	28.8	20.4	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	21.0	XAFC36D	800	29.0	20.0	14.00	12.25
RAC13L30B23S	RGF2L080BE12MP11	17.5	XAHB30C	800	28.6	20.0	14.00	12.00
RAC13L30B23S	RGF2L080BE12MP11	17.5	XAHB36D	925	29.6	21.4	13.75	12.00
RAC13L30B23S	RGF2L080BE12MP11	21.0	XAHC30C	800	28.6	20.0	14.00	12.00
RAC13L30B23S	RGF2L080BE12MP11	21.0	XAHC36D	800	29.0	20.0	14.00	12.25
RAC13L30B23S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	950	29.2	22.8	14.25	12.25
RAC13L30B23S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	950	29.6	23.0	14.25	12.25
RAC13L30B23S	RGF2L100CE16MP11	21.0	CF/CM30C	950	29.2	22.8	14.25	12.25
RAC13L30B23S	RGF2L100CE16MP11	21.0	CF/CM36D	975	29.6	23.2	14.25	12.25

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L30B23S	RGF2L100CE16MP11	21.0	CF/CM42D	975	29.8	23.2	14.50	12.50
RAC13L30B23S	RGF2L100CE16MP11	21.0	XAFC30C	950	29.4	21.6	14.25	12.25
RAC13L30B23S	RGF2L100CE16MP11	21.0	XAFC36D	950	29.8	21.6	14.25	12.50
RAC13L30B23S	RGF2L100CE16MP11	21.0	XAHC30C	950	29.4	21.6	14.25	12.25
RAC13L30B23S	RGF2L100CE16MP11	21.0	XAHC36D	925	29.8	21.4	14.25	12.25
RAC13L30B23S	RGF2L100CE20MP11	21.0	CF/CM/CU36C	1000	29.6	23.4	14.50	12.50
RAC13L30B23S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	1000	29.8	23.6	14.50	12.50
RAC13L30B23S	RGF2L100CE20MP11	21.0	CF/CM30C	1000	29.4	23.2	14.25	12.25
RAC13L30B23S	RGF2L100CE20MP11	21.0	CF/CM36D	1000	29.6	23.4	14.50	12.50
RAC13L30B23S	RGF2L100CE20MP11	21.0	CF/CM42D	1000	29.8	23.6	14.50	12.50
RAC13L30B23S	RGF2L100CE20MP11	21.0	XAFC30C	975	29.6	22.0	14.25	12.25
RAC13L30B23S	RGF2L100CE20MP11	21.0	XAFC36D	950	30.0	21.8	14.25	12.25
RAC13L30B23S	RGF2L100CE20MP11	21.0	XAHC30C	950	29.4	21.6	14.25	12.25
RAC13L30B23S	RGF2L100CE20MP11	21.0	XAHC36D	925	29.8	21.4	14.25	12.25
RAC13L30B23S	RGF19026AE08MP13	14.5	CF/CM/CU30B	850	28.4	21.3	13.25	11.50
RAC13L30B23S	RGF19026AE08MP13	14.5	CF/CM/CU36B	850	28.8	21.3	13.25	11.50
RAC13L30B23S	RGF19026AE08MP13	14.5	CF42B	850	28.8	21.4	13.25	11.50
RAC13L30B23S	RGF19026AE08MP13	17.5	XAF/XAUB30C	850	28.4	20.6	13.00	11.50
RAC13L30B23S	RGF19026AE08MP13	17.5	XAF/XAUB36D	850	28.8	20.4	13.25	11.50
RAC13L30B23S	RGF19026AE08MP13	14.5	XAFA30D	825	28.0	20.2	13.00	11.25
RAC13L30B23S	RGF19026AE08MP13	17.5	XAHB30C	850	28.4	20.6	13.00	11.50
RAC13L30B23S	RGF19026AE08MP13	17.5	XAHB36D	825	28.6	20.2	13.25	11.50
RAC13L30B23S	RGF19040AE10MP13	14.5	CF/CM36A	825	28.6	19.8	13.00	11.25
RAC13L30B23S	RGF19040AE10MP13	17.5	XAF/XAUB30C	800	28.4	20.0	13.25	11.50
RAC13L30B23S	RGF19040AE10MP13	17.5	XAF/XAUB36D	800	28.6	19.9	13.25	11.50
RAC13L30B23S	RGF19040AE10MP13	14.5	XAFA30D	825	28.0	20.2	13.00	11.25
RAC13L30B23S	RGF19040AE10MP13	17.5	XAHB30C	800	28.4	20.0	13.25	11.50
RAC13L30B23S	RGF19040AE10MP13	17.5	XAHB36D	825	28.8	20.2	13.25	11.50
RAC13L30B23S	RGF19060AE10MP13	14.5	CF/CM36A	800	28.6	19.5	13.25	11.50
RAC13L30B23S	RGF19060AE10MP13	17.5	XAF/XAUB30C	825	28.6	20.2	13.50	11.50
RAC13L30B23S	RGF19060AE10MP13	17.5	XAF/XAUB36D	800	28.8	20.0	13.50	11.50
RAC13L30B23S	RGF19060AE10MP13	14.5	XAFA30D	825	28.0	20.2	13.25	11.50
RAC13L30B23S	RGF19060AE10MP13	17.5	XAHB30C	800	28.4	19.9	13.50	11.50
RAC13L30B23S	RGF19060AE10MP13	17.5	XAHB36D	825	28.8	20.2	13.50	11.50
RAC13L30B23S	RGF19060BE12MP13	17.5	XAF/XAUB30C	925	29.0	21.4	13.50	11.50
RAC13L30B23S	RGF19060BE12MP13	17.5	XAF/XAUB36D	925	29.4	21.4	13.75	11.75
RAC13L30B23S	RGF19060BE12MP13	21.0	XAFC30C	925	28.8	21.4	13.50	11.50
RAC13L30B23S	RGF19060BE12MP13	21.0	XAFC36D	925	29.4	21.4	13.75	11.75
RAC13L30B23S	RGF19060BE12MP13	17.5	XAHB30C	900	29.0	21.2	13.50	11.50
RAC13L30B23S	RGF19060BE12MP13	17.5	XAHB36D	875	29.2	20.8	13.50	11.75
RAC13L30B23S	RGF19060BE12MP13	21.0	XAHC30C	925	28.8	21.4	13.50	11.50
RAC13L30B23S	RGF19060BE12MP13	21.0	XAHC36D	900	29.2	21.0	13.50	11.75
RAC13L30B23S	RGF19080BE12MP13	17.5	XAF/XAUB30C	925	29.2	21.4	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	17.5	XAF/XAUB36D	900	29.4	21.2	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	21.0	XAFC30C	925	29.0	21.4	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	21.0	XAFC36D	925	29.4	21.4	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	17.5	XAHB30C	900	29.0	21.0	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	17.5	XAHB36D	875	29.4	20.8	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	21.0	XAHC30C	925	29.0	21.4	13.75	11.75
RAC13L30B23S	RGF19080BE12MP13	21.0	XAHC36D	900	29.4	21.2	13.75	11.75
RAC13L30B23S	RGF19080CE16MP13	21.0	XAFC30C	875	29.2	21.0	14.00	12.25
RAC13L30B23S	RGF19080CE16MP13	21.0	XAFC36D	850	29.2	20.6	14.00	12.25
RAC13L30B23S	RGF19080CE16MP13	21.0	XAHC30C	850	28.8	20.6	14.00	12.00

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L30B23S	RGF19080CE16MP13	21.0	XAHC36D	825	29.0	20.2	14.00	12.25
RAC13L30B23S	RGF19080CE20MP13	21.0	XAFC30C	1200	30.0	24.4	13.75	12.00
RAC13L30B23S	RGF19080CE20MP13	21.0	XAFC36D	1175	30.0	24.0	14.00	12.00
RAC13L30B23S	RGF19080CE20MP13	21.0	XAHC30C	1200	30.0	24.4	13.75	12.00
RAC13L30B23S	RGF19080CE20MP13	21.0	XAHC36D	1150	30.0	23.8	14.00	12.00
RAC13L30B23S	RGF19100CE16MP13	21.0	XAFC30C	900	29.2	21.2	14.00	12.25
RAC13L30B23S	RGF19100CE16MP13	21.0	XAFC36D	900	29.6	21.0	14.25	12.25
RAC13L30B23S	RGF19100CE16MP13	21.0	XAHC30C	900	29.2	21.2	14.00	12.25
RAC13L30B23S	RGF19100CE16MP13	21.0	XAHC36D	875	29.4	20.6	14.00	12.25
RAC13L30B23S	RGF19100CE20MP13	21.0	XAFC30C	1175	29.8	24.0	13.75	12.00
RAC13L30B23S	RGF19100CE20MP13	21.0	XAFC36D	1150	30.0	23.8	14.00	12.25
RAC13L30B23S	RGF19100CE20MP13	21.0	XAHC30C	1175	29.8	24.0	13.75	12.00
RAC13L30B23S	RGF19100CE20MP13	21.0	XAHC36D	1150	30.0	23.8	14.00	12.00
RAC13L36B24S	RGF1L040AE12MP12	14.5	CF/CM/CU36B	1025	35.2	26.1	13.75	11.75
RAC13L36B24S	RGF1L040AE12MP12	14.5	CF42B	1000	35.6	25.7	13.75	11.75
RAC13L36B24S	RGF1L040AE12MP12	17.5	XAF/XAUB36D	1000	35.2	22.8	13.75	12.00
RAC13L36B24S	RGF1L040AE12MP12	17.5	XAFB36E	1000	35.4	23.0	13.75	12.00
RAC13L36B24S	RGF1L040AE12MP12	17.5	XAHB36D	1150	35.8	24.0	13.00	11.50
RAC13L36B24S	RGF1L060AE12MP12	14.5	CF/CM/CU36B	1025	35.2	26.1	13.75	11.75
RAC13L36B24S	RGF1L060AE12MP12	14.5	CF42B	1000	35.6	25.7	13.75	11.75
RAC13L36B24S	RGF1L060AE12MP12	17.5	XAF/XAUB36D	1000	35.2	22.8	13.75	12.00
RAC13L36B24S	RGF1L060AE12MP12	17.5	XAFB36E	1000	35.2	22.8	13.75	12.00
RAC13L36B24S	RGF1L060AE12MP12	17.5	XAHB36D	1175	35.8	24.2	13.00	11.50
RAC13L36B24S	RGF1L080BE12MP12	17.5	CF/CM/CU36B	1025	35.2	26.1	13.75	11.75
RAC13L36B24S	RGF1L080BE12MP12	17.5	CF/CM/CU36C	1050	35.4	26.5	13.75	11.75
RAC13L36B24S	RGF1L080BE12MP12	17.5	CF/CM/CU42C	1050	36.0	26.4	13.75	11.75
RAC13L36B24S	RGF1L080BE12MP12	17.5	CF/CM/CU48C	1050	35.8	26.4	13.75	11.75
RAC13L36B24S	RGF1L080BE12MP12	17.5	CF42B	1025	35.4	26.3	13.75	11.75
RAC13L36B24S	RGF1L080BE12MP12	17.5	XAF/XAUB36D	1000	35.2	22.8	13.75	12.25
RAC13L36B24S	RGF1L080BE12MP12	21.0	XAF/XAUC42E	1025	35.4	23.2	13.75	12.25
RAC13L36B24S	RGF1L080BE12MP12	17.5	XAFB36E	1000	35.2	22.8	13.75	12.25
RAC13L36B24S	RGF1L080BE12MP12	21.0	XAFC36D	1000	35.2	22.8	13.75	12.25
RAC13L36B24S	RGF1L080BE12MP12	17.5	XAHB36D	1150	35.6	24.0	13.00	11.50
RAC13L36B24S	RGF1L080BE12MP12	21.0	XAHC36D	1000	35.2	22.8	13.75	12.25
RAC13L36B24S	RGF1L080BE12MP12	21.0	XAHC42E	1000	35.2	22.8	13.75	12.25
RAC13L36B24S	RGF1L080CE16MP12	21.0	CF/CM/CU36C	1100	35.8	27.2	14.00	12.00
RAC13L36B24S	RGF1L080CE16MP12	21.0	CF/CM/CU42C	1100	36.0	27.3	14.00	12.25
RAC13L36B24S	RGF1L080CE16MP12	21.0	CF/CM/CU48C	1100	36.0	27.5	14.25	12.25
RAC13L36B24S	RGF1L080CE16MP12	21.0	CF/CM/CU48D	1100	36.0	27.5	14.25	12.00
RAC13L36B24S	RGF1L080CE16MP12	21.0	CF/CM36D	1125	36.0	27.5	14.00	12.00
RAC13L36B24S	RGF1L080CE16MP12	21.0	CF/CM42D	1125	36.0	27.4	14.25	12.00
RAC13L36B24S	RGF1L080CE16MP12	21.0	XAF/XAUC42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF1L080CE16MP12	21.0	XAFC36D	1050	35.6	23.2	14.00	12.50
RAC13L36B24S	RGF1L080CE16MP12	24.5	XAFD42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF1L080CE16MP12	21.0	XAHC36D	1025	35.4	23.0	14.00	12.50
RAC13L36B24S	RGF1L080CE16MP12	21.0	XAHC42E	1025	35.6	23.2	14.00	12.50
RAC13L36B24S	RGF1L080CE16MP12	24.5	XAHD42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF1L080CE20MP12	21.0	CF/CM/CU36C	1250	36.0	28.8	14.00	12.00
RAC13L36B24S	RGF1L080CE20MP12	21.0	CF/CM/CU42C	1250	36.0	28.6	14.00	12.25
RAC13L36B24S	RGF1L080CE20MP12	21.0	CF/CM/CU48C	1250	36.0	28.9	14.25	12.25
RAC13L36B24S	RGF1L080CE20MP12	21.0	CF/CM/CU48D	1275	36.0	29.3	14.25	12.00
RAC13L36B24S	RGF1L080CE20MP12	21.0	CF/CM36D	1275	36.0	29.1	14.00	12.00
RAC13L36B24S	RGF1L080CE20MP12	21.0	CF/CM42D	1275	36.0	29.1	14.00	12.00
RAC13L36B24S	RGF1L080CE20MP12	21.0	XAF/XAUC42E	1200	36.0	24.6	14.00	12.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L36B24S	RGF1L080CE20MP12	21.0	XAFC36D	1200	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF1L080CE20MP12	24.5	XAFD42E	1225	35.8	24.8	14.00	12.50
RAC13L36B24S	RGF1L080CE20MP12	21.0	XAHC36D	1175	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF1L080CE20MP12	21.0	XAHC42E	1175	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF1L080CE20MP12	24.5	XAHD42E	1200	35.8	24.6	14.00	12.50
RAC13L36B24S	RGF1L100BE12MP12	17.5	CF/CM/CU36B	1075	35.4	26.6	13.50	11.75
RAC13L36B24S	RGF1L100BE12MP12	17.5	CF/CM/CU36C	1100	35.6	27.0	13.75	11.75
RAC13L36B24S	RGF1L100BE12MP12	17.5	CF/CM/CU42C	1100	35.8	27.1	13.75	11.75
RAC13L36B24S	RGF1L100BE12MP12	17.5	CF/CM/CU48C	1100	36.0	27.4	13.75	11.75
RAC13L36B24S	RGF1L100BE12MP12	17.5	CF42B	1050	35.8	26.3	13.50	11.75
RAC13L36B24S	RGF1L100BE12MP12	17.5	XAF/XAUB36D	1050	35.4	23.2	13.50	12.25
RAC13L36B24S	RGF1L100BE12MP12	21.0	XAF/XAUC42E	1075	35.6	23.6	13.75	12.25
RAC13L36B24S	RGF1L100BE12MP12	17.5	XAFB36E	1050	35.6	23.4	13.50	12.25
RAC13L36B24S	RGF1L100BE12MP12	21.0	XAFC36D	1050	35.4	23.2	13.75	12.25
RAC13L36B24S	RGF1L100BE12MP12	17.5	XAHB36D	1025	35.2	23.0	13.50	12.25
RAC13L36B24S	RGF1L100BE12MP12	21.0	XAHC36D	1050	35.4	23.2	13.75	12.25
RAC13L36B24S	RGF1L100BE12MP12	21.0	XAHC42E	1050	35.6	23.4	13.75	12.25
RAC13L36B24S	RGF1L100CE16MP12	21.0	CF/CM/CU36C	1125	36.0	27.5	14.00	12.00
RAC13L36B24S	RGF1L100CE16MP12	21.0	CF/CM/CU42C	1125	36.0	27.4	14.00	12.00
RAC13L36B24S	RGF1L100CE16MP12	21.0	CF/CM/CU48C	1125	36.0	27.6	14.25	12.25
RAC13L36B24S	RGF1L100CE16MP12	21.0	CF/CM/CU48D	1125	36.0	27.6	14.25	12.00
RAC13L36B24S	RGF1L100CE16MP12	21.0	CF/CM36D	1125	36.0	27.5	14.00	12.00
RAC13L36B24S	RGF1L100CE16MP12	21.0	CF/CM42D	1125	36.0	27.4	14.00	12.00
RAC13L36B24S	RGF1L100CE16MP12	21.0	XAF/XAUC42E	1075	35.8	23.6	14.00	12.50
RAC13L36B24S	RGF1L100CE16MP12	21.0	XAFC36D	1075	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF1L100CE16MP12	24.5	XAFD42E	1075	35.8	23.6	14.00	12.50
RAC13L36B24S	RGF1L100CE16MP12	21.0	XAHC36D	1050	35.6	23.2	14.00	12.50
RAC13L36B24S	RGF1L100CE16MP12	21.0	XAHC42E	1050	35.6	23.4	14.00	12.50
RAC13L36B24S	RGF1L100CE16MP12	24.5	XAHD42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF1L100CE20MP12	21.0	CF/CM/CU36C	1250	36.0	28.8	14.00	12.00
RAC13L36B24S	RGF1L100CE20MP12	21.0	CF/CM/CU42C	1250	36.0	28.6	14.00	12.00
RAC13L36B24S	RGF1L100CE20MP12	21.0	CF/CM/CU48C	1250	36.0	28.9	14.25	12.25
RAC13L36B24S	RGF1L100CE20MP12	21.0	CF/CM/CU48D	1275	36.0	29.3	14.25	12.00
RAC13L36B24S	RGF1L100CE20MP12	21.0	CF/CM36D	1275	36.0	29.1	14.00	12.00
RAC13L36B24S	RGF1L100CE20MP12	21.0	CF/CM42D	1275	36.0	29.1	14.00	12.00
RAC13L36B24S	RGF1L100CE20MP12	21.0	XAF/XAUC42E	1200	36.0	24.6	14.00	12.50
RAC13L36B24S	RGF1L100CE20MP12	21.0	XAFC36D	1200	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF1L100CE20MP12	24.5	XAFD42E	1225	35.8	24.8	14.00	12.50
RAC13L36B24S	RGF1L100CE20MP12	21.0	XAHC36D	1175	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF1L100CE20MP12	21.0	XAHC42E	1175	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF1L100CE20MP12	24.5	XAHD42E	1200	35.8	24.6	14.00	12.50
RAC13L36B24S	RGF1L120CE16MP12	21.0	CF/CM/CU36C	1125	36.0	27.5	14.00	12.00
RAC13L36B24S	RGF1L120CE16MP12	21.0	CF/CM/CU42C	1125	36.0	27.4	14.00	12.00
RAC13L36B24S	RGF1L120CE16MP12	21.0	CF/CM/CU48C	1125	36.0	27.6	14.25	12.25
RAC13L36B24S	RGF1L120CE16MP12	21.0	CF/CM/CU48D	1125	36.0	27.6	14.25	12.00
RAC13L36B24S	RGF1L120CE16MP12	21.0	CF/CM36D	1125	36.0	27.5	14.00	12.00
RAC13L36B24S	RGF1L120CE16MP12	21.0	CF/CM42D	1125	36.0	27.4	14.00	12.00
RAC13L36B24S	RGF1L120CE16MP12	21.0	XAF/XAUC42E	1075	35.8	23.6	14.00	12.50
RAC13L36B24S	RGF1L120CE16MP12	21.0	XAFC36D	1075	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF1L120CE16MP12	24.5	XAFD42E	1075	35.8	23.6	14.00	12.50
RAC13L36B24S	RGF1L120CE16MP12	21.0	XAHC36D	1050	35.6	23.2	14.00	12.50
RAC13L36B24S	RGF1L120CE16MP12	21.0	XAHC42E	1050	35.6	23.4	14.00	12.50
RAC13L36B24S	RGF1L120CE16MP12	24.5	XAHD42E	1075	35.8	23.6	14.00	12.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L36B24S	RGF1L120CE20MP12	21.0	CF/CM/CU36C	1275	36.0	29.1	14.00	12.00
RAC13L36B24S	RGF1L120CE20MP12	21.0	CF/CM/CU42C	1275	36.0	29.1	14.00	12.00
RAC13L36B24S	RGF1L120CE20MP12	21.0	CF/CM/CU48C	1300	36.0	29.4	14.25	12.00
RAC13L36B24S	RGF1L120CE20MP12	21.0	CF/CM/CU48D	1300	36.0	29.4	14.25	12.00
RAC13L36B24S	RGF1L120CE20MP12	21.0	CF/CM36D	1300	35.4	27.2	13.50	11.50
RAC13L36B24S	RGF1L120CE20MP12	21.0	CF/CM42D	1300	36.0	29.6	14.00	12.00
RAC13L36B24S	RGF1L120CE20MP12	21.0	XAF/XAUC42E	1250	36.0	25.0	14.00	12.50
RAC13L36B24S	RGF1L120CE20MP12	21.0	XAFC36D	1225	36.0	24.6	14.00	12.50
RAC13L36B24S	RGF1L120CE20MP12	24.5	XAFD42E	1250	35.8	25.0	14.00	12.50
RAC13L36B24S	RGF1L120CE20MP12	21.0	XAHC36D	1225	36.0	24.6	14.00	12.50
RAC13L36B24S	RGF1L120CE20MP12	21.0	XAHC42E	1225	36.0	24.8	14.00	12.50
RAC13L36B24S	RGF1L120CE20MP12	24.5	XAHD42E	1225	35.8	24.8	14.00	12.50
RAC13L36B24S	RGF1L130DE20MP12	24.5	CF/CM/CU48D	1300	36.0	29.6	14.25	12.25
RAC13L36B24S	RGF1L130DE20MP12	24.5	CF/CM36D	1300	35.4	27.2	13.50	11.75
RAC13L36B24S	RGF1L130DE20MP12	24.5	CF/CM42D	1300	36.0	29.6	14.25	12.25
RAC13L36B24S	RGF1L130DE20MP12	24.5	XAFD42E	1250	36.0	25.0	14.00	12.50
RAC13L36B24S	RGF1L130DE20MP12	24.5	XAHD42E	1225	36.0	24.8	14.00	12.50
RAC13L36B24S	RGF2L080BE12MP11	17.5	CF/CM/CU36B	975	35.0	25.6	13.75	11.75
RAC13L36B24S	RGF2L080BE12MP11	17.5	CF/CM/CU36C	1000	35.2	25.8	13.75	12.00
RAC13L36B24S	RGF2L080BE12MP11	17.5	CF/CM/CU42C	1000	35.6	25.7	13.75	12.00
RAC13L36B24S	RGF2L080BE12MP11	17.5	CF/CM/CU48C	1000	35.6	25.9	14.00	12.00
RAC13L36B24S	RGF2L080BE12MP11	17.5	CF42B	1150	36.0	27.3	13.25	11.50
RAC13L36B24S	RGF2L080BE12MP11	17.5	XAF/XAUB36D	1150	35.8	24.0	13.25	11.75
RAC13L36B24S	RGF2L080BE12MP11	21.0	XAF/XAUC42E	1175	35.8	24.4	13.50	11.75
RAC13L36B24S	RGF2L080BE12MP11	17.5	XAFB36E	1150	35.8	24.2	13.50	11.75
RAC13L36B24S	RGF2L080BE12MP11	21.0	XAFC36D	1175	35.8	24.2	13.25	11.75
RAC13L36B24S	RGF2L080BE12MP11	17.5	XAHB36D	1125	35.6	23.8	13.25	11.75
RAC13L36B24S	RGF2L080BE12MP11	21.0	XAHC36D	1150	35.8	24.0	13.25	11.75
RAC13L36B24S	RGF2L080BE12MP11	21.0	XAHC42E	1150	35.8	24.2	13.50	11.75
RAC13L36B24S	RGF2L100CE16MP11	21.0	CF/CM/CU36C	1150	36.0	27.9	14.00	12.00
RAC13L36B24S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	1150	36.0	27.6	14.00	12.00
RAC13L36B24S	RGF2L100CE16MP11	21.0	CF/CM/CU48C	1150	36.0	27.7	14.25	12.00
RAC13L36B24S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	975	35.6	25.7	14.25	12.25
RAC13L36B24S	RGF2L100CE16MP11	21.0	CF/CM36D	975	35.2	25.7	14.00	12.00
RAC13L36B24S	RGF2L100CE16MP11	21.0	CF/CM42D	975	35.6	25.5	14.25	12.25
RAC13L36B24S	RGF2L100CE16MP11	21.0	XAF/XAUC42E	1125	36.0	24.0	14.00	12.50
RAC13L36B24S	RGF2L100CE16MP11	21.0	XAFC36D	1125	36.0	23.8	14.00	12.50
RAC13L36B24S	RGF2L100CE16MP11	24.5	XAFD42E	1150	35.8	24.2	14.00	12.50
RAC13L36B24S	RGF2L100CE16MP11	21.0	XAHC36D	1125	36.0	23.8	14.00	12.50
RAC13L36B24S	RGF2L100CE16MP11	21.0	XAHC42E	1100	36.0	23.8	14.00	12.50
RAC13L36B24S	RGF2L100CE16MP11	24.5	XAHD42E	1125	35.8	24.0	14.00	12.50
RAC13L36B24S	RGF2L100CE20MP11	21.0	CF/CM/CU36C	1000	35.2	25.7	14.25	12.25
RAC13L36B24S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	1000	35.8	25.9	14.25	12.25
RAC13L36B24S	RGF2L100CE20MP11	21.0	CF/CM/CU48C	1000	35.8	26.1	14.50	12.25
RAC13L36B24S	RGF2L100CE20MP11	21.0	CF/CM/CU48D	1000	35.8	26.1	14.50	12.25
RAC13L36B24S	RGF2L100CE20MP11	21.0	CF/CM36D	1000	35.4	25.9	14.25	12.25
RAC13L36B24S	RGF2L100CE20MP11	21.0	CF/CM42D	1000	35.8	25.9	14.25	12.25
RAC13L36B24S	RGF2L100CE20MP11	21.0	XAF/XAUC42E	1175	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF2L100CE20MP11	21.0	XAFC36D	1175	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF2L100CE20MP11	24.5	XAFD42E	1175	35.8	24.4	14.00	12.50
RAC13L36B24S	RGF2L100CE20MP11	21.0	XAHC36D	1150	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF2L100CE20MP11	21.0	XAHC42E	1150	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF2L100CE20MP11	24.5	XAHD42E	1175	35.8	24.4	14.00	12.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L36B24S	RGF19060AE10MP13	14.5	CF/CM/CU36B	1025	35.0	26.0	13.00	11.25
RAC13L36B24S	RGF19060AE10MP13	14.5	CF42B	1025	35.0	26.0	13.00	11.25
RAC13L36B24S	RGF19060AE10MP13	17.5	XAF/XAUB36D	1025	35.2	23.2	13.00	11.50
RAC13L36B24S	RGF19060AE10MP13	17.5	XAFB36E	1000	35.0	23.0	13.00	11.50
RAC13L36B24S	RGF19060AE10MP13	17.5	XAHB36D	1000	34.8	22.8	13.00	11.50
RAC13L36B24S	RGF19060BE12MP13	17.5	CF/CM/CU36B	1075	35.2	26.4	13.25	11.50
RAC13L36B24S	RGF19060BE12MP13	17.5	CF/CM/CU36C	1100	35.4	26.9	13.25	11.25
RAC13L36B24S	RGF19060BE12MP13	17.5	CF/CM/CU42C	1100	35.6	27.0	13.25	11.50
RAC13L36B24S	RGF19060BE12MP13	17.5	CF/CM/CU48C	1100	35.8	27.2	13.50	11.50
RAC13L36B24S	RGF19060BE12MP13	17.5	CF42B	1050	35.6	26.1	13.25	11.50
RAC13L36B24S	RGF19060BE12MP13	17.5	XAF/XAUB36D	1050	35.2	23.2	13.25	11.75
RAC13L36B24S	RGF19060BE12MP13	21.0	XAF/XAUC42E	1075	35.4	23.6	13.25	11.75
RAC13L36B24S	RGF19060BE12MP13	17.5	XAFB36E	1050	35.4	23.4	13.25	11.75
RAC13L36B24S	RGF19060BE12MP13	21.0	XAFC36D	1050	35.2	23.2	13.25	11.75
RAC13L36B24S	RGF19060BE12MP13	17.5	XAHB36D	1025	35.0	23.0	13.00	11.50
RAC13L36B24S	RGF19060BE12MP13	21.0	XAHC36D	1050	35.2	23.2	13.25	11.75
RAC13L36B24S	RGF19060BE12MP13	21.0	XAHC42E	1050	35.4	23.4	13.25	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	CF/CM/CU36B	1050	35.4	26.5	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	CF/CM/CU36C	1075	35.4	26.6	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	CF/CM/CU42C	1075	36.0	26.6	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	CF/CM/CU48C	1075	36.0	26.8	13.75	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	CF42B	1025	35.2	26.1	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	XAF/XAUB36D	1025	35.2	23.0	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	21.0	XAF/XAUC42E	1050	35.6	23.4	13.75	12.25
RAC13L36B24S	RGF19080BE12MP13	17.5	XAFB36E	1025	35.4	23.2	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	21.0	XAFC36D	1025	35.2	23.0	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	17.5	XAHB36D	1000	35.0	22.8	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	21.0	XAHC36D	1025	35.2	23.0	13.50	11.75
RAC13L36B24S	RGF19080BE12MP13	21.0	XAHC42E	1025	35.4	23.2	13.75	12.25
RAC13L36B24S	RGF19080CE16MP13	21.0	CF/CM/CU36C	1075	35.6	26.8	13.75	12.00
RAC13L36B24S	RGF19080CE16MP13	21.0	CF/CM/CU42C	1075	36.0	26.6	13.75	12.00
RAC13L36B24S	RGF19080CE16MP13	21.0	CF/CM/CU48C	1100	36.0	27.6	14.00	12.00
RAC13L36B24S	RGF19080CE16MP13	21.0	CF/CM/CU48D	1100	36.0	27.6	14.00	11.75
RAC13L36B24S	RGF19080CE16MP13	21.0	CF/CM36D	1100	35.6	27.0	13.75	11.75
RAC13L36B24S	RGF19080CE16MP13	21.0	CF/CM42D	1100	36.0	27.3	14.00	11.75
RAC13L36B24S	RGF19080CE16MP13	21.0	XAF/XAUC42E	1050	35.6	23.4	13.75	12.25
RAC13L36B24S	RGF19080CE16MP13	21.0	XAFC36D	1050	35.6	23.4	13.75	12.00
RAC13L36B24S	RGF19080CE16MP13	24.5	XAFD42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF19080CE16MP13	21.0	XAHC36D	1025	35.4	23.0	13.75	12.00
RAC13L36B24S	RGF19080CE16MP13	21.0	XAHC42E	1025	35.4	23.2	13.75	12.25
RAC13L36B24S	RGF19080CE16MP13	24.5	XAHD42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF19080CE20MP13	21.0	CF/CM/CU36C	1225	36.0	28.6	14.00	12.00
RAC13L36B24S	RGF19080CE20MP13	21.0	CF/CM/CU42C	1225	36.0	28.5	14.00	12.00
RAC13L36B24S	RGF19080CE20MP13	21.0	CF/CM/CU48C	1225	36.0	28.8	14.25	12.00
RAC13L36B24S	RGF19080CE20MP13	21.0	CF/CM/CU48D	1250	36.0	28.9	14.25	12.00
RAC13L36B24S	RGF19080CE20MP13	21.0	CF/CM36D	1250	36.0	29.0	14.00	12.00
RAC13L36B24S	RGF19080CE20MP13	21.0	CF/CM42D	1250	36.0	28.8	14.00	12.00
RAC13L36B24S	RGF19080CE20MP13	21.0	XAF/XAUC42E	1175	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF19080CE20MP13	21.0	XAFC36D	1175	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF19080CE20MP13	24.5	XAFD42E	1200	35.8	24.6	14.25	12.50
RAC13L36B24S	RGF19080CE20MP13	21.0	XAHC36D	1150	36.0	24.0	14.00	12.50
RAC13L36B24S	RGF19080CE20MP13	21.0	XAHC42E	1150	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF19080CE20MP13	24.5	XAHD42E	1175	35.8	24.4	14.00	12.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L36B24S	RGF19100CE16MP13	21.0	CF/CM/CU36C	1075	35.6	26.7	14.00	12.00
RAC13L36B24S	RGF19100CE16MP13	21.0	CF/CM/CU42C	1075	36.0	26.8	14.00	12.00
RAC13L36B24S	RGF19100CE16MP13	21.0	CF/CM/CU48C	1075	36.0	26.7	14.25	12.00
RAC13L36B24S	RGF19100CE16MP13	21.0	CF/CM/CU48D	1075	36.0	26.7	14.25	12.00
RAC13L36B24S	RGF19100CE16MP13	21.0	CF/CM36D	1075	35.6	26.7	14.00	12.00
RAC13L36B24S	RGF19100CE16MP13	21.0	CF/CM42D	1075	36.0	26.8	14.00	12.00
RAC13L36B24S	RGF19100CE16MP13	21.0	XAF/XAUC42E	1025	35.6	23.2	14.00	12.50
RAC13L36B24S	RGF19100CE16MP13	21.0	XAFC36D	1025	35.4	23.0	14.00	12.50
RAC13L36B24S	RGF19100CE16MP13	24.5	XAFD42E	1050	35.8	23.4	14.00	12.50
RAC13L36B24S	RGF19100CE16MP13	21.0	XAHC36D	1025	35.4	23.0	14.00	12.50
RAC13L36B24S	RGF19100CE16MP13	21.0	XAHC42E	1025	35.6	23.2	14.00	12.50
RAC13L36B24S	RGF19100CE16MP13	24.5	XAHD42E	1025	35.8	23.2	14.00	12.50
RAC13L36B24S	RGF19100CE20MP13	21.0	CF/CM/CU36C	1200	36.0	28.4	14.00	12.00
RAC13L36B24S	RGF19100CE20MP13	21.0	CF/CM/CU42C	1225	36.0	28.5	14.25	12.25
RAC13L36B24S	RGF19100CE20MP13	21.0	CF/CM/CU48C	1225	36.0	28.8	14.25	12.25
RAC13L36B24S	RGF19100CE20MP13	21.0	CF/CM/CU48D	1225	36.0	29.0	14.25	12.00
RAC13L36B24S	RGF19100CE20MP13	21.0	CF/CM36D	1225	36.0	28.6	14.00	12.00
RAC13L36B24S	RGF19100CE20MP13	21.0	CF/CM42D	1225	36.0	28.5	14.25	12.00
RAC13L36B24S	RGF19100CE20MP13	21.0	XAF/XAUC42E	1175	36.0	24.4	14.00	12.50
RAC13L36B24S	RGF19100CE20MP13	21.0	XAFC36D	1150	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF19100CE20MP13	24.5	XAFD42E	1175	35.8	24.4	14.00	12.50
RAC13L36B24S	RGF19100CE20MP13	21.0	XAHC36D	1150	36.0	24.0	14.00	12.50
RAC13L36B24S	RGF19100CE20MP13	21.0	XAHC42E	1150	36.0	24.2	14.00	12.50
RAC13L36B24S	RGF19100CE20MP13	24.5	XAHD42E	1150	35.8	24.2	14.00	12.50
RAC13L36B24S	RGF19120DE20MP13	24.5	CF/CM/CU48D	1250	36.0	28.9	14.25	12.25
RAC13L36B24S	RGF19120DE20MP13	24.5	CF/CM36D	1250	36.0	28.8	14.00	12.00
RAC13L36B24S	RGF19120DE20MP13	24.5	CF/CM42D	1250	36.0	28.6	14.00	12.00
RAC13L36B24S	RGF19120DE20MP13	24.5	XAFD42E	1200	36.0	24.6	14.00	12.50
RAC13L36B24S	RGF19120DE20MP13	24.5	XAHD42E	1175	36.0	24.4	14.00	12.50
RAC13L42B24S	RGF1L080BE12MP12	17.5	CF/CM/CU42C	1250	40.5	30.6	13.50	11.50
RAC13L42B24S	RGF1L080BE12MP12	17.5	CF/CM/CU48C	1250	41.0	31.0	13.50	11.75
RAC13L42B24S	RGF1L080BE12MP12	17.5	CF/CM/CU60C	1250	40.5	30.2	13.50	11.50
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM/CU42C	1275	41.5	31.4	14.00	12.00
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM/CU48C	1275	41.5	31.6	14.00	12.00
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM/CU48D	1300	41.5	31.6	14.00	12.00
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM/CU60C	1275	41.0	30.9	14.00	12.00
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM/CU60D	1300	41.0	31.0	14.00	12.00
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM42D	1300	41.5	31.6	14.00	12.00
RAC13L42B24S	RGF1L080CE16MP12	21.0	CF/CM64D	1275	42.0	31.6	14.00	12.25
RAC13L42B24S	RGF1L080CE16MP12	21.0	XAF/XAUC42E	1250	41.0	28.4	13.75	11.75
RAC13L42B24S	RGF1L080CE16MP12	21.0	XAF/XAUC48F	1250	41.0	28.0	13.50	11.75
RAC13L42B24S	RGF1L080CE16MP12	24.5	XAFD42E	1250	40.5	28.4	13.75	11.75
RAC13L42B24S	RGF1L080CE16MP12	24.5	XAFD48F	1275	40.5	28.2	13.75	11.75
RAC13L42B24S	RGF1L080CE16MP12	21.0	XAHC42E	1225	41.0	28.2	13.50	11.75
RAC13L42B24S	RGF1L080CE16MP12	21.0	XAHC48F	1275	41.0	28.2	13.75	11.75
RAC13L42B24S	RGF1L080CE16MP12	24.5	XAHD42E	1225	40.5	28.2	13.50	11.75
RAC13L42B24S	RGF1L080CE16MP12	24.5	XAHD48F	1250	40.5	28.0	13.50	11.75
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM/CU42C	1250	41.0	31.0	14.25	12.25
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM/CU48C	1250	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM/CU48D	1275	41.5	31.5	14.25	12.25
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM/CU60C	1250	41.0	30.6	14.25	12.00
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM/CU60D	1275	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM42D	1275	41.5	31.3	14.25	12.25

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B24S	RGF1L080CE20MP12	21.0	CF/CM64D	1250	42.0	31.3	14.25	12.50
RAC13L42B24S	RGF1L080CE20MP12	21.0	XAF/XAUC42E	1200	41.0	28.0	14.00	12.00
RAC13L42B24S	RGF1L080CE20MP12	21.0	XAF/XAUC48F	1225	41.0	27.8	13.75	12.00
RAC13L42B24S	RGF1L080CE20MP12	24.5	XAFD42E	1225	40.5	28.2	14.00	12.00
RAC13L42B24S	RGF1L080CE20MP12	24.5	XAFD48F	1225	40.5	27.8	14.00	11.75
RAC13L42B24S	RGF1L080CE20MP12	21.0	XAHC42E	1400	41.0	29.8	13.50	11.75
RAC13L42B24S	RGF1L080CE20MP12	21.0	XAHC48F	1225	41.0	27.8	13.75	11.75
RAC13L42B24S	RGF1L080CE20MP12	24.5	XAHD42E	1200	40.5	28.0	13.75	11.75
RAC13L42B24S	RGF1L080CE20MP12	24.5	XAHD48F	1225	40.5	27.8	13.75	11.75
RAC13L42B24S	RGF1L100BE12MP12	17.5	CF/CM/CU42C	1250	40.5	30.6	13.50	11.75
RAC13L42B24S	RGF1L100BE12MP12	17.5	CF/CM/CU48C	1250	41.0	31.0	13.50	11.75
RAC13L42B24S	RGF1L100BE12MP12	17.5	CF/CM/CU60C	1250	40.5	30.2	13.50	11.75
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM/CU42C	1300	41.5	31.6	13.75	12.00
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM/CU48C	1300	41.5	31.7	13.75	12.00
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM/CU48D	1325	41.5	32.0	14.00	12.00
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM/CU60C	1300	41.0	31.0	13.75	12.00
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM/CU60D	1325	41.0	31.2	14.00	12.00
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM42D	1325	41.5	31.9	14.00	12.00
RAC13L42B24S	RGF1L100CE16MP12	21.0	CF/CM64D	1325	42.0	32.3	14.00	12.25
RAC13L42B24S	RGF1L100CE16MP12	21.0	XAF/XAUC42E	1275	41.0	28.6	13.50	11.75
RAC13L42B24S	RGF1L100CE16MP12	21.0	XAF/XAUC48F	1275	41.0	28.2	13.50	11.75
RAC13L42B24S	RGF1L100CE16MP12	24.5	XAFD42E	1275	40.5	28.6	13.75	11.75
RAC13L42B24S	RGF1L100CE16MP12	24.5	XAFD48F	1300	40.5	28.4	13.75	11.75
RAC13L42B24S	RGF1L100CE16MP12	21.0	XAHC42E	1250	41.0	28.4	13.50	11.75
RAC13L42B24S	RGF1L100CE16MP12	21.0	XAHC48F	1300	41.0	28.4	13.75	11.75
RAC13L42B24S	RGF1L100CE16MP12	24.5	XAHD42E	1250	40.5	28.4	13.50	11.75
RAC13L42B24S	RGF1L100CE16MP12	24.5	XAHD48F	1275	40.5	28.2	13.50	11.75
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM/CU42C	1250	41.0	31.0	14.25	12.25
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM/CU48C	1250	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM/CU48D	1275	41.5	31.5	14.25	12.25
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM/CU60C	1250	41.0	30.6	14.25	12.00
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM/CU60D	1275	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM42D	1275	41.5	31.3	14.25	12.25
RAC13L42B24S	RGF1L100CE20MP12	21.0	CF/CM64D	1250	42.0	31.3	14.25	12.50
RAC13L42B24S	RGF1L100CE20MP12	21.0	XAF/XAUC42E	1200	41.0	28.0	13.75	12.00
RAC13L42B24S	RGF1L100CE20MP12	21.0	XAF/XAUC48F	1225	41.0	27.8	13.75	12.00
RAC13L42B24S	RGF1L100CE20MP12	24.5	XAFD42E	1225	40.5	28.2	14.00	12.00
RAC13L42B24S	RGF1L100CE20MP12	24.5	XAFD48F	1225	40.5	27.8	13.75	11.75
RAC13L42B24S	RGF1L100CE20MP12	21.0	XAHC42E	1375	41.0	29.6	13.50	11.75
RAC13L42B24S	RGF1L100CE20MP12	21.0	XAHC48F	1225	41.0	27.8	13.75	11.75
RAC13L42B24S	RGF1L100CE20MP12	24.5	XAHD42E	1200	40.5	28.0	13.75	11.75
RAC13L42B24S	RGF1L100CE20MP12	24.5	XAHD48F	1225	40.5	27.8	13.75	11.75
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM/CU42C	1300	41.5	31.6	14.00	12.00
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM/CU48C	1325	41.5	32.0	14.00	12.00
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM/CU48D	1325	41.5	32.0	14.00	12.00
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM/CU60C	1300	41.0	31.0	13.75	12.00
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM/CU60D	1325	41.0	31.2	14.00	12.00
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM42D	1325	41.5	31.9	14.00	12.00
RAC13L42B24S	RGF1L120CE16MP12	21.0	CF/CM64D	1325	42.0	32.2	14.00	12.25
RAC13L42B24S	RGF1L120CE16MP12	21.0	XAF/XAUC42E	1275	41.0	28.6	13.75	11.75
RAC13L42B24S	RGF1L120CE16MP12	21.0	XAF/XAUC48F	1275	41.0	28.2	13.50	11.75
RAC13L42B24S	RGF1L120CE16MP12	24.5	XAFD42E	1275	40.5	28.6	13.75	11.75
RAC13L42B24S	RGF1L120CE16MP12	24.5	XAFD48F	1300	40.5	28.4	13.75	11.75

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B24S	RGF1L120CE16MP12	21.0	XAHC42E	1250	41.0	28.4	13.50	11.75
RAC13L42B24S	RGF1L120CE16MP12	21.0	XAHC48F	1300	41.0	28.4	13.75	11.75
RAC13L42B24S	RGF1L120CE16MP12	24.5	XAHD42E	1250	40.5	28.4	13.50	11.75
RAC13L42B24S	RGF1L120CE16MP12	24.5	XAHD48F	1300	40.5	28.4	13.75	11.75
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM/CU42C	1275	41.5	31.4	14.00	12.25
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM/CU48C	1300	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM/CU48D	1300	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM/CU60C	1275	41.0	30.9	14.00	12.00
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM/CU60D	1325	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM42D	1300	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L120CE20MP12	21.0	CF/CM64D	1300	42.0	32.0	14.00	12.50
RAC13L42B24S	RGF1L120CE20MP12	21.0	XAF/XAUC42E	1250	41.0	28.4	13.75	12.00
RAC13L42B24S	RGF1L120CE20MP12	21.0	XAF/XAUC48F	1250	41.0	28.0	13.75	12.00
RAC13L42B24S	RGF1L120CE20MP12	24.5	XAFD42E	1250	40.5	28.4	14.00	11.75
RAC13L42B24S	RGF1L120CE20MP12	24.5	XAFD48F	1275	40.5	28.2	13.75	11.75
RAC13L42B24S	RGF1L120CE20MP12	21.0	XAHC42E	1225	41.0	28.2	13.75	11.75
RAC13L42B24S	RGF1L120CE20MP12	21.0	XAHC48F	1275	41.0	28.2	13.75	11.75
RAC13L42B24S	RGF1L120CE20MP12	24.5	XAHD42E	1225	40.5	28.2	13.75	11.75
RAC13L42B24S	RGF1L120CE20MP12	24.5	XAHD48F	1275	40.5	28.2	13.75	11.75
RAC13L42B24S	RGF1L130DE20MP12	24.5	CF/CM/CU48D	1300	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L130DE20MP12	24.5	CF/CM/CU60D	1325	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L130DE20MP12	24.5	CF/CM42D	1300	41.5	31.6	14.25	12.25
RAC13L42B24S	RGF1L130DE20MP12	24.5	CF/CM64D	1300	42.0	32.5	14.00	12.50
RAC13L42B24S	RGF1L130DE20MP12	24.5	XAFD42E	1250	41.0	28.4	14.00	12.00
RAC13L42B24S	RGF1L130DE20MP12	24.5	XAFD48F	1275	41.0	28.0	14.00	12.00
RAC13L42B24S	RGF1L130DE20MP12	24.5	XAHD42E	1225	41.0	28.2	13.75	12.00
RAC13L42B24S	RGF1L130DE20MP12	24.5	XAHD48F	1250	41.0	28.0	13.75	12.00
RAC13L42B24S	RGF2L080BE12MP11	17.5	CF/CM/CU42C	1200	40.5	30.1	13.50	11.75
RAC13L42B24S	RGF2L080BE12MP11	17.5	CF/CM/CU48C	1200	40.5	30.0	13.75	11.75
RAC13L42B24S	RGF2L080BE12MP11	17.5	CF/CM/CU60C	1200	40.5	29.9	13.50	11.75
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM/CU42C	1375	41.0	32.3	13.75	11.75
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM/CU48C	1375	41.5	32.1	13.75	11.75
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	1400	41.5	32.5	13.75	12.00
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM/CU60C	1375	41.0	31.6	13.75	11.75
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM/CU60D	1175	40.5	29.4	14.25	12.00
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM42D	1175	41.0	30.0	14.25	12.25
RAC13L42B24S	RGF2L100CE16MP11	21.0	CF/CM64D	1375	42.0	33.2	13.50	12.00
RAC13L42B24S	RGF2L100CE16MP11	21.0	XAF/XAUC42E	1350	41.0	29.6	13.50	11.75
RAC13L42B24S	RGF2L100CE16MP11	21.0	XAF/XAUC48F	1375	41.0	28.8	13.50	11.50
RAC13L42B24S	RGF2L100CE16MP11	24.5	XAFD42E	1375	41.0	29.6	13.50	11.75
RAC13L42B24S	RGF2L100CE16MP11	24.5	XAFD48F	1375	40.5	28.8	13.50	11.75
RAC13L42B24S	RGF2L100CE16MP11	21.0	XAHC42E	1325	41.0	29.0	13.50	11.50
RAC13L42B24S	RGF2L100CE16MP11	21.0	XAHC48F	1375	41.0	28.8	13.50	11.50
RAC13L42B24S	RGF2L100CE16MP11	24.5	XAHD42E	1350	41.0	29.6	13.50	11.50
RAC13L42B24S	RGF2L100CE16MP11	24.5	XAHD48F	1375	40.5	28.8	13.50	11.50
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM/CU42C	1225	41.0	30.6	14.25	12.25
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM/CU48C	1225	41.5	31.1	14.25	12.25
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM/CU48D	1250	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM/CU60C	1225	41.0	30.4	14.25	12.25
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM/CU60D	1250	41.0	30.6	14.25	12.25
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM42D	1250	41.0	31.0	14.25	12.25
RAC13L42B24S	RGF2L100CE20MP11	21.0	CF/CM64D	1225	42.0	31.3	14.25	12.50
RAC13L42B24S	RGF2L100CE20MP11	21.0	XAF/XAUC42E	1350	41.5	29.4	13.50	11.75

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B24S	RGF2L100CE20MP11	21.0	XAF/XAUC48F	1200	40.5	27.2	14.00	12.00
RAC13L42B24S	RGF2L100CE20MP11	24.5	XAFD42E	1375	41.0	29.6	13.75	11.75
RAC13L42B24S	RGF2L100CE20MP11	24.5	XAFD48F	1200	40.5	27.6	14.00	11.75
RAC13L42B24S	RGF2L100CE20MP11	21.0	XAHC42E	1325	41.5	29.2	13.50	11.75
RAC13L42B24S	RGF2L100CE20MP11	21.0	XAHC48F	1200	41.0	27.6	13.75	11.75
RAC13L42B24S	RGF2L100CE20MP11	24.5	XAHD42E	1325	41.0	29.2	13.50	11.75
RAC13L42B24S	RGF2L100CE20MP11	24.5	XAHD48F	1200	40.0	27.2	14.00	11.75
RAC13L42B24S	RGF19060BE12MP13	17.5	CF/CM/CU42C	1225	40.5	30.3	13.00	11.25
RAC13L42B24S	RGF19060BE12MP13	17.5	CF/CM/CU48C	1225	40.5	30.2	13.00	11.25
RAC13L42B24S	RGF19060BE12MP13	17.5	CF/CM/CU60C	1225	40.0	29.5	13.00	11.25
RAC13L42B24S	RGF19080BE12MP13	17.5	CF/CM/CU42C	1250	40.5	30.6	13.50	11.50
RAC13L42B24S	RGF19080BE12MP13	17.5	CF/CM/CU48C	1250	40.5	30.5	13.50	11.50
RAC13L42B24S	RGF19080BE12MP13	17.5	CF/CM/CU60C	1250	40.5	30.2	13.25	11.50
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM/CU42C	1275	41.0	30.9	13.75	11.75
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM/CU48C	1275	41.0	31.1	13.75	11.75
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM/CU48D	1275	41.0	31.1	13.75	12.00
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM/CU60C	1275	40.5	30.4	13.75	11.75
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM/CU60D	1275	40.5	30.4	13.75	11.75
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM42D	1275	41.0	30.9	13.75	12.00
RAC13L42B24S	RGF19080CE16MP13	21.0	CF/CM64D	1275	42.0	31.6	13.75	12.00
RAC13L42B24S	RGF19080CE16MP13	21.0	XAF/XAUC42E	1225	41.0	28.4	13.50	11.50
RAC13L42B24S	RGF19080CE16MP13	21.0	XAF/XAUC48F	1250	40.5	27.8	13.50	11.50
RAC13L42B24S	RGF19080CE16MP13	24.5	XAFD42E	1250	40.5	28.6	13.50	11.75
RAC13L42B24S	RGF19080CE16MP13	24.5	XAFD48F	1250	40.0	27.8	13.50	11.50
RAC13L42B24S	RGF19080CE16MP13	21.0	XAHC42E	1200	40.5	27.8	13.25	11.50
RAC13L42B24S	RGF19080CE16MP13	21.0	XAHC48F	1250	40.5	27.8	13.50	11.50
RAC13L42B24S	RGF19080CE16MP13	24.5	XAHD42E	1225	40.5	28.4	13.50	11.50
RAC13L42B24S	RGF19080CE16MP13	24.5	XAHD48F	1250	40.0	27.8	13.50	11.50
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM/CU42C	1225	41.0	30.6	14.25	12.25
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM/CU48C	1225	41.5	31.1	14.25	12.25
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM/CU48D	1250	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM/CU60C	1225	41.0	30.4	14.00	12.00
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM/CU60D	1450	41.5	32.9	14.00	12.00
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM42D	1250	41.0	31.0	14.25	12.25
RAC13L42B24S	RGF19080CE20MP13	21.0	CF/CM64D	1250	42.0	31.3	14.25	12.50
RAC13L42B24S	RGF19080CE20MP13	21.0	XAF/XAUC42E	1375	41.0	29.6	13.50	11.75
RAC13L42B24S	RGF19080CE20MP13	21.0	XAF/XAUC48F	1200	40.5	27.4	13.75	12.00
RAC13L42B24S	RGF19080CE20MP13	24.5	XAFD42E	1200	40.5	28.0	14.00	11.75
RAC13L42B24S	RGF19080CE20MP13	24.5	XAFD48F	1225	40.5	27.8	14.00	11.75
RAC13L42B24S	RGF19080CE20MP13	21.0	XAHC42E	1350	41.0	29.6	13.50	11.75
RAC13L42B24S	RGF19080CE20MP13	21.0	XAHC48F	1225	41.0	27.8	13.75	11.75
RAC13L42B24S	RGF19080CE20MP13	24.5	XAHD42E	1375	41.0	29.6	13.50	11.75
RAC13L42B24S	RGF19080CE20MP13	24.5	XAHD48F	1200	40.0	27.4	13.75	11.75
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM/CU42C	1275	41.0	30.9	13.75	12.00
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM/CU48C	1275	41.0	31.1	13.75	12.00
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM/CU48D	1300	41.5	31.7	13.75	12.00
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM/CU60C	1275	40.5	30.4	13.75	11.75
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM/CU60D	1300	41.0	31.0	13.75	12.00
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM42D	1300	41.5	31.6	13.75	12.00
RAC13L42B24S	RGF19100CE16MP13	21.0	CF/CM64D	1275	42.0	31.6	13.75	12.25
RAC13L42B24S	RGF19100CE16MP13	21.0	XAF/XAUC42E	1250	41.0	28.4	13.50	11.75
RAC13L42B24S	RGF19100CE16MP13	21.0	XAF/XAUC48F	1250	40.5	27.8	13.50	11.50
RAC13L42B24S	RGF19100CE16MP13	24.5	XAFD42E	1250	40.5	28.4	13.50	11.75

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L42B24S	RGF19100CE16MP13	24.5	XAFD48F	1250	40.0	27.8	13.50	11.50
RAC13L42B24S	RGF19100CE16MP13	21.0	XAHC42E	1225	41.0	28.4	13.50	11.50
RAC13L42B24S	RGF19100CE16MP13	21.0	XAHC48F	1250	40.5	27.8	13.50	11.50
RAC13L42B24S	RGF19100CE16MP13	24.5	XAHD42E	1225	40.5	28.4	13.50	11.50
RAC13L42B24S	RGF19100CE16MP13	24.5	XAHD48F	1250	40.0	27.8	13.50	11.50
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM/CU42C	1225	41.0	30.6	14.25	12.25
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM/CU48C	1225	41.5	31.1	14.25	12.25
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM/CU48D	1225	41.5	31.1	14.25	12.25
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM/CU60C	1225	41.0	30.4	14.25	12.25
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM/CU60D	1250	41.0	30.6	14.25	12.25
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM42D	1225	41.0	30.6	14.25	12.25
RAC13L42B24S	RGF19100CE20MP13	21.0	CF/CM64D	1225	42.0	31.3	14.25	12.50
RAC13L42B24S	RGF19100CE20MP13	21.0	XAF/XAUC42E	1375	41.0	29.6	13.75	11.75
RAC13L42B24S	RGF19100CE20MP13	21.0	XAF/XAUC48F	1400	41.5	29.2	13.75	11.75
RAC13L42B24S	RGF19100CE20MP13	24.5	XAFD42E	1400	41.0	29.8	13.75	11.75
RAC13L42B24S	RGF19100CE20MP13	24.5	XAFD48F	1200	40.0	27.2	14.00	11.75
RAC13L42B24S	RGF19100CE20MP13	21.0	XAHC42E	1350	41.0	29.4	13.50	11.75
RAC13L42B24S	RGF19100CE20MP13	21.0	XAHC48F	1200	40.5	27.2	13.75	11.75
RAC13L42B24S	RGF19100CE20MP13	24.5	XAHD42E	1375	41.0	29.6	13.75	11.75
RAC13L42B24S	RGF19100CE20MP13	24.5	XAHD48F	1200	40.0	27.2	14.00	11.75
RAC13L42B24S	RGF19120DE20MP13	24.5	CF/CM/CU48D	1250	41.0	30.9	14.25	12.25
RAC13L42B24S	RGF19120DE20MP13	24.5	CF/CM/CU60D	1250	41.0	30.6	14.00	12.00
RAC13L42B24S	RGF19120DE20MP13	24.5	CF/CM42D	1250	41.0	31.0	14.25	12.25
RAC13L42B24S	RGF19120DE20MP13	24.5	CF/CM64D	1250	42.0	31.3	14.25	12.50
RAC13L42B24S	RGF19120DE20MP13	24.5	XAFD42E	1200	41.0	28.0	13.75	12.00
RAC13L42B24S	RGF19120DE20MP13	24.5	XAFD48F	1225	41.0	27.8	13.75	12.00
RAC13L42B24S	RGF19120DE20MP13	24.5	XAHD42E	1400	41.5	29.8	13.50	11.50
RAC13L42B24S	RGF19120DE20MP13	24.5	XAHD48F	1200	40.5	27.4	13.75	11.75
RAC13L48B23S	RGF1L080CE16MP12	21.0	XAF/XAUC48F	1550	46.0	32.6	13.00	11.00
RAC13L48B23S	RGF1L080CE16MP12	21.0	XAF/XAUC60G	1575	47.5	33.8	13.00	11.50
RAC13L48B23S	RGF1L080CE16MP12	24.5	XAF/XAUD60G	1575	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF1L080CE16MP12	24.5	XAFD48F	1575	46.0	32.8	13.00	11.00
RAC13L48B23S	RGF1L080CE16MP12	21.0	XAHC48F	1550	46.0	32.6	13.00	11.00
RAC13L48B23S	RGF1L080CE16MP12	21.0	XAHC60G	1575	47.5	33.8	13.00	11.50
RAC13L48B23S	RGF1L080CE16MP12	24.5	XAHD48F	1575	46.0	32.8	13.00	11.00
RAC13L48B23S	RGF1L080CE16MP12	21.0	XAHD60G	1550	47.0	33.4	13.00	11.25
RAC13L48B23S	RGF1L080CE20MP12	21.0	XAF/XAUC48F	1425	46.0	31.6	13.25	11.50
RAC13L48B23S	RGF1L080CE20MP12	21.0	XAF/XAUC60G	1450	47.5	32.8	13.75	12.00
RAC13L48B23S	RGF1L080CE20MP12	24.5	XAF/XAUD60G	1450	47.5	32.8	13.75	12.00
RAC13L48B23S	RGF1L080CE20MP12	24.5	XAFD48F	1425	46.0	31.6	13.50	11.50
RAC13L48B23S	RGF1L080CE20MP12	21.0	XAHC48F	1425	46.0	31.6	13.25	11.50
RAC13L48B23S	RGF1L080CE20MP12	21.0	XAHC60G	1450	47.5	32.8	13.75	12.00
RAC13L48B23S	RGF1L080CE20MP12	24.5	XAHD48F	1425	46.0	31.6	13.50	11.50
RAC13L48B23S	RGF1L080CE20MP12	21.0	XAHD60G	1425	47.0	32.4	13.75	11.75
RAC13L48B23S	RGF1L100CE16MP12	21.0	XAF/XAUC48F	1550	46.0	32.6	13.00	11.00
RAC13L48B23S	RGF1L100CE16MP12	21.0	XAF/XAUC60G	1575	47.5	33.8	13.00	11.50
RAC13L48B23S	RGF1L100CE16MP12	24.5	XAF/XAUD60G	1575	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF1L100CE16MP12	24.5	XAFD48F	1575	46.0	32.8	13.00	11.25
RAC13L48B23S	RGF1L100CE16MP12	21.0	XAHC48F	1550	46.0	32.6	13.00	11.00
RAC13L48B23S	RGF1L100CE16MP12	21.0	XAHC60G	1575	47.5	33.8	13.00	11.50
RAC13L48B23S	RGF1L100CE16MP12	24.5	XAHD48F	1550	46.0	32.6	13.00	11.00
RAC13L48B23S	RGF1L100CE16MP12	21.0	XAHD60G	1550	47.0	33.4	13.00	11.25
RAC13L48B23S	RGF1L100CE20MP12	21.0	XAF/XAUC48F	1400	46.0	31.4	13.25	11.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L48B23S	RGF1L100CE20MP12	21.0	XAF/XAUC60G	1425	47.0	32.4	13.75	12.00
RAC13L48B23S	RGF1L100CE20MP12	24.5	XAF/XAUD60G	1425	47.0	32.4	13.75	12.00
RAC13L48B23S	RGF1L100CE20MP12	24.5	XAFD48F	1400	46.0	31.4	13.50	11.50
RAC13L48B23S	RGF1L100CE20MP12	21.0	XAHC48F	1400	46.0	31.4	13.25	11.50
RAC13L48B23S	RGF1L100CE20MP12	21.0	XAHC60G	1425	47.0	32.4	13.75	12.00
RAC13L48B23S	RGF1L100CE20MP12	24.5	XAHD48F	1400	46.0	31.4	13.25	11.50
RAC13L48B23S	RGF1L100CE20MP12	21.0	XAHD60G	1400	47.0	32.2	13.75	11.75
RAC13L48B23S	RGF1L120CE16MP12	21.0	XAF/XAUC48F	1550	46.0	32.6	13.00	11.25
RAC13L48B23S	RGF1L120CE16MP12	21.0	XAF/XAUC60G	1575	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF1L120CE16MP12	24.5	XAF/XAUD60G	1575	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF1L120CE16MP12	24.5	XAFD48F	1575	46.5	33.2	13.00	11.25
RAC13L48B23S	RGF1L120CE16MP12	21.0	XAHC48F	1550	46.0	32.6	13.00	11.00
RAC13L48B23S	RGF1L120CE16MP12	21.0	XAHC60G	1575	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF1L120CE16MP12	24.5	XAHD48F	1575	46.5	33.2	13.00	11.25
RAC13L48B23S	RGF1L120CE16MP12	21.0	XAHD60G	1575	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF1L120CE20MP12	21.0	XAF/XAUC48F	1400	46.0	31.4	13.50	11.50
RAC13L48B23S	RGF1L120CE20MP12	21.0	XAF/XAUC60G	1425	47.0	32.4	13.75	12.00
RAC13L48B23S	RGF1L120CE20MP12	24.5	XAF/XAUD60G	1425	47.0	32.4	13.75	12.00
RAC13L48B23S	RGF1L120CE20MP12	24.5	XAFD48F	1425	46.0	31.6	13.50	11.75
RAC13L48B23S	RGF1L120CE20MP12	21.0	XAHC48F	1400	46.0	31.4	13.25	11.50
RAC13L48B23S	RGF1L120CE20MP12	21.0	XAHC60G	1425	47.0	32.4	13.75	12.00
RAC13L48B23S	RGF1L120CE20MP12	24.5	XAHD48F	1400	46.0	31.4	13.50	11.50
RAC13L48B23S	RGF1L120CE20MP12	21.0	XAHD60G	1400	47.0	32.2	13.75	11.75
RAC13L48B23S	RGF1L130DE20MP12	24.5	XAF/XAUD60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF1L130DE20MP12	24.5	XAFD48F	1400	46.0	31.4	13.50	11.75
RAC13L48B23S	RGF1L130DE20MP12	24.5	XAHD48F	1400	46.0	31.4	13.50	11.75
RAC13L48B23S	RGF1L130DE20MP12	21.0	XAHD60G	1600	47.5	34.0	13.25	11.50
RAC13L48B23S	RGF2L100CE16MP11	21.0	CF/CM/CU48C	1350	46.0	33.6	13.75	11.75
RAC13L48B23S	RGF2L100CE16MP11	21.0	CF/CM/CU48D	1375	46.5	34.4	13.75	11.75
RAC13L48B23S	RGF2L100CE16MP11	21.0	CF/CM/CU60C	1350	46.5	34.0	14.00	11.75
RAC13L48B23S	RGF2L100CE16MP11	21.0	CF/CM/CU60D	1375	46.5	34.2	14.00	11.75
RAC13L48B23S	RGF2L100CE16MP11	21.0	CF/CM64D	1350	47.0	34.2	14.25	12.00
RAC13L48B23S	RGF2L100CE16MP11	21.0	XAF/XAUC48F	1525	46.0	32.4	13.00	11.25
RAC13L48B23S	RGF2L100CE16MP11	21.0	XAF/XAUC60G	1525	47.0	33.2	13.00	11.50
RAC13L48B23S	RGF2L100CE16MP11	24.5	XAF/XAUD60G	1550	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF2L100CE16MP11	24.5	XAFD48F	1525	46.0	32.4	13.00	11.25
RAC13L48B23S	RGF2L100CE16MP11	21.0	XAHC48F	1525	46.0	32.4	13.00	11.00
RAC13L48B23S	RGF2L100CE16MP11	21.0	XAHC60G	1550	47.5	33.8	13.25	11.50
RAC13L48B23S	RGF2L100CE16MP11	24.5	XAHD48F	1525	46.0	32.4	13.00	11.25
RAC13L48B23S	RGF2L100CE16MP11	21.0	XAHD60G	1525	47.0	33.2	13.00	11.50
RAC13L48B23S	RGF2L100CE20MP11	21.0	CF/CM/CU48C	1375	46.5	34.4	14.00	11.75
RAC13L48B23S	RGF2L100CE20MP11	21.0	CF/CM/CU48D	1400	47.0	35.2	14.00	12.25
RAC13L48B23S	RGF2L100CE20MP11	21.0	CF/CM/CU60C	1375	47.0	34.6	14.25	12.25
RAC13L48B23S	RGF2L100CE20MP11	21.0	CF/CM/CU60D	1600	48.0	37.4	14.25	12.00
RAC13L48B23S	RGF2L100CE20MP11	21.0	CF/CM64D	1375	47.5	34.8	14.25	12.25
RAC13L48B23S	RGF2L100CE20MP11	21.0	XAF/XAUC48F	1525	46.5	32.6	13.25	11.50
RAC13L48B23S	RGF2L100CE20MP11	21.0	XAF/XAUC60G	1550	47.5	33.6	13.50	11.75
RAC13L48B23S	RGF2L100CE20MP11	24.5	XAF/XAUD60G	1550	47.5	33.6	13.50	11.75
RAC13L48B23S	RGF2L100CE20MP11	24.5	XAFD48F	1550	46.5	32.8	13.25	11.50
RAC13L48B23S	RGF2L100CE20MP11	21.0	XAHC48F	1525	46.5	32.6	13.00	11.25
RAC13L48B23S	RGF2L100CE20MP11	21.0	XAHC60G	1550	47.5	33.6	13.50	11.75
RAC13L48B23S	RGF2L100CE20MP11	24.5	XAHD48F	1525	46.5	32.6	13.25	11.50
RAC13L48B23S	RGF2L100CE20MP11	21.0	XAHD60G	1525	47.5	33.4	13.50	11.75
RAC13L48B23S	RGF19080CE20MP13	21.0	XAF/XAUC48F	1475	46.0	32.0	13.25	11.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L48B23S	RGF19080CE20MP13	21.0	XAF/XAUC60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF19080CE20MP13	24.5	XAF/XAUD60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF19080CE20MP13	24.5	XAFD48F	1400	46.0	31.4	13.50	11.75
RAC13L48B23S	RGF19080CE20MP13	21.0	XAHC48F	1475	46.0	32.0	13.25	11.25
RAC13L48B23S	RGF19080CE20MP13	21.0	XAHC60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF19080CE20MP13	24.5	XAHD48F	1475	46.0	32.0	13.25	11.50
RAC13L48B23S	RGF19080CE20MP13	21.0	XAHD60G	1475	47.0	32.8	13.50	11.75
RAC13L48B23S	RGF19100CE20MP13	21.0	XAF/XAUC48F	1475	46.0	32.0	13.25	11.50
RAC13L48B23S	RGF19100CE20MP13	21.0	XAF/XAUC60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF19100CE20MP13	24.5	XAF/XAUD60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF19100CE20MP13	24.5	XAFD48F	1500	46.5	32.4	13.25	11.50
RAC13L48B23S	RGF19100CE20MP13	21.0	XAHC48F	1475	46.0	32.0	13.25	11.25
RAC13L48B23S	RGF19100CE20MP13	21.0	XAHC60G	1400	47.0	32.2	13.75	12.00
RAC13L48B23S	RGF19100CE20MP13	24.5	XAHD48F	1500	46.5	32.4	13.25	11.50
RAC13L48B23S	RGF19100CE20MP13	21.0	XAHD60G	1500	47.5	33.2	13.50	11.75
RAC13L48B23S	RGF19120DE20MP13	24.5	XAF/XAUD60G	1425	47.0	32.4	13.50	11.75
RAC13L48B23S	RGF19120DE20MP13	24.5	XAFD48F	1425	46.0	31.6	13.25	11.50
RAC13L48B23S	RGF19120DE20MP13	24.5	XAHD48F	1400	46.0	31.4	13.25	11.50
RAC13L48B23S	RGF19120DE20MP13	21.0	XAHD60G	1400	47.0	32.2	13.50	11.75
RAC13L60B23S	RGF1L080CE16MP12	21.0	CF/CM/CU60C	1575	54.5	39.5	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	21.0	CF/CM/CU60D	1600	54.5	39.5	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	21.0	CF/CM64D	1575	56.0	40.5	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	21.0	XAF/XAUC60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	24.5	XAF/XAUD60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	24.5	XAF/XAUD60H	1575	55.5	37.4	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	21.0	XAFC60H	1575	55.0	37.4	13.00	11.25
RAC13L60B23S	RGF1L080CE16MP12	21.0	XAHC60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	21.0	XAHC60H	1575	55.0	37.4	13.00	11.25
RAC13L60B23S	RGF1L080CE16MP12	21.0	XAHD60G	1550	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L080CE16MP12	24.5	XAHD60H	1575	55.5	37.4	13.00	11.00
RAC13L60B23S	RGF1L080CE20MP12	21.0	CF/CM/CU60C	1550	54.5	39.0	13.00	11.00
RAC13L60B23S	RGF1L080CE20MP12	21.0	CF/CM/CU60D	1575	54.5	39.5	13.25	11.25
RAC13L60B23S	RGF1L080CE20MP12	21.0	CF/CM64D	1575	56.5	41.0	13.25	11.25
RAC13L60B23S	RGF1L080CE20MP12	21.0	XAF/XAUC60G	1550	55.0	36.6	13.25	11.25
RAC13L60B23S	RGF1L080CE20MP12	24.5	XAF/XAUD60G	1550	54.5	36.6	13.25	11.25
RAC13L60B23S	RGF1L080CE20MP12	24.5	XAF/XAUD60H	1550	55.5	37.0	13.25	11.25
RAC13L60B23S	RGF1L080CE20MP12	21.0	XAFC60H	1550	55.5	37.0	13.25	11.50
RAC13L60B23S	RGF1L080CE20MP12	21.0	XAHC60G	1550	55.0	36.6	13.25	11.25
RAC13L60B23S	RGF1L080CE20MP12	21.0	XAHC60H	1550	55.5	37.0	13.25	11.50
RAC13L60B23S	RGF1L080CE20MP12	21.0	XAHD60G	1725	55.0	38.0	13.00	11.00
RAC13L60B23S	RGF1L080CE20MP12	24.5	XAHD60H	1550	55.5	37.0	13.25	11.25
RAC13L60B23S	RGF1L100CE16MP12	21.0	CF/CM/CU60C	1575	54.5	39.5	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	21.0	CF/CM/CU60D	1600	54.5	39.5	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	21.0	CF/CM64D	1575	56.0	40.5	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	21.0	XAF/XAUC60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	24.5	XAF/XAUD60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	24.5	XAF/XAUD60H	1575	55.5	37.4	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	21.0	XAFC60H	1575	55.0	37.4	13.00	11.25
RAC13L60B23S	RGF1L100CE16MP12	21.0	XAHC60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	21.0	XAHC60H	1575	55.0	37.4	13.00	11.25
RAC13L60B23S	RGF1L100CE16MP12	21.0	XAHD60G	1550	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L100CE16MP12	24.5	XAHD60H	1575	55.5	37.4	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	21.0	CF/CM/CU60C	1725	55.0	41.0	13.00	11.00

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L60B23S	RGF1L100CE20MP12	21.0	CF/CM/CU60D	1550	54.5	39.0	13.25	11.25
RAC13L60B23S	RGF1L100CE20MP12	21.0	CF/CM64D	1525	56.0	40.0	13.25	11.25
RAC13L60B23S	RGF1L100CE20MP12	21.0	XAF/XAUC60G	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	24.5	XAF/XAUD60G	1750	55.0	38.5	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	24.5	XAF/XAUD60H	1725	56.0	38.5	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	21.0	XAFC60H	1725	55.5	38.5	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	21.0	XAHC60G	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	21.0	XAHC60H	1725	55.5	38.5	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	21.0	XAHD60G	1725	55.0	38.0	13.00	11.00
RAC13L60B23S	RGF1L100CE20MP12	24.5	XAHD60H	1725	56.0	38.5	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	21.0	CF/CM/CU60C	1575	54.5	40.0	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	21.0	CF/CM/CU60D	1600	54.5	39.5	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	21.0	CF/CM64D	1575	56.0	40.5	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	21.0	XAF/XAUC60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	24.5	XAF/XAUD60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	24.5	XAF/XAUD60H	1575	55.5	37.4	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	21.0	XAFC60H	1575	55.0	37.4	13.25	11.25
RAC13L60B23S	RGF1L120CE16MP12	21.0	XAHC60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	21.0	XAHC60H	1575	55.0	37.4	13.25	11.25
RAC13L60B23S	RGF1L120CE16MP12	21.0	XAHD60G	1575	54.5	36.6	13.00	11.00
RAC13L60B23S	RGF1L120CE16MP12	24.5	XAHD60H	1575	55.5	37.4	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	21.0	CF/CM/CU60C	1750	55.0	41.0	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	21.0	CF/CM/CU60D	1525	54.5	39.0	13.25	11.25
RAC13L60B23S	RGF1L120CE20MP12	21.0	CF/CM64D	1525	56.0	40.0	13.25	11.25
RAC13L60B23S	RGF1L120CE20MP12	21.0	XAF/XAUC60G	1750	55.5	38.5	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	24.5	XAF/XAUD60G	1750	55.0	38.5	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	24.5	XAF/XAUD60H	1750	56.0	39.0	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	21.0	XAFC60H	1750	55.5	39.0	13.00	11.25
RAC13L60B23S	RGF1L120CE20MP12	21.0	XAHC60G	1750	55.5	38.5	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	21.0	XAHC60H	1750	55.5	39.0	13.00	11.25
RAC13L60B23S	RGF1L120CE20MP12	21.0	XAHD60G	1725	55.0	38.0	13.00	11.00
RAC13L60B23S	RGF1L120CE20MP12	24.5	XAHD60H	1750	56.0	39.0	13.00	11.00
RAC13L60B23S	RGF1L130DE20MP12	24.5	CF/CM/CU60D	1650	55.0	40.5	13.00	11.00
RAC13L60B23S	RGF1L130DE20MP12	24.5	CF/CM64D	1625	56.0	41.0	13.00	11.00
RAC13L60B23S	RGF1L130DE20MP12	24.5	XAF/XAUD60G	1625	55.0	37.2	13.25	11.25
RAC13L60B23S	RGF1L130DE20MP12	24.5	XAF/XAUD60H	1625	56.0	37.8	13.25	11.25
RAC13L60B23S	RGF1L130DE20MP12	21.0	XAHD60G	1600	55.0	37.0	13.25	11.25
RAC13L60B23S	RGF1L130DE20MP12	24.5	XAHD60H	1625	56.0	37.8	13.25	11.25
RAC13L60B23S	RGF2L100CE16MP11	21.0	CF/CM/CU60C	1525	55.0	39.5	13.00	11.00
RAC13L60B23S	RGF2L100CE16MP11	21.0	CF/CM/CU60D	1550	55.5	40.0	13.00	11.25
RAC13L60B23S	RGF2L100CE16MP11	21.0	CF/CM64D	1525	54.5	39.0	13.00	11.00
RAC13L60B23S	RGF2L100CE16MP11	24.5	XAF/XAUD60G	1550	54.5	36.4	13.00	11.00
RAC13L60B23S	RGF2L100CE16MP11	24.5	XAF/XAUD60H	1550	55.5	37.2	13.00	11.00
RAC13L60B23S	RGF2L100CE16MP11	21.0	XAFC60H	1550	55.0	37.2	13.00	11.25
RAC13L60B23S	RGF2L100CE16MP11	21.0	XAHC60G	1550	54.5	36.4	13.00	11.00
RAC13L60B23S	RGF2L100CE16MP11	21.0	XAHC60H	1550	55.0	37.2	13.00	11.25
RAC13L60B23S	RGF2L100CE20MP11	21.0	CF/CM/CU60C	1550	54.5	39.0	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	21.0	CF/CM/CU60D	1600	55.0	40.0	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	21.0	CF/CM64D	1550	55.0	40.0	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	21.0	XAF/XAUC60G	1550	55.5	36.6	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	24.5	XAF/XAUD60G	1550	55.5	36.6	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	24.5	XAF/XAUD60H	1550	55.5	37.0	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	21.0	XAFC60H	1550	55.5	37.0	13.25	11.50

COOLING CAPACITY - With High Efficiency Motor Furnaces¹ (Continued)

UNIT MODEL	FURNACE		COIL MODEL ²	COOLING				
	MODEL	WIDTH		RATED CFM	NET MBH		SEER	EER
					TOTAL	SENS.		
RAC13L60B23S	RGF2L100CE20MP11	21.0	XAHC60G	1550	55.5	36.6	13.25	11.25
RAC13L60B23S	RGF2L100CE20MP11	21.0	XAHC60H	1550	55.5	37.0	13.25	11.50
RAC13L60B23S	RGF2L100CE20MP11	24.5	XAHD60H	1550	55.5	37.0	13.25	11.25
RAC13L60B23S	RGF19080CE20MP13	21.0	CF/CM/CU60C	1725	55.0	41.0	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	21.0	CF/CM/CU60D	1525	54.5	39.0	13.25	11.25
RAC13L60B23S	RGF19080CE20MP13	21.0	CF/CM64D	1750	56.0	42.0	13.25	11.25
RAC13L60B23S	RGF19080CE20MP13	21.0	XAF/XAUC60G	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	24.5	XAF/XAUD60G	1750	55.0	38.5	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	24.5	XAF/XAUD60H	1750	56.0	39.0	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	21.0	XAFC60H	1750	55.5	39.0	13.00	11.25
RAC13L60B23S	RGF19080CE20MP13	21.0	XAHC60G	1725	55.5	38.0	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	21.0	XAHC60H	1750	55.5	39.0	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	21.0	XAHD60G	1725	55.0	38.0	13.00	11.00
RAC13L60B23S	RGF19080CE20MP13	24.5	XAHD60H	1725	56.0	38.5	13.00	11.00
RAC13L60B23S	RGF19100CE16MP13	21.0	CF/CM/CU60D	1600	54.5	40.0	13.00	11.00
RAC13L60B23S	RGF19100CE20MP13	21.0	CF/CM/CU60C	1700	55.0	41.0	13.00	11.00
RAC13L60B23S	RGF19100CE20MP13	21.0	CF/CM/CU60D	1550	54.5	39.0	13.25	11.25
RAC13L60B23S	RGF19100CE20MP13	21.0	CF/CM64D	1525	56.0	40.0	13.25	11.25
RAC13L60B23S	RGF19100CE20MP13	21.0	XAF/XAUC60G	1700	55.5	38.0	13.00	11.00
RAC13L60B23S	RGF19100CE20MP13	24.5	XAF/XAUD60G	1725	55.0	38.0	13.00	11.25
RAC13L60B23S	RGF19100CE20MP13	24.5	XAF/XAUD60H	1700	56.0	38.5	13.00	11.00
RAC13L60B23S	RGF19100CE20MP13	21.0	XAFC60H	1700	55.5	38.5	13.00	11.25
RAC13L60B23S	RGF19100CE20MP13	21.0	XAHC60G	1700	55.5	38.0	13.00	11.00
RAC13L60B23S	RGF19100CE20MP13	21.0	XAHC60H	1700	55.5	38.5	13.00	11.25
RAC13L60B23S	RGF19100CE20MP13	21.0	XAHD60G	1700	55.0	37.8	13.00	11.00
RAC13L60B23S	RGF19100CE20MP13	24.5	XAHD60H	1700	56.0	38.5	13.00	11.00
RAC13L60B23S	RGF19120DE20MP13	24.5	CF/CM/CU60D	1625	55.0	40.5	13.00	11.00
RAC13L60B23S	RGF19120DE20MP13	24.5	CF/CM64D	1600	56.0	41.0	13.00	11.25
RAC13L60B23S	RGF19120DE20MP13	24.5	XAF/XAUD60G	1600	55.0	37.0	13.00	11.25
RAC13L60B23S	RGF19120DE20MP13	24.5	XAF/XAUD60H	1600	55.5	37.4	13.25	11.25
RAC13L60B23S	RGF19120DE20MP13	21.0	XAHD60G	1575	55.0	36.6	13.00	11.25
RAC13L60B23S	RGF19120DE20MP13	24.5	XAHD60H	1600	55.5	37.4	13.25	11.25

For rated condition information, see the *COOLING CAPACITY - With Air Handler Coils* table footnotes.

1. High Efficiency Motor Furnaces have blower off delay (B.O.D) standard.
 2. CM coils available with a factory installed horizontal drain pan. Refer to the Price pages for specific model number.
- Furnaces that are listed individually in the above table use Coil Only Ratings.

APPLICATIONS AND ACCESSORIES

Refer to the *Price Manual* for specific model numbers.

Standard Application Limits*		
Maximum Lineset Equivalent Length		80 ft
Outdoor Ambient Temperature Limits		
Cooling Operation	Maximum DB	115°F
	Minimum DB	55°F

*For Low Ambient and/or Long Lineset Applications, see the accessories listed below.

Non-Standard Lineset Applications - For installations with reduced diameter or long linesets, refer to the current version of the *Piping Application Guide* P/N 247077, available in the *Application Bulletins* section on www.simplygettingthejobdone.com.

OD Unit Anti Short Cycle Kit (10 Pack) (S1-2TD08700124BK): A time delay that prevents rapid compressor restarting as a result of power interruption, limit switch operation, or thermostat resetting. Not required for HP models or for AC models with factory electronic controls.

Standard Low Ambient Control Kit (S1-2LA06700424): Allows the use of air conditioning at low outdoor ambient temperatures down to +20°F (-7°C). For use with all R-410A single-stage AC and HP models.

Advanced Low Ambient Control Kit (S1-2LA04701024): Contains the necessary components and controls to allow cooling operation down to -20°F (-29°C). For use with some R-410A single-stage AC and HP models. This accessory can only be applied to models that contain a PSC outdoor fan motor.

Low Pressure Switch Kit (S1-2PS06700524): Provides field installed low pressure (loss of charge) protection. Not required for HP models or for AC models with factory electronic controls.

High Ambient Outdoor Fan Motor (S1-FHM**HT)**: Class F 70°C motor to allow cooling operation up to 160°F air entering the outdoor coil. For use with all R-410A single-stage AC and HP models containing R-410A refrigerant only.

Outdoor Communicating Board Kit (S1-33102952310): Electronic control upgrade for standard air conditioning units to provide compatibility with the Hx™ Touch Screen Thermostat used in communicating mode.

Start Assist Kit (S1-2SA067**)**: Provides increased compressor starting torque for areas with low supply voltage. Required for units with reciprocating compressors when applied with indoor TXV, and for all units when applied with long linesets or low ambient kits. May be factory installed on select AC and HP units (see the *PHYSICAL AND ELECTRICAL DATA* table). Refer to the Price pages or Source 1 SmartSearch for the correct kit for each application.

Compressor Crankcase Heater Kit (S1-025-**.***):** A wrap-around electrical resistance heater that warms the compressor sump, reducing the chance of liquid slugging on startup. Required on all long lineset and low ambient applications. Refer to the Price pages or Source 1 SmartSearch for the correct part for each application.

Anchor Bracket Kit (S1-1HK0601): Firmly anchors unit to pad or support structure. When properly installed, approved for ground-mounted or roof-mounted applications.

Indoor TXV Kit (S1-1TVM*):** Thermal expansion valves precisely meter refrigerant for optimum performance over a wide range of conditions. See the *SYSTEM CHARGE FOR VARIOUS MATCHED SYSTEMS* table or refer to the Price pages or Source 1 Smart Search for the TXV part number for each AC and HP model.

Winter Cover Kit (S1-CCVRE*):** Custom fit winter cover protects AC condensing unit from debris during the off-season. Remove before unit operation. Refer to the Price pages or Source 1 SmartSearch for the correct cover for each application.

Cold Weather Charging Tent (S1-CHGTENT01): Provides warm environment to accurately service AC and HP systems in ambient conditions 55°F (13°C) or colder.

Touch-up Paint (S1-5130153**)**: Color matched aerosol paint for touching up unit chassis and panels. Refer to the Price pages or Source 1 SmartSearch for the correct color for each application.

Compressor Sound Blanket (S1-010-07xxx-000): A field installed dense foam cover that provides 2 dBA sound level reduction. Refer to the Price pages or Source 1 SmartSearch for the correct blanket for each application.

Thermostat: Compatible thermostat controls are available through accessory sourcing. For optimum performance, these outdoor units are fully compatible with our residential Hx™ Touch Screen Thermostats available through Source 1. For more information, refer to the *Thermostats & Controllers* section of the *Offering Catalog*.

SOUND POWER RATINGS

Cooling	Octave Band Sound Power Level (db re. 1-pW)									
Model Number	63	125	250	500	1000	2000	4000	8000	dBA	SQI
RAC13L18B23S	76.4	74.9	67.8	70.2	69.6	66.0	61.6	57.9	74.0	19.1
RAC13L24B24S	67.2	70.3	65.8	67.8	67.5	63.7	58.8	54.8	74.0	19.1
RAC13L30B23S	73.9	75.1	66.4	69.4	69.1	63.9	59.6	60.6	74.0	19.0
RAC13L36B24S	75.7	71.2	68.1	70.2	69.6	64.8	60.1	55.8	75.0	19.0
RAC13L42B24S	71.8	75.2	68.5	71.9	69.9	64.4	59.8	55.8	75.0	19.1
RAC13L48B23S	73.0	75.7	70.3	72.0	72.8	65.8	60.8	55.9	76.0	19.1
RAC13L60B23S	72.1	71.9	69.1	70.7	70.1	66.5	67.3	64.4	76.0	19.0

Rated in accordance with ARI Standard 270.

MECHANICAL SPECIFICATIONS

MANUFACTURE AND CERTIFICATIONS

- Units shall be manufactured in an ISO 9001 certified facility.
- Units shall be certified by CSA to UL 1995/CSA 22.2 and performance certified to ANSI/AHRI Standard 210/240.
- Units shall be sound tested according to ANSI/AHRI Standard 270.
- Certified matched system ratings shall be available for download from the AHRI online directory at www.ahridirectory.org
- Unit packaging shall be marked, "Assembled in the USA".

UNIT APPLICATION

- Units shall be approved for cooling operation between 55°F and 115°F without modification.
- Units shall be approved for linesets up to 80 ft equivalent length without modification.
- Units shall be approved for installation within 6 in. of a flat vertical wall without modification, according to the instructions in the technical literature.
- Units shall be certified to the 5th Edition (2014) of the Florida Building Code for a combined allowable lateral and uplift wind force of 200 psf and 100 psf, respectively, for both ground-mounted and rooftop-mounted applications up to 200 ft above grade with approved mounting kit.
- Units shall be designed to 77 dBA or less to minimize sound pollution.

UNIT ACCESS

- Units shall have a removable fan guard that can be removed independently of the top for interior access through the top of the unit without damaging the coil.
- Units shall have two removable stamped steel coil guards for exterior coil access.
- Units shall have a separate compartment for electrical controls that can be accessed without disturbing the unit airflow.
- Units shall have a blockoff panel that can be removed to provide interior unit access through the side of the unit.
- Units shall have a removable blockoff panel and a swing away removable electrical panel that provides sufficient interior unit access for removing the compressor through the side of the unit.

UNIT CONSTRUCTION

- Units shall be shipped completely wired, piped, and assembled. Wiring pigtails shall be provided for field control wiring connections. Service valves shall be provided for field refrigerant line connections.

- Units shall be factory leak checked, run tested, and shipped with a holding charge of R-410A refrigerant.
- Unit cabinet components shall be G90 equivalent steel, finished with powder-coat paint rated at a minimum of 500 h under ASTM B117 testing.
- Unit base pan shall be stamped G90 equivalent steel, finished with powder-coat paint rated at a minimum of 500 h under ASTM B117 testing.
- Units shall have a single corner post opposite the electrical control box and two independently removable steel coil guard panels to optimize cabinet strength and serviceability.
- Units shall have L-shaped stamped sheet metal coil guards with punched and extruded slots for maximum panel durability and stiffness.
- Units shall have a factory installed filter-drier for faster installation and improved system reliability.
- Unit base valves shall be mounted diagonally on the unit base pan with service ports that provide sufficient clearance for low-loss hose fittings.
- Units shall be constructed with a high-pressure switch for system protection.
- Units shall be constructed with all badging and labels applied at the factory.


UNIT COMPONENTS

- Compressor shall be hermetic with internal electrical overload protection and internal overpressure protection.
- Compressor shall be mounted on rubber vibration isolators that do not require the removal of transportation clips or brackets.
- Outdoor fan shall be direct drive with vertical air discharge for low sound levels.
- Outdoor fan motor shall be totally enclosed with permanently lubricated ball bearings motors approved for vertical shaft applications.
- Outdoor coil shall be air cooled and have zinc-coated aluminum microchannel construction for small size and low weight.

UNIT WARRANTIES


- Unit manufacturer shall provide a 5-year compressor warranty without a requirement for unit registration.
- Unit manufacturer shall provide a 5-year parts warranty without a requirement for unit registration.
- Unit manufacturer shall provide a limited 5-year parts warranty extended to 10 years with registration.

TYPICAL INSTALLATION

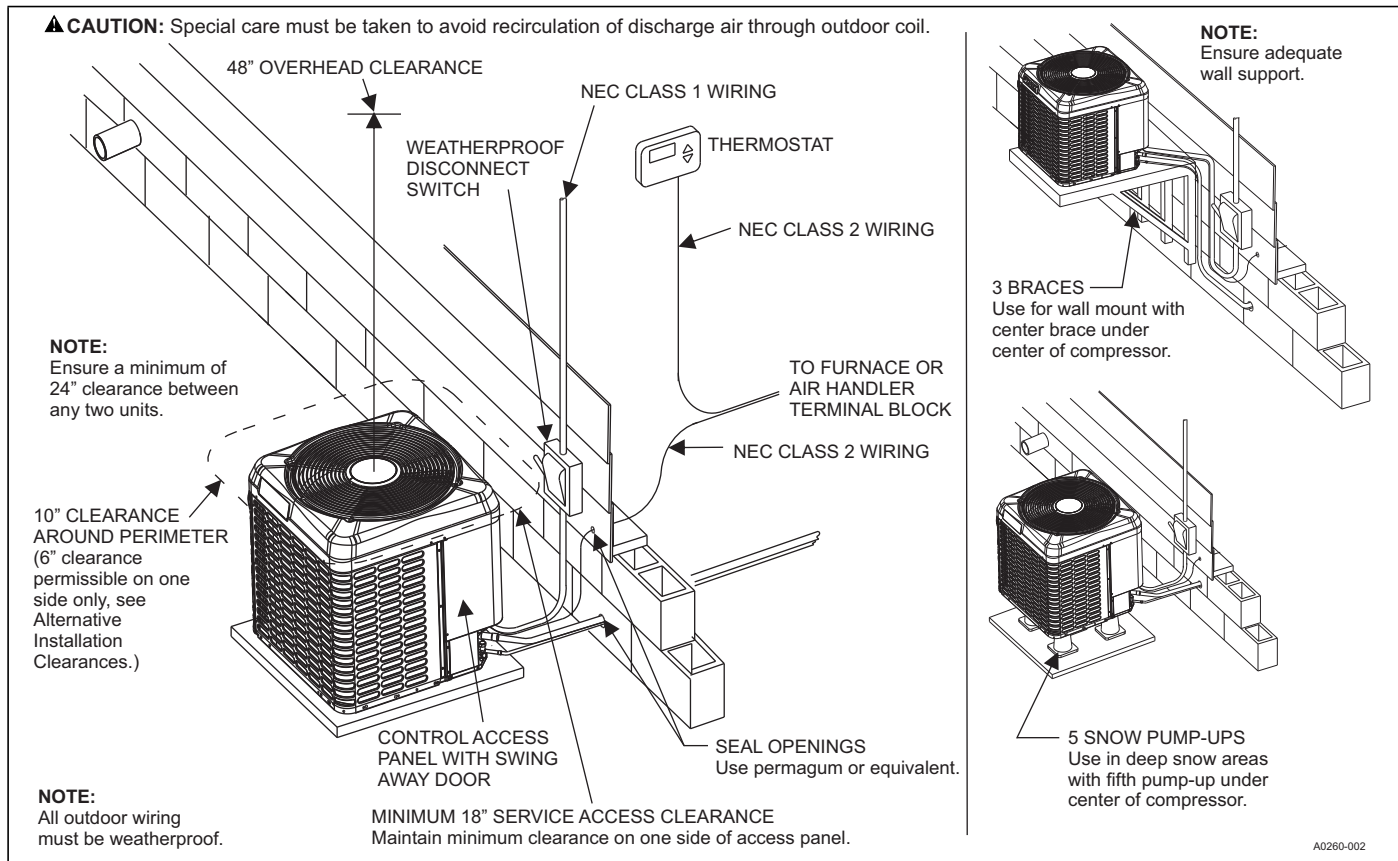


▲ CAUTION


Care must be taken to prevent ice from damaging the unit. Damage may occur from ice falling onto unit from a sloped roof or from a vertical drip line due to a partial overhang.

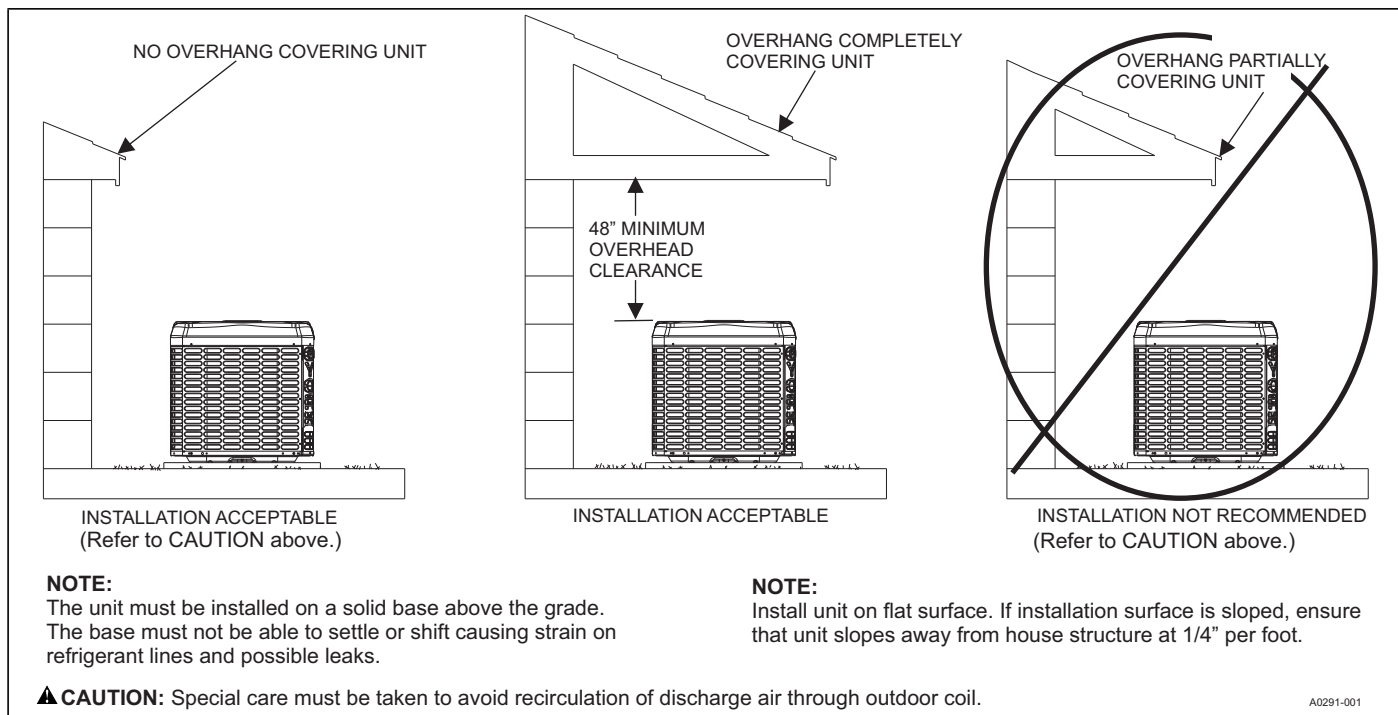

TYPICAL FIELD WIRING

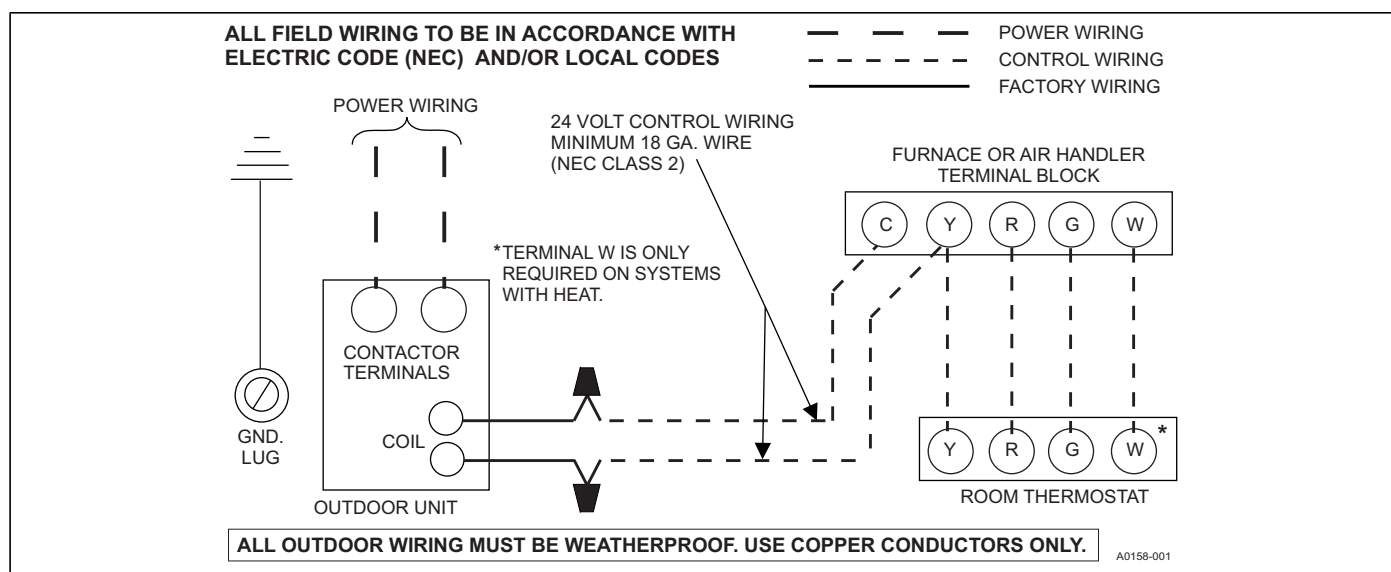

ALTERNATIVE INSTALLATION CLEARANCES

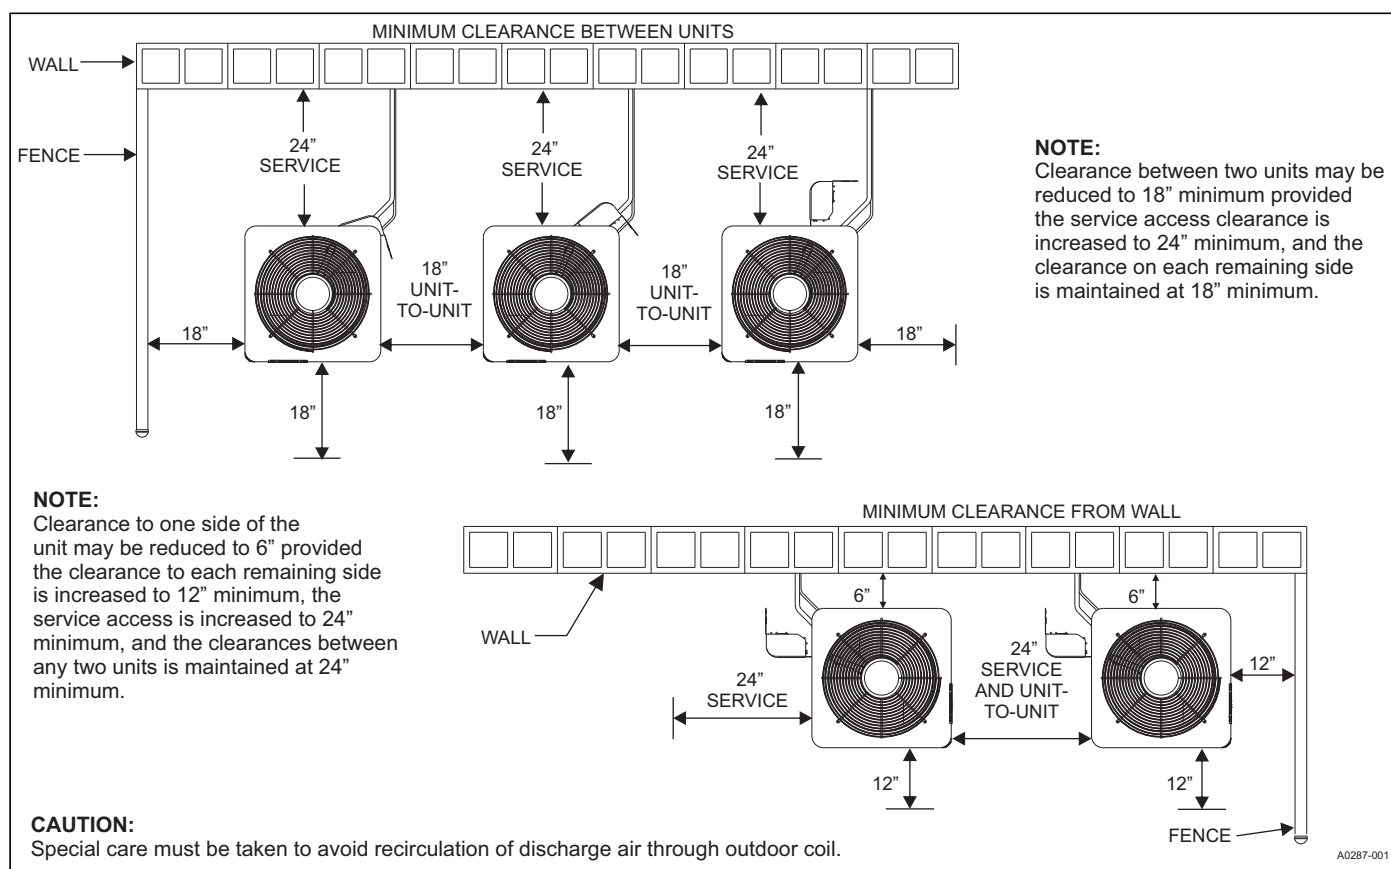

PERFORMANCE DATA - 1.5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L18B23S	35	107	15.6	1.04	14.8	1.17	13.9	1.29	13.1	1.42	12.2	1.56	11.3	1.73	10.3	1.93
	40	119	17.3	1.03	16.4	1.15	15.4	1.27	14.5	1.40	13.6	1.55	12.6	1.72	11.5	1.92
	45	130	19.1	1.01	18.1	1.13	17.1	1.26	16.1	1.39	15.0	1.53	13.9	1.70	12.8	1.90
	50	143	21.0	0.99	19.9	1.12	18.9	1.24	17.8	1.37	16.6	1.51	15.4	1.68	14.2	1.89
	55	156	23.2	0.98	22.0	1.10	20.8	1.22	19.6	1.35	18.4	1.49	17.1	1.66	15.7	1.86

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L18B23S													
INDOOR COIL MODEL NO.			CF18AXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	450					600					750				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	14.5	15.8	15.8	15.8	15.5	15.2	15.8	15.9	15.8	15.5	15.8	15.9	16.0	15.8	15.5
	S.C.	14.5	13.5	11.5	10.5	8.3	15.2	13.2	11.8	10.9	8.4	15.8	12.9	12.2	11.2	8.5
	kW	1.02	1.02	1.03	1.03	1.03	1.02	1.02	1.03	1.03	1.03	1.02	1.02	1.03	1.03	1.03
65	T.C.	15.1	16.2	16.1	16.5	16.7	15.7	16.3	16.3	16.7	16.8	16.4	16.5	16.5	16.8	16.9
	S.C.	15.1	13.9	11.9	11.1	8.8	15.7	14.3	12.5	11.6	9.1	16.4	14.6	13.0	12.2	9.4
	kW	1.14	1.13	1.14	1.14	1.14	1.13	1.14	1.14	1.14	1.14	1.13	1.14	1.14	1.14	1.14
75	T.C.	15.6	16.5	16.5	17.3	17.9	16.3	16.8	16.8	17.5	18.1	17.0	17.1	17.1	17.8	18.2
	S.C.	15.6	14.3	12.4	11.7	9.4	16.3	15.3	13.1	12.4	9.8	17.0	16.2	13.9	13.1	10.3
	kW	1.25	1.25	1.24	1.26	1.25	1.25	1.25	1.25	1.25	1.25	1.24	1.25	1.25	1.25	1.25
85	T.C.	15.4	15.8	15.9	17.0	18.0	16.1	16.3	16.3	17.4	18.2	16.8	16.8	16.7	17.7	18.4
	S.C.	15.4	14.2	13.1	11.8	9.6	16.1	15.4	13.2	12.7	10.1	16.8	16.5	13.4	13.6	10.6
	kW	1.41	1.41	1.40	1.41	1.41	1.41	1.41	1.40	1.41	1.41	1.40	1.40	1.40	1.41	1.41
95	T.C.	15.1	15.1	15.2	16.7	18.1	15.8	15.8	15.8	17.2	18.4	16.6	16.5	16.4	17.7	18.6
	S.C.	15.1	14.1	13.8	11.9	9.7	15.8	15.5	13.4	13.1	10.3	16.6	16.5	12.9	14.2	10.9
	kW	1.57	1.57	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56
105	T.C.	13.9	13.9	13.9	15.6	17.3	14.9	14.7	14.5	16.1	17.6	15.9	15.5	15.1	16.6	18.0
	S.C.	13.9	13.5	12.4	11.6	9.4	14.9	14.7	12.9	12.9	10.2	15.9	15.5	13.5	14.2	11.0
	kW	1.78	1.78	1.77	1.78	1.78	1.77	1.78	1.77	1.78	1.78	1.77	1.77	1.77	1.77	1.78
115	T.C.	12.6	12.6	12.5	14.5	16.5	13.9	13.6	13.1	15.0	16.9	15.2	14.5	13.8	15.4	17.3
	S.C.	12.6	12.6	11.0	11.2	9.1	13.9	13.6	12.5	12.7	10.1	15.2	14.5	13.8	14.3	11.1
	kW	1.99	1.99	1.98	1.99	1.99	1.98	1.99	1.98	1.99	1.99	1.98	1.99	1.98	1.99	1.99
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 1.5 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU18A	1.00	1.00	1.00
—	CF/CM/CU18B	1.00	1.06	1.00
—	CF/CM/CU24A	1.01	1.04	1.01
—	CF/CM/CU24B	1.01	1.04	1.01
—	CF/CM/CU30A	1.02	1.04	1.02
—	CF/CM/CU30B	1.02	1.04	1.02
—	CF/CM/CU36B	1.02	1.03	1.00
—	CF/CM/CU36C	1.02	1.03	1.00
—	CF/CM24C	1.01	1.04	1.01
—	CF/CM30C	1.02	1.04	1.02
—	CF/CM36A	1.00	1.00	1.00
—	CF/CM36D	1.02	1.03	1.00
—	XAF/XAUA18A	1.00	1.04	1.00
—	XAF/XAUA24B	1.01	1.04	1.01
—	XAFB18A	1.00	1.04	1.00
—	XAFB24B	1.01	1.04	1.01
—	XAHA18A	1.00	1.04	1.00
—	XAHA24B	1.01	1.04	1.01
—	XAHB24B	1.01	1.04	1.01
RFCX18BE06MP22	—	1.04	1.06	0.94
RFCX24BE08MP22	—	1.05	1.03	0.94
RFCX30BE10MP22	—	1.05	1.01	0.94
RFCX18BP06MP22	—	1.02	1.07	1.02
RFCX24BP08MP22	—	1.02	1.10	1.02
ME08BN21	CF/CM18B	1.03	1.01	0.93
ME08BN21	CF/CM24B	1.03	1.01	0.93
ME08BN21	CF/CM30B	1.05	1.01	0.94
ME08BN21	CF/CM36B	1.05	0.99	0.94
ME12BN21	CF/CM18B	1.05	1.07	0.94
ME12BN21	CF/CM24B	1.05	1.08	0.94
ME12BN21	CF/CM30B	1.05	1.05	0.94
ME12BN21	CF/CM36B	1.05	1.05	0.94
ME12CN21	CF/CM24C	1.04	1.01	0.94
ME12CN21	CF/CM30C	1.05	1.01	0.94
ME12CN21	CF/CM36C	1.05	1.01	0.94

FURNACE MULTIPLIERS - 1.5 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L040AE12MP12	CF/CM/CU18B	1.03	1.15	0.95
RGF1L040AE12MP12	CF/CM/CU24A	1.05	1.14	0.96
RGF1L040AE12MP12	CF/CM/CU24B	1.05	1.19	0.96
RGF1L040AE12MP12	CF/CM/CU30B	1.04	1.18	0.96
RGF1L040AE12MP12	CF/CM/CU36B	1.05	1.21	0.96
RGF1L040AE12MP12	CF/CM18A	1.03	1.14	0.95
RGF1L040AE12MP12	CF/CM30A	1.04	1.12	0.96
RGF1L040AE12MP12	CF/CM36A	1.05	1.15	0.96
RGF1L040AE12MP12	XAF/XAUA18A	1.03	1.08	0.95
RGF1L040AE12MP12	XAF/XAUA24B	1.04	1.06	0.96
RGF1L040AE12MP12	XAFB18A	1.03	1.09	0.95
RGF1L040AE12MP12	XAFB24B	1.04	1.10	0.96
RGF1L040AE12MP12	XAHA18A	1.03	1.05	0.95
RGF1L040AE12MP12	XAHA24B	1.04	1.06	0.96
RGF1L040AE12MP12	XAHB24B	1.04	1.08	0.96
RGF1L060AE12MP12	CF/CM/CU24A	1.05	1.21	0.96

FURNACE MULTIPLIERS - 1.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L060AE12MP12	CF/CM18A	1.05	1.21	0.96
RGF1L060AE12MP12	CF/CM30A	1.05	1.22	0.96
RGF1L060AE12MP12	CF/CM36A	1.05	1.23	0.96
RGF1L060AE12MP12	XAF/XAUA18A	1.04	1.13	0.96
RGF1L060AE12MP12	XAF/XAUA24B	1.05	1.14	0.96
RGF1L060AE12MP12	XAHA18A	1.04	1.13	0.96
RGF1L060AE12MP12	XAHA24B	1.05	1.14	0.96
RGF1L080BE12MP12	CF/CM/CU18B	1.05	1.21	0.96
RGF1L080BE12MP12	CF/CM/CU24B	1.05	1.22	0.96
RGF1L080BE12MP12	CF/CM/CU30B	1.04	1.22	0.96
RGF1L080BE12MP12	CF/CM/CU36B	1.05	1.22	0.96
RGF1L080BE12MP12	XAFB18A	1.05	1.13	0.96
RGF1L080BE12MP12	XAFB24B	1.05	1.14	0.96
RGF1L080BE12MP12	XAHB24B	1.05	1.12	0.96
RGF1L100BE12MP12	CF/CM/CU18B	1.03	1.18	0.95
RGF1L100BE12MP12	CF/CM/CU30B	1.05	1.22	0.96
RGF1L100BE12MP12	CF/CM/CU36B	1.05	1.23	0.96
RGF1L100BE12MP12	CF/CM/CU36C	1.05	1.23	0.96
RGF1L100BE12MP12	CF/CM30C	1.05	1.22	0.96
RGF1L100BE12MP12	XAFB18A	1.03	1.11	0.95
RGF1L100BE12MP12	XAFB24B	1.05	1.12	0.96
RGF1L100BE12MP12	XAHB24B	1.05	1.12	0.96
RGF2L080BE12MP11	CF/CM/CU18B	1.05	1.07	0.94
RGF2L080BE12MP11	CF/CM/CU24B	1.05	1.08	0.94
RGF2L080BE12MP11	CF/CM/CU30B	1.05	1.05	0.94
RGF2L080BE12MP11	CF/CM/CU36B	1.05	1.05	0.94
RGF2L080BE12MP11	CF/CM24C	1.05	1.08	0.94
RGF2L080BE12MP11	CF/CM30C	1.05	1.05	0.94
RGF2L080BE12MP11	XAFB18A	1.03	1.08	0.95
RGF2L080BE12MP11	XAFB24B	1.05	1.08	0.96
RGF2L080BE12MP11	XAHB24B	1.05	1.08	0.96
RGF19026AE08MP13	CF/CM/CU18A	1.01	1.03	0.93
RGF19026AE08MP13	CF/CM/CU18B	1.02	1.06	0.94
RGF19026AE08MP13	CF/CM/CU24A	1.02	1.04	0.94
RGF19026AE08MP13	CF/CM/CU24B	1.03	1.08	0.95
RGF19026AE08MP13	CF/CM/CU30A	1.02	1.08	0.94
RGF19026AE08MP13	CF/CM/CU30B	1.03	1.08	0.95
RGF19026AE08MP13	CF/CM/CU36B	1.03	1.08	0.95
RGF19026AE08MP13	CF/CM36A	1.03	1.08	0.95
RGF19026AE08MP13	XAF/XAUA18A	1.01	0.99	0.93
RGF19026AE08MP13	XAF/XAUA24B	1.02	1.00	0.94
RGF19026AE08MP13	XAFB18A	0.99	0.95	0.91
RGF19026AE08MP13	XAFB24B	1.01	0.95	0.93
RGF19026AE08MP13	XAHA18A	1.01	1.02	0.95
RGF19026AE08MP13	XAHA24B	1.02	1.00	0.94
RGF19026AE08MP13	XAHB24B	1.02	1.02	0.94
RGF19040AE10MP13	CF/CM/CU18B	1.02	1.10	0.94
RGF19040AE10MP13	CF/CM/CU24A	1.03	1.08	0.95
RGF19040AE10MP13	CF/CM/CU24B	1.03	1.11	0.95
RGF19040AE10MP13	CF/CM/CU30B	1.04	1.12	0.98
RGF19040AE10MP13	CF/CM/CU36B	1.03	1.13	0.95
RGF19040AE10MP13	CF/CM18A	1.02	1.08	0.94
RGF19040AE10MP13	CF/CM30A	1.04	1.10	0.98
RGF19040AE10MP13	CF/CM36A	1.03	1.09	0.95
RGF19040AE10MP13	XAF/XAUA18A	1.02	1.03	0.94

FURNACE MULTIPLIERS - 1.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19040AE10MP13	XAF/XAUA24B	1.03	1.05	0.95
RGF19040AE10MP13	XAFB18A	1.02	1.05	0.94
RGF19040AE10MP13	XAFB24B	1.03	1.06	0.95
RGF19040AE10MP13	XAHA18A	1.02	1.03	0.94
RGF19040AE10MP13	XAHA24B	1.03	1.05	0.95
RGF19040AE10MP13	XAHB24B	1.03	1.06	0.95
RGF19060AE10MP13	CF/CM/CU18B	1.03	1.18	0.95
RGF19060AE10MP13	CF/CM/CU24A	1.05	1.16	0.96
RGF19060AE10MP13	CF/CM/CU24B	1.03	1.18	0.95
RGF19060AE10MP13	CF/CM/CU30B	1.04	1.21	0.96
RGF19060AE10MP13	CF/CM/CU36B	1.03	1.20	0.95
RGF19060AE10MP13	CF/CM18A	1.03	1.15	0.95
RGF19060AE10MP13	CF/CM30A	1.05	1.17	0.98
RGF19060AE10MP13	CF/CM36A	1.03	1.17	0.95
RGF19060AE10MP13	XAF/XAUA18A	1.03	1.09	0.95
RGF19060AE10MP13	XAF/XAUA24B	1.05	1.11	0.96
RGF19060AE10MP13	XAFB18A	1.03	1.12	0.95
RGF19060AE10MP13	XAFB24B	1.03	1.12	0.95
RGF19060AE10MP13	XAHA18A	1.03	1.09	0.95
RGF19060AE10MP13	XAHA24B	1.04	1.08	0.96
RGF19060AE10MP13	XAHB24B	1.03	1.11	0.95

FURNACE MULTIPLIERS - 1.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19060BE12MP13	XAFB18A	1.04	1.13	0.96
RGF19060BE12MP13	XAFB24B	1.05	1.15	0.96
RGF19060BE12MP13	XAHB24B	1.05	1.15	0.96
RGF29040AE12MP11	CF/CM/CU18A	1.03	1.09	0.97
RGF29040AE12MP11	CF/CM/CU18B	1.01	0.99	0.91
RGF29040AE12MP11	CF/CM/CU24A	1.03	1.10	0.97
RGF29040AE12MP11	CF/CM/CU24B	1.01	0.99	0.91
RGF29040AE12MP11	CF/CM/CU30A	1.05	1.06	0.96
RGF29040AE12MP11	CF/CM/CU30B	1.02	0.98	0.92
RGF29040AE12MP11	CF/CM/CU36B	1.03	0.97	0.93
RGF29040AE12MP11	CF/CM36A	1.05	1.06	0.96
RGF29040AE12MP11	XAF/XAUA18A	0.99	0.95	0.93
RGF29040AE12MP11	XAF/XAUA24B	1.01	0.95	0.93
RGF29040AE12MP11	XAFB18A	0.99	0.95	0.93
RGF29040AE12MP11	XAFB24B	1.00	0.95	0.92
RGF29040AE12MP11	XAHA18A	0.99	0.95	0.93
RGF29040AE12MP11	XAHA24B	1.01	0.95	0.93
RGF29040AE12MP11	XAHB24B	1.00	0.95	0.92

PERFORMANCE DATA - 2 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L24B24S	35	107	23.6	1.27	22.3	1.47	21.0	1.67	19.6	1.85	18.2	2.03	16.8	2.20	15.4	2.37
	40	118	26.0	1.24	24.6	1.45	23.2	1.66	21.7	1.85	20.2	2.04	18.7	2.22	17.1	2.41
	45	130	28.6	1.21	27.1	1.44	25.6	1.65	24.0	1.85	22.4	2.04	20.7	2.24	19.0	2.43
	50	142	31.3	1.19	29.7	1.42	28.1	1.64	26.4	1.85	24.7	2.05	22.9	2.26	21.1	2.46
	55	156	34.2	1.17	32.5	1.41	30.8	1.64	29.0	1.86	27.1	2.06	25.2	2.27	23.3	2.48

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L24B24S													
INDOOR COIL MODEL NO.			CF24AXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	600					800					1000				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	23.5	24.8	24.5	25.4	25.0	24.3	25.4	25.2	26.6	25.9	25.1	26.0	25.8	27.8	26.7
	S.C.	22.4	18.9	16.6	15.5	11.2	23.5	20.2	17.5	16.7	11.9	24.5	21.4	18.5	18.0	12.5
	kW	1.46	1.45	1.45	1.45	1.47	1.53	1.52	1.52	1.53	1.54	1.59	1.59	1.60	1.60	1.62
65	T.C.	22.8	24.4	24.0	25.4	24.9	24.0	25.2	24.7	26.5	25.8	25.1	26.1	25.4	27.7	26.8
	S.C.	22.0	19.1	16.5	15.7	11.4	23.2	20.8	17.9	17.0	12.0	24.5	22.6	19.2	18.4	12.7
	kW	1.61	1.60	1.60	1.60	1.61	1.68	1.67	1.67	1.67	1.68	1.75	1.74	1.75	1.75	1.76
75	T.C.	22.2	24.0	23.5	25.3	24.7	23.7	25.1	24.3	26.4	25.8	25.2	26.1	25.0	27.5	26.9
	S.C.	21.6	19.2	16.4	15.9	11.6	23.0	21.5	18.2	17.4	12.2	24.5	23.7	20.0	18.8	12.8
	kW	1.76	1.75	1.75	1.75	1.75	1.83	1.82	1.82	1.82	1.83	1.90	1.89	1.90	1.89	1.90
85	T.C.	21.3	23.9	22.2	24.2	25.0	22.9	23.7	23.2	25.3	26.0	24.4	23.6	24.2	26.5	26.9
	S.C.	20.5	21.2	15.8	15.5	11.7	22.1	21.0	17.9	17.3	12.5	23.7	20.9	19.9	19.1	13.4
	kW	1.93	2.01	1.93	1.93	1.94	2.01	2.01	2.00	2.01	2.01	2.09	2.00	2.08	2.09	2.09
95	T.C.	20.4	23.8	21.0	23.0	25.4	22.1	22.4	22.1	24.2	26.2	23.7	21.1	23.3	25.4	27.0
	S.C.	19.5	23.1	15.2	15.2	11.8	21.3	20.6	17.5	17.2	12.9	23.0	18.1	19.8	19.3	13.9
	kW	2.10	2.27	2.11	2.12	2.13	2.19	2.19	2.19	2.20	2.20	2.27	2.11	2.27	2.28	2.28
105	T.C.	19.2	20.6	19.1	21.5	23.5	21.0	20.5	20.2	22.6	24.2	22.8	20.5	21.3	23.8	24.9
	S.C.	18.3	19.9	14.4	14.5	11.3	20.0	19.3	16.7	16.6	12.4	21.7	18.8	19.0	18.8	13.5
	kW	2.31	2.39	2.31	2.33	2.35	2.40	2.40	2.39	2.42	2.43	2.49	2.41	2.48	2.50	2.51
115	T.C.	18.0	17.3	17.2	19.9	21.7	20.0	18.6	18.2	21.0	22.3	21.9	19.9	19.3	22.1	22.9
	S.C.	17.0	16.6	13.6	13.8	10.7	18.7	18.0	15.9	16.1	11.9	20.4	19.4	18.1	18.3	13.2
	kW	2.51	2.52	2.51	2.54	2.58	2.61	2.61	2.60	2.63	2.66	2.71	2.71	2.69	2.72	2.74
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor). Green shaded cells are ACCA (TVA) conditions. Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 2 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU24A	1.00	1.00	1.00
—	CF/CM/CU24B	1.00	1.13	1.00
—	CF/CM/CU30A	1.00	1.15	1.00
—	CF/CM/CU30B	1.00	1.15	1.00
—	CF/CM/CU36B	1.01	1.14	1.01
—	CF/CM/CU36C	1.01	1.14	1.01
—	CF/CM/CU42C	1.02	1.15	1.02
—	CF/CM24C	1.00	1.13	1.00
—	CF/CM30C	1.00	1.15	1.00
—	CF/CM36A	1.01	1.14	1.01
—	CF/CM36D	1.01	1.14	1.01
—	CF/CM42D	1.02	1.15	1.02
—	CF42B	1.02	1.15	1.02
—	XAF/XAUA24B	1.00	1.09	1.00
—	XAF/XAUB30C	1.00	1.13	1.00
—	XAFB24B	1.00	1.09	1.00
—	XAFC30C	1.00	1.13	1.00
—	XAHA24B	1.00	1.09	1.00
—	XAHB24B	1.00	1.09	1.00
—	XAHB30C	1.00	1.13	1.00
—	XAHC30C	1.00	1.13	1.00
RFCX24BE08MP22	—	1.02	1.17	0.94
RFCX30BE10MP22	—	1.02	1.24	0.94
RFCX36BE12MP22	—	1.02	1.21	0.94
RFCX36CE12MP22	—	1.02	1.18	0.94
RFCX24BP08MP22	—	1.00	1.04	1.00
RFCX30BP10MP22	—	1.02	1.19	1.02
ME08BN21	CF/CM24B	1.02	1.15	0.94
ME08BN21	CF/CM30B	1.02	1.19	0.94
ME08BN21	CF/CM36B	1.02	1.18	0.94
ME08BN21	CF42B	1.02	1.16	0.94
ME12BN21	CF/CM24B	1.02	1.21	0.94
ME12BN21	CF/CM30B	1.02	1.22	0.94
ME12BN21	CF/CM36B	1.02	1.24	0.94
ME12BN21	CF42B	1.02	1.22	0.94
ME12CN21	CF/CM24C	1.02	1.19	0.94
ME12CN21	CF/CM30C	1.02	1.22	0.94
ME12CN21	CF/CM36C	1.02	1.22	0.94
ME12CN21	CF/CM42C	1.02	1.22	0.94
ME14DN21	CF/CM36D	1.02	1.24	0.94
ME14DN21	CF/CM42D	1.02	1.24	0.94
ME16CN21	CF/CM24C	1.02	1.15	0.94
ME16CN21	CF/CM30C	1.02	1.27	0.94
ME16CN21	CF/CM36C	1.02	1.28	0.94
ME16CN21	CF/CM42C	1.02	1.29	0.94

FURNACE MULTIPLIERS - 2 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L040AE12MP12	CF/CM/CU24A	1.02	1.03	0.95
RGF1L040AE12MP12	CF/CM/CU24B	1.02	1.13	0.95
RGF1L040AE12MP12	CF/CM/CU30A	1.02	1.11	0.95
RGF1L040AE12MP12	CF/CM/CU30B	1.02	1.15	0.94
RGF1L040AE12MP12	CF/CM/CU36B	1.02	1.16	0.94
RGF1L040AE12MP12	CF/CM36A	1.02	1.11	0.94

FURNACE MULTIPLIERS - 2 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L040AE12MP12	CF42B	1.02	1.16	0.94
RGF1L040AE12MP12	XAF/XAUA24B	1.02	1.04	0.95
RGF1L040AE12MP12	XAF/XAUB30C	1.02	1.10	0.94
RGF1L040AE12MP12	XAFB24B	1.02	1.05	0.95
RGF1L040AE12MP12	XAHA24B	1.02	1.04	0.95
RGF1L040AE12MP12	XAHB24B	1.02	1.05	0.95
RGF1L040AE12MP12	XAHB30C	1.02	1.08	0.94
RGF1L060AE12MP12	CF/CM/CU24A	1.02	1.10	0.95
RGF1L060AE12MP12	CF/CM/CU24B	1.02	1.12	0.95
RGF1L060AE12MP12	CF/CM/CU30A	1.02	1.15	0.95
RGF1L060AE12MP12	CF/CM/CU30B	1.02	1.19	0.94
RGF1L060AE12MP12	CF/CM/CU36B	1.02	1.13	0.94
RGF1L060AE12MP12	CF/CM36A	1.02	1.11	0.94
RGF1L060AE12MP12	CF42B	1.02	1.15	0.94
RGF1L060AE12MP12	XAF/XAUA24B	1.02	1.04	0.95
RGF1L060AE12MP12	XAF/XAUB30C	1.02	1.14	0.94
RGF1L060AE12MP12	XAFB24B	1.02	1.05	0.95
RGF1L060AE12MP12	XAHA24B	1.02	1.04	0.95
RGF1L060AE12MP12	XAHB24B	1.02	1.05	0.95
RGF1L060AE12MP12	XAHB30C	1.02	1.08	0.94
RGF1L080BE12MP12	CF/CM/CU24B	1.02	1.10	0.95
RGF1L080BE12MP12	CF/CM/CU30B	1.02	1.11	0.94
RGF1L080BE12MP12	CF/CM/CU36B	1.02	1.12	0.94
RGF1L080BE12MP12	CF/CM/CU36C	1.02	1.13	0.94
RGF1L080BE12MP12	CF/CM/CU42C	1.02	1.14	0.94
RGF1L080BE12MP12	CF/CM24C	1.02	1.12	0.95
RGF1L080BE12MP12	CF/CM30C	1.02	1.13	0.94
RGF1L080BE12MP12	CF42B	1.02	1.13	0.94
RGF1L080BE12MP12	XAF/XAUB30C	1.02	1.07	0.94
RGF1L080BE12MP12	XAFB24B	1.02	1.04	0.95
RGF1L080BE12MP12	XAFC30C	1.02	1.07	0.94
RGF1L080BE12MP12	XAHB24B	1.02	1.02	0.95
RGF1L080BE12MP12	XAHB30C	1.02	1.05	0.94
RGF1L080BE12MP12	XAHC30C	1.02	1.07	0.94
RGF1L080CE16MP12	CF/CM/CU36C	1.02	1.21	0.94
RGF1L080CE16MP12	CF/CM/CU42C	1.02	1.19	0.94
RGF1L080CE16MP12	CF/CM24C	1.02	1.18	0.94
RGF1L080CE16MP12	CF/CM30C	1.02	1.19	0.94
RGF1L080CE16MP12	CF/CM36D	1.02	1.21	0.94
RGF1L080CE16MP12	CF/CM42D	1.02	1.20	0.94
RGF1L080CE16MP12	XAFC30C	1.02	1.13	0.94
RGF1L080CE16MP12	XAHC30C	1.02	1.10	0.94
RGF1L100BE12MP12	CF/CM/CU24B	1.02	1.10	0.95
RGF1L100BE12MP12	CF/CM/CU30B	1.02	1.11	0.94
RGF1L100BE12MP12	CF/CM/CU36B	1.02	1.12	0.94
RGF1L100BE12MP12	CF/CM/CU36C	1.02	1.12	0.94
RGF1L100BE12MP12	CF/CM/CU42C	1.02	1.22	0.94
RGF1L100BE12MP12	CF/CM24C	1.02	1.10	0.95
RGF1L100BE12MP12	CF/CM30C	1.02	1.11	0.94
RGF1L100BE12MP12	CF42B	1.02	1.19	0.94
RGF1L100BE12MP12	XAF/XAUB30C	1.02	1.16	0.94
RGF1L100BE12MP12	XAFB24B	1.02	1.02	0.95
RGF1L100BE12MP12	XAFC30C	1.02	1.16	0.94
RGF1L100BE12MP12	XAHB24B	1.02	1.02	0.95
RGF1L100BE12MP12	XAHB30C	1.02	1.05	0.94

FURNACE MULTIPLIERS - 2 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L100BE12MP12	XAHC30C	1.02	1.14	0.94
RGF1L100CE16MP12	CF/CM/CU36C	1.02	1.18	0.94
RGF1L100CE16MP12	CF/CM/CU42C	1.02	1.18	0.94
RGF1L100CE16MP12	CF/CM24C	1.02	1.15	0.94
RGF1L100CE16MP12	CF/CM30C	1.02	1.19	0.94
RGF1L100CE16MP12	CF/CM36D	1.02	1.18	0.94
RGF1L100CE16MP12	CF/CM42D	1.02	1.18	0.94
RGF1L100CE16MP12	XAFC30C	1.02	1.10	0.94
RGF1L100CE16MP12	XAHC30C	1.02	1.09	0.94
RGF1L120CE16MP12	CF/CM/CU36C	1.02	1.23	0.94
RGF1L120CE16MP12	CF/CM/CU42C	1.02	1.20	0.94
RGF1L120CE16MP12	CF/CM24C	1.02	1.15	0.94
RGF1L120CE16MP12	CF/CM30C	1.02	1.19	0.94
RGF1L120CE16MP12	CF/CM36D	1.02	1.23	0.94
RGF1L120CE16MP12	CF/CM42D	1.02	1.20	0.94
RGF1L120CE16MP12	XAFC30C	1.02	1.10	0.94
RGF1L120CE16MP12	XAHC30C	1.02	1.10	0.94
RGF2L080BE12MP11	CF/CM/CU24B	1.02	1.13	0.94
RGF2L080BE12MP11	CF/CM/CU30B	1.02	1.15	0.94
RGF2L080BE12MP11	CF/CM/CU36B	1.02	1.16	0.94
RGF2L080BE12MP11	CF/CM/CU36C	1.02	1.21	0.94
RGF2L080BE12MP11	CF/CM/CU42C	1.02	1.10	0.94
RGF2L080BE12MP11	CF/CM24C	1.02	1.13	0.94
RGF2L080BE12MP11	CF/CM30C	1.02	1.15	0.94
RGF2L080BE12MP11	CF42B	1.02	1.14	0.94
RGF2L080BE12MP11	XAF/XAUB30C	1.02	1.10	0.95
RGF2L080BE12MP11	XAFB24B	1.02	1.05	0.97
RGF2L080BE12MP11	XAFC30C	1.01	1.10	0.95
RGF2L080BE12MP11	XAHB24B	1.02	1.10	0.97
RGF2L080BE12MP11	XAHB30C	1.02	1.14	0.95
RGF2L080BE12MP11	XAHC30C	1.01	1.08	0.95
RGF2L100CE16MP11	CF/CM/CU36C	1.02	1.10	0.94
RGF2L100CE16MP11	CF/CM/CU42C	1.02	1.10	0.94
RGF2L100CE16MP11	CF/CM24C	1.02	1.08	0.94
RGF2L100CE16MP11	CF/CM30C	1.02	1.10	0.94
RGF2L100CE16MP11	CF/CM36D	1.02	1.12	0.94
RGF2L100CE16MP11	CF/CM42D	1.02	1.13	0.94
RGF2L100CE16MP11	XAFC30C	1.02	1.07	0.95
RGF2L100CE16MP11	XAHC30C	1.02	1.07	0.95
RGF19026AE08MP13	CF/CM/CU24A	1.02	1.05	1.00
RGF19026AE08MP13	CF/CM/CU24B	1.01	0.99	0.97
RGF19026AE08MP13	CF/CM/CU30A	1.02	1.06	0.97
RGF19026AE08MP13	CF/CM/CU30B	1.02	1.08	0.95
RGF19026AE08MP13	CF/CM/CU36B	1.02	1.08	0.95
RGF19026AE08MP13	CF/CM36A	1.02	1.06	0.95
RGF19026AE08MP13	CF42B	1.02	1.01	0.95
RGF19026AE08MP13	XAF/XAUA24B	1.02	1.01	0.97
RGF19026AE08MP13	XAF/XAUB30C	1.02	1.05	0.95
RGF19026AE08MP13	XAFB24B	1.01	1.01	0.97
RGF19026AE08MP13	XAHA24B	1.02	0.99	0.97
RGF19026AE08MP13	XAHB24B	1.01	1.01	0.97
RGF19026AE08MP13	XAHB30C	1.02	1.03	0.95
RGF19040AE10MP13	CF/CM/CU24A	0.98	0.98	0.98
RGF19040AE10MP13	CF/CM/CU24B	1.00	1.01	0.98
RGF19040AE10MP13	CF/CM/CU30A	1.02	1.00	0.95

FURNACE MULTIPLIERS - 2 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19040AE10MP13	CF/CM/CU30B	1.02	1.02	0.95
RGF19040AE10MP13	CF/CM/CU36B	1.02	1.02	0.95
RGF19040AE10MP13	CF/CM36A	1.02	1.06	0.95
RGF19040AE10MP13	CF42B	1.02	1.03	0.95
RGF19040AE10MP13	XAF/XAUA24B	1.00	0.95	0.98
RGF19040AE10MP13	XAF/XAUB30C	1.02	0.99	0.95
RGF19040AE10MP13	XAFB24B	1.00	0.97	0.96
RGF19040AE10MP13	XAHA24B	1.00	0.95	0.98
RGF19040AE10MP13	XAHB24B	1.00	0.97	0.96
RGF19040AE10MP13	XAHB30C	1.02	0.99	0.95
RGF19060AE10MP13	CF/CM/CU24A	1.02	1.05	1.00
RGF19060AE10MP13	CF/CM/CU24B	1.02	1.07	0.95
RGF19060AE10MP13	CF/CM/CU30A	1.02	1.06	0.95
RGF19060AE10MP13	CF/CM/CU30B	1.02	1.10	0.95
RGF19060AE10MP13	CF/CM/CU36B	1.02	1.08	0.95
RGF19060AE10MP13	CF/CM36A	1.02	1.07	0.95
RGF19060AE10MP13	CF42B	1.02	1.10	0.95
RGF19060AE10MP13	XAF/XAUA24B	1.02	1.01	0.97
RGF19060AE10MP13	XAF/XAUB30C	1.02	1.05	0.95
RGF19060AE10MP13	XAFB24B	1.02	1.02	0.95
RGF19060AE10MP13	XAHA24B	1.02	0.99	0.97
RGF19060AE10MP13	XAHB24B	1.02	1.01	0.95
RGF19060AE10MP13	XAHB30C	1.02	1.04	0.95
RGF19060BE12MP13	CF/CM/CU24B	1.02	1.11	0.95
RGF19060BE12MP13	CF/CM/CU30B	1.02	1.13	0.94
RGF19060BE12MP13	CF/CM/CU36B	1.02	1.13	0.95
RGF19060BE12MP13	CF/CM/CU36C	1.02	1.13	0.95
RGF19060BE12MP13	CF/CM/CU42C	1.02	1.14	0.95
RGF19060BE12MP13	CF/CM24C	1.02	1.11	0.95
RGF19060BE12MP13	CF/CM30C	1.02	1.13	0.95
RGF19060BE12MP13	CF42B	1.02	1.11	0.94
RGF19060BE12MP13	XAF/XAUB30C	1.02	1.07	0.94
RGF19060BE12MP13	XAFB24B	1.02	1.04	0.95
RGF19060BE12MP13	XAFC30C	1.02	1.07	0.95
RGF19060BE12MP13	XAHB24B	1.02	1.04	0.95
RGF19060BE12MP13	XAHB30C	1.02	1.07	0.94
RGF19060BE12MP13	XAHC30C	1.02	1.07	0.95
RGF19080BE12MP13	CF/CM/CU24B	1.02	1.15	0.95
RGF19080BE12MP13	CF/CM/CU30B	1.02	1.18	0.94
RGF19080BE12MP13	CF/CM/CU36B	1.02	1.17	0.94
RGF19080BE12MP13	CF/CM/CU36C	1.02	1.21	0.94
RGF19080BE12MP13	CF/CM/CU42C	1.02	1.19	0.94
RGF19080BE12MP13	CF/CM24C	1.02	1.15	0.95
RGF19080BE12MP13	CF/CM30C	1.02	1.19	0.94
RGF19080BE12MP13	CF42B	1.02	1.16	0.94
RGF19080BE12MP13	XAF/XAUB30C	1.02	1.12	0.94
RGF19080BE12MP13	XAFB24B	1.02	1.08	0.95
RGF19080BE12MP13	XAFC30C	1.02	1.12	0.94
RGF19080BE12MP13	XAHB24B	1.02	1.08	0.95
RGF19080BE12MP13	XAHB30C	1.02	1.11	0.94
RGF19080BE12MP13	XAHC30C	1.02	1.11	0.94
RGF19080CE16MP13	CF/CM/CU36C	1.02	1.13	0.94
RGF19080CE16MP13	CF/CM/CU42C	1.02	1.14	0.94
RGF19080CE16MP13	CF/CM24C	1.02	1.12	0.94
RGF19080CE16MP13	CF/CM30C	1.02	1.13	0.94

FURNACE MULTIPLIERS - 2 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19080CE16MP13	CF/CM36D	1.02	1.27	0.94
RGF19080CE16MP13	CF/CM42D	1.02	1.14	0.94
RGF19080CE16MP13	XAFC30C	1.02	1.07	0.94
RGF19080CE16MP13	XAHC30C	1.02	1.17	0.94
RGF19100CE16MP13	CF/CM/CU36C	1.02	1.18	0.94
RGF19100CE16MP13	CF/CM/CU42C	1.02	1.18	0.94
RGF19100CE16MP13	CF/CM24C	1.02	1.13	0.94
RGF19100CE16MP13	CF/CM30C	1.02	1.19	0.94
RGF19100CE16MP13	CF/CM36D	1.02	1.18	0.94
RGF19100CE16MP13	CF/CM42D	1.02	1.18	0.94
RGF19100CE16MP13	XAFC30C	1.02	1.09	0.94
RGF19100CE16MP13	XAHC30C	1.02	1.08	0.94
RGF29040AE12MP11	CF/CM/CU24A	1.00	1.05	0.98
RGF29040AE12MP11	CF/CM/CU24B	1.02	1.06	1.02

FURNACE MULTIPLIERS - 2 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF29040AE12MP11	CF/CM/CU30A	1.02	1.05	1.00
RGF29040AE12MP11	CF/CM/CU30B	1.02	1.09	0.97
RGF29040AE12MP11	CF/CM/CU36B	1.02	1.08	0.97
RGF29040AE12MP11	CF/CM36A	1.02	1.06	1.00
RGF29040AE12MP11	CF42B	1.02	1.07	0.97
RGF29040AE12MP11	XAF/XAUA24B	1.02	1.01	0.97
RGF29040AE12MP11	XAF/XAUB30C	1.02	1.05	0.97
RGF29040AE12MP11	XAFB24B	1.01	1.01	0.97
RGF29040AE12MP11	XAHA24B	1.02	1.01	0.97
RGF29040AE12MP11	XAHB24B	1.01	1.01	0.97
RGF29040AE12MP11	XAHB30C	1.02	1.04	0.97

PERFORMANCE DATA - 2.5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L30B23S	35	107	26.7	1.67	25.4	1.86	24.0	2.06	22.7	2.29	21.3	2.55	19.7	2.86	18.1	3.22
	40	119	29.5	1.67	28.0	1.86	26.5	2.06	25.1	2.28	23.6	2.53	21.9	2.84	20.2	3.20
	45	130	32.4	1.66	30.7	1.85	29.2	2.06	27.6	2.27	26.0	2.52	24.3	2.82	22.4	3.17
	50	143	35.5	1.67	33.7	1.86	32.0	2.06	30.3	2.28	28.6	2.52	26.8	2.81	24.8	3.15
	55	156	38.8	1.68	36.8	1.87	34.9	2.07	33.1	2.29	31.3	2.52	29.4	2.81	27.3	3.14

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L30B23S													
INDOOR COIL MODEL NO.			CF30BXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	800					1000					1200				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	27.3	28.3	28.1	29.4	29.7	27.9	28.8	28.5	29.8	30.1	28.4	29.2	28.9	30.2	30.6
	S.C.	26.2	22.3	19.3	18.3	14.5	26.7	23.3	20.2	19.0	15.2	27.2	24.4	21.0	19.6	15.8
	kW	1.62	1.64	1.64	1.65	1.66	1.63	1.64	1.64	1.65	1.67	1.63	1.65	1.64	1.66	1.68
65	T.C.	27.4	28.0	28.0	29.4	30.3	28.0	28.5	28.4	29.9	30.7	28.6	29.1	28.9	30.3	31.2
	S.C.	26.3	22.6	19.6	18.7	15.0	26.9	23.9	20.7	19.5	15.7	27.5	25.3	21.8	20.3	16.4
	kW	1.82	1.83	1.83	1.84	1.85	1.83	1.84	1.83	1.85	1.86	1.83	1.85	1.84	1.86	1.88
75	T.C.	27.5	27.7	27.8	29.5	30.9	28.2	28.3	28.3	30.0	31.3	28.9	29.0	28.8	30.5	31.8
	S.C.	26.4	22.9	19.8	19.1	15.4	27.1	24.5	21.2	20.0	16.2	27.7	26.1	22.5	20.9	16.9
	kW	2.01	2.03	2.01	2.04	2.04	2.02	2.04	2.02	2.05	2.06	2.03	2.05	2.04	2.06	2.07
85	T.C.	26.1	26.5	26.7	28.8	30.6	27.2	27.3	27.3	29.3	31.1	28.2	28.1	27.9	29.8	31.6
	S.C.	25.0	22.8	19.5	19.1	15.4	26.1	24.4	21.1	20.3	16.2	27.1	26.1	22.7	21.5	17.0
	kW	2.28	2.30	2.28	2.32	2.32	2.29	2.31	2.29	2.33	2.34	2.30	2.31	2.30	2.34	2.35
95	T.C.	24.7	25.4	25.6	28.0	30.3	26.1	26.3	26.3	28.6	30.8	27.5	27.2	27.0	29.2	31.3
	S.C.	23.7	22.6	19.2	19.1	15.3	25.0	24.3	21.1	20.6	16.3	26.4	26.1	23.0	22.1	17.2
	kW	2.54	2.57	2.56	2.59	2.61	2.55	2.58	2.56	2.60	2.62	2.57	2.58	2.56	2.61	2.63
105	T.C.	22.9	23.7	23.8	26.4	28.9	24.5	24.7	24.4	27.0	29.4	26.1	25.7	25.0	27.6	29.9
	S.C.	22.0	21.7	18.4	18.5	14.9	23.5	23.2	20.3	20.2	15.9	25.0	24.7	22.2	21.9	17.0
	kW	2.90	2.92	2.89	2.94	2.97	2.91	2.92	2.90	2.95	2.99	2.93	2.93	2.91	2.96	3.00
115	T.C.	21.2	22.0	22.0	24.7	27.5	22.9	23.1	22.6	25.3	28.0	24.6	24.3	23.1	25.9	28.5
	S.C.	20.4	20.8	17.7	17.9	14.4	22.0	22.0	19.6	19.8	15.6	23.6	23.3	21.5	21.7	16.8
	kW	3.26	3.27	3.23	3.28	3.34	3.27	3.27	3.24	3.30	3.36	3.28	3.28	3.25	3.31	3.37
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor). Green shaded cells are ACCA (TVA) conditions. Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 2.5 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU30B	1.00	1.00	1.00
—	CF/CM/CU36B	1.01	1.05	0.99
—	CF/CM/CU36C	1.01	1.05	0.99
—	CF/CM/CU42C	1.01	1.04	0.99
—	CF/CM30C	1.01	1.05	1.01
—	CF/CM36A	1.00	1.02	1.00
—	CF/CM36D	1.01	1.05	0.99
—	CF/CM42D	1.01	1.04	0.99
—	XAF/XAUB30C	1.01	1.06	1.01
—	XAF/XAUB36D	1.03	1.05	0.97
—	XAFA30D	0.98	0.96	0.96
—	XAFC30C	1.01	1.06	1.01
—	XAFC36D	1.03	1.05	0.97
—	XAHB30C	1.01	1.06	1.01
—	XAHB36D	1.02	1.00	1.00
—	XAHC30C	1.01	1.06	1.01
—	XAHC36D	1.03	1.05	0.97
RFCX30BE10MP22	—	1.01	1.01	0.90
RFCX36BE12MP22	—	1.01	0.98	0.90
RFCX36CE12MP22	—	1.03	1.02	0.91
RFCX30BP10MP22	—	1.01	1.10	0.96
RFCX36CP12MP22	—	1.03	1.08	0.99
ME08BN21	CF/CM30B	1.01	1.01	0.90
ME08BN21	CF/CM36B	1.02	1.00	0.92
ME08BN21	CF42B	1.02	0.99	0.92
ME12BN21	CF/CM30B	1.01	1.00	0.90
ME12BN21	CF/CM36B	1.01	0.98	0.89
ME12BN21	CF42B	1.01	0.99	0.89
ME12CN21	CF/CM30C	1.03	1.03	0.90
ME12CN21	CF/CM36C	1.03	1.03	0.91
ME12CN21	CF/CM42C	1.01	0.97	0.89
ME14DN21	CF/CM36D	1.04	1.03	0.92
ME14DN21	CF/CM42D	1.04	1.04	0.92
ME16CN21	CF/CM30C	1.01	1.02	0.91
ME16CN21	CF/CM36C	1.03	0.99	0.90
ME16CN21	CF/CM42C	1.03	0.99	0.90

FURNACE MULTIPLIERS - 2.5 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L040AE12MP12	CF/CM36A	1.00	0.93	0.92
RGF1L040AE12MP12	XAF/XAUB30C	1.01	0.98	0.94
RGF1L040AE12MP12	XAF/XAUB36D	1.02	0.97	0.96
RGF1L040AE12MP12	XAFA30D	0.98	0.94	0.92
RGF1L040AE12MP12	XAHB30C	1.01	0.97	0.94
RGF1L040AE12MP12	XAHB36D	1.01	0.95	0.95
RGF1L060AE12MP12	CF/CM36A	1.01	0.93	0.92
RGF1L060AE12MP12	XAF/XAUB30C	1.01	0.98	0.94
RGF1L060AE12MP12	XAF/XAUB36D	1.02	0.97	0.96
RGF1L060AE12MP12	XAFA30D	0.98	0.94	0.92
RGF1L060AE12MP12	XAHB30C	1.01	0.97	0.94
RGF1L060AE12MP12	XAHB36D	1.01	0.95	0.95
RGF1L080BE12MP12	XAF/XAUB30C	1.02	1.00	0.94
RGF1L080BE12MP12	XAF/XAUB36D	1.03	0.98	0.94
RGF1L080BE12MP12	XAFC30C	1.01	1.00	0.95

FURNACE MULTIPLIERS - 2.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L080BE12MP12	XAFC36D	1.02	0.98	0.96
RGF1L080BE12MP12	XAHB30C	1.01	0.98	0.93
RGF1L080BE12MP12	XAHB36D	1.02	0.97	0.94
RGF1L080BE12MP12	XAHC30C	1.01	0.98	0.94
RGF1L080BE12MP12	XAHC36D	1.02	0.98	0.96
RGF1L080CE16MP12	XAFC30C	1.03	1.01	0.92
RGF1L080CE16MP12	XAFC36D	1.03	0.99	0.93
RGF1L080CE16MP12	XAHC30C	1.02	1.00	0.92
RGF1L080CE16MP12	XAHC36D	1.03	0.97	0.92
RGF1L080CE20MP12	XAFC36D	1.05	1.14	0.94
RGF1L080CE20MP12	XAHC30C	1.05	1.15	0.96
RGF1L080CE20MP12	XAHC36D	1.05	1.13	0.96
RGF1L100BE12MP12	XAF/XAUB30C	1.01	0.96	0.90
RGF1L100BE12MP12	XAF/XAUB36D	1.01	0.94	0.91
RGF1L100BE12MP12	XAFC30C	1.01	0.96	0.90
RGF1L100BE12MP12	XAFC36D	1.01	0.94	0.91
RGF1L100BE12MP12	XAHB30C	1.00	0.94	0.92
RGF1L100BE12MP12	XAHB36D	1.02	0.97	0.94
RGF1L100BE12MP12	XAHC30C	1.01	1.00	0.93
RGF1L100BE12MP12	XAHC36D	1.01	0.94	0.91
RGF1L100CE16MP12	XAFC30C	1.02	1.00	0.92
RGF1L100CE16MP12	XAFC36D	1.03	0.98	0.93
RGF1L100CE16MP12	XAHC30C	1.02	1.00	0.92
RGF1L100CE16MP12	XAHC36D	1.03	0.97	0.92
RGF1L100CE20MP12	XAFC36D	1.05	1.14	0.96
RGF1L100CE20MP12	XAHC30C	1.05	1.15	0.96
RGF1L100CE20MP12	XAHC36D	1.05	1.13	0.96
RGF1L120CE16MP12	XAFC30C	1.03	1.01	0.92
RGF1L120CE16MP12	XAFC36D	1.03	0.99	0.93
RGF1L120CE16MP12	XAHC30C	1.02	1.00	0.88
RGF1L120CE16MP12	XAHC36D	1.03	0.98	0.93
RGF2L080BE12MP11	CF/CM/CU30B	1.00	0.99	0.90
RGF2L080BE12MP11	CF/CM/CU36B	1.01	0.97	0.90
RGF2L080BE12MP11	CF/CM/CU36C	1.01	0.97	0.90
RGF2L080BE12MP11	CF/CM/CU42C	1.01	0.98	0.90
RGF2L080BE12MP11	CF/CM30C	1.00	0.99	0.90
RGF2L080BE12MP11	CF42B	1.03	1.01	0.92
RGF2L080BE12MP11	XAF/XAUB30C	1.01	0.96	0.90
RGF2L080BE12MP11	XAF/XAUB36D	1.01	0.94	0.91
RGF2L080BE12MP11	XAFC30C	1.01	0.96	0.90
RGF2L080BE12MP11	XAFC36D	1.01	0.94	0.91
RGF2L080BE12MP11	XAHB30C	1.00	0.94	0.92
RGF2L080BE12MP11	XAHB36D	1.03	1.01	0.95
RGF2L080BE12MP11	XAHC30C	1.00	0.94	0.92
RGF2L080BE12MP11	XAHC36D	1.01	0.94	0.91
RGF2L100CE16MP11	CF/CM/CU36C	1.02	1.02	0.92
RGF2L100CE16MP11	CF/CM/CU42C	1.03	1.01	0.93
RGF2L100CE16MP11	CF/CM30C	1.02	1.02	0.92
RGF2L100CE16MP11	CF/CM36D	1.03	1.02	0.93
RGF2L100CE16MP11	CF/CM42D	1.04	1.00	0.92
RGF2L100CE16MP11	XAFC30C	1.03	1.02	0.92
RGF2L100CE16MP11	XAFC36D	1.04	1.02	0.92
RGF2L100CE16MP11	XAHC30C	1.03	1.02	0.92
RGF2L100CE16MP11	XAHC36D	1.04	1.01	0.94
RGF2L100CE20MP11	CF/CM/CU36C	1.03	1.03	0.91

FURNACE MULTIPLIERS - 2.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF2L100CE20MP11	CF/CM/CU42C	1.04	1.02	0.92
RGF2L100CE20MP11	CF/CM30C	1.03	1.03	0.92
RGF2L100CE20MP11	CF/CM36D	1.03	1.03	0.91
RGF2L100CE20MP11	CF/CM42D	1.04	1.02	0.92
RGF2L100CE20MP11	XAFC30C	1.03	1.04	0.93
RGF2L100CE20MP11	XAFC36D	1.05	1.03	0.94
RGF2L100CE20MP11	XAHC30C	1.03	1.02	0.92
RGF2L100CE20MP11	XAHC36D	1.04	1.01	0.94
RGF19026AE08MP13	CF/CM/CU30B	0.99	1.00	0.95
RGF19026AE08MP13	CF/CM/CU36B	1.01	1.00	0.96
RGF19026AE08MP13	CF42B	1.01	1.01	0.96
RGF19026AE08MP13	XAF/XAUB30C	0.99	0.97	0.95
RGF19026AE08MP13	XAF/XAUB36D	1.01	0.96	0.96
RGF19026AE08MP13	XAFA30D	0.98	0.95	0.96
RGF19026AE08MP13	XAHB30C	0.99	0.97	0.95
RGF19026AE08MP13	XAHB36D	1.00	0.95	0.96
RGF19040AE10MP13	CF/CM36A	1.00	0.93	0.98
RGF19040AE10MP13	XAF/XAUB30C	0.99	0.94	0.95
RGF19040AE10MP13	XAF/XAUB36D	1.00	0.94	0.96
RGF19040AE10MP13	XAFA30D	0.98	0.95	0.96
RGF19040AE10MP13	XAHB30C	0.99	0.94	0.95
RGF19040AE10MP13	XAHB36D	1.01	0.95	0.96
RGF19060AE10MP13	CF/CM36A	1.00	0.92	0.96
RGF19060AE10MP13	XAF/XAUB30C	1.00	0.95	0.96
RGF19060AE10MP13	XAF/XAUB36D	1.01	0.94	0.96
RGF19060AE10MP13	XAFA30D	0.98	0.95	0.94
RGF19060AE10MP13	XAHB30C	0.99	0.94	0.95
RGF19060AE10MP13	XAHB36D	1.01	0.95	0.96
RGF19060BE12MP13	XAF/XAUB30C	1.01	1.01	0.97
RGF19060BE12MP13	XAF/XAUB36D	1.03	1.01	0.96
RGF19060BE12MP13	XAFC30C	1.01	1.01	0.96
RGF19060BE12MP13	XAFC36D	1.03	1.01	0.96
RGF19060BE12MP13	XAHB30C	1.01	1.00	0.97
RGF19060BE12MP13	XAHB36D	1.02	0.98	0.96
RGF19060BE12MP13	XAHC30C	1.01	1.01	0.96
RGF19060BE12MP13	XAHC36D	1.02	0.99	0.96
RGF19080BE12MP13	XAF/XAUB30C	1.02	1.01	0.96
RGF19080BE12MP13	XAF/XAUB36D	1.03	1.00	0.96

FURNACE MULTIPLIERS - 2.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19080BE12MP13	XAFC30C	1.01	1.01	0.95
RGF19080BE12MP13	XAFC36D	1.03	1.01	0.96
RGF19080BE12MP13	XAHB30C	1.01	0.99	0.95
RGF19080BE12MP13	XAHB36D	1.03	0.98	0.96
RGF19080BE12MP13	XAHC30C	1.01	1.01	0.95
RGF19080BE12MP13	XAHC36D	1.03	1.00	0.96
RGF19080CE16MP13	XAFC30C	1.02	0.99	0.92
RGF19080CE16MP13	XAFC36D	1.02	0.97	0.92
RGF19080CE16MP13	XAHC30C	1.01	0.97	0.92
RGF19080CE16MP13	XAHC36D	1.01	0.95	0.91
RGF19080CE20MP13	XAFC30C	1.05	1.15	0.96
RGF19080CE20MP13	XAFC36D	1.05	1.13	0.96
RGF19080CE20MP13	XAHC30C	1.05	1.15	0.96
RGF19080CE20MP13	XAHC36D	1.05	1.12	0.96
RGF19100CE16MP13	XAFC30C	1.02	1.00	0.92
RGF19100CE16MP13	XAFC36D	1.03	0.99	0.93
RGF19100CE16MP13	XAHC30C	1.02	1.00	0.92
RGF19100CE16MP13	XAHC36D	1.03	0.97	0.92
RGF19100CE20MP13	XAFC30C	1.04	1.13	0.96
RGF19100CE20MP13	XAFC36D	1.05	1.12	0.94
RGF19100CE20MP13	XAHC30C	1.04	1.13	0.96
RGF19100CE20MP13	XAHC36D	1.05	1.12	0.96

PERFORMANCE DATA - 3 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L36B24S	35	107	34.4	1.92	32.2	2.21	30.3	2.47	28.5	2.73	26.7	3.02	24.8	3.35	22.9	3.75
	40	118	38.2	1.92	35.8	2.21	33.6	2.47	31.6	2.73	29.6	3.01	27.6	3.34	25.4	3.74
	45	130	42.4	1.94	39.7	2.22	37.4	2.48	35.1	2.74	32.9	3.01	30.6	3.33	28.2	3.73
	50	142	47.1	1.98	44.2	2.26	41.4	2.51	38.9	2.76	36.4	3.03	34.0	3.34	31.4	3.72
	55	156	52.2	2.04	49.0	2.30	46.0	2.55	43.1	2.81	40.4	3.06	37.6	3.37	34.9	3.73

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L36B24S													
INDOOR COIL MODEL NO.			CF36BXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	1000					1200					1400				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	31.0	34.0	34.2	35.8	36.8	31.6	34.5	35.0	36.3	37.6	32.3	35.0	35.7	36.9	38.5
	S.C.	31.0	25.6	22.4	21.0	16.3	31.6	26.3	23.1	21.2	16.5	32.3	26.9	23.8	21.5	16.7
	kW	2.10	2.10	2.09	2.10	2.11	2.18	2.18	2.18	2.18	2.19	2.25	2.25	2.26	2.26	2.27
65	T.C.	30.9	33.8	34.1	35.9	38.0	31.7	34.5	34.9	36.6	38.9	32.5	35.1	35.7	37.4	39.8
	S.C.	30.9	26.4	22.9	21.5	16.9	31.7	27.4	23.9	22.1	17.2	32.5	28.5	24.8	22.7	17.5
	kW	2.33	2.33	2.33	2.33	2.34	2.41	2.41	2.41	2.42	2.43	2.49	2.49	2.49	2.50	2.51
75	T.C.	30.8	33.6	33.9	36.1	39.1	31.8	34.4	34.8	37.0	40.1	32.7	35.3	35.7	37.8	41.1
	S.C.	30.8	27.1	23.4	22.1	17.5	31.8	28.5	24.6	23.0	17.9	32.7	30.0	25.8	23.9	18.4
	kW	2.56	2.56	2.57	2.57	2.58	2.64	2.64	2.65	2.65	2.66	2.72	2.72	2.73	2.73	2.74
85	T.C.	30.0	32.3	32.7	35.3	38.8	31.1	33.3	33.7	36.2	39.8	32.3	34.3	34.6	37.1	40.8
	S.C.	30.0	27.1	23.3	22.2	17.5	31.1	28.8	24.8	23.4	18.1	32.3	30.5	26.2	24.5	18.7
	kW	2.83	2.83	2.84	2.85	2.87	2.92	2.92	2.93	2.93	2.95	3.00	3.00	3.01	3.02	3.04
95	T.C.	29.1	31.1	31.5	34.5	38.5	30.5	32.2	32.5	35.4	39.4	31.9	33.3	33.6	36.3	40.4
	S.C.	29.1	27.0	23.1	22.3	17.5	30.5	29.1	24.9	23.7	18.3	31.9	33.3	26.7	25.1	19.1
	kW	3.11	3.11	3.12	3.13	3.15	3.20	3.20	3.20	3.22	3.24	3.28	3.28	3.29	3.30	3.33
105	T.C.	27.5	29.3	29.3	32.6	36.9	28.9	30.6	30.3	33.5	38.1	30.3	31.8	31.4	34.5	39.3
	S.C.	27.5	26.2	22.3	21.8	17.1	28.9	27.9	24.2	23.5	18.0	30.3	31.8	26.1	25.1	18.9
	kW	3.44	3.44	3.45	3.48	3.51	3.53	3.54	3.54	3.57	3.60	3.63	3.63	3.63	3.65	3.69
115	T.C.	25.8	27.5	27.1	30.7	35.4	27.3	28.9	28.1	31.7	36.8	28.8	30.4	29.2	32.6	38.1
	S.C.	25.8	27.5	21.5	21.3	16.6	27.3	28.9	23.5	23.2	17.6	28.8	30.4	25.4	25.0	18.6
	kW	3.77	3.78	3.78	3.83	3.87	3.87	3.88	3.87	3.92	3.96	3.97	3.97	3.97	4.00	4.05
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 3 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU36B	1.00	1.00	1.00
—	CF/CM/CU36B	1.00	1.00	1.00
—	CF/CM/CU36C	1.00	1.19	1.00
—	CF/CM/CU42C	1.01	1.17	1.01
—	CF/CM/CU48C	1.01	1.18	0.99
—	CF/CM/CU48D	1.01	1.18	0.99
—	CF/CM36D	1.00	1.19	1.00
—	CF/CM42D	1.01	1.17	1.01
—	CF42B	1.01	1.17	1.01
—	XAF/XAUB36D	1.00	1.02	1.00
—	XAF/XAUC42E	1.01	1.04	1.01
—	XAFB36E	1.01	1.01	1.01
—	XAFC36D	1.00	1.03	1.00
—	XAFD42E	1.01	1.04	1.01
—	XAHC36D	1.00	1.02	1.00
—	XAHC42E	1.01	1.03	1.01
—	XAHD42E	1.01	1.04	1.01
RFCX36BE12MP22	—	1.01	1.14	0.92
RFCX36CE12MP22	—	1.02	1.18	0.91
RFCX42CE14MP22	—	1.02	1.18	0.91
RFCX48CE16MP22	—	1.02	1.13	0.91
RFCX48DE16MP22	—	1.02	1.13	0.91
RFCX36BP12MP22	—	1.00	1.16	0.98
RFCX36CP12MP22	—	1.00	1.14	0.98
RFCX48CP16MP22	—	1.02	1.23	0.99
ME12BN21	CF/CM36B	1.01	1.13	0.92
ME12BN21	CF42B	1.02	1.12	0.93
ME12CN21	CF/CM36C	1.00	1.10	0.90
ME12CN21	CF/CM42C	1.01	1.10	0.91
ME12CN21	CF/CM48C	1.01	1.11	0.91
ME14DN21	CF/CM36D	1.02	1.21	0.91
ME14DN21	CF/CM42D	1.01	1.13	0.91
ME14DN21	CF/CM48D	1.02	1.12	0.91
ME16CN21	CF/CM36C	1.01	1.15	0.91
ME16CN21	CF/CM42C	1.02	1.17	0.91
ME16CN21	CF/CM48C	1.02	1.17	0.91
ME20DN21	CF/CM36D	1.02	1.24	0.91
ME20DN21	CF/CM42D	1.02	1.24	0.91
ME20DN21	CF/CM48D	1.02	1.25	0.91

FURNACE MULTIPLIERS - 3 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L040AE12MP12	CF/CM/CU36B	0.99	1.11	0.93
RGF1L040AE12MP12	CF42B	1.01	1.09	0.94
RGF1L040AE12MP12	XAF/XAUB36D	0.99	0.97	0.91
RGF1L040AE12MP12	XAFB36E	1.00	0.97	0.92
RGF1L040AE12MP12	XAHB36D	1.01	1.02	0.97
RGF1L060AE12MP12	CF/CM/CU36B	0.99	1.11	0.93
RGF1L060AE12MP12	CF42B	1.01	1.09	0.94
RGF1L060AE12MP12	XAF/XAUB36D	0.99	0.97	0.91
RGF1L060AE12MP12	XAFB36E	0.99	0.97	0.91
RGF1L060AE12MP12	XAHB36D	1.01	1.03	0.97
RGF1L080BE12MP12	CF/CM/CU36B	0.99	1.11	0.93
RGF1L080BE12MP12	CF/CM/CU36C	1.00	1.12	0.94
RGF1L080BE12MP12	CF/CM/CU42C	1.02	1.12	0.95

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L080BE12MP12	CF/CM/CU48C	1.01	1.12	0.95
RGF1L080BE12MP12	CF42B	1.00	1.11	0.94
RGF1L080BE12MP12	XAF/XAUB36D	0.99	0.97	0.89
RGF1L080BE12MP12	XAF/XAUC42E	1.00	0.98	0.90
RGF1L080BE12MP12	XAFB36E	0.99	0.97	0.89
RGF1L080BE12MP12	XAFC36D	0.99	0.97	0.89
RGF1L080BE12MP12	XAHB36D	1.01	1.02	0.96
RGF1L080BE12MP12	XAHC36D	0.99	0.97	0.89
RGF1L080BE12MP12	XAHC42E	0.99	0.97	0.89
RGF1L080CE16MP12	CF/CM/CU36C	1.01	1.15	0.93
RGF1L080CE16MP12	CF/CM/CU42C	1.02	1.16	0.91
RGF1L080CE16MP12	CF/CM/CU48C	1.02	1.17	0.91
RGF1L080CE16MP12	CF/CM/CU48D	1.02	1.17	0.93
RGF1L080CE16MP12	CF/CM36D	1.02	1.17	0.93
RGF1L080CE16MP12	CF/CM42D	1.02	1.16	0.93
RGF1L080CE16MP12	XAF/XAUC42E	1.01	0.99	0.89
RGF1L080CE16MP12	XAFC36D	1.01	0.98	0.89
RGF1L080CE16MP12	XAFD42E	1.01	0.99	0.89
RGF1L080CE16MP12	XAHC36D	1.00	0.97	0.88
RGF1L080CE16MP12	XAHC42E	1.01	0.98	0.89
RGF1L080CE16MP12	XAHD42E	1.01	0.99	0.89
RGF1L080CE20MP12	CF/CM/CU36C	1.02	1.22	0.93
RGF1L080CE20MP12	CF/CM/CU42C	1.02	1.21	0.91
RGF1L080CE20MP12	CF/CM/CU48C	1.02	1.22	0.91
RGF1L080CE20MP12	CF/CM/CU48D	1.02	1.24	0.93
RGF1L080CE20MP12	CF/CM36D	1.02	1.23	0.93
RGF1L080CE20MP12	CF/CM42D	1.02	1.23	0.93
RGF1L080CE20MP12	XAF/XAUC42E	1.02	1.04	0.89
RGF1L080CE20MP12	XAFC36D	1.02	1.03	0.89
RGF1L080CE20MP12	XAFD42E	1.01	1.05	0.89
RGF1L080CE20MP12	XAHC36D	1.02	1.03	0.89
RGF1L080CE20MP12	XAHC42E	1.02	1.03	0.89
RGF1L080CE20MP12	XAHD42E	1.01	1.04	0.89
RGF1L100BE12MP12	CF/CM/CU36B	1.00	1.13	0.94
RGF1L100BE12MP12	CF/CM/CU36C	1.01	1.14	0.94
RGF1L100BE12MP12	CF/CM/CU42C	1.01	1.15	0.95
RGF1L100BE12MP12	CF/CM/CU48C	1.02	1.16	0.95
RGF1L100BE12MP12	CF42B	1.01	1.11	0.95
RGF1L100BE12MP12	XAF/XAUB36D	1.00	0.98	0.90
RGF1L100BE12MP12	XAF/XAUC42E	1.01	1.00	0.90
RGF1L100BE12MP12	XAFB36E	1.01	0.99	0.90
RGF1L100BE12MP12	XAFC36D	1.00	0.98	0.90
RGF1L100BE12MP12	XAHB36D	0.99	0.97	0.89
RGF1L100BE12MP12	XAHC36D	1.00	0.98	0.90
RGF1L100BE12MP12	XAHC42E	1.01	0.99	0.90
RGF1L100CE16MP12	CF/CM/CU36C	1.02	1.17	0.93
RGF1L100CE16MP12	CF/CM/CU42C	1.02	1.16	0.93
RGF1L100CE16MP12	CF/CM/CU48C	1.02	1.17	0.91
RGF1L100CE16MP12	CF/CM/CU48D	1.02	1.17	0.93
RGF1L100CE16MP12	CF/CM36D	1.02	1.17	0.93
RGF1L100CE16MP12	CF/CM42D	1.02	1.16	0.93
RGF1L100CE16MP12	XAF/XAUC42E	1.01	1.00	0.89
RGF1L100CE16MP12	XAFC36D	1.01	0.99	0.89
RGF1L100CE16MP12	XAFD42E	1.01	1.00	0.89
RGF1L100CE16MP12	XAHC36D	1.01	0.98	0.89

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L100CE16MP12	XAHC42E	1.01	0.99	0.89
RGF1L100CE16MP12	XAHD42E	1.01	0.99	0.89
RGF1L100CE20MP12	CF/CM/CU36C	1.02	1.22	0.93
RGF1L100CE20MP12	CF/CM/CU42C	1.02	1.21	0.93
RGF1L100CE20MP12	CF/CM/CU48C	1.02	1.22	0.91
RGF1L100CE20MP12	CF/CM/CU48D	1.02	1.24	0.93
RGF1L100CE20MP12	CF/CM36D	1.02	1.23	0.93
RGF1L100CE20MP12	CF/CM42D	1.02	1.23	0.93
RGF1L100CE20MP12	XAF/XAUC42E	1.02	1.04	0.89
RGF1L100CE20MP12	XAFC36D	1.02	1.03	0.89
RGF1L100CE20MP12	XAFD42E	1.01	1.05	0.89
RGF1L100CE20MP12	XAHC36D	1.02	1.03	0.89
RGF1L100CE20MP12	XAHC42E	1.02	1.03	0.89
RGF1L100CE20MP12	XAHD42E	1.01	1.04	0.89
RGF1L120CE16MP12	CF/CM/CU36C	1.02	1.17	0.93
RGF1L120CE16MP12	CF/CM/CU42C	1.02	1.16	0.93
RGF1L120CE16MP12	CF/CM/CU48C	1.02	1.17	0.91
RGF1L120CE16MP12	CF/CM/CU48D	1.02	1.17	0.93
RGF1L120CE16MP12	CF/CM36D	1.02	1.17	0.93
RGF1L120CE16MP12	CF/CM42D	1.02	1.16	0.93
RGF1L120CE16MP12	XAF/XAUC42E	1.01	1.00	0.89
RGF1L120CE16MP12	XAFC36D	1.01	0.99	0.89
RGF1L120CE16MP12	XAFD42E	1.01	1.00	0.89
RGF1L120CE16MP12	XAHC36D	1.01	0.98	0.89
RGF1L120CE16MP12	XAHC42E	1.01	0.99	0.89
RGF1L120CE16MP12	XAHD42E	1.01	1.00	0.89
RGF1L120CE20MP12	CF/CM/CU36C	1.02	1.23	0.93
RGF1L120CE20MP12	CF/CM/CU42C	1.02	1.23	0.93
RGF1L120CE20MP12	CF/CM/CU48C	1.02	1.25	0.93
RGF1L120CE20MP12	CF/CM/CU48D	1.02	1.25	0.93
RGF1L120CE20MP12	CF/CM36D	1.00	1.15	0.96
RGF1L120CE20MP12	CF/CM42D	1.02	1.25	0.93
RGF1L120CE20MP12	XAF/XAUC42E	1.02	1.06	0.89
RGF1L120CE20MP12	XAFC36D	1.02	1.04	0.89
RGF1L120CE20MP12	XAFD42E	1.01	1.06	0.89
RGF1L120CE20MP12	XAHC36D	1.02	1.04	0.89
RGF1L120CE20MP12	XAHC42E	1.02	1.05	0.89
RGF1L120CE20MP12	XAHD42E	1.01	1.05	0.89
RGF1L130DE20MP12	CF/CM/CU48D	1.02	1.25	0.91
RGF1L130DE20MP12	CF/CM36D	1.00	1.15	0.94
RGF1L130DE20MP12	CF/CM42D	1.02	1.25	0.91
RGF1L130DE20MP12	XAFD42E	1.02	1.06	0.89
RGF1L130DE20MP12	XAHD42E	1.02	1.05	0.89
RGF2L080BE12MP11	CF/CM/CU36B	0.99	1.08	0.93
RGF2L080BE12MP11	CF/CM/CU36C	0.99	1.09	0.91
RGF2L080BE12MP11	CF/CM/CU42C	1.01	1.09	0.92
RGF2L080BE12MP11	CF/CM/CU48C	1.01	1.10	0.92
RGF2L080BE12MP11	CF42B	1.02	1.16	0.97
RGF2L080BE12MP11	XAF/XAUB36D	1.01	1.02	0.95
RGF2L080BE12MP11	XAF/XAUC42E	1.01	1.03	0.95
RGF2L080BE12MP11	XAFB36E	1.01	1.03	0.95
RGF2L080BE12MP11	XAFC36D	1.01	1.03	0.95
RGF2L080BE12MP11	XAHB36D	1.01	1.01	0.94
RGF2L080BE12MP11	XAHC36D	1.01	1.02	0.95
RGF2L080BE12MP11	XAHC42E	1.01	1.03	0.95

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF2L100CE16MP11	CF/CM/CU36C	1.02	1.18	0.93
RGF2L100CE16MP11	CF/CM/CU42C	1.02	1.17	0.93
RGF2L100CE16MP11	CF/CM/CU48C	1.02	1.17	0.93
RGF2L100CE16MP11	CF/CM/CU48D	1.01	1.09	0.90
RGF2L100CE16MP11	CF/CM36D	0.99	1.09	0.91
RGF2L100CE16MP11	CF/CM42D	1.01	1.08	0.90
RGF2L100CE16MP11	XAF/XAUC42E	1.02	1.02	0.89
RGF2L100CE16MP11	XAFC36D	1.02	1.01	0.89
RGF2L100CE16MP11	XAFD42E	1.01	1.03	0.89
RGF2L100CE16MP11	XAHC36D	1.02	1.01	0.89
RGF2L100CE16MP11	XAHC42E	1.02	1.01	0.89
RGF2L100CE16MP11	XAHD42E	1.01	1.02	0.89
RGF2L100CE20MP11	CF/CM/CU36C	0.99	1.09	0.89
RGF2L100CE20MP11	CF/CM/CU42C	1.01	1.10	0.91
RGF2L100CE20MP11	CF/CM/CU48C	1.01	1.11	0.91
RGF2L100CE20MP11	CF/CM/CU48D	1.01	1.11	0.91
RGF2L100CE20MP11	CF/CM36D	1.00	1.10	0.90
RGF2L100CE20MP11	CF/CM42D	1.01	1.10	0.91
RGF2L100CE20MP11	XAF/XAUC42E	1.02	1.03	0.89
RGF2L100CE20MP11	XAFC36D	1.02	1.03	0.89
RGF2L100CE20MP11	XAFD42E	1.01	1.03	0.89
RGF2L100CE20MP11	XAHC36D	1.02	1.03	0.89
RGF2L100CE20MP11	XAHC42E	1.02	1.03	0.89
RGF2L100CE20MP11	XAHD42E	1.01	1.03	0.89
RGF19060AE10MP13	CF/CM/CU36B	0.99	1.10	0.97
RGF19060AE10MP13	CF42B	0.99	1.10	0.97
RGF19060AE10MP13	XAF/XAUB36D	0.99	0.98	0.95
RGF19060AE10MP13	XAFB36E	0.99	0.97	0.95
RGF19060AE10MP13	XAHB36D	0.98	0.97	0.94
RGF19060BE12MP13	CF/CM/CU36B	0.99	1.12	0.95
RGF19060BE12MP13	CF/CM/CU36C	1.00	1.14	0.98
RGF19060BE12MP13	CF/CM/CU42C	1.01	1.14	0.96
RGF19060BE12MP13	CF/CM/CU48C	1.01	1.15	0.97
RGF19060BE12MP13	CF42B	1.01	1.11	0.96
RGF19060BE12MP13	XAF/XAUB36D	0.99	0.98	0.93
RGF19060BE12MP13	XAF/XAUC42E	1.00	1.00	0.94
RGF19060BE12MP13	XAFB36E	1.00	0.99	0.94
RGF19060BE12MP13	XAFC36D	0.99	0.98	0.93
RGF19060BE12MP13	XAHB36D	0.99	0.97	0.95
RGF19060BE12MP13	XAHC36D	0.99	0.98	0.93
RGF19060BE12MP13	XAHC42E	1.00	0.99	0.94
RGF19080BE12MP13	CF/CM/CU36B	1.00	1.12	0.94
RGF19080BE12MP13	CF/CM/CU36C	1.00	1.13	0.94
RGF19080BE12MP13	CF/CM/CU42C	1.02	1.13	0.95
RGF19080BE12MP13	CF/CM/CU48C	1.02	1.14	0.95
RGF19080BE12MP13	CF42B	0.99	1.11	0.93
RGF19080BE12MP13	XAF/XAUB36D	0.99	0.97	0.93
RGF19080BE12MP13	XAF/XAUC42E	1.01	0.99	0.90
RGF19080BE12MP13	XAFB36E	1.00	0.98	0.94
RGF19080BE12MP13	XAFC36D	0.99	0.97	0.93
RGF19080BE12MP13	XAHB36D	0.99	0.97	0.93
RGF19080BE12MP13	XAHC36D	0.99	0.97	0.93
RGF19080BE12MP13	XAHC42E	1.00	0.98	0.90
RGF19080CE16MP13	CF/CM/CU36C	1.01	1.14	0.92
RGF19080CE16MP13	CF/CM/CU42C	1.02	1.13	0.93

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19080CE16MP13	CF/CM/CU48C	1.02	1.17	0.93
RGF19080CE16MP13	CF/CM/CU48D	1.02	1.17	0.95
RGF19080CE16MP13	CF/CM36D	1.01	1.14	0.94
RGF19080CE16MP13	CF/CM42D	1.02	1.16	0.95
RGF19080CE16MP13	XAF/XAUC42E	1.01	0.99	0.90
RGF19080CE16MP13	XAFC36D	1.01	0.99	0.92
RGF19080CE16MP13	XAFD42E	1.01	0.99	0.89
RGF19080CE16MP13	XAHC36D	1.00	0.97	0.92
RGF19080CE16MP13	XAHC42E	1.00	0.98	0.90
RGF19080CE16MP13	XAHD42E	1.01	0.99	0.89
RGF19080CE20MP13	CF/CM/CU36C	1.02	1.21	0.93
RGF19080CE20MP13	CF/CM/CU42C	1.02	1.21	0.93
RGF19080CE20MP13	CF/CM/CU48C	1.02	1.22	0.93
RGF19080CE20MP13	CF/CM/CU48D	1.02	1.22	0.93
RGF19080CE20MP13	CF/CM36D	1.02	1.23	0.93
RGF19080CE20MP13	CF/CM42D	1.02	1.22	0.93
RGF19080CE20MP13	XAF/XAUC42E	1.02	1.03	0.89
RGF19080CE20MP13	XAFC36D	1.02	1.03	0.89
RGF19080CE20MP13	XAFD42E	1.01	1.04	0.89
RGF19080CE20MP13	XAHC36D	1.02	1.02	0.89
RGF19080CE20MP13	XAHC42E	1.02	1.03	0.89
RGF19080CE20MP13	XAHD42E	1.01	1.03	0.89
RGF19100CE16MP13	CF/CM/CU36C	1.01	1.13	0.92
RGF19100CE16MP13	CF/CM/CU42C	1.02	1.14	0.93
RGF19100CE16MP13	CF/CM/CU48C	1.02	1.13	0.93
RGF19100CE16MP13	CF/CM/CU48D	1.02	1.13	0.93
RGF19100CE16MP13	CF/CM36D	1.01	1.13	0.92

FURNACE MULTIPLIERS - 3 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19100CE16MP13	CF/CM42D	1.02	1.14	0.93
RGF19100CE16MP13	XAF/XAUC42E	1.01	0.98	0.89
RGF19100CE16MP13	XAFC36D	1.00	0.97	0.88
RGF19100CE16MP13	XAFD42E	1.01	0.99	0.89
RGF19100CE16MP13	XAHC36D	1.00	0.97	0.88
RGF19100CE16MP13	XAHC42E	1.01	0.98	0.89
RGF19100CE16MP13	XAHD42E	1.01	0.98	0.89
RGF19100CE20MP13	CF/CM/CU36C	1.02	1.20	0.93
RGF19100CE20MP13	CF/CM/CU42C	1.02	1.21	0.91
RGF19100CE20MP13	CF/CM/CU48C	1.02	1.22	0.91
RGF19100CE20MP13	CF/CM/CU48D	1.02	1.23	0.93
RGF19100CE20MP13	CF/CM36D	1.02	1.21	0.93
RGF19100CE20MP13	CF/CM42D	1.02	1.21	0.93
RGF19100CE20MP13	XAF/XAUC42E	1.02	1.03	0.89
RGF19100CE20MP13	XAFC36D	1.02	1.03	0.89
RGF19100CE20MP13	XAFD42E	1.01	1.03	0.89
RGF19100CE20MP13	XAHC36D	1.02	1.02	0.89
RGF19100CE20MP13	XAHC42E	1.02	1.03	0.89
RGF19100CE20MP13	XAHD42E	1.01	1.03	0.89
RGF19120DE20MP13	CF/CM/CU48D	1.02	1.22	0.91
RGF19120DE20MP13	CF/CM36D	1.02	1.22	0.93
RGF19120DE20MP13	CF/CM42D	1.02	1.21	0.93
RGF19120DE20MP13	XAFD42E	1.02	1.04	0.89
RGF19120DE20MP13	XAHD42E	1.02	1.03	0.89

PERFORMANCE DATA - 3.5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L42B24S	35	107	38.8	2.47	37.2	2.70	35.5	2.97	33.5	3.28	31.3	3.63	29.0	4.04	26.5	4.48
	40	118	42.7	2.47	41.0	2.70	39.1	2.96	36.9	3.27	34.6	3.61	32.0	4.01	29.3	4.45
	45	130	46.9	2.49	45.0	2.71	42.9	2.97	40.5	3.26	38.0	3.59	35.2	3.98	32.3	4.41
	50	142	51.3	2.52	49.2	2.74	46.8	2.99	44.2	3.27	41.5	3.58	38.5	3.96	35.3	4.38
	55	156	55.9	2.56	53.5	2.77	50.9	3.02	48.1	3.29	45.0	3.59	41.9	3.94	38.5	4.34

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L42B24S													
INDOOR COIL MODEL NO.			CF42CXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	1200					1400					1600				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	42.8	40.7	41.6	41.7	43.9	44.9	41.0	42.2	42.4	44.3	47.0	41.3	42.7	43.1	44.6
	S.C.	42.8	33.3	28.9	26.3	20.9	44.9	34.5	29.9	27.2	21.3	47.0	35.7	30.9	28.1	21.6
	kW	2.41	2.42	2.43	2.41	2.41	2.49	2.50	2.50	2.49	2.49	2.56	2.57	2.57	2.57	2.57
65	T.C.	41.9	40.0	40.9	41.4	43.3	43.9	40.7	41.5	44.2	43.5	46.0	41.4	42.0	47.0	43.8
	S.C.	41.9	33.8	29.2	26.9	20.9	43.9	35.4	30.4	28.5	21.3	46.0	37.0	31.7	30.1	21.7
	kW	2.68	2.70	2.70	2.69	2.70	2.76	2.77	2.77	2.77	2.77	2.83	2.84	2.85	2.84	2.85
75	T.C.	40.9	39.3	40.3	41.0	42.6	42.9	40.4	40.7	46.0	42.8	44.9	41.5	41.2	50.9	43.0
	S.C.	40.9	34.3	29.5	27.5	20.9	42.9	36.3	30.9	29.8	21.3	44.9	38.3	32.4	32.2	21.8
	kW	2.96	2.97	2.97	2.97	2.98	3.03	3.04	3.04	3.04	3.06	3.10	3.12	3.12	3.12	3.13
85	T.C.	38.9	38.1	38.0	40.4	42.5	40.8	38.8	38.8	43.2	42.9	42.7	39.5	39.6	46.1	43.4
	S.C.	38.9	33.7	28.7	27.5	21.0	40.8	35.5	30.5	29.5	21.7	42.7	37.2	32.2	31.5	22.3
	kW	3.26	3.27	3.27	3.28	3.30	3.34	3.35	3.35	3.36	3.38	3.43	3.43	3.43	3.44	3.46
95	T.C.	36.9	36.9	35.8	39.7	42.3	38.7	37.2	36.8	40.5	43.0	40.4	37.6	37.9	41.3	43.7
	S.C.	36.9	33.1	27.9	27.6	21.2	38.7	37.2	30.0	29.2	22.0	40.4	37.6	32.1	30.8	22.8
	kW	3.57	3.57	3.57	3.60	3.62	3.66	3.66	3.66	3.68	3.71	3.75	3.74	3.74	3.76	3.79
105	T.C.	35.1	34.4	33.6	37.1	40.0	37.2	35.3	34.4	38.0	40.4	39.2	36.2	35.1	38.9	40.8
	S.C.	35.1	31.6	27.0	26.8	20.4	37.2	35.3	28.9	28.6	21.3	39.2	36.2	30.9	30.3	22.2
	kW	3.94	3.94	3.93	3.98	4.01	4.04	4.03	4.02	4.07	4.10	4.13	4.12	4.11	4.15	4.18
115	T.C.	33.4	31.9	31.5	34.6	37.6	35.7	33.4	31.9	35.5	37.7	38.0	34.8	32.3	36.5	37.9
	S.C.	33.4	31.9	26.2	26.1	19.6	35.7	33.4	27.9	28.0	20.6	38.0	34.8	32.3	29.9	21.6
	kW	4.32	4.31	4.29	4.37	4.40	4.41	4.41	4.39	4.45	4.49	4.51	4.51	4.48	4.53	4.57
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 3.5 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU42C	1.00	1.00	1.00
—	CF/CM/CU42C	1.00	1.00	1.00
—	CF/CM/CU48C	1.01	1.11	0.99
—	CF/CM/CU48D	1.01	1.11	0.99
—	CF/CM/CU60C	1.00	1.09	0.98
—	CF/CM42D	1.01	1.12	0.99
—	CF/CM64D	1.04	1.14	0.99
—	XAF/XAUC42E	1.01	1.01	0.96
—	XAF/XAUC48F	1.01	1.01	0.96
—	XAFD42E	1.01	1.03	0.96
—	XAFD48F	1.01	1.01	0.96
—	XAHC48F	1.00	1.01	0.98
—	XAHD42E	1.00	0.99	0.95
—	XAHD48F	1.01	1.01	0.96
RFCX42CE14MP22	—	1.02	1.11	0.94
RFCX48CE16MP22	—	1.04	1.16	0.93
RFCX48DE16MP22	—	1.04	1.18	0.91
RFCX60CE20MP23	—	1.02	1.12	0.94
RFCX60DE20MP22	—	1.04	1.13	0.91
RFCX48CP16MP22	—	1.01	1.08	0.97
RFCX48DP16MP22	—	1.02	1.15	0.98
RFCX60DP20MP24	—	1.01	1.16	1.01
ME12CN21	CF/CM42C	1.01	1.06	0.91
ME12CN21	CF/CM48C	1.02	1.07	0.92
ME12CN21	CF/CM60C	1.01	1.05	0.91
ME14DN21	CF/CM42D	1.01	1.05	0.91
ME14DN21	CF/CM48D	1.04	1.12	0.93
ME14DN21	CF/CM60D	1.01	1.04	0.91
ME14DN21	CF/CM64D	1.04	1.06	0.89
ME16CN21	CF/CM42C	1.02	1.10	0.92
ME16CN21	CF/CM48C	1.02	1.10	0.94
ME16CN21	CF/CM60C	1.01	1.07	0.93
ME20DN21	CF/CM42D	1.02	1.08	0.90
ME20DN21	CF/CM48D	1.02	1.09	0.90
ME20DN21	CF/CM60D	1.04	1.18	0.93
ME20DN21	CF/CM64D	1.04	1.09	0.89

FURNACE MULTIPLIERS - 3.5 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L080BE12MP12	CF/CM/CU42C	1.00	1.06	0.96
RGF1L080BE12MP12	CF/CM/CU48C	1.01	1.07	0.95
RGF1L080BE12MP12	CF/CM/CU60C	1.00	1.04	0.96
RGF1L080CE16MP12	CF/CM/CU42C	1.02	1.08	0.94
RGF1L080CE16MP12	CF/CM/CU48C	1.02	1.09	0.94
RGF1L080CE16MP12	CF/CM/CU48D	1.02	1.09	0.94
RGF1L080CE16MP12	CF/CM/CU60C	1.01	1.07	0.93
RGF1L080CE16MP12	CF/CM/CU60D	1.01	1.07	0.93
RGF1L080CE16MP12	CF/CM42D	1.02	1.09	0.94
RGF1L080CE16MP12	CF/CM64D	1.04	1.09	0.93
RGF1L080CE16MP12	XAF/XAUC42E	1.01	0.98	0.95
RGF1L080CE16MP12	XAF/XAUC48F	1.01	0.97	0.95
RGF1L080CE16MP12	XAFD42E	1.00	0.98	0.94
RGF1L080CE16MP12	XAFD48F	1.00	0.97	0.94
RGF1L080CE16MP12	XAHC42E	1.01	0.97	0.95
RGF1L080CE16MP12	XAHC48F	1.01	0.97	0.95

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L080CE16MP12	XAHD42E	1.00	0.97	0.94
RGF1L080CE16MP12	XAHD48F	1.00	0.97	0.94
RGF1L080CE20MP12	CF/CM/CU42C	1.01	1.07	0.91
RGF1L080CE20MP12	CF/CM/CU48C	1.01	1.07	0.91
RGF1L080CE20MP12	CF/CM/CU48D	1.02	1.09	0.92
RGF1L080CE20MP12	CF/CM/CU60C	1.01	1.06	0.93
RGF1L080CE20MP12	CF/CM/CU60D	1.01	1.07	0.91
RGF1L080CE20MP12	CF/CM42D	1.02	1.08	0.92
RGF1L080CE20MP12	CF/CM64D	1.04	1.08	0.91
RGF1L080CE20MP12	XAF/XAUC42E	1.01	0.97	0.93
RGF1L080CE20MP12	XAF/XAUC48F	1.01	0.96	0.93
RGF1L080CE20MP12	XAFD42E	1.00	0.97	0.92
RGF1L080CE20MP12	XAFD48F	1.00	0.96	0.94
RGF1L080CE20MP12	XAHC42E	1.01	1.03	0.95
RGF1L080CE20MP12	XAHC48F	1.01	0.96	0.95
RGF1L080CE20MP12	XAHD42E	1.00	0.97	0.94
RGF1L080CE20MP12	XAHD48F	1.00	0.96	0.94
RGF1L100BE12MP12	CF/CM/CU42C	1.00	1.06	0.94
RGF1L100BE12MP12	CF/CM/CU48C	1.01	1.07	0.95
RGF1L100BE12MP12	CF/CM/CU60C	1.00	1.04	0.94
RGF1L100CE16MP12	CF/CM/CU42C	1.02	1.09	0.94
RGF1L100CE16MP12	CF/CM/CU48C	1.02	1.09	0.94
RGF1L100CE16MP12	CF/CM/CU48D	1.02	1.10	0.94
RGF1L100CE16MP12	CF/CM/CU60C	1.01	1.07	0.93
RGF1L100CE16MP12	CF/CM/CU60D	1.01	1.08	0.93
RGF1L100CE16MP12	CF/CM42D	1.02	1.10	0.94
RGF1L100CE16MP12	CF/CM64D	1.04	1.11	0.93
RGF1L100CE16MP12	XAF/XAUC42E	1.01	0.99	0.95
RGF1L100CE16MP12	XAF/XAUC48F	1.01	0.97	0.95
RGF1L100CE16MP12	XAFD42E	1.00	0.99	0.94
RGF1L100CE16MP12	XAFD48F	1.00	0.98	0.94
RGF1L100CE16MP12	XAHC42E	1.01	0.98	0.95
RGF1L100CE16MP12	XAHC48F	1.01	0.98	0.95
RGF1L100CE16MP12	XAHD42E	1.00	0.98	0.94
RGF1L100CE16MP12	XAHD48F	1.00	0.97	0.94
RGF1L100CE20MP12	CF/CM/CU42C	1.01	1.07	0.91
RGF1L100CE20MP12	CF/CM/CU48C	1.01	1.07	0.91
RGF1L100CE20MP12	CF/CM/CU48D	1.02	1.09	0.92
RGF1L100CE20MP12	CF/CM/CU60C	1.01	1.06	0.93
RGF1L100CE20MP12	CF/CM/CU60D	1.01	1.07	0.91
RGF1L100CE20MP12	CF/CM42D	1.02	1.08	0.92
RGF1L100CE20MP12	CF/CM64D	1.04	1.08	0.91
RGF1L100CE20MP12	XAF/XAUC42E	1.01	0.97	0.93
RGF1L100CE20MP12	XAF/XAUC48F	1.01	0.96	0.93
RGF1L100CE20MP12	XAFD42E	1.00	0.97	0.92
RGF1L100CE20MP12	XAFD48F	1.00	0.96	0.94
RGF1L100CE20MP12	XAHC42E	1.01	1.02	0.95
RGF1L100CE20MP12	XAHC48F	1.01	0.96	0.95
RGF1L100CE20MP12	XAHD42E	1.00	0.97	0.94
RGF1L100CE20MP12	XAHD48F	1.00	0.96	0.94
RGF1L120CE16MP12	CF/CM/CU42C	1.02	1.09	0.94
RGF1L120CE16MP12	CF/CM/CU48C	1.02	1.10	0.94
RGF1L120CE16MP12	CF/CM/CU48D	1.02	1.10	0.94
RGF1L120CE16MP12	CF/CM/CU60C	1.01	1.07	0.93
RGF1L120CE16MP12	CF/CM/CU60D	1.01	1.08	0.93

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L120CE16MP12	CF/CM42D	1.02	1.10	0.94
RGF1L120CE16MP12	CF/CM64D	1.04	1.11	0.93
RGF1L120CE16MP12	XAF/XAUC42E	1.01	0.99	0.95
RGF1L120CE16MP12	XAF/XAUC48F	1.01	0.97	0.95
RGF1L120CE16MP12	XAFD42E	1.00	0.99	0.94
RGF1L120CE16MP12	XAFD48F	1.00	0.98	0.94
RGF1L120CE16MP12	XAHC42E	1.01	0.98	0.95
RGF1L120CE16MP12	XAHC48F	1.01	0.98	0.95
RGF1L120CE16MP12	XAHD42E	1.00	0.98	0.94
RGF1L120CE16MP12	XAHD48F	1.00	0.98	0.94
RGF1L120CE20MP12	CF/CM/CU42C	1.02	1.08	0.92
RGF1L120CE20MP12	CF/CM/CU48C	1.02	1.09	0.92
RGF1L120CE20MP12	CF/CM/CU48D	1.02	1.09	0.92
RGF1L120CE20MP12	CF/CM/CU60C	1.01	1.07	0.93
RGF1L120CE20MP12	CF/CM/CU60D	1.02	1.09	0.92
RGF1L120CE20MP12	CF/CM42D	1.02	1.09	0.92
RGF1L120CE20MP12	CF/CM64D	1.04	1.10	0.91
RGF1L120CE20MP12	XAF/XAUC42E	1.01	0.98	0.93
RGF1L120CE20MP12	XAF/XAUC48F	1.01	0.97	0.93
RGF1L120CE20MP12	XAFD42E	1.00	0.98	0.94
RGF1L120CE20MP12	XAFD48F	1.00	0.97	0.94
RGF1L120CE20MP12	XAHC42E	1.01	0.97	0.95
RGF1L120CE20MP12	XAHC48F	1.01	0.97	0.95
RGF1L120CE20MP12	XAHD42E	1.00	0.97	0.94
RGF1L120CE20MP12	XAHD48F	1.00	0.97	0.94
RGF1L130DE20MP12	CF/CM/CU48D	1.02	1.09	0.92
RGF1L130DE20MP12	CF/CM/CU60D	1.02	1.09	0.92
RGF1L130DE20MP12	CF/CM42D	1.02	1.09	0.92
RGF1L130DE20MP12	CF/CM64D	1.04	1.12	0.91
RGF1L130DE20MP12	XAFD42E	1.01	0.98	0.93
RGF1L130DE20MP12	XAFD48F	1.01	0.97	0.93
RGF1L130DE20MP12	XAHD42E	1.01	0.97	0.93
RGF1L130DE20MP12	XAHD48F	1.01	0.97	0.93
RGF2L080BE12MP11	CF/CM/CU42C	1.00	1.04	0.94
RGF2L080BE12MP11	CF/CM/CU48C	1.00	1.03	0.94
RGF2L080BE12MP11	CF/CM/CU60C	1.00	1.03	0.94
RGF2L100CE16MP11	CF/CM/CU42C	1.01	1.11	0.95
RGF2L100CE16MP11	CF/CM/CU48C	1.02	1.11	0.96
RGF2L100CE16MP11	CF/CM/CU48D	1.02	1.12	0.94
RGF2L100CE16MP11	CF/CM/CU60C	1.01	1.09	0.95
RGF2L100CE16MP11	CF/CM/CU60D	1.00	1.01	0.92
RGF2L100CE16MP11	CF/CM42D	1.01	1.03	0.91
RGF2L100CE16MP11	CF/CM64D	1.04	1.14	0.95
RGF2L100CE16MP11	XAF/XAUC42E	1.01	1.02	0.95
RGF2L100CE16MP11	XAF/XAUC48F	1.01	0.99	0.97
RGF2L100CE16MP11	XAFD42E	1.01	1.02	0.95
RGF2L100CE16MP11	XAFD48F	1.00	0.99	0.94
RGF2L100CE16MP11	XAHC42E	1.01	1.00	0.97
RGF2L100CE16MP11	XAHC48F	1.01	0.99	0.97
RGF2L100CE16MP11	XAHD42E	1.01	1.02	0.97
RGF2L100CE16MP11	XAHD48F	1.00	0.99	0.96
RGF2L100CE20MP11	CF/CM/CU42C	1.01	1.06	0.91
RGF2L100CE20MP11	CF/CM/CU48C	1.02	1.07	0.92
RGF2L100CE20MP11	CF/CM/CU48D	1.01	1.07	0.91
RGF2L100CE20MP11	CF/CM/CU60C	1.01	1.05	0.94

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF2L100CE20MP11	CF/CM/CU60D	1.01	1.06	0.91
RGF2L100CE20MP11	CF/CM42D	1.01	1.07	0.91
RGF2L100CE20MP11	CF/CM64D	1.04	1.08	0.91
RGF2L100CE20MP11	XAF/XAUC42E	1.02	1.01	0.96
RGF2L100CE20MP11	XAF/XAUC48F	1.00	0.94	0.92
RGF2L100CE20MP11	XAFD42E	1.01	1.02	0.95
RGF2L100CE20MP11	XAFD48F	1.00	0.95	0.94
RGF2L100CE20MP11	XAHC42E	1.02	1.01	0.96
RGF2L100CE20MP11	XAHC48F	1.01	0.95	0.95
RGF2L100CE20MP11	XAHD42E	1.01	1.01	0.95
RGF2L100CE20MP11	XAHD48F	0.99	0.94	0.92
RGF19060BE12MP13	CF/CM/CU42C	1.00	1.04	0.98
RGF19060BE12MP13	CF/CM/CU48C	1.00	1.04	0.98
RGF19060BE12MP13	CF/CM/CU60C	0.99	1.02	0.97
RGF19080BE12MP13	CF/CM/CU42C	1.00	1.06	0.96
RGF19080BE12MP13	CF/CM/CU48C	1.00	1.05	0.96
RGF19080BE12MP13	CF/CM/CU60C	1.00	1.04	0.96
RGF19080CE16MP13	CF/CM/CU42C	1.01	1.07	0.95
RGF19080CE16MP13	CF/CM/CU48C	1.01	1.07	0.95
RGF19080CE16MP13	CF/CM/CU48D	1.01	1.07	0.93
RGF19080CE16MP13	CF/CM/CU60C	1.00	1.05	0.94
RGF19080CE16MP13	CF/CM/CU60D	1.00	1.05	0.94
RGF19080CE16MP13	CF/CM42D	1.01	1.07	0.93
RGF19080CE16MP13	CF/CM64D	1.04	1.09	0.95
RGF19080CE16MP13	XAF/XAUC42E	1.01	0.98	0.97
RGF19080CE16MP13	XAF/XAUC48F	1.00	0.96	0.96
RGF19080CE16MP13	XAFD42E	1.00	0.99	0.94
RGF19080CE16MP13	XAFD48F	0.99	0.96	0.94
RGF19080CE16MP13	XAHC42E	1.00	0.96	0.96
RGF19080CE16MP13	XAHC48F	1.00	0.96	0.96
RGF19080CE16MP13	XAHD42E	1.00	0.98	0.96
RGF19080CE16MP13	XAHD48F	0.99	0.96	0.94
RGF19080CE20MP13	CF/CM/CU42C	1.01	1.06	0.91
RGF19080CE20MP13	CF/CM/CU48C	1.02	1.07	0.92
RGF19080CE20MP13	CF/CM/CU48D	1.01	1.07	0.91
RGF19080CE20MP13	CF/CM/CU60C	1.01	1.05	0.93
RGF19080CE20MP13	CF/CM/CU60D	1.02	1.13	0.94
RGF19080CE20MP13	CF/CM42D	1.01	1.07	0.91
RGF19080CE20MP13	CF/CM64D	1.04	1.08	0.91
RGF19080CE20MP13	XAF/XAUC42E	1.01	1.02	0.95
RGF19080CE20MP13	XAF/XAUC48F	1.00	0.94	0.92
RGF19080CE20MP13	XAFD42E	1.00	0.97	0.94
RGF19080CE20MP13	XAFD48F	1.00	0.96	0.94
RGF19080CE20MP13	XAHC42E	1.01	1.02	0.95
RGF19080CE20MP13	XAHC48F	1.01	0.96	0.95
RGF19080CE20MP13	XAHD42E	1.01	1.02	0.95
RGF19080CE20MP13	XAHD48F	0.99	0.94	0.92
RGF19100CE16MP13	CF/CM/CU42C	1.01	1.07	0.93
RGF19100CE16MP13	CF/CM/CU48C	1.01	1.07	0.93
RGF19100CE16MP13	CF/CM/CU48D	1.02	1.09	0.94
RGF19100CE16MP13	CF/CM/CU60C	1.00	1.05	0.94
RGF19100CE16MP13	CF/CM/CU60D	1.01	1.07	0.93
RGF19100CE16MP13	CF/CM42D	1.02	1.09	0.94
RGF19100CE16MP13	CF/CM64D	1.04	1.09	0.93
RGF19100CE16MP13	XAF/XAUC42E	1.01	0.98	0.95

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19100CE16MP13	XAF/XAUC48F	1.00	0.96	0.96
RGF19100CE16MP13	XAFD42E	1.00	0.98	0.94
RGF19100CE16MP13	XAFD48F	0.99	0.96	0.94
RGF19100CE16MP13	XAHC42E	1.01	0.98	0.97
RGF19100CE16MP13	XAHC48F	1.00	0.96	0.96
RGF19100CE16MP13	XAHD42E	1.00	0.98	0.96
RGF19100CE16MP13	XAHD48F	0.99	0.96	0.94
RGF19100CE20MP13	CF/CM/CU42C	1.01	1.06	0.91
RGF19100CE20MP13	CF/CM/CU48C	1.02	1.07	0.92
RGF19100CE20MP13	CF/CM/CU48D	1.02	1.07	0.92
RGF19100CE20MP13	CF/CM/CU60C	1.01	1.05	0.91
RGF19100CE20MP13	CF/CM/CU60D	1.01	1.06	0.91
RGF19100CE20MP13	CF/CM42D	1.01	1.06	0.91
RGF19100CE20MP13	CF/CM64D	1.04	1.08	0.91
RGF19100CE20MP13	XAF/XAUC42E	1.01	1.02	0.95
RGF19100CE20MP13	XAF/XAUC48F	1.02	1.01	0.96

FURNACE MULTIPLIERS - 3.5 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19100CE20MP13	XAFD42E	1.01	1.03	0.95
RGF19100CE20MP13	XAFD48F	0.99	0.94	0.92
RGF19100CE20MP13	XAHC42E	1.01	1.01	0.95
RGF19100CE20MP13	XAHC48F	1.00	0.94	0.94
RGF19100CE20MP13	XAHD42E	1.01	1.02	0.95
RGF19100CE20MP13	XAHD48F	0.99	0.94	0.92
RGF19120DE20MP13	CF/CM/CU48D	1.01	1.07	0.91
RGF19120DE20MP13	CF/CM/CU60D	1.01	1.06	0.93
RGF19120DE20MP13	CF/CM42D	1.01	1.07	0.91
RGF19120DE20MP13	CF/CM64D	1.04	1.08	0.91
RGF19120DE20MP13	XAFD42E	1.01	0.97	0.93
RGF19120DE20MP13	XAFD48F	1.01	0.96	0.93
RGF19120DE20MP13	XAHD42E	1.02	1.03	0.98
RGF19120DE20MP13	XAHD48F	1.00	0.94	0.94

PERFORMANCE DATA - 4 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L48B23S	35	107	46.2	2.20	44.0	2.49	41.7	2.79	39.4	3.13	36.9	3.51	34.3	3.98	31.5	4.51
	40	119	50.8	2.19	48.4	2.49	45.9	2.80	43.3	3.14	40.7	3.51	37.9	3.97	34.9	4.50
	45	130	55.8	2.19	53.0	2.50	50.3	2.81	47.6	3.15	44.6	3.53	41.8	3.97	38.6	4.50
	50	143	61.1	2.19	58.1	2.51	55.0	2.83	52.0	3.17	48.9	3.56	45.8	4.00	42.5	4.50
	55	156	66.7	2.20	63.4	2.52	60.0	2.85	56.6	3.21	53.4	3.58	49.9	4.04	46.6	4.52

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L48B23S													
INDOOR COIL MODEL NO.			CF48CXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	1400					1600					1800				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	43.3	46.5	46.4	49.1	51.0	44.0	46.8	46.8	49.5	51.0	44.6	47.0	47.1	49.8	50.9
	S.C.	42.7	36.7	32.2	30.5	23.8	43.4	38.0	33.1	31.3	24.2	44.0	39.4	34.0	32.2	24.6
	kW	2.70	2.69	2.73	2.77	2.81	2.76	2.80	2.82	2.85	2.89	2.82	2.91	2.90	2.94	2.98
65	T.C.	43.2	46.0	45.9	48.8	51.5	44.1	46.4	46.4	49.2	51.5	45.0	46.8	47.0	49.7	51.6
	S.C.	42.6	37.5	32.6	31.1	24.2	43.5	39.1	34.0	32.1	24.7	44.4	40.7	35.4	33.2	25.2
	kW	2.99	2.96	3.02	3.06	3.10	3.04	3.05	3.10	3.14	3.18	3.09	3.15	3.18	3.22	3.27
75	T.C.	43.1	45.5	45.4	48.4	51.9	44.3	46.1	46.1	49.0	52.1	45.4	46.6	46.8	49.6	52.2
	S.C.	42.5	38.4	33.1	31.7	24.6	43.7	40.2	34.9	32.9	25.2	44.8	41.9	36.8	34.1	25.9
	kW	3.27	3.23	3.30	3.34	3.39	3.32	3.31	3.38	3.43	3.47	3.36	3.39	3.46	3.51	3.56
85	T.C.	41.5	43.5	43.1	47.2	50.8	43.1	44.0	43.8	47.5	50.6	44.7	44.5	44.6	47.9	50.5
	S.C.	40.9	38.1	32.2	31.6	24.2	42.5	40.0	34.2	33.2	25.0	44.0	41.8	36.3	34.8	25.8
	kW	3.58	3.63	3.65	3.72	3.78	3.65	3.69	3.74	3.80	3.87	3.72	3.75	3.82	3.89	3.95
95	T.C.	39.9	41.4	40.7	45.9	49.7	41.9	41.9	41.5	46.0	49.2	43.9	42.3	42.3	46.1	48.7
	S.C.	39.4	37.9	31.3	31.5	23.9	41.3	39.8	33.5	33.5	24.8	43.2	41.7	35.7	35.5	25.7
	kW	3.89	4.02	4.01	4.10	4.17	3.99	4.06	4.10	4.18	4.26	4.09	4.11	4.19	4.27	4.35
105	T.C.	37.6	38.3	37.4	42.3	46.8	39.3	39.3	38.0	42.7	46.4	41.0	40.4	38.7	43.1	46.1
	S.C.	37.1	36.3	29.8	30.3	22.9	38.7	38.1	32.0	32.4	24.0	40.4	39.8	34.2	34.4	25.2
	kW	4.33	4.39	4.45	4.56	4.66	4.44	4.47	4.54	4.65	4.75	4.54	4.55	4.63	4.74	4.85
115	T.C.	35.2	35.2	34.1	38.6	43.8	36.7	36.8	34.6	39.4	43.7	38.1	38.4	35.0	40.1	43.5
	S.C.	34.7	34.7	28.4	29.1	21.9	36.2	36.3	30.5	31.2	23.3	37.6	37.9	32.7	33.4	24.7
	kW	4.77	4.77	4.88	5.03	5.14	4.89	4.88	4.98	5.12	5.24	5.00	4.98	5.07	5.21	5.34
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor).																
Green shaded cells are ACCA (TVA) conditions.																
Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 4 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU48C	1.00	1.00	1.00
—	CF/CM/CU48D	1.00	1.00	1.00
—	CF/CM/CU60C	1.04	1.07	1.02
—	CF/CM/CU60D	1.04	1.07	1.02
—	CF/CM64D	1.04	1.07	1.02
—	XAF/XAUC48F	1.00	0.98	0.97
—	XAF/XAUC60G	1.03	1.02	0.98
—	XAF/XAUD60G	1.03	1.02	0.98
—	XAFD48F	1.00	0.99	0.97
—	XAHC48F	1.00	0.98	1.00
—	XAHC60G	1.03	1.02	0.98
—	XAHD48F	1.00	0.99	0.97
—	XAHD60G	1.03	1.02	0.98
RFCX48CE16MP22	—	1.03	1.04	0.93
RFCX48DE16MP22	—	1.04	1.06	0.94
RFCX60DE20MP22	—	1.04	1.04	0.94
RFCX48CP16MP22	—	1.00	0.97	0.96
RFCX48DP16MP22	—	1.03	1.04	1.03
RFCX60DP20MP24	—	1.02	1.03	0.95
ME14DN21	CF/CM60D	1.04	1.04	0.94
ME14DN21	CF/CM64D	1.04	1.03	0.94
ME16CN21	CF/CM48C	1.04	1.06	0.94
ME16CN21	CF/CM60C	1.04	1.06	0.94
ME20DN21	CF/CM48D	1.04	1.06	0.94
ME20DN21	CF/CM60D	1.04	1.04	0.94
ME20DN21	CF/CM64D	1.04	1.06	0.94

FURNACE MULTIPLIERS - 4 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L080CE16MP12	XAF/XAUC48F	1.00	0.98	0.96
RGF1L080CE16MP12	XAF/XAUC60G	1.03	1.01	0.99
RGF1L080CE16MP12	XAF/XAUD60G	1.03	1.01	0.99
RGF1L080CE16MP12	XAFD48F	1.00	0.98	1.00
RGF1L080CE16MP12	XAHC48F	1.00	0.98	1.00
RGF1L080CE16MP12	XAHC60G	1.03	1.01	0.99
RGF1L080CE16MP12	XAHD48F	1.00	0.98	1.00
RGF1L080CE16MP12	XAHD60G	1.02	1.00	0.96
RGF1L080CE20MP12	XAF/XAUC48F	1.00	0.95	0.96
RGF1L080CE20MP12	XAF/XAUC60G	1.03	0.98	0.95
RGF1L080CE20MP12	XAF/XAUD60G	1.03	0.98	0.95
RGF1L080CE20MP12	XAFD48F	1.00	0.95	0.96
RGF1L080CE20MP12	XAHC48F	1.00	0.95	0.96
RGF1L080CE20MP12	XAHC60G	1.03	0.98	0.95
RGF1L080CE20MP12	XAHD48F	1.00	0.95	0.96
RGF1L080CE20MP12	XAHD60G	1.02	0.97	0.92
RGF1L100CE16MP12	XAF/XAUC48F	1.00	0.98	0.96
RGF1L100CE16MP12	XAF/XAUC60G	1.03	1.01	0.99
RGF1L100CE16MP12	XAF/XAUD60G	1.03	1.01	0.99
RGF1L100CE16MP12	XAFD48F	1.00	0.98	0.98
RGF1L100CE16MP12	XAHC48F	1.00	0.98	1.00
RGF1L100CE16MP12	XAHC60G	1.03	1.01	0.99
RGF1L100CE16MP12	XAHD48F	1.00	0.98	1.00
RGF1L100CE16MP12	XAHD60G	1.02	1.00	0.96
RGF1L100CE20MP12	XAF/XAUC48F	1.00	0.94	0.96

FURNACE MULTIPLIERS - 4 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF1L100CE20MP12	XAF/XAUC60G	1.02	0.97	0.94
RGF1L100CE20MP12	XAF/XAUD60G	1.02	0.97	0.94
RGF1L100CE20MP12	XAFD48F	1.00	0.94	0.96
RGF1L100CE20MP12	XAHC48F	1.00	0.94	0.96
RGF1L100CE20MP12	XAHC60G	1.02	0.97	0.94
RGF1L100CE20MP12	XAHD48F	1.00	0.94	0.96
RGF1L100CE20MP12	XAHD60G	1.02	0.96	0.92
RGF1L120CE16MP12	XAF/XAUC48F	1.00	0.98	0.96
RGF1L120CE16MP12	XAF/XAUC60G	1.03	1.01	0.99
RGF1L120CE16MP12	XAF/XAUD60G	1.03	1.01	0.99
RGF1L120CE16MP12	XAFD48F	1.01	0.99	0.99
RGF1L120CE16MP12	XAHC48F	1.00	0.98	1.00
RGF1L120CE16MP12	XAHC60G	1.03	1.01	0.99
RGF1L120CE16MP12	XAHD48F	1.01	0.99	0.99
RGF1L120CE16MP12	XAHD60G	1.03	1.01	0.99
RGF1L120CE20MP12	XAF/XAUC48F	1.00	0.94	0.96
RGF1L120CE20MP12	XAF/XAUC60G	1.02	0.97	0.94
RGF1L120CE20MP12	XAF/XAUD60G	1.02	0.97	0.94
RGF1L120CE20MP12	XAFD48F	1.00	0.95	0.94
RGF1L120CE20MP12	XAHC48F	1.00	0.94	0.96
RGF1L120CE20MP12	XAHC60G	1.02	0.97	0.94
RGF1L120CE20MP12	XAHD48F	1.00	0.94	0.96
RGF1L120CE20MP12	XAHD60G	1.02	0.96	0.92
RGF1L130DE20MP12	XAF/XAUD60G	1.02	0.96	0.94
RGF1L130DE20MP12	XAFD48F	1.00	0.94	0.92
RGF1L130DE20MP12	XAHD48F	1.00	0.94	0.92
RGF1L130DE20MP12	XAHD60G	1.03	1.02	0.99
RGF2L100CE16MP11	CF/CM/CU48C	1.00	1.01	0.94
RGF2L100CE16MP11	CF/CM/CU48D	1.01	1.03	0.95
RGF2L100CE16MP11	CF/CM/CU60C	1.01	1.02	0.95
RGF2L100CE16MP11	CF/CM/CU60D	1.01	1.02	0.95
RGF2L100CE16MP11	CF/CM64D	1.02	1.02	0.94
RGF2L100CE16MP11	XAF/XAUC48F	1.00	0.97	0.96
RGF2L100CE16MP11	XAF/XAUC60G	1.02	0.99	0.98
RGF2L100CE16MP11	XAF/XAUD60G	1.03	1.01	0.99
RGF2L100CE16MP11	XAFD48F	1.00	0.97	0.98
RGF2L100CE16MP11	XAHC48F	1.00	0.97	1.00
RGF2L100CE16MP11	XAHC60G	1.03	1.01	0.99
RGF2L100CE16MP11	XAHD48F	1.00	0.97	0.98
RGF2L100CE16MP11	XAHD60G	1.02	0.99	0.98
RGF2L100CE20MP11	CF/CM/CU48C	1.01	1.03	0.95
RGF2L100CE20MP11	CF/CM/CU48D	1.02	1.05	0.92
RGF2L100CE20MP11	CF/CM/CU60C	1.02	1.03	0.92
RGF2L100CE20MP11	CF/CM/CU60D	1.04	1.12	0.96
RGF2L100CE20MP11	CF/CM64D	1.03	1.04	0.93
RGF2L100CE20MP11	XAF/XAUC48F	1.01	0.98	0.97
RGF2L100CE20MP11	XAF/XAUC60G	1.03	1.01	0.94
RGF2L100CE20MP11	XAF/XAUD60G	1.03	1.01	0.97
RGF2L100CE20MP11	XAFD48F	1.01	0.98	0.97
RGF2L100CE20MP11	XAHC48F	1.01	0.98	0.99
RGF2L100CE20MP11	XAHC60G	1.03	1.01	0.94
RGF2L100CE20MP11	XAHD48F	1.01	0.98	0.97
RGF2L100CE20MP11	XAHD60G	1.03	1.00	0.94
RGF19080CE20MP13	XAF/XAUC48F	1.00	0.96	0.96
RGF19080CE20MP13	XAF/XAUC60G	1.02	0.96	0.94

FURNACE MULTIPLIERS - 4 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19080CE20MP13	XAF/XAUD60G	1.02	0.96	0.94
RGF19080CE20MP13	XAFD48F	1.00	0.94	0.94
RGF19080CE20MP13	XAHC48F	1.00	0.96	0.98
RGF19080CE20MP13	XAHC60G	1.02	0.96	0.94
RGF19080CE20MP13	XAHD48F	1.00	0.96	0.96
RGF19080CE20MP13	XAHD60G	1.02	0.98	0.94
RGF19100CE20MP13	XAF/XAUC48F	1.00	0.96	0.96
RGF19100CE20MP13	XAF/XAUC60G	1.02	0.96	0.94
RGF19100CE20MP13	XAF/XAUD60G	1.02	0.96	0.94
RGF19100CE20MP13	XAFD48F	1.01	0.97	0.97

FURNACE MULTIPLIERS - 4 TON (Continued)

Furnaces	Coil	T.C.	S.C.	kW
RGF19100CE20MP13	XAHC48F	1.00	0.96	0.98
RGF19100CE20MP13	XAHC60G	1.02	0.96	0.94
RGF19100CE20MP13	XAHD48F	1.01	0.97	0.97
RGF19100CE20MP13	XAHD60G	1.03	0.99	0.94
RGF19120DE20MP13	XAF/XAUD60G	1.02	0.97	0.93
RGF19120DE20MP13	XAFD48F	1.00	0.95	0.96
RGF19120DE20MP13	XAHD48F	1.00	0.94	0.96
RGF19120DE20MP13	XAHD60G	1.02	0.96	0.93

PERFORMANCE DATA - 5 TON

CONDENSER-ONLY DATA (OUTDOOR UNIT)																
MODEL	SATURATED SUCTION AT COMPRESSOR		Outdoor Ambient Temperature													
			55°F		65°F		75°F		85°F		95°F		105°F		115°F	
	T (°F)	P (PSIG)	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW
RAC13L60B23S	35	107	55.4	3.33	52.8	3.73	50.1	4.10	47.4	4.47	44.6	4.89	41.6	5.39	38.5	5.98
	40	119	60.9	3.31	57.9	3.73	55.1	4.10	52.1	4.49	49.0	4.90	45.9	5.39	42.5	5.98
	45	130	66.9	3.30	63.6	3.72	60.3	4.11	57.1	4.49	53.7	4.91	50.3	5.40	46.7	5.98
	50	143	73.4	3.27	69.7	3.70	66.1	4.10	62.4	4.51	58.8	4.92	55.0	5.42	51.3	5.98
	55	156	80.2	3.23	76.2	3.67	72.2	4.08	68.1	4.49	64.1	4.92	60.0	5.43	55.9	5.99

Notes:

- For Outdoor Unit (Condenser) performance only. Data does not include the effects of air handler power or heat.
- Performance based on 15°F subcooling and 15°F superheat at the Outdoor Unit base valves.
 - Increase capacity by 1% for each 2°F increase in subcooling.
 - Decrease capacity by 1% for each 2°F decrease in subcooling.
- Maximum recommended condensing temperature is 140°F.

COOLING PERFORMANCE DATA																
OUTDOOR UNIT MODEL NO.			RAC13L60B23S													
INDOOR COIL MODEL NO.			CF60CXA1													
AIR TEMPERATURE ENTERING OUTDOOR UNIT (°F)	ID CFM	1520					1720					1920				
	ID DB (°F)	80	80	75	80	80	80	80	75	80	80	80	80	75	80	80
	ID WB (°F)	57	62	62	67	72	57	62	62	67	72	57	62	62	67	72
55	T.C.	54.7	57.1	54.0	56.8	57.3	56.7	58.0	54.8	57.8	57.3	58.6	58.8	55.7	58.7	57.2
	S.C.	49.6	26.3	37.2	35.5	28.1	51.0	36.7	38.6	36.9	28.8	52.4	47.0	40.0	38.2	29.5
	kW	3.27	3.30	3.31	3.33	3.35	3.35	3.38	3.39	3.41	3.43	3.43	3.46	3.47	3.49	3.51
65	T.C.	52.3	55.5	52.9	56.2	56.6	55.3	56.3	53.9	57.0	56.9	58.3	57.1	54.9	57.9	57.3
	S.C.	48.9	35.4	37.3	35.8	27.8	50.3	41.2	38.8	37.1	28.7	51.8	47.0	40.4	38.5	29.5
	kW	3.63	3.66	3.67	3.70	3.73	3.72	3.72	3.75	3.78	3.82	3.81	3.78	3.83	3.87	3.90
75	T.C.	49.9	54.0	51.9	55.5	55.9	54.0	54.7	53.1	56.3	56.6	58.0	55.4	54.2	57.1	57.4
	S.C.	48.2	44.4	37.3	36.1	27.5	49.6	45.7	39.0	37.4	28.5	51.1	47.0	40.7	38.8	29.5
	kW	4.00	4.02	4.03	4.06	4.11	4.09	4.06	4.10	4.15	4.20	4.18	4.10	4.18	4.24	4.29
85	T.C.	49.1	52.3	50.0	55.0	55.4	51.5	53.0	51.1	55.9	56.2	53.9	53.7	52.3	56.8	56.9
	S.C.	46.5	44.2	36.6	36.2	27.3	48.0	45.5	38.6	37.9	28.4	49.4	46.8	40.5	39.5	29.6
	kW	4.43	4.46	4.47	4.51	4.56	4.53	4.50	4.55	4.60	4.65	4.62	4.54	4.63	4.69	4.73
95	T.C.	48.3	50.5	48.1	54.4	55.0	49.0	51.3	49.2	55.5	55.8	49.8	52.0	50.3	56.6	56.5
	S.C.	44.8	43.9	35.9	36.3	27.0	46.3	45.2	38.1	38.3	28.3	47.7	46.5	40.2	40.3	29.6
	kW	4.87	4.90	4.90	4.96	5.02	4.96	4.94	4.99	5.05	5.10	5.06	4.99	5.07	5.13	5.18
105	T.C.	45.4	47.3	43.7	49.8	52.1	46.5	47.9	44.6	50.8	52.8	47.6	48.5	45.4	51.8	53.5
	S.C.	42.0	41.9	34.2	34.7	26.0	43.5	43.1	36.3	36.8	27.3	44.9	44.2	38.3	38.9	28.7
	kW	5.46	5.48	5.47	5.55	5.63	5.56	5.55	5.56	5.65	5.72	5.67	5.62	5.65	5.74	5.81
115	T.C.	42.5	44.1	39.5	45.4	49.2	44.1	44.6	40.1	46.2	49.9	45.6	45.1	40.6	47.1	50.5
	S.C.	39.3	40.0	32.5	33.2	25.1	40.7	40.9	34.5	35.4	26.4	42.2	41.9	36.5	37.5	27.8
	kW	6.03	6.04	6.02	6.13	6.22	6.14	6.13	6.12	6.23	6.32	6.26	6.23	6.22	6.32	6.42
Note: All capacities include indoor fan heat. kW values are for the system (outdoor + indoor). Green shaded cells are ACCA (TVA) conditions. Blue shaded cells are AHRI conditions.																

Multipliers for determining the performance with other indoor sections

Note: For dry bulb temperatures different than those listed (between 73°F to 87°F), sensible capacity increases by 1060 BTUH per 1000 CFM per degree above the listed temperature and decreases by 1060 BTUH per 1000 CFM per degree below the listed temperature.

COIL MULTIPLIERS - 5 TON

Air Handler	Coil	T.C.	S.C.	kW
—	CF/CM/CU60C	0.99	1.08	0.99
—	CF/CM/CU60D	1.00	1.00	1.00
—	CF/CM/CU60D	1.00	1.00	1.00
—	CF/CM64D	1.02	1.12	1.02
—	XAF/XAUC60G	0.99	1.00	0.99
—	XAF/XAUD60G	1.00	1.00	0.98
—	XAF/XAUD60H	1.01	1.01	0.98
—	XAFC60H	1.00	1.01	1.00
—	XAHC60G	0.99	1.00	0.99
—	XAHC60H	1.00	1.01	1.00
—	XAHD60G	0.99	0.97	0.97
—	XAHD60H	1.01	1.01	0.98
RFCX60CE20MP23	—	1.01	1.08	0.99
RFCX60DE20MP22	—	1.03	1.08	1.00
ME16CN21	CF/CM60C	1.00	1.07	0.98
ME20DN21	CF/CM60D	1.01	1.09	0.99
ME20DN21	CF/CM64D	1.02	1.11	0.97

FURNACE MULTIPLIERS - 5 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L080CE16MP12	CF/CM/CU60C	0.98	1.04	0.98
RGF1L080CE16MP12	CF/CM/CU60D	0.98	1.04	0.98
RGF1L080CE16MP12	CF/CM64D	1.01	1.07	1.01
RGF1L080CE16MP12	XAF/XAUC60G	0.98	0.96	0.98
RGF1L080CE16MP12	XAF/XAUD60G	0.98	0.96	0.96
RGF1L080CE16MP12	XAF/XAUD60H	1.00	0.98	1.00
RGF1L080CE16MP12	XAFC60H	0.99	0.98	0.97
RGF1L080CE16MP12	XAHC60G	0.98	0.96	0.98
RGF1L080CE16MP12	XAHC60H	0.99	0.98	0.97
RGF1L080CE16MP12	XAHD60G	0.98	0.96	0.98
RGF1L080CE16MP12	XAHD60H	1.00	0.98	1.00
RGF1L080CE20MP12	CF/CM/CU60C	0.98	1.03	0.98
RGF1L080CE20MP12	CF/CM/CU60D	0.98	1.04	0.96
RGF1L080CE20MP12	CF/CM64D	1.02	1.08	1.00
RGF1L080CE20MP12	XAF/XAUC60G	0.99	0.96	0.97
RGF1L080CE20MP12	XAF/XAUD60G	0.98	0.96	0.96
RGF1L080CE20MP12	XAF/XAUD60H	1.00	0.97	0.98
RGF1L080CE20MP12	XAFC60H	1.00	0.97	0.96
RGF1L080CE20MP12	XAHC60G	0.99	0.96	0.97
RGF1L080CE20MP12	XAHC60H	1.00	0.97	0.96
RGF1L080CE20MP12	XAHD60G	0.99	1.00	0.99
RGF1L080CE20MP12	XAHD60H	1.00	0.97	0.98
RGF1L100CE16MP12	CF/CM/CU60C	0.98	1.04	0.98
RGF1L100CE16MP12	CF/CM/CU60D	0.98	1.04	0.98
RGF1L100CE16MP12	CF/CM64D	1.01	1.07	1.01
RGF1L100CE16MP12	XAF/XAUC60G	0.98	0.96	0.98
RGF1L100CE16MP12	XAF/XAUD60G	0.98	0.96	0.96
RGF1L100CE16MP12	XAF/XAUD60H	1.00	0.98	1.00
RGF1L100CE16MP12	XAFC60H	0.99	0.98	0.97
RGF1L100CE16MP12	XAHC60G	0.98	0.96	0.98
RGF1L100CE16MP12	XAHC60H	0.99	0.98	0.97
RGF1L100CE16MP12	XAHD60G	0.98	0.96	0.98
RGF1L100CE16MP12	XAHD60H	1.00	0.98	1.00
RGF1L100CE20MP12	CF/CM/CU60C	0.99	1.08	0.99

FURNACE MULTIPLIERS - 5 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF1L100CE20MP12	CF/CM/CU60D	0.98	1.03	0.96
RGF1L100CE20MP12	CF/CM64D	1.01	1.05	0.99
RGF1L100CE20MP12	XAF/XAUC60G	1.00	1.00	1.00
RGF1L100CE20MP12	XAF/XAUD60G	0.99	1.01	0.99
RGF1L100CE20MP12	XAF/XAUD60H	1.01	1.01	1.01
RGF1L100CE20MP12	XAFC60H	1.00	1.01	1.00
RGF1L100CE20MP12	XAHC60G	1.00	1.00	1.00
RGF1L100CE20MP12	XAHC60H	1.00	1.01	1.00
RGF1L100CE20MP12	XAHD60G	0.99	1.00	0.99
RGF1L100CE20MP12	XAHD60H	1.01	1.01	1.01
RGF1L120CE16MP12	CF/CM/CU60C	0.98	1.05	0.98
RGF1L120CE16MP12	CF/CM/CU60D	0.98	1.04	0.98
RGF1L120CE16MP12	CF/CM64D	1.01	1.07	1.01
RGF1L120CE16MP12	XAF/XAUC60G	0.98	0.96	0.98
RGF1L120CE16MP12	XAF/XAUD60G	0.98	0.96	0.95
RGF1L120CE16MP12	XAF/XAUD60H	1.00	0.98	1.00
RGF1L120CE16MP12	XAFC60H	0.99	0.98	0.97
RGF1L120CE16MP12	XAHC60G	0.98	0.96	0.98
RGF1L120CE16MP12	XAHC60H	0.99	0.98	0.97
RGF1L120CE16MP12	XAHD60G	0.98	0.96	0.98
RGF1L120CE16MP12	XAHD60H	1.00	0.98	1.00
RGF1L120CE20MP12	CF/CM/CU60C	0.99	1.08	0.99
RGF1L120CE20MP12	CF/CM/CU60D	0.98	1.03	0.96
RGF1L120CE20MP12	CF/CM64D	1.01	1.05	0.99
RGF1L120CE20MP12	XAF/XAUC60G	1.00	1.01	1.00
RGF1L120CE20MP12	XAF/XAUD60G	0.99	1.01	0.99
RGF1L120CE20MP12	XAF/XAUD60H	1.01	1.03	1.01
RGF1L120CE20MP12	XAFC60H	1.00	1.03	0.98
RGF1L120CE20MP12	XAHC60G	1.00	1.01	1.00
RGF1L120CE20MP12	XAHC60H	1.00	1.03	0.98
RGF1L120CE20MP12	XAHD60G	0.99	1.00	0.99
RGF1L120CE20MP12	XAHD60H	1.01	1.03	1.01
RGF1L130DE20MP12	CF/CM/CU60D	0.99	1.07	0.99
RGF1L130DE20MP12	CF/CM64D	1.01	1.08	1.01
RGF1L130DE20MP12	XAF/XAUD60G	0.99	0.98	0.97
RGF1L130DE20MP12	XAF/XAUD60H	1.01	0.99	0.95
RGF1L130DE20MP12	XAHD60G	0.99	0.97	0.97
RGF1L130DE20MP12	XAHD60H	1.01	0.99	0.95
RGF2L100CE16MP11	CF/CM/CU60C	0.99	1.04	0.99
RGF2L100CE16MP11	CF/CM/CU60D	1.00	1.05	0.98
RGF2L100CE16MP11	CF/CM64D	0.98	1.03	0.98
RGF2L100CE16MP11	XAF/XAUD60G	0.98	0.96	0.95
RGF2L100CE16MP11	XAF/XAUD60H	1.00	0.98	1.00
RGF2L100CE16MP11	XAFC60H	0.99	0.98	0.97
RGF2L100CE16MP11	XAHC60G	0.98	0.96	0.98
RGF2L100CE16MP11	XAHC60H	0.99	0.98	0.97
RGF2L100CE20MP11	CF/CM/CU60C	0.98	1.03	0.96
RGF2L100CE20MP11	CF/CM/CU60D	0.99	1.05	0.97
RGF2L100CE20MP11	CF/CM64D	0.99	1.05	0.97
RGF2L100CE20MP11	XAF/XAUC60G	1.00	0.96	0.94
RGF2L100CE20MP11	XAF/XAUD60G	1.00	0.96	0.98
RGF2L100CE20MP11	XAF/XAUD60H	1.00	0.97	0.98
RGF2L100CE20MP11	XAFC60H	1.00	0.97	0.96
RGF2L100CE20MP11	XAHC60G	1.00	0.96	0.94
RGF2L100CE20MP11	XAHC60H	1.00	0.97	0.96

FURNACE MULTIPLIERS - 5 TON

Furnaces	Coil	T.C.	S.C.	kW
RGF2L100CE20MP11	XAHD60H	1.00	0.97	0.98
RGF19080CE20MP13	CF/CM/CU60C	0.99	1.08	0.99
RGF19080CE20MP13	CF/CM/CU60D	0.98	1.03	0.96
RGF19080CE20MP13	CF/CM64D	1.01	1.11	0.99
RGF19080CE20MP13	XAF/XAUC60G	1.00	1.00	1.00
RGF19080CE20MP13	XAF/XAUD60G	0.99	1.01	0.99
RGF19080CE20MP13	XAF/XAUD60H	1.01	1.03	1.01
RGF19080CE20MP13	XAFC60H	1.00	1.03	0.98
RGF19080CE20MP13	XAHC60G	1.00	1.00	1.00
RGF19080CE20MP13	XAHC60H	1.00	1.03	1.00
RGF19080CE20MP13	XAHD60G	0.99	1.00	0.99
RGF19080CE20MP13	XAHD60H	1.01	1.01	1.01
RGF19100CE16MP13	CF/CM/CU60D	0.98	1.05	0.98
RGF19100CE20MP13	CF/CM/CU60C	0.99	1.08	0.99
RGF19100CE20MP13	CF/CM/CU60D	0.98	1.03	0.96
RGF19100CE20MP13	CF/CM64D	1.01	1.05	0.99
RGF19100CE20MP13	XAF/XAUC60G	1.00	1.00	1.00
RGF19100CE20MP13	XAF/XAUD60G	0.99	1.00	0.97
RGF19100CE20MP13	XAF/XAUD60H	1.01	1.01	1.01
RGF19100CE20MP13	XAFC60H	1.00	1.01	0.98
RGF19100CE20MP13	XAHC60G	1.00	1.00	1.00
RGF19100CE20MP13	XAHC60H	1.00	1.01	0.98
RGF19100CE20MP13	XAHD60G	0.99	0.99	0.99
RGF19100CE20MP13	XAHD60H	1.01	1.01	1.01
RGF19120DE20MP13	CF/CM/CU60D	0.99	1.07	0.99
RGF19120DE20MP13	CF/CM64D	1.01	1.08	0.99
RGF19120DE20MP13	XAF/XAUD60G	0.99	0.97	0.97
RGF19120DE20MP13	XAF/XAUD60H	1.00	0.98	0.95
RGF19120DE20MP13	XAHD60G	0.99	0.96	0.95
RGF19120DE20MP13	XAHD60H	1.00	0.98	0.95