

SUBMITTAL DATA: PEAD-A24AA & PUY-A24NHA3 24,000 BTU/H HORIZONTAL-DUCTED AIR CONDITIONING SYSTEM

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
Unit Designation:	Schedule No.:	

GENERAL FEATURES

- Horizontal-ducted indoor unit features medium static pressure capability
- Thin body: 9-7/8" high
- Built-in drain mechanism for condensate removal; lifts to 27-9/16"
- Air filter is included with indoor unit
- Quiet operation—both indoor and outdoor units
- PAR-21MAA wired remote controller is included; wireless remote controller available as an option
- Automatic fan speed control
- Auto restart following a power outage
- Self-check function—integrated diagnostics
- Knockout for ventilation air
- Limited warranty: five years on parts and defects and seven years on compressors

OPTIONAL ACCESSORIES
Indoor Unit

- Remote Temperature Sensor (PAC-SE41TS)
- Wireless Remote Controller (PAR-FL32MA)
- Wireless Remote Receiver (PAR-FA32MA)

Outdoor Unit

- M-NET Adapter (PAC-SF81MA-E)
- Air Outlet Guide (PAC-SG59SG-E)
- Wind Baffle (WB-PA2)

Cooling*

Rated Capacity 24,000 Btu/h
 Minimum Capacity 12,000 Btu/h
 SEER 16.0 Btu/h/W
 Total Input 2,400 W

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB / 67°F (19°C) WB.
 Outdoor: 95°F (35°C) DB / 75°F (24°C) WB.

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
 Breaker Size 30 A


Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
 Indoor - Outdoor S2-S3 DC24V
 Indoor - Remote Controller DC12V

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling	Maximum	95°F (35°C) DB, 71°F (22°C) WB	115°F (46°C) DB
	Minimum	67°F (19°C) DB, 57°F (14°C) WB	0°F** (-18°C) DB

** With optional wind baffle accessory installed. If not installed, the minimum temperature will be 23°F (-5°C) DB.

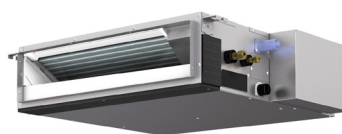

Indoor Unit: PEAD-A24AA


Remote Controller:
PAR-21MAA


Outdoor Unit: PUY-A24NHA3

Indoor Unit

MCA 2.63 A
 Fan Type x Quantity Sirocco fan x 2
 Fan Motor Type Direct-driven DC Brushless Motor
 Fan Motor 2.10 F.L.A.
 Fan Motor Output 121 W
 Airflow (Lo - Mid - Hi) 512 - 636 - 742 Dry CFM
 494 - 600 - 671 Wet CFM
 Air Filter Polypropylene Honeycomb
 External Static Pressure 0.14 - 0.20 - 0.28 - 0.40 - 0.60" WG
 Sound Pressure Level (Lo - Mid - Hi) 30 - 33 - 37 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	43-5/16 / 1,100
D	28-7/8 / 732
H	9-7/8 / 250

Weight 73 lbs. / 33 kg
 External Finish Galvanized-steel Sheet
 Field Drainpipe Size O.D. 1-1/4" / 32 mm
 Wall-mounted Remote Controller PAR-21MAA
 (See Data Submittal Sheet)

Outdoor Unit

Compressor DC Inverter-driven Rotary
 MCA 18 A
 Fan Motor 0.75 F.L.A.
 Sound Pressure Level (Cooling) 48 dB(A)

DIMENSIONS	INCHES / MM
W	37-3/8 / 950
D	13 + 1-3/16 / 330 + 30
H	37-1/8 / 943


Weight 165 lbs. / 75 kg
 External Finish Munsell No. 3Y 7.8 / 1.1
 Refrigerant Type R410A
 Refrigerant Pipe Size O.D.
 Gas Side 5/8" / 15.88 mm
 Liquid Side 3/8" / 9.52 mm
 Max. Refrigerant Pipe Length 165' / 50 m
 Max. Refrigerant Pipe Height Difference 100' / 30 m
 Connection Method Flared


INVERTER

INDOOR UNIT PEAD-A24AA FAN PERFORMANCE AND AIRFLOW RATES


PEAD-A24AA

(External static pressure 35Pa [0.14 in. WG]) 208-230V 60Hz

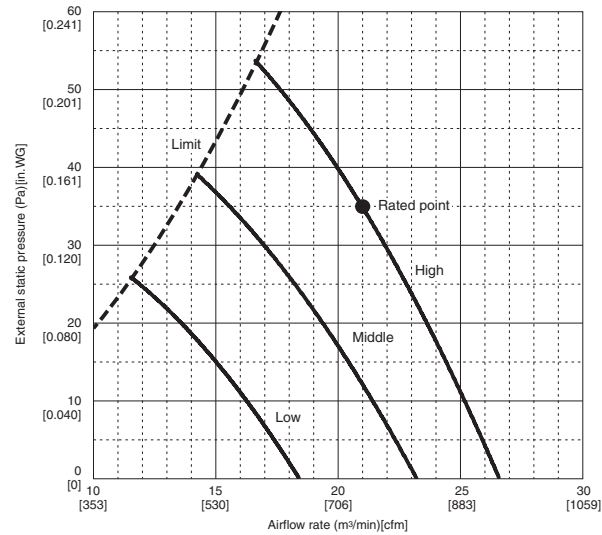


PEAD-A24AA

(External static pressure 100Pa [0.4 in. WG]) 208-230V 60Hz

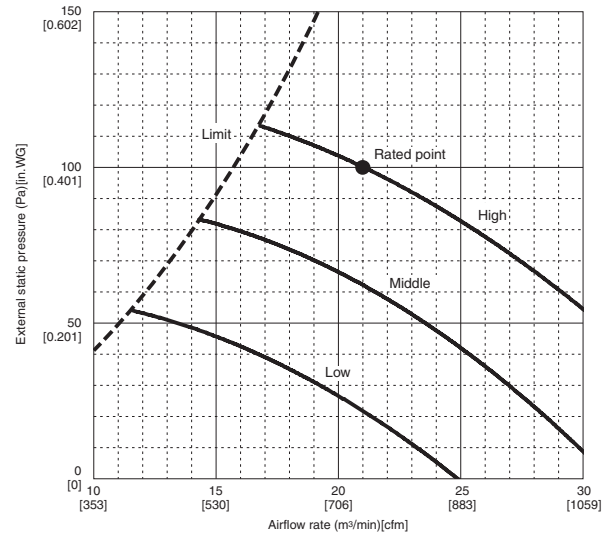


PEAD-A24AA

(External static pressure 50Pa [0.2 in. WG]) 208-230V 60Hz

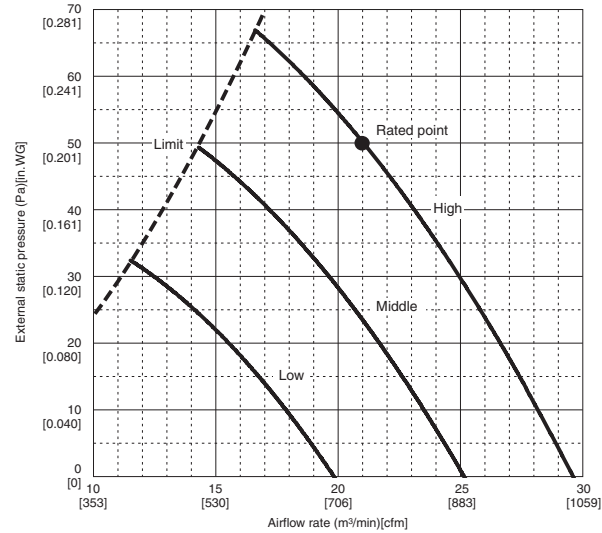


PEAD-A24AA

(External static pressure 150Pa [0.6 in. WG]) 208-230V 60Hz

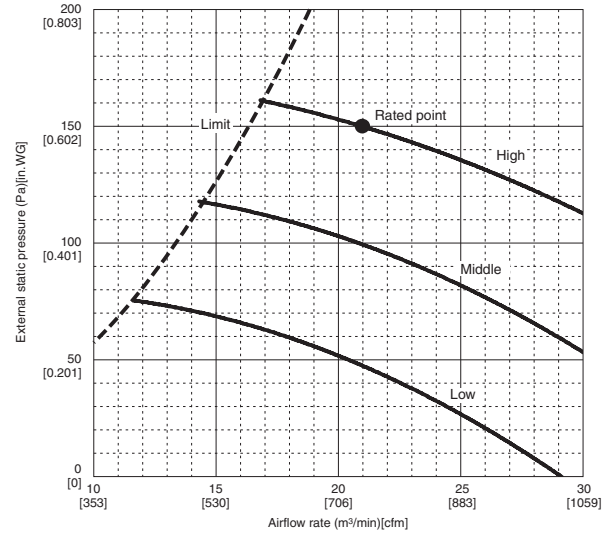


PEAD-A24AA

(External static pressure 70Pa [0.3 in. WG]) 208-230V 60Hz

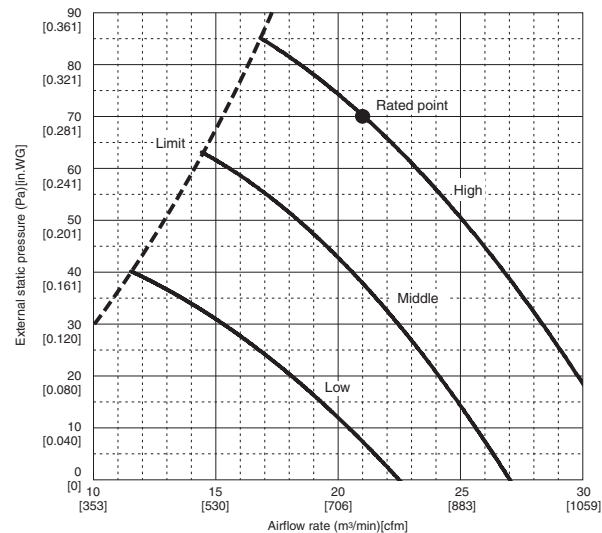


DIMENSIONS: PEAD-A24AA

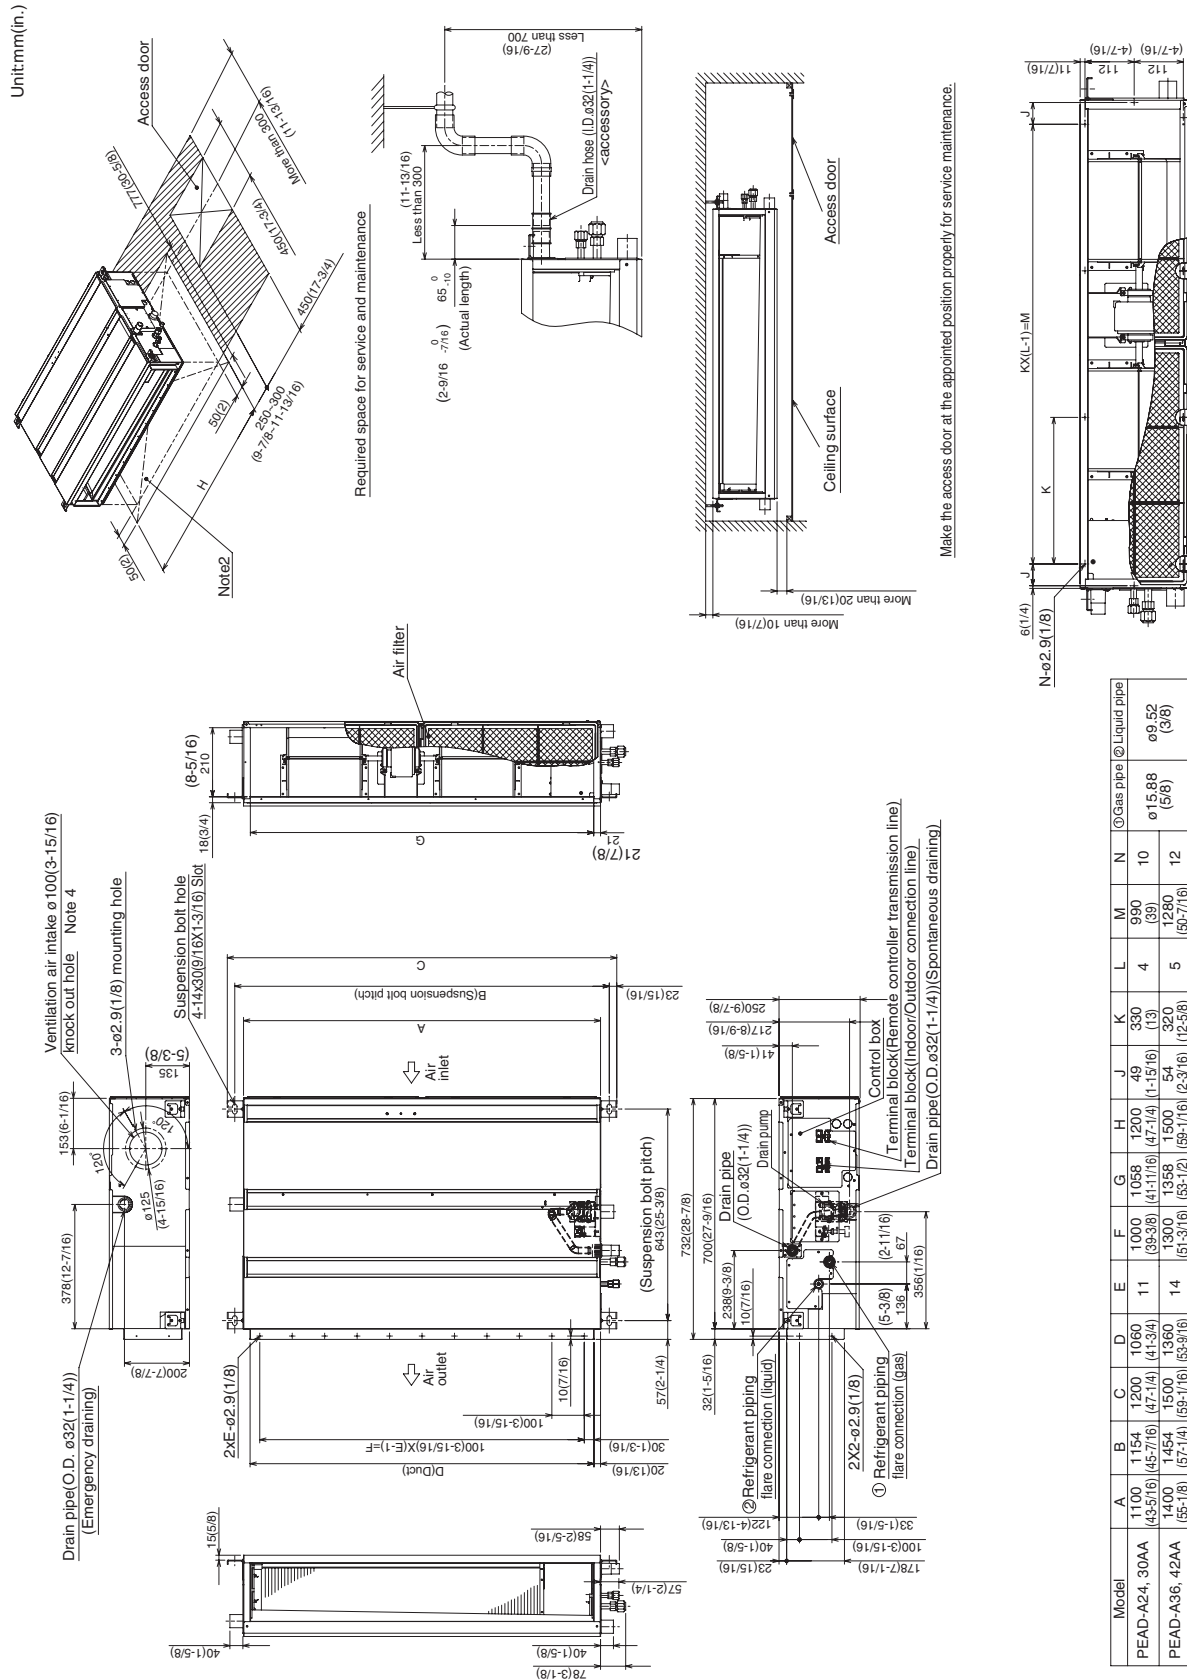

- NOTE 1. Use M10 screw for the Suspension bolt (field supply).
2. Keep the service space for the maintenance at the bottom.
3. This chart indicates for PEAD-A24-30-36-42AA models, which have 2 fans.
4. In case of the inlet duct is used, remove the air filter (supplied with the unit), then install a filter (field supplied) at suction side.

DIMENSIONS: PUY-A24NHA3

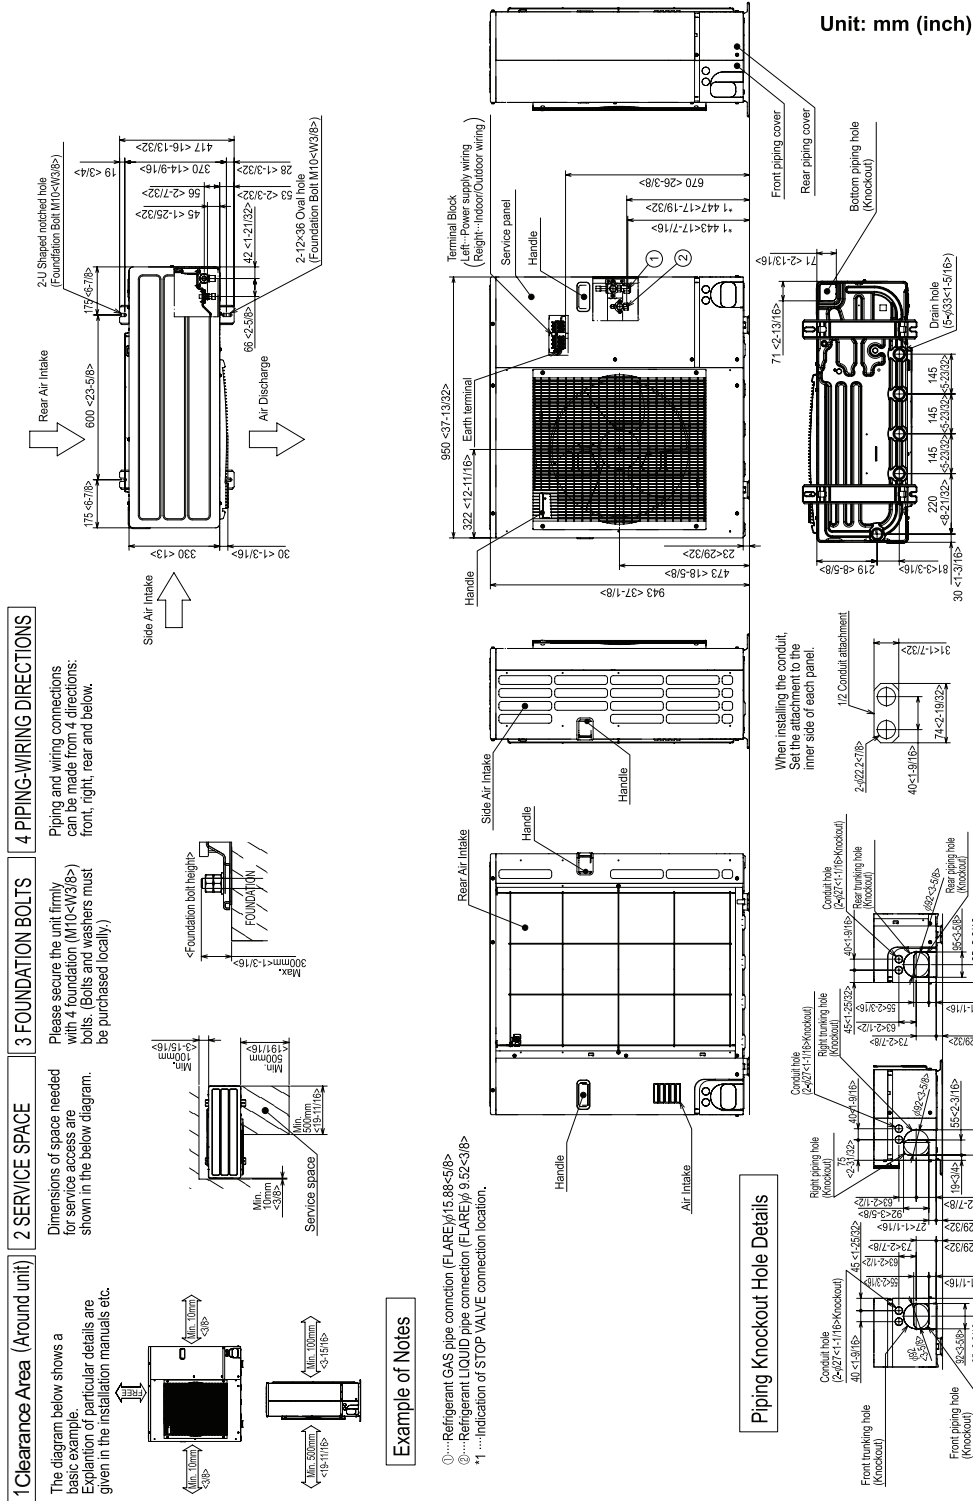

HVAC Advanced Products Division
3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822 (#3)
www.mehvac.com
Specifications are subject to change without notice.