

FRIGIDAIRE®

FRIGIDAIRE

Delivering Comfort

WITH THE **FG8SA-FS SERIES** OF GAS FURNACES

Table of Contents

- 2** CONTRACTOR SUPPORT
- 3** PRODUCT FEATURES & BENEFITS
- 4** TECHNICAL SPECIFICATIONS
 - MODEL ID CODES
 - SPECIFICATIONS
- 5** LOCATION OF FURNACE COMPONENTS
- 6** DIMENSIONS
- 7** AIRFLOW DATA
- 10** ACCESSORIES





THE FRIGIDAIRE®

TOTAL PACKAGE™


Designed with contractors in mind. Frigidaire HVAC equipment is designed with the contractor in mind. Each unit is equipped with features designed to make them easier to install and service, reducing time spent on each job while ensuring peak performance and safety.



EASY TO
Service



EASY TO
Install

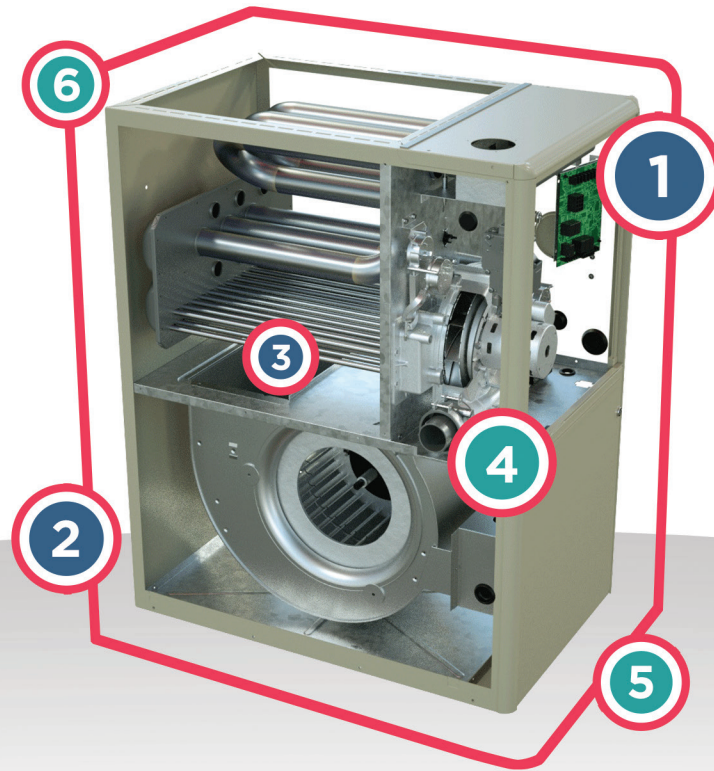

FG8SA-FS Series

Single Stage, Ultra-Low NOx Gas Furnaces | 80% AFUE | High Efficiency Upflow/Horizontal

The FG8SA-FS Series of furnaces offers exceptional performance.

This high efficiency ultra-low emissions gas furnace may be installed free standing in a utility room, basement, or enclosed in an alcove or closet. The rounded corner jacket provides a pleasing “appliance appearance.”

Easy to

Service


- ① **REMOVABLE SIDE PANELS**
Side panels can be easily removed and replaced without removing the top grill.
- ② **COLOR CODED WIRE HARNESS**
Utilizes quick-connect fittings for ease of service and component replacement.
- ③ **GALVANIZED STEEL EXTERIOR**
Powder-coated paint and gloss finish eliminates sharp edges and reduces scratching.

Easy to

Install

- ④ **QR CODES**
QR codes on each unit link directly to the product's technical literature, eliminating the need to search for relevant documentation when working on the unit.
- ⑤ **HIGH STATIC BLOWERS**
All models equipped with high static blowers.
- ⑥ **LOW BOY HEIGHT**
Easy to apply in low ceiling applications, works well with taller high SEER2 coils, easier to handle and install.


MODEL ID CODES

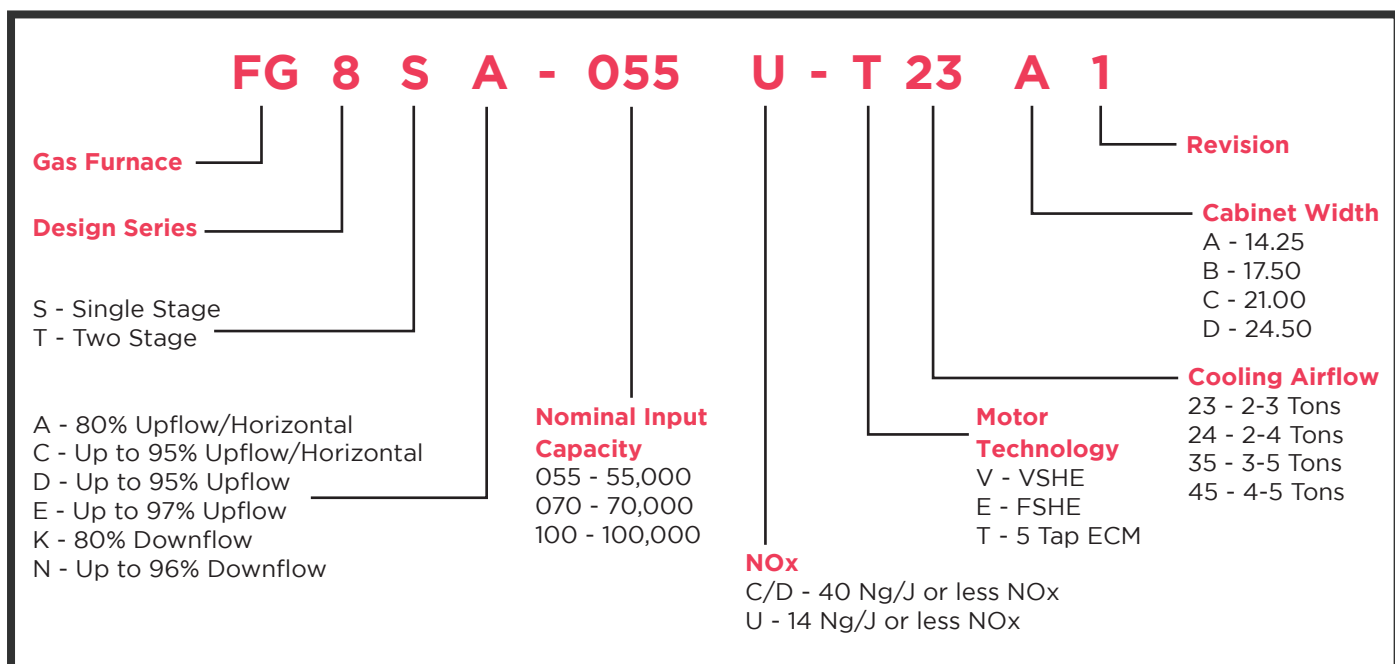

SPECIFICATIONS

FG8SA MODEL NUMBERS	-055U-T23A1	-070U-T24B1	-100U-T35C1
Input - Btuh (a)	55000	70000	100000
Heating Capacity - BtuH	44000	56000	80000
AFUE	80	80	80
Motor H.P. - Speed - Type	1/2 - 5 - ECM	3/4 - 5 - ECM	1 - 5 - ECM
Motor FLA	6	8.4	11
Rated Ext. SP - In. W.C.	0.5	0.5	0.5
Temperature Rise Range - °F	35-65	35-65	35-65
Shipping Weights (lbs)	107	135	144
NOx	<14ng/J	<14ng/J	<14ng/J

LOCATION OF FURNACE COMPONENTS

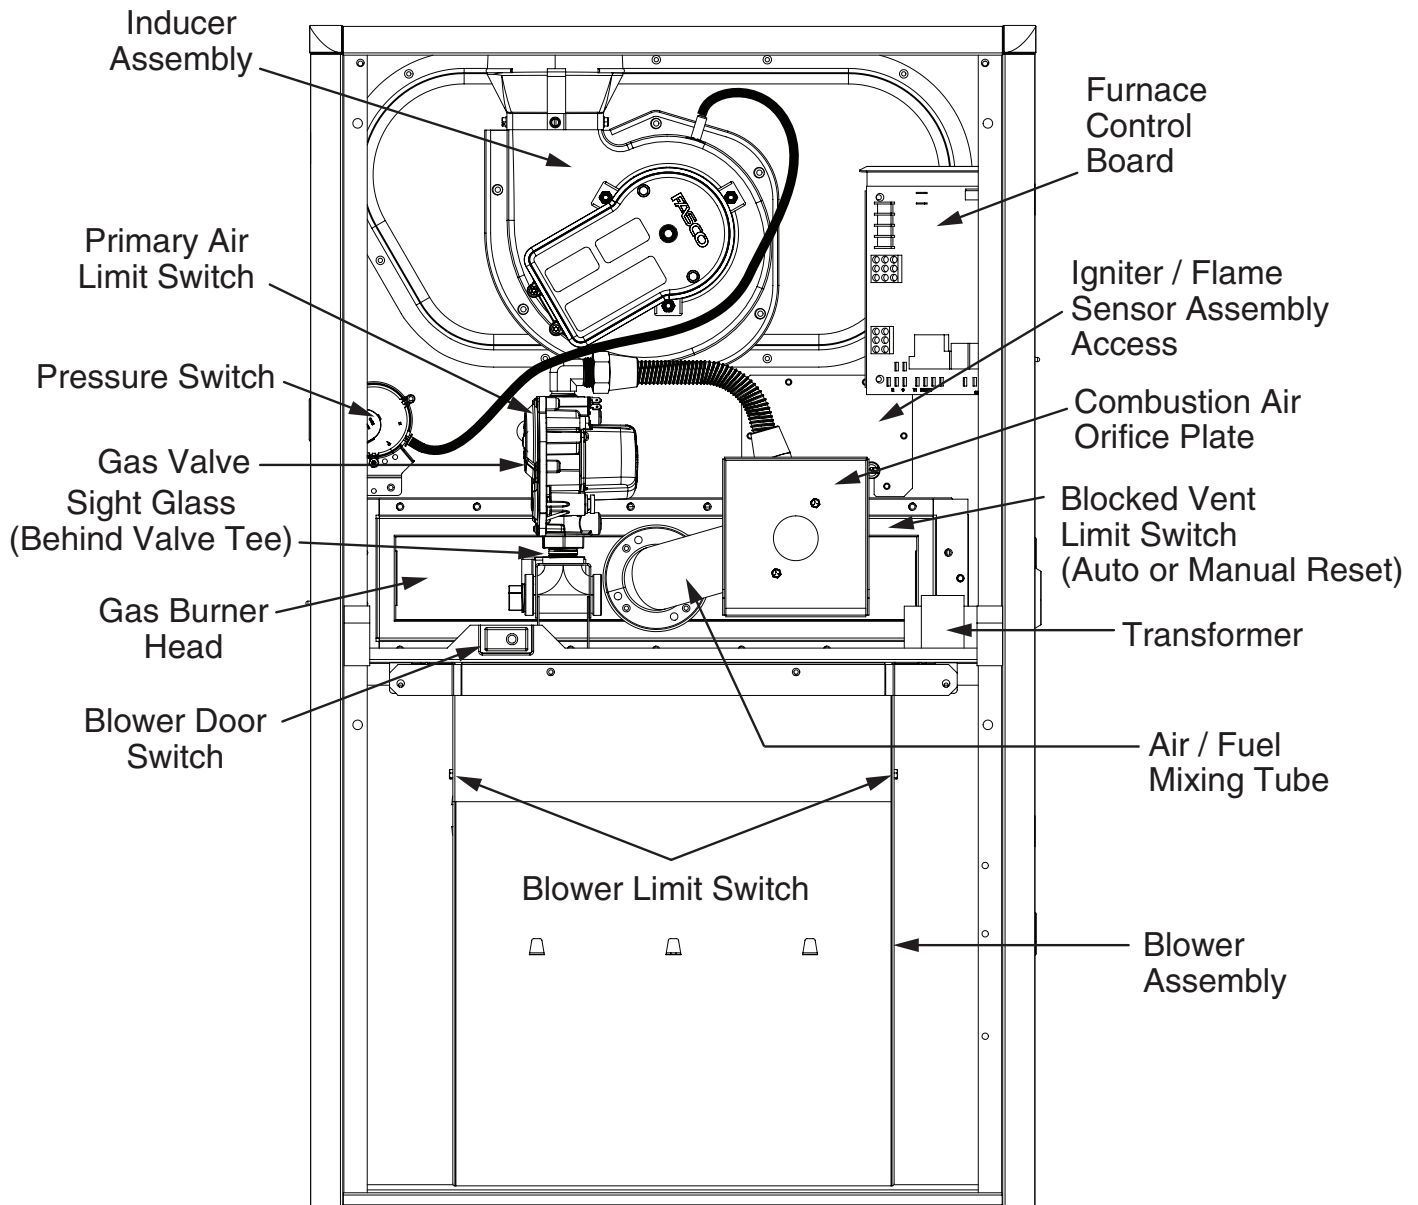


FG8SA 80% AFUE Standard Efficiency Ultra-Low NOx Upflow/Horizontal Series

DIMENSIONS

Model FG8SA	Dimension "A"	Dimension "B"	Dimension "C"	Dimension "D"
055U	14 1/4	10 3/4	12 5/8	12 7/8
070U	17 1/2	11 3/4	15 7/8	16 1/8
100U	21	14	19 3/8	19 7/8

NOTE: Dimensions shown in inches

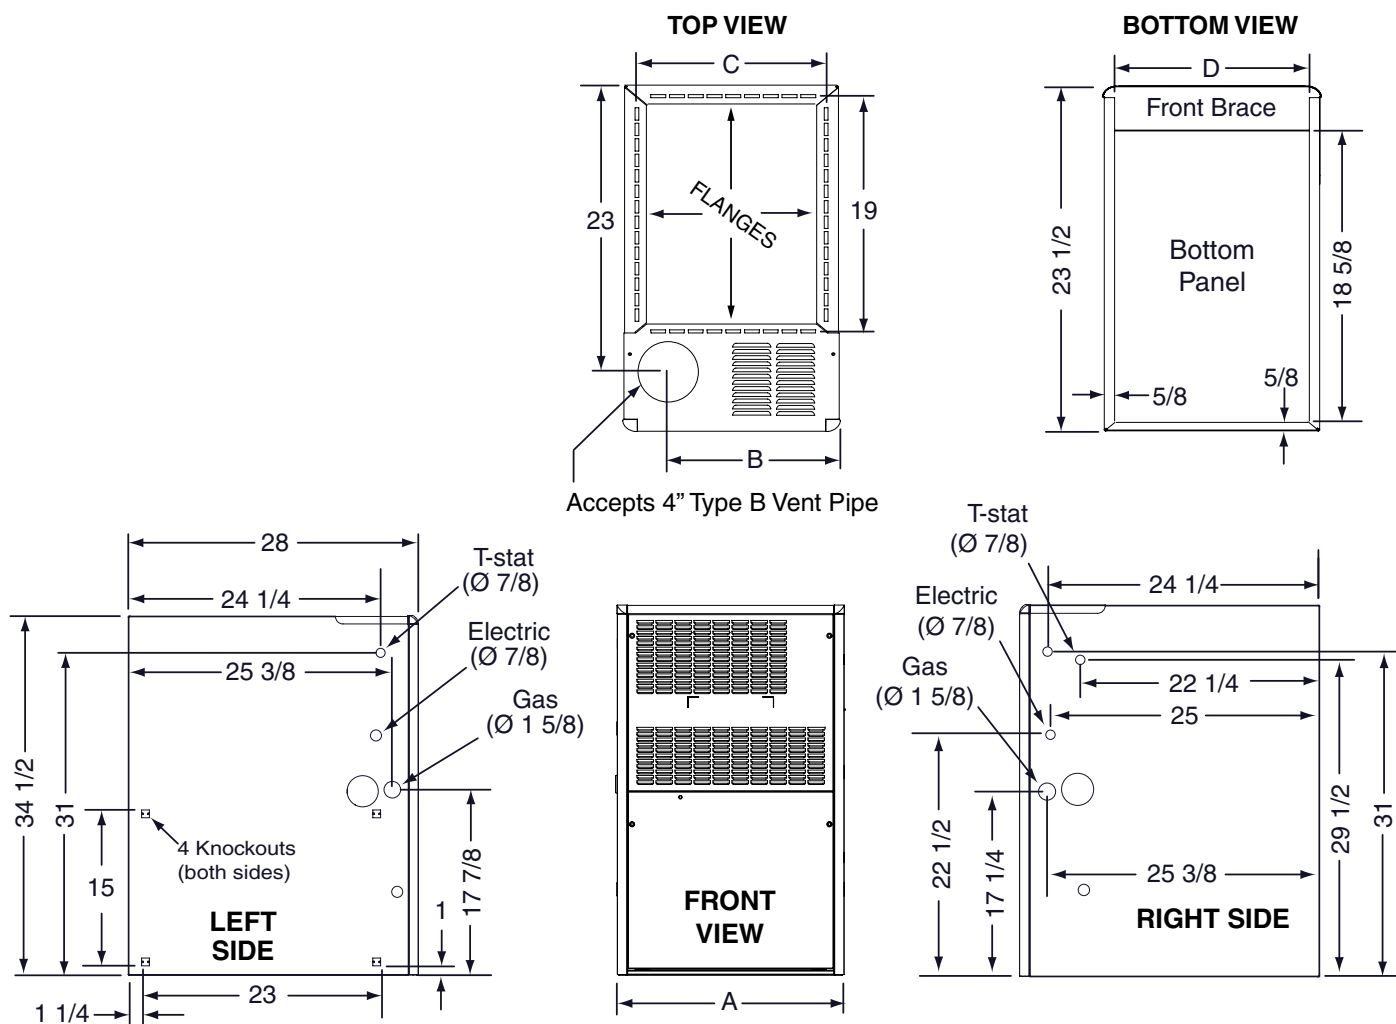

FG8SA 80% AFUE Standard Efficiency Ultra-Low NOx Upflow/Horizontal Series

AIRFLOW DATA

HEATING AIRFLOW (CFM) & TEMPERATURE RISE (°F)												
MODEL NAME/ HEATING INPUT FG8SA	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)									
			0.1		0.2		0.3		0.4		0.5	
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE
-055U-T23A*	Bottom	5 - High *										
		4 - Med-High										
		3 - Med-Low **	880	46	845	48	810	50	770	53	735	55
		2 - Alternate	705	58	650	63	610		570		530	
		1 - Low ***	640	64	600		555		510		470	
	Side	5 - High *										
		4 - Med-High										
		3 - Med-Low **	875	47	830	49	795	51	750	54	715	57
		2 - Alternate	685	59	650	63	595		555		515	
		1 - Low ***	640	64	585		540		500		460	

COOLING AIRFLOW (CFM)										
MODEL NAME/ HEATING INPUT FG8SA	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
			CFM	CFM	CFM	CFM	CFM	(CFM)	(CFM)	(CFM)
-055U-T23A*	Bottom	5 - High *	1,180	1,140	1,110	1080	1045	1,015	985	955
		4 - Med-High	920	880	850	810	775	740	700	665
		3 - Med-Low **	880	845	810	770	735	700	665	630
		2 - Alternate	705	650	610	570	530	480	440	400
		1 - Low ***	640	600	555	510	470	430	390	340
	Side	5 - High *	1,160	1,125	1,095	1,065	1,040	1,010	975	945
		4 - Med-High	905	860	827	790	755	717	683	639
		3 - Med-Low **	875	830	793	752	715	684	642	606
		2 - Alternate	685	650	595	555	515	471	424	376
		1 - Low ***	640	585	540	500	460	415		

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
2. Data is shown without filter.
3. Temperature rises in the table are approximate. Actual temperature rises may vary.
4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
6. The “*” denotes the factory COOL setting, “***” denotes the factory HEAT setting, and “****” denotes factory FAN setting. If the Alternate speed is to be used, the speed tap must be adjusted at the blower motor plug.

AIRFLOW DATA CONTINUED

HEATING AIRFLOW (CFM) & TEMPERATURE RISE (°F)												
MODEL NAME/ HEATING INPUT FG8SA	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)									
			0.1		0.2		0.3		0.4		0.5	
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE
-070U-T24B*	Bottom	5 - High *										
		4 - Med-High										
		3 - Med-Low **										
		2 - Alternate	1,130	46	1,070	48	1,010	51	960	54	890	58
		1 - Low ***	820	63	730		630		570		540	
	Side	5 - High *										
		4 - Med-High										
		3 - Med-Low **										
		2 - Alternate	1,090	48	1,020	51	970	53	920	56	860	60
		1 - Low ***	740		680		620		560		510	

COOLING AIRFLOW (CFM)										
MODEL NAME/ HEATING INPUT FG8SA	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
			CFM	CFM	CFM	CFM	CFM	(CFM)	(CFM)	(CFM)
-070U-T24B*	Bottom	5 - High *	1,790	1,740	1,690	1,640	1,590	1,540	1,490	1,440
		4 - Med-High	1,650	1,590	1,560	1,500	1,450	1,400	1,350	1,290
		3 - Med-Low **	1,395	1,340	1,290	1,235	1,190	1,130	1,070	1,010
		2 - Alternate	1,130	1,070	1,010	960	890	820	770	720
		1 - Low ***	820	730	630	570	540	490	430	380
	Side	5 - High *	1,740	1,700	1,660	1,610	1,550	1,510	1,460	1,400
		4 - Med-High	1,610	1,550	1,510	1,460	1,410	1,360	1,310	1,250
		3 - Med-Low **	1,350	1,295	1,245	1,185	1,140	1,085	1,035	985
		2 - Alternate	1,090	1,020	970	920	860	800	750	700
		1 - Low ***	740	680	620	560	510	450	410	360

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
2. Data is shown without filter.
3. Temperature rises in the table are approximate. Actual temperature rises may vary.
4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
6. The “*” denotes the factory COOL setting, “***” denotes the factory HEAT setting, and “****” denotes factory FAN setting. If the Alternate speed is to be used, the speed tap must be adjusted at the blower motor plug.

AIRFLOW DATA CONTINUED

HEATING AIRFLOW (CFM) & TEMPERATURE RISE (°F)												
MODEL NAME/ HEATING INPUT FG8SA	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)									
			0.1		0.2		0.3		0.4		0.5	
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE
-100U-T35C*	Bottom	5 - High *										
		4 - Med-High										
		3 - Med-Low **	880	46	845	48	810	50	770	53	735	55
		2 - Alternate	705	58	650	63	610		570		530	
		1 - Low ***	640	64	600		555		510		470	
	Side	5 - High *										
		4 - Med-High										
		3 - Med-Low **	875	47	830	49	795	51	750	54	715	57
		2 - Alternate	685	59	650	63	595		555		515	
		1 - Low ***	640	64	585		540		500		460	
	Side + Bottom or 2 Sides	5 - High *										
		4 - Med-High										
		3 - Med-Low **	1,600	46	1,530	48	1,460	51	1,400	53	1,340	55
		2 - Alternate	1,525	49	1,455	51	1,390	53	1,330	56	1,265	59
		1 - Low ***	1,370	54	1,300	57	1,230	60	1,150	64	1,090	

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
2. Data is shown without filter.
3. Temperature rises in the table are approximate. Actual temperature rises may vary.
4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
6. The "*" denotes the factory COOL setting, "***" denotes the factory HEAT setting, and "****" denotes factory FAN setting. If the Alternate speed is to be used, the speed tap must be adjusted at the blower motor plug.

AIRFLOW DATA CONTINUED

COOLING AIRFLOW (CFM)										
MODEL NAME/ HEATING INPUT FG8SA	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
			CFM	CFM	CFM	CFM	CFM	(CFM)	(CFM)	(CFM)
-100U-T35C*	Bottom	5 - High *	2,310	2,260	2,200	2,150	2,100	2,040	1,990	1,940
		4 - Med-High	1,870	1,820	1,760	1,720	1,670	1,610	1,560	1,490
		3 - Med-Low **	1,580	1,530	1,480	1,420	1,360	1,290	1,230	1,155
		2 - Alternate	1,500	1,450	1,400	1,340	1,280	1,210	1,130	1,050
		1 - Low ***	1,390	1,320	1,260	1,200	1,130	1,060	970	890
	Side	5 - High *	2,160	2,100	2,060	2,020	2,050	1,990	1,950	1,880
		4 - Med-High	1,810	1,750	1,710	1,660	1,620	1,560	1,510	1,440
		3 - Med-Low **	1,540	1,490	1,440	1,380	1,330	1,270	1,210	1,150
		2 - Alternate	1,470	1,420	1,360	1,310	1,260	1,200	1,130	1,070
		1 - Low ***	1,310	1,250	1,190	1,150	1,080	1,000	950	880
	Side + Bottom or 2 sides	5 - High *	2,280	2,220	2,170	2,120	2,090	2,080	2,020	1,950
		4 - Med-High	1,880	1,820	1,770	1,720	1,670	1,610	1,560	1,490
		3 - Med-Low **	1,600	1,530	1,460	1,400	1,340	1,270	1,200	1,120
		2 - Alternate	1,525	1,455	1,390	1,330	1,265	1,190	1,120	1,045
		1 - Low ***	1,370	1,300	1,230	1,150	1,090	1,000	920	860

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
2. Data is shown without filter.
3. Temperature rises in the table are approximate. Actual temperature rises may vary.
4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
6. The “*” denotes the factory COOL setting, “**” denotes the factory HEAT setting, and “***” denotes factory FAN setting. If the Alternate speed is to be used, the speed tap must be adjusted at the blower motor plug.

ACCESSORIES

FG8SA Kits

Description	SKU
Side Return Filter Kit	541036

GENERAL TERMS OF LIMITED WARRANTY

Nordyne, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.



DISCOVER Comfort

GET STARTED AT FRIGIDAIREHVAC.COM



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (06/24)

FRIGIDAIRE is a registered trademark of Electrolux Home Products Inc. and used under a license from Electrolux Home Products, Inc.

© Nordyne, LLC 2024. All Rights Reserved.

988F-0624



FRIGIDAIRE®

