

FRIGIDAIRE®



Delivering Comfort

WITH THE **FG8SD-FS SERIES** OF GAS FURNACES

Table of Contents

- 2** CONTRACTOR SUPPORT
- 3** PRODUCT FEATURES & BENEFITS
- 4** TECHNICAL SPECIFICATIONS
 - MODEL ID CODES
- 5** SPECIFICATIONS
- 6** LOCATION OF FURNACE COMPONENTS
- 7** DIMENSIONS
- 8** AIRFLOW DATA
- 13** ACCESSORIES





THE FRIGIDAIRE®

TOTAL PACKAGE™


Designed with contractors in mind. Frigidaire HVAC equipment is designed with the contractor in mind. Each unit is equipped with features designed to make them easier to install and service, reducing time spent on each job while ensuring peak performance and safety.



EASY TO
Service



EASY TO
Install

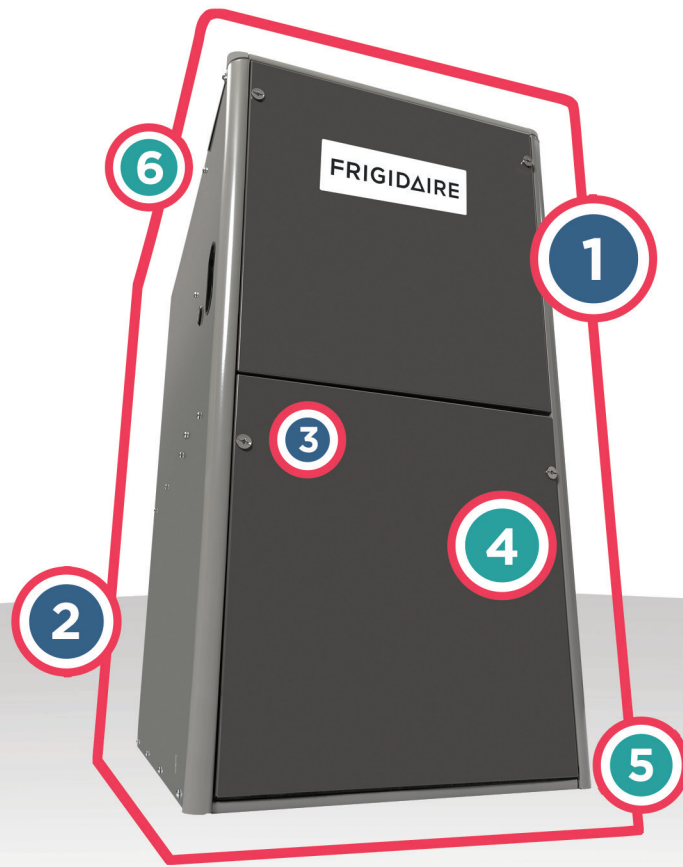

FG8SD-FS Series

Single Stage, Ultra-Low NOx Gas Furnaces | Up to 95% AFUE | High Efficiency Upflow/Horizontal

The FG8SD-FS Series of furnaces offers exceptional performance.

This high efficiency ultra-low emissions gas furnace may be installed free standing in a utility room, basement, or enclosed in an alcove or closet. The rounded corner jacket provides a pleasing “appliance appearance.”

Easy to

Service

Easy to

Install

① REMOVABLE SIDE PANELS

Side panels can be easily removed and replaced without removing the top grill.

② COLOR CODED WIRE HARNESS

Utilizes quick-connect fittings for ease of service and component replacement.

③ GALVANIZED STEEL EXTERIOR

Powder-coated paint and gloss finish eliminates sharp edges and reduces scratching.

④ QR CODES

QR codes on each unit link directly to the product's technical literature, eliminating the need to search for relevant documentation when working on the unit.


⑤ HIGH STATIC BLOWERS

All models equipped with high static blowers.

⑥ LOW BOY HEIGHT

Easy to apply in low ceiling applications, works well with taller high SEER2 coils, easier to handle and install.


MODEL ID CODES

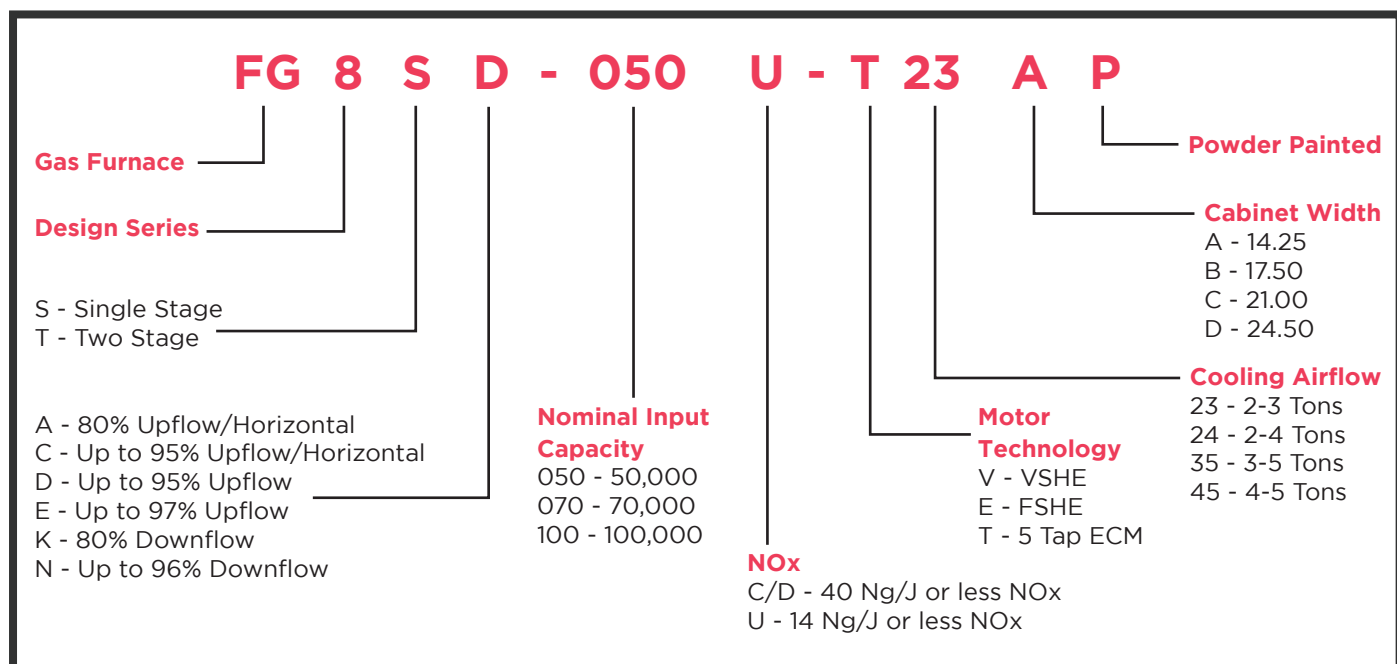

SPECIFICATIONS

FG8SD MODEL NUMBERS	-038D-T24B1	-108D-T45D1	-120D-T45D1
Input - Btuh (a)	50,000	70,000	100,000
Heating Capacity - BtuH	48,000	67,000	95,000
AFUE	95.0	95.0	95.0
Motor H.P. - Speed - Type	3/4 - 9 - ECM	3/4 - 9 - ECM	1 - 9 - ECM
Motor FLA	8.4	8.4	11
Rated Ext. SP - In. W.C.	0.5	0.5	0.5
Temperature Rise Range - °F	30-60	30-60	35-65
Shipping Weights (lbs)	115	133	153
NOx	<14ng/J	<14ng/J	<14ng/J

LOCATION OF FURNACE COMPONENTS

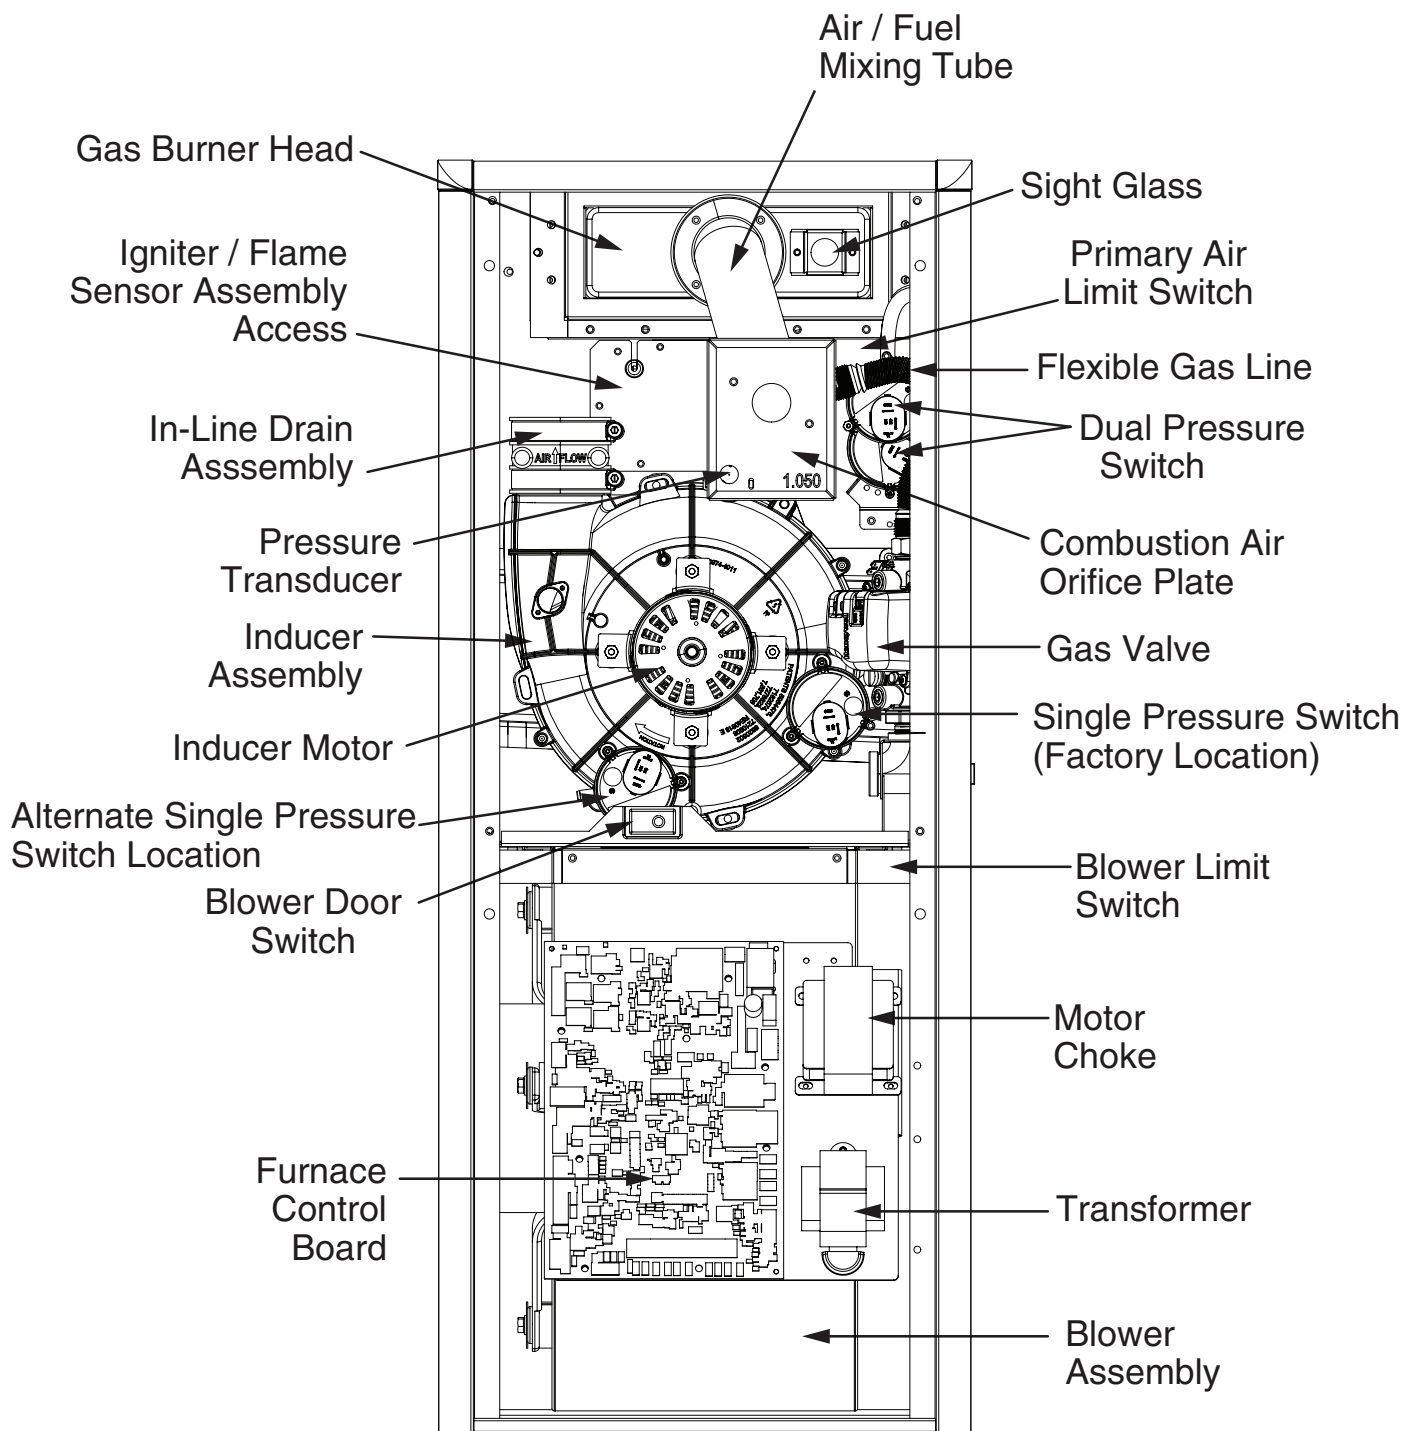


FG8SD Up to 95% AFUE High Efficiency Ultra-Low NOx Upflow/Horizontal Series

DIMENSIONS

Model FG8SD	Dimension "A"	Dimension "B"	Dimension "C"
050U-T23A	14 1/4	12 5/8	12 7/8
070U-T24B	17 1/2	15 7/8	16 1/8
100U-T35C	21	19 3/8	19 7/8

NOTE: Dimensions shown in inches

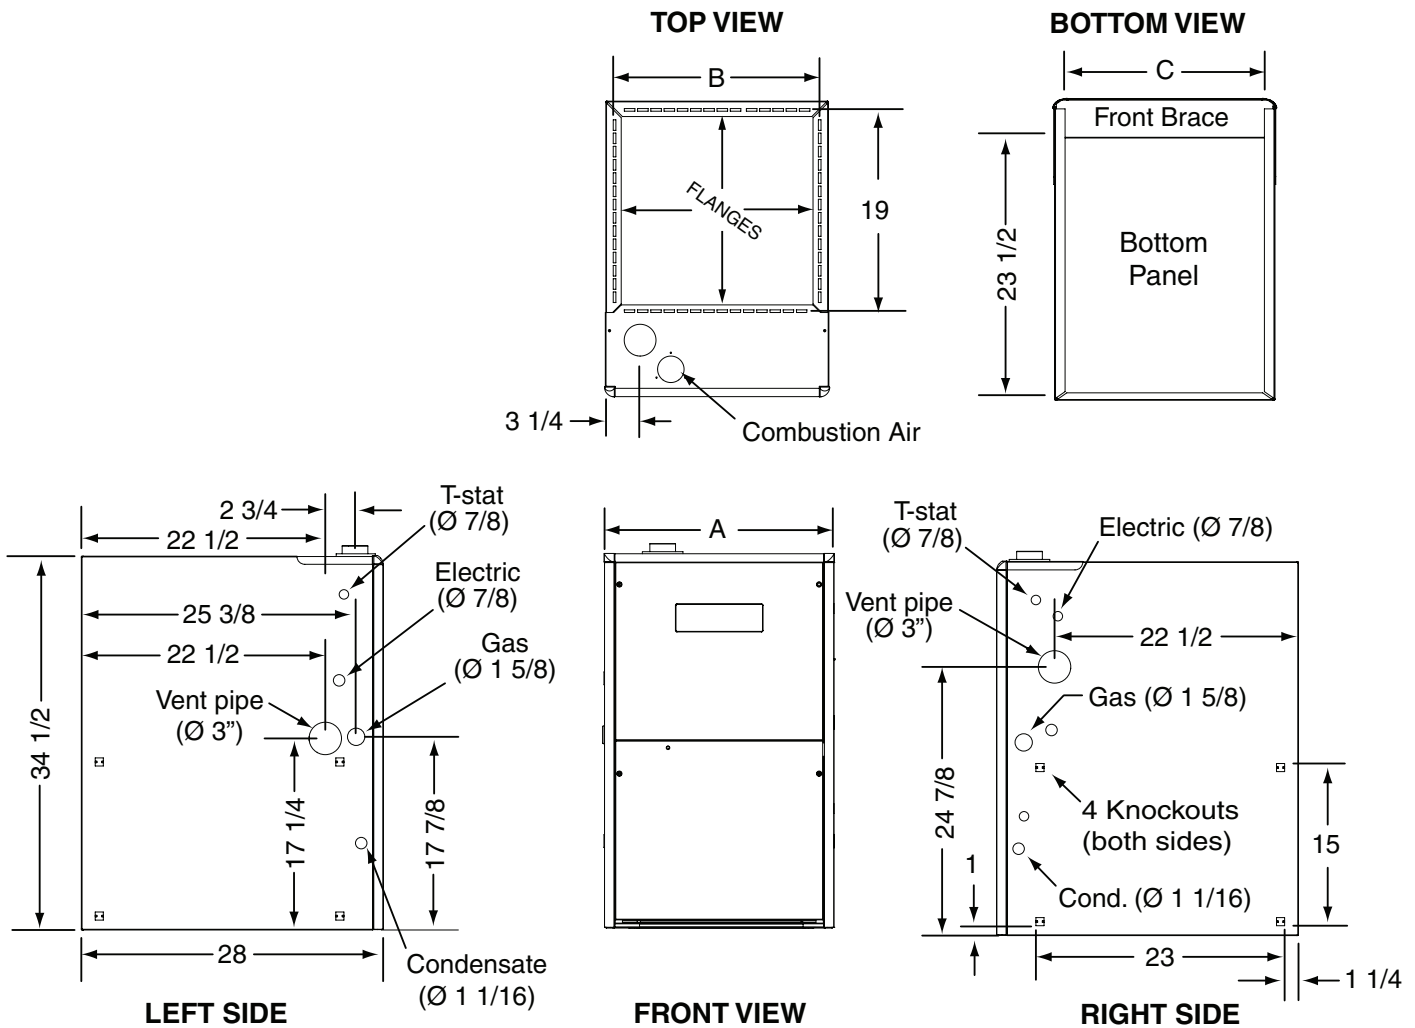

FG8SD Up to 95% AFUE High Efficiency Ultra-Low NOx Upflow/Horizontal Series

AIRFLOW DATA

HEATING AIRFLOW (CFM) & TEMPERATURE RISE (°F)												
MODEL NAME/ HEATING INPUT FG8SD	RETURN AIR VIA:	MOTOR SPEED	EXTERNAL STATIC PRESSURE (IN. W.C.)									
			0.1		0.2		0.3		0.4		0.5	
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE
-050U-T23A* 50,000 BTU/h Input 48,000 BTU/h Output	Bottom	Tap 9										
		Tap 8										
		Tap 7										
		Tap 6*										
		Tap 5**	970	45	935	47	915	48	880	50	845	52
		Tap 4	875	50	835	53	810	54	770	57	735	60
		Tap 3	835	53	795	55	765	57				
		Tap 2										
		Tap 1***										
	Side	Tap 9										
		Tap 8										
		Tap 7										
		Tap 6*										
		Tap 5**	935	47	915	48	880	50	845	52	805	55
		Tap 4	850	52	815	54	780	56	745	59		
		Tap 3	815	54	775	57	740	59				
		Tap 2										
		Tap 1***										

COOLING AIRFLOW (CFM)										
MODEL NAME/ HEATING INPUT FG8SD	RETURN AIR VIA:	MOTOR SPEED	EXTERNAL STATIC PRESSURE (IN. W.C.)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
			CFM	CFM	CFM	CFM	CFM	(CFM)	(CFM)	(CFM)
-050U-T23A* 50,000 BTU/h Input 48,000 BTU/h Output	Bottom Only	Tap 9	1,420	1,395	1,360	1,330	1,300	1,280	1,245	1,220
		Tap 8	1,310	1,270	1,245	1,215	1,180	1,145	1,120	1,095
		Tap 7	1,180	1,145	1,115	1,085	1,050	1,020	990	955
		Tap 6*	1,085	1,050	1,015	985	950	920	890	855
		Tap 5**	970	935	915	880	845	810	780	745
		Tap 4	875	835	810	770	735	700	665	630
		Tap 3	835	795	765	725	690	655	615	580
		Tap 2	650	590	560	520	465	430	380	340
		Tap 1***	550	485	450	405	330	290	250	195
	Left Side Only Motor	Tap 9	1,410	1,380	1,350	1,315	1,285	1,255	1,225	1,200
		Tap 8	1,290	1,260	1,230	1,195	1,160	1,135	1,100	1,070
		Tap 7	1,145	1,115	1,090	1,055	1,030	995	960	920
		Tap 6*	1,045	1,015	980	950	920	885	855	825
		Tap 5**	935	915	880	845	805	775	745	695
		Tap 4	850	815	780	745	715	665	625	585
		Tap 3	815	775	740	700	675	620	575	540
		Tap 2	605	575	530	495	445	390	325	235
		Tap 1***	495	470	410	365	320	260	160	

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
2. Data is shown without filter.
3. Temperature rises in the table are approximate. Actual temperature rises may vary.
4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
6. The “*” denotes the factory COOL setting, “***” denotes the factory HEAT setting, and “****” denotes factory FAN setting. If the Alternate speed is to be used, the speed tap must be adjusted at the blower motor plug.

AIRFLOW DATA CONTINUED

HEATING AIRFLOW (CFM) & TEMPERATURE RISE (°F)												
MODEL NAME/ HEATING INPUT FG8SD	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)									
			0.1		0.2		0.3		0.4		0.5	
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE
FG8SD-070U-T24B* 70,000 BTU/h Input 67,000 BTU/h Output	Bottom Only	9										
		8										
		7										
		6 **	1,460	42	1,430	43	1,385	45	1,345	46	1,300	48
		5 *	1,380	45	1,330	47	1,285	48	1,240	50	1,200	52
		4	1,065	58								
		3										
		2										
		1 ***										
	Side Only	9										
		8										
		7										
		6 **	1,440	43	1,400	44	1,360	46	1,315	47	1,270	49
		5 *	1,340	46	1,295	48	1,255	49	1,215	51	1,170	53
		4										
		3										
		2										
		1 ***										
	Side + Bottom	9										
		8										
		7										
		6 **	1,460	42	1,415	44	1,375	45	1,330	47	1,290	48
		5 *	1,400	44	1,355	46	1,310	47	1,270	49	1,225	51
		4	1,065	58								
		3										
		2										
		1 ***										

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
 2. Data is shown without filter.
 3. Temperature rises in the table are approximate. Actual temperature rises may vary.
 4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
 5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
 6. The “*” denotes the factory (default) COOL setting, “***” denotes the factory (default) HEAT setting, and “****” denotes the factory (default) FAN setting.
- If an alternate speed is to be used, refer to the installation instructions for Speed Tap Selection.

AIRFLOW DATA CONTINUED

COOLING AIRFLOW (CFM)										
MODEL NAME/ HEATING INPUT FG8SD	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
			CFM	CFM	CFM	CFM	CFM	(CFM)	(CFM)	(CFM)
FG8SD-070U-T24B* 70,000 BTUH/h Input 67,000 BTUH/h Output	Bottom Only	9	1,775	1,745	1,705	1,660	1,620	1,580	1,540	1,500
		8	1,640	1,605	1,560	1,525	1,485	1,440	1,400	1,350
		7	1,565	1,525	1,480	1,440	1,390	1,355	1,310	1,260
		6 **	1,460	1,430	1,385	1,345	1,300	1,260	1,215	1,175
		5 *	1,380	1,330	1,285	1,240	1,200	1,150	1,110	1,065
		4	1,065	1,015	965	920	870	815	755	700
		3	860	770	735	670	610	560	490	460
		2	625	550	490	435	365			
		1 ***	660	610	550	460	430	360		
	Side Only	9	1,715	1,710	1,675	1,640	1,600	1,565	1,525	1,480
		8	1,600	1,565	1,530	1,490	1,445	1,410	1,370	1,320
		7	1,515	1,480	1,440	1,405	1,360	1,320	1,275	1,230
		6 **	1,440	1,400	1,360	1,315	1,270	1,230	1,180	1,130
		5 *	1,340	1,295	1,255	1,215	1,170	1,120	1,070	1,020
		4	1,025	980	925	875	820	780	740	680
		3	830	760	700	650	595	525	495	465
		2	585	530	490	420	370			
		1 ***	695	600	565	470	400	385		
	Bottom + Side	9	1,820	1,785	1,745	1,710	1,665	1,625	1,585	1,540
		8	1,675	1,640	1,600	1,550	1,515	1,480	1,435	1,390
		7	1,585	1,545	1,500	1,460	1,420	1,380	1,340	1,295
		6 **	1,460	1,415	1,375	1,330	1,290	1,245	1,205	1,160
		5 *	1,400	1,355	1,310	1,270	1,225	1,180	1,135	1,090
		4	1,065	1,010	965	915	850	810	755	710
		3	860	790	735	680	625	550	500	460
		2	650	550	500	435	390			
		1 ***	680	600	550	480	420	390		

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
 2. Data is shown without filter.
 3. Temperature rises in the table are approximate. Actual temperature rises may vary.
 4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
 5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
 6. The “*” denotes the factory (default) COOL setting, “***” denotes the factory (default) HEAT setting, and “****” denotes the factory (default) FAN setting.
- If an alternate speed is to be used, refer to the installation instructions for Speed Tap Selection.

AIRFLOW DATA CONTINUED

HEATING AIRFLOW (CFM) & TEMPERATURE RISE (°F)												
MODEL NAME/ HEATING INPUT FG8SD	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)									
			0.1		0.2		0.3		0.4		0.5	
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE
FG8SD-100U-T35C* 100,000 BTU/h Input 95,000 BTU/h Output	Bottom Only	9	---	---	---	---	---	---	---	---	---	---
		8	---	---	---	---	---	---	---	---	---	---
		7	---	---	---	---	---	---	---	---	---	---
		6 *	1,850	48	1,790	49	1,745	50	1,700	52	1,650	53
		5 **	1,745	50	1,690	52	1,645	53	1,590	55	1,535	57
		4	1,480	59	1,420	62	1,360	65				
		3										
		2										
		1 ***										
	Side Only	9	---	---	---	---	---	---	---	---	---	---
		8	---	---	---	---	---	---	---	---	---	---
		7	---	---	---	---	---	---	---	---	---	---
		6 *	1,785	49	1,740	51	1,690	52	1,640	54	1,590	55
		5 **	1,690	52	1,640	54	1,595	55	1,540	57	1,490	59
		4	1,435	61	1,375	64	1,300					
		3										
		2										
		1 ***										
	Side + Bottom	9	---	---	---	---	---	---	---	---	---	---
		8	---	---	---	---	---	---	---	---	---	---
		7	---	---	---	---	---	---	---	---	---	---
		6 *	1,865	47	1,810	49	1,755	50	1,695	52	1,645	53
		5 **	1,760	50	1,705	52	1,655	53	1,595	55	1,535	57
		4	1,495	59	1,430	62	1,365	64				
		3										
		2										
		1 ***										

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
 2. Data is shown without filter.
 3. Temperature rises in the table are approximate. Actual temperature rises may vary.
 4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
 5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
 6. The "*" denotes the factory (default) COOL setting, "***" denotes the factory (default) HEAT setting, and "****" denotes the factory (default) FAN setting.
- If an alternate speed is to be used, refer to the installation instructions for Speed Tap Selection.

AIRFLOW DATA CONTINUED

COOLING AIRFLOW (CFM)										
MODEL NAME/ HEATING INPUT FG8SD	RETURN AIR VIA:	MOTOR SPEED TAP	EXTERNAL STATIC PRESSURE (IN. W.C.)							
			0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
			CFM	CFM	CFM	CFM	CFM	(CFM)	(CFM)	(CFM)
FG8SD-100U-T35C* 100,000 BTUH/h Input 95,000 BTUH/h Output	Bottom Only	9	2,250	2,250	2,190	2,130	2,080	2,025	1,975	1,915
		8	2,055	2,010	1,970	1,900	1,840	1,790	1,730	1,675
		7	1,900	1,845	1,795	1,750	1,700	1,650	1,575	1,520
		6 *	1,850	1,790	1,745	1,700	1,650	1,595	1,535	1,470
		5 **	1,745	1,690	1,645	1,590	1,535	1,485	1,420	1,365
		4	1,480	1,420	1,360	1,300	1,230	1,165	1,110	1,055
		3	1,315	1,245	1,170	1,100	1,025	975	915	860
		2	1,140	1,055	975	890	820	765	705	660
		1 ***	1,025	920	830	745	690	625	580	500
	Side Only	9	2,155	2,110	2,075	2,020	1,975	1,965	1,950	1,900
		8	1,980	1,940	1,890	1,850	1,805	1,760	1,710	1,650
		7	1,835	1,785	1,740	1,685	1,635	1,585	1,545	1,495
		6 *	1,785	1,740	1,690	1,640	1,590	1,540	1,490	1,440
		5 **	1,690	1,640	1,595	1,540	1,490	1,440	1,390	1,340
		4	1,435	1,375	1,300	1,250	1,195	1,140	1,080	1,020
		3	1,265	1,190	1,140	1,070	1,005	935	875	815
		2	1,095	1,015	945	870	790	715	665	615
		1 ***	980	905	835	740	665	590	525	440
	Bottom + Side	9	2,245	2,195	2,155	2,095	2,065	2,070	2,015	1,950
		8	2,080	2,030	1,980	1,930	1,880	1,820	1,765	1,705
		7	1,915	1,875	1,820	1,765	1,715	1,655	1,600	1,535
		6 *	1,865	1,810	1,755	1,695	1,645	1,585	1,530	1,485
		5 **	1,760	1,705	1,655	1,595	1,535	1,480	1,430	1,370
		4	1,495	1,430	1,365	1,290	1,235	1,170	1,115	1,065
		3	1,325	1,245	1,175	1,095	1,035	970	910	855
		2	1,175	1,065	965	900	810	775	705	635
		1 ***	1,040	930	850	750	680	610	560	475

NOTES:

1. To comply with government mandated efficiency standards, two openings are required for airflows above 1,600 CFM.
 2. Data is shown without filter.
 3. Temperature rises in the table are approximate. Actual temperature rises may vary.
 4. Individual cells shaded in gray indicate a temperature rise outside of the recommended range.
 5. To comply with government mandated efficiency standards, speed settings shaded in gray are not allowed in HEAT mode.
 6. The “*” denotes the factory (default) COOL setting, “***” denotes the factory (default) HEAT setting, and “****” denotes the factory (default) FAN setting.
- If an alternate speed is to be used, refer to the installation instructions for Speed Tap Selection.

ACCESSORIES

FG8SD Kits

Description	SKU
Side Return Filter Kit	541036

GENERAL TERMS OF LIMITED WARRANTY

Nordyne, LLC will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the Nordyne, LLC warranty department for a copy.



DISCOVER Comfort

GET STARTED AT FRIGIDAIREHVAC.COM



Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (06/24)

FRIGIDAIRE is a registered trademark of Electrolux Home Products Inc. and used under a license from Electrolux Home Products, Inc.

© Nordyne, LLC 2024. All Rights Reserved.

986F-0624



FRIGIDAIRE®

