

SCB EZI2C: Software mode

› **Description:**

- This example demonstrates SCB-EZI2C in SW Slave Mode, with PC/Aardvark in master Mode.

› **Target Device:**

- Traveo-II CYT2B6x devices

› **Hardware:**

- CYTVII-B-E-1M-100-CPU REV 1.0
- TVII Base Board (BB)

SCB EZI2C: Software mode


› **Dependency:**

- Any example could be copied to the main “src” based on the interested core
- Two slave addresses are supported for the MCU, 0x08 and 0x09
- Aardvark SCL/0 – JP2/12 on BB
- Aardvark SDA/2 – JP2/10 on BB
- Aardvark GND/1 to any GND on the CPU/BB

› **Expectation:**

- MCU is set in Slave Mode always in EZI2C, Aardvark shall be set in Master mode and click start.
- PC/Aardvark sends data to MCU. Aardvark will show the sent data and received data.
- Any SCB channel can be used and along with respective channel interrupts.

SCB EZI2C: Software mode

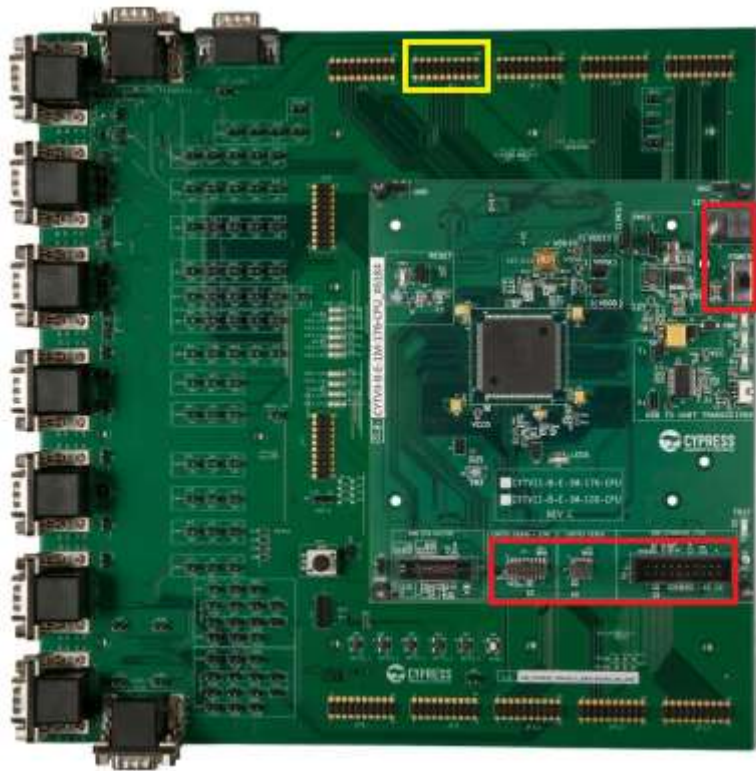

- › **Legend:**
- **Red block** for power, debug and USB (Mandatory)
 - **Yellow block** for the example specific connections