

Crypto: HMAC_SHA1 (ClientRunsOnCM4)

› **Description:**

- This example is used to demonstrate HMAC_SHA1 Test.
Calculate HASH and compare calculated result with reference result.

› **Target Device:**

- Traveo-II CYT2Bx devices

› **CPU Board:**



- CYTVII-B-E-176-CPU BOARD REV.C (REV_C)

Crypto: HMAC_SHA1

- › **Dependency:**
 - None

- › **Expectation:**
 - Calculate HASH and compare calculated result with reference result.

Trigger MUX: DMA-UART

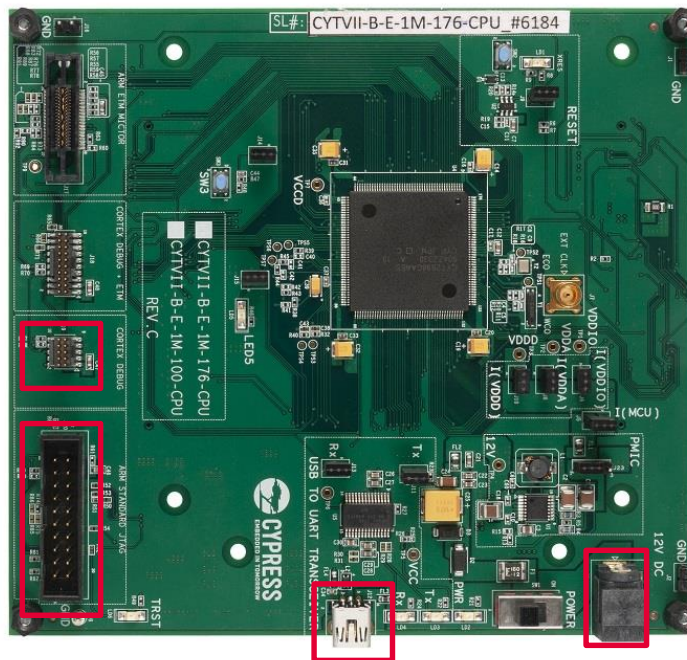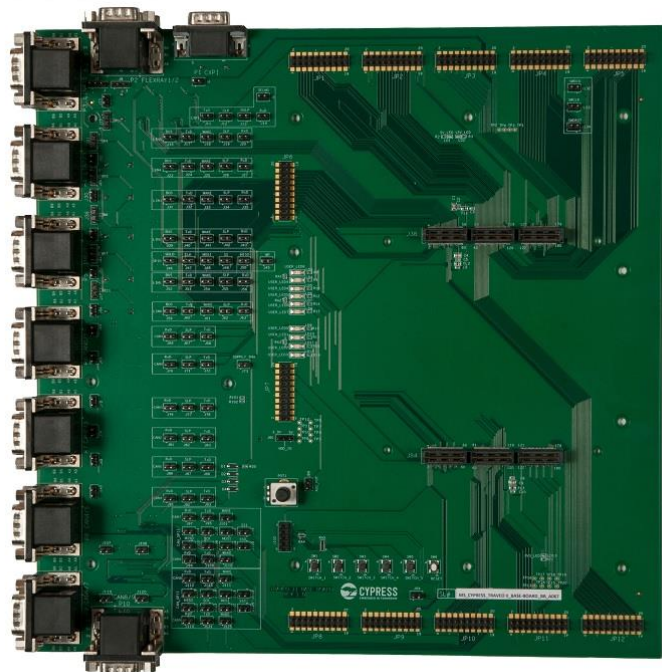

Legend:

- Red block for power, debug and USB (Mandatory)