Crypto: HMAC_SHA2 (ClientRunsOnCM4)

› **Description**:
  – This example is used to demonstrate HMAC_SHA2 Test.
    Calculate HASH and compare calculated result with reference result.

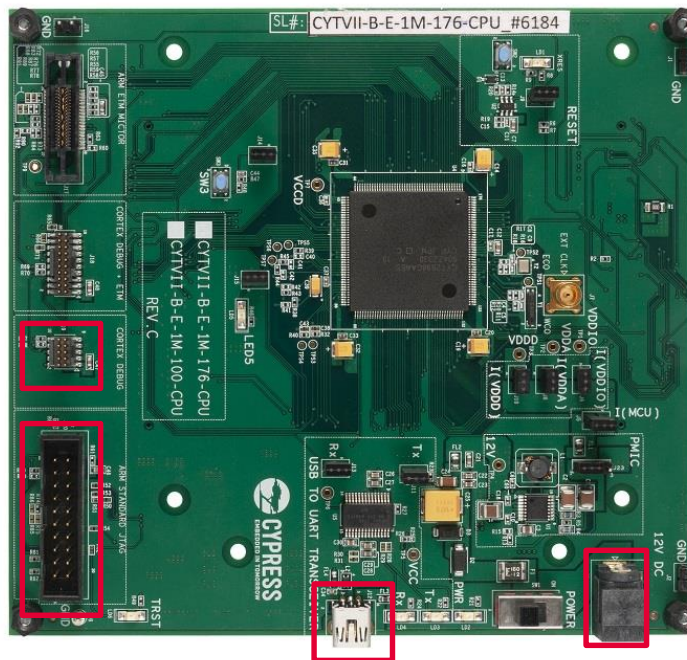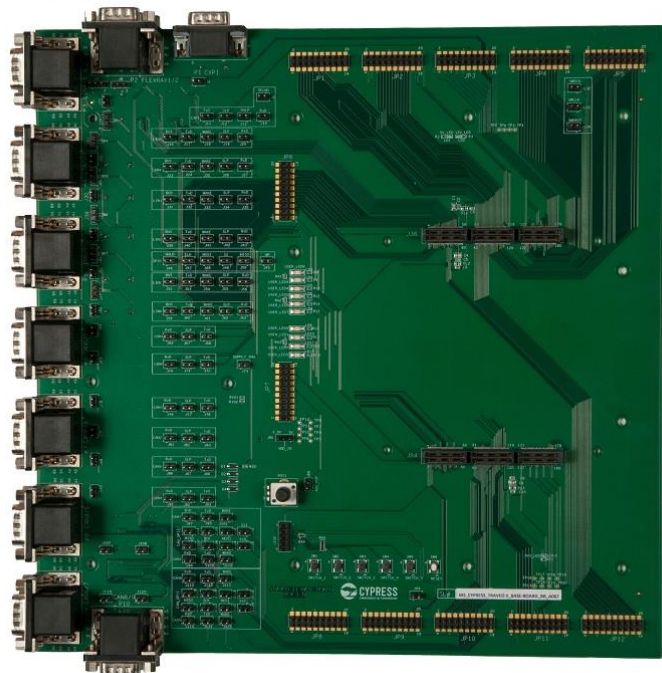› **Target Device**:
  – Traveo-II CYT2Bx devices

› **CPU Board**:
  – CYTVII-B-E-176-CPU BOARD REV.C (REV_C)

Crypto: HMAC_SHA2

› **Dependency:**
  – None

› **Expectation**:
  – Calculate HASH and compare calculated result with reference result.

Trigger MUX: DMA-UART

› **Legend**:
  – Red block for power, debug and USB (Mandatory)