Crypto: AES (ClientRunsOnCM4)

› **Description**:
  - This example is used to demonstrate decrypt and encrypt of AES.
    Encrypt plain text, and compare it with reference value. Decrypt plain text, and compare it with reference value.

› **Target Device**:
  - Traveo-II CYT2Bx devices

› **CPU Board**:
  - CYTVII-B-E-176-CPU BOARD REV.C (REV_C)

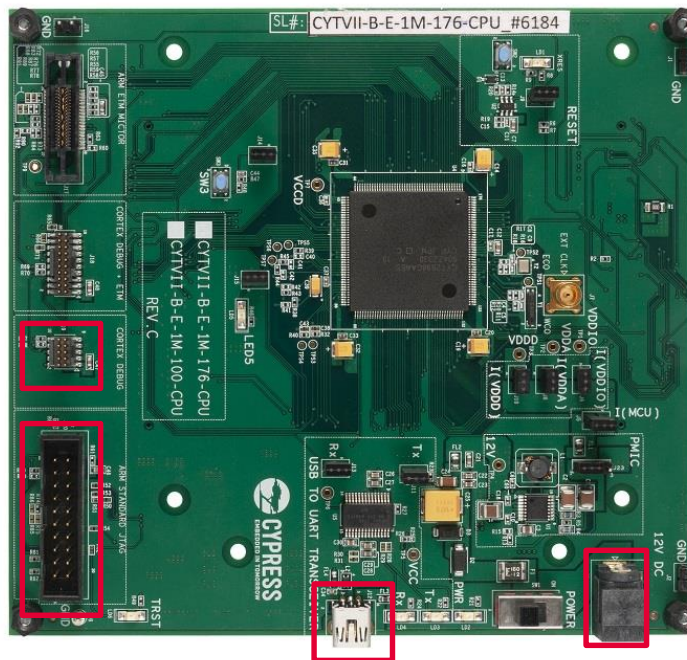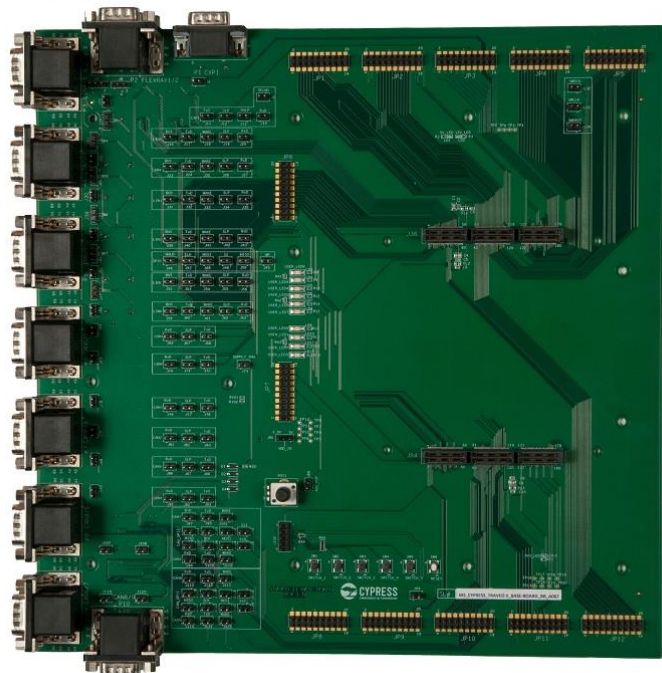# Crypto: AES (ClientRunsOnCM4)

› **Dependency:**
  – None

› **Expectation**:
  – Encrypt plain text, and compare it with reference value.
  – Decrypt plain text, and compare it with reference value.

Trigger MUX: DMA-UART

› **Legend**:
  - <mark>Red block</mark> for power, debug and USB (Mandatory)