

Crypto: CMAC (ClientRunsOnCM4)

› **Description:**

- This example is used to demonstrate CMAC Test.
Calculate CMAC with 128bit key and compare it with reference value.

› **Target Device:**

- Traveo-II CYT2Bx devices

› **CPU Board:**



- CYTVII-B-E-176-CPU BOARD REV.C (REV_C)

Crypto: CMAC (ClientRunsOnCM4)

- › **Dependency:**
 - None

- › **Expectation:**
 - Calculate CMAC with 128bit key and compare it with reference value.

Trigger MUX: DMA-UART

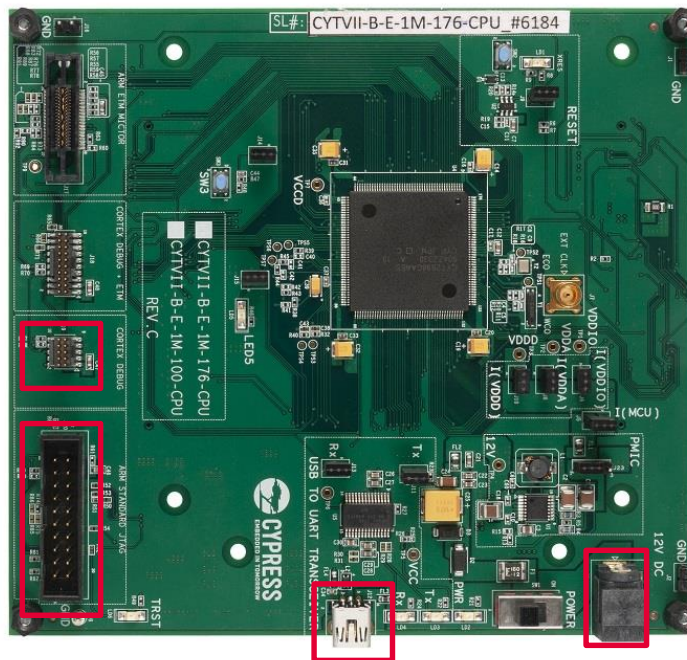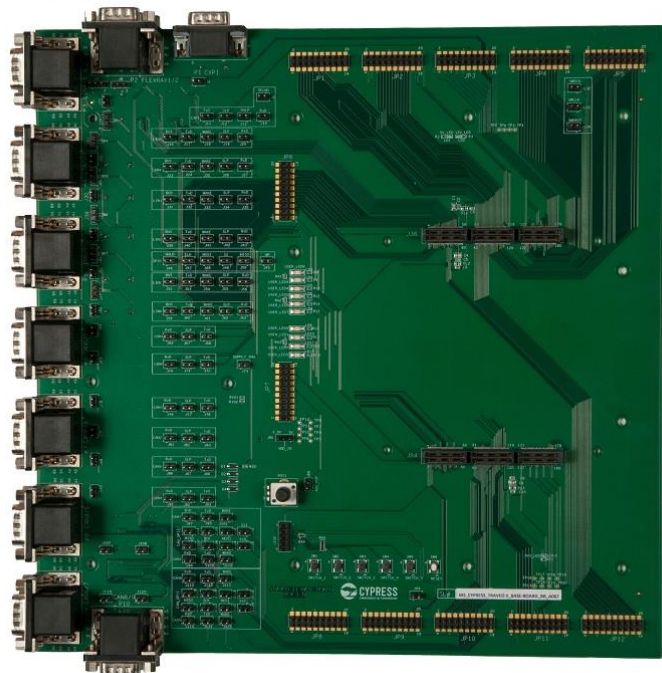

Legend:

- Red block for power, debug and USB (Mandatory)