

GPIO: LEDs

› **Description:**

- This example demonstrates blinking of multiple LEDs available on the TVII Base Board .

› **Target Device:**

- Traveo-II CYT2Bx devices

› **CPU Board:**

- CYTVII-B-E-1M-176-CPU Rev. C Board
- CYTVII-B-E-BB Rev.A Board

GPIO: LEDs


› **Dependency:**

- Jumper J80 to be short on position 1-2 on Base Board
- CYTVII-B-E-1M-176-CPU board should be connected on CYTVII-B-E-BB board.

› **Expectation:**

- All the Base Board LEDs will toggle at the interval of 50ms.
 - LED0 - LED9 on
 - Delay 50ms
 - LED0 - LED9 off
 - Delay 50ms

GPIO: LEDs

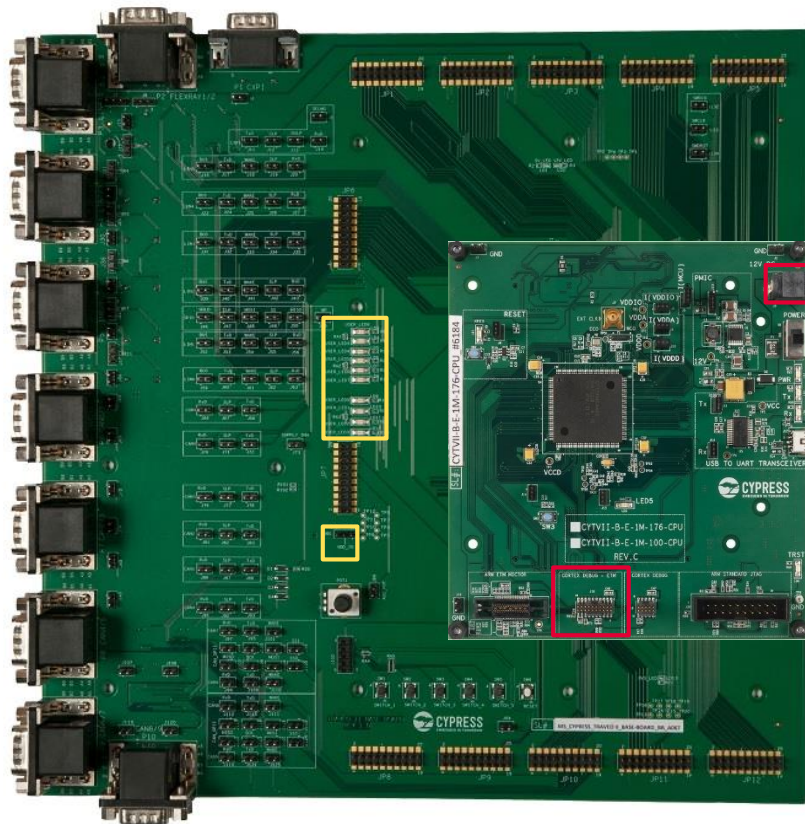

> Legend:

- Red block for power, debug and USB (Mandatory)
- Yellow block for the example specific connections