




Configuration

Reset Configuration

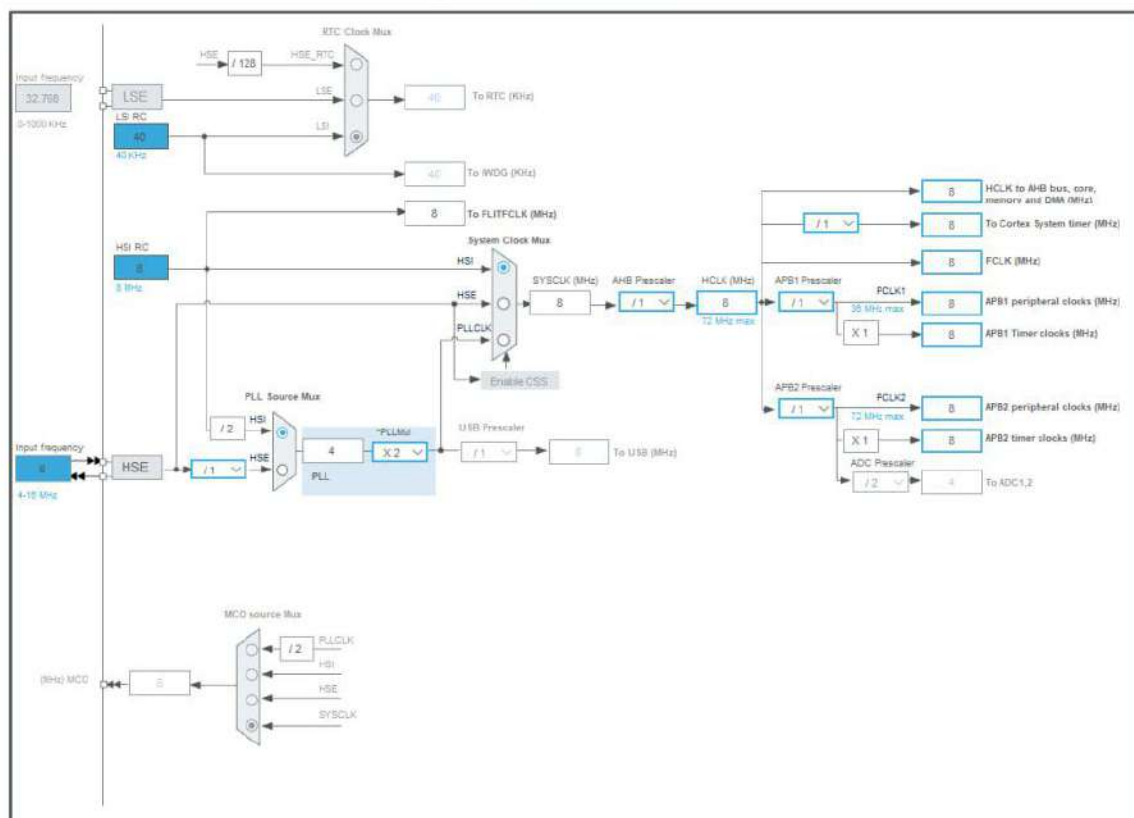

NVIC Settings



DMA Settings



Parameter Settings



User Constants

NVIC Interrupt Table

Enabled

Preemption

TIM3 global interrupt



0

▲ RCC
▲ SYS
WWDG

Analog >

Timers >

RTC
▲ TIM1
▲ TIM2
▲ TIM3
TIM4

Connectivity >

Computing >

Middleware and Software Packs >

Channel3 Disable ▾

Channel4 Disable ▾

Combined Channels Disable ▾

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

● NVIC Settings

● DMA Settings

● Parameter Settings

● User Constants

Configure the below parameters :

🔍 Search (Ctrl+F)



▼ Counter Settings

Prescaler (P... 7199

Counter Mode Up

Counter Peri... 4999

Internal Cloc... No Division

auto-reload p... Disable

▼ Trigger Output (TRG...

Master/Slave... Disable (Trigger input ef...

Trigger Event... Reset (UG bit from TIM...

Categories

System Core

DMA

GPIO

IWDG

NVIC

RCC

SYS

WWDG

Analog

Timers

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity

Computing

Middleware and Software Packs

Configuration

Group By Peripherals

GPIO

I2C

RCC

SYS

Search Signals

Search (Ctrl+F)

Show only Modified Pins

	Sig...	GPI...	GPI...	GPI...	Ma...	Use...	Mo...
PA...	n/a	n/a	Inpu...	Pull...	n/a	Btn1	☒
PA1	n/a	n/a	Inpu...	Pull...	n/a	btn2	☒
PA2	n/a	n/a	Inpu...	Pull...	n/a	bt3	☒
PA8	n/a	Low	Out...	No ...	Low	fan	☒
PB0	n/a	Low	Out...	No ...	Low		☐