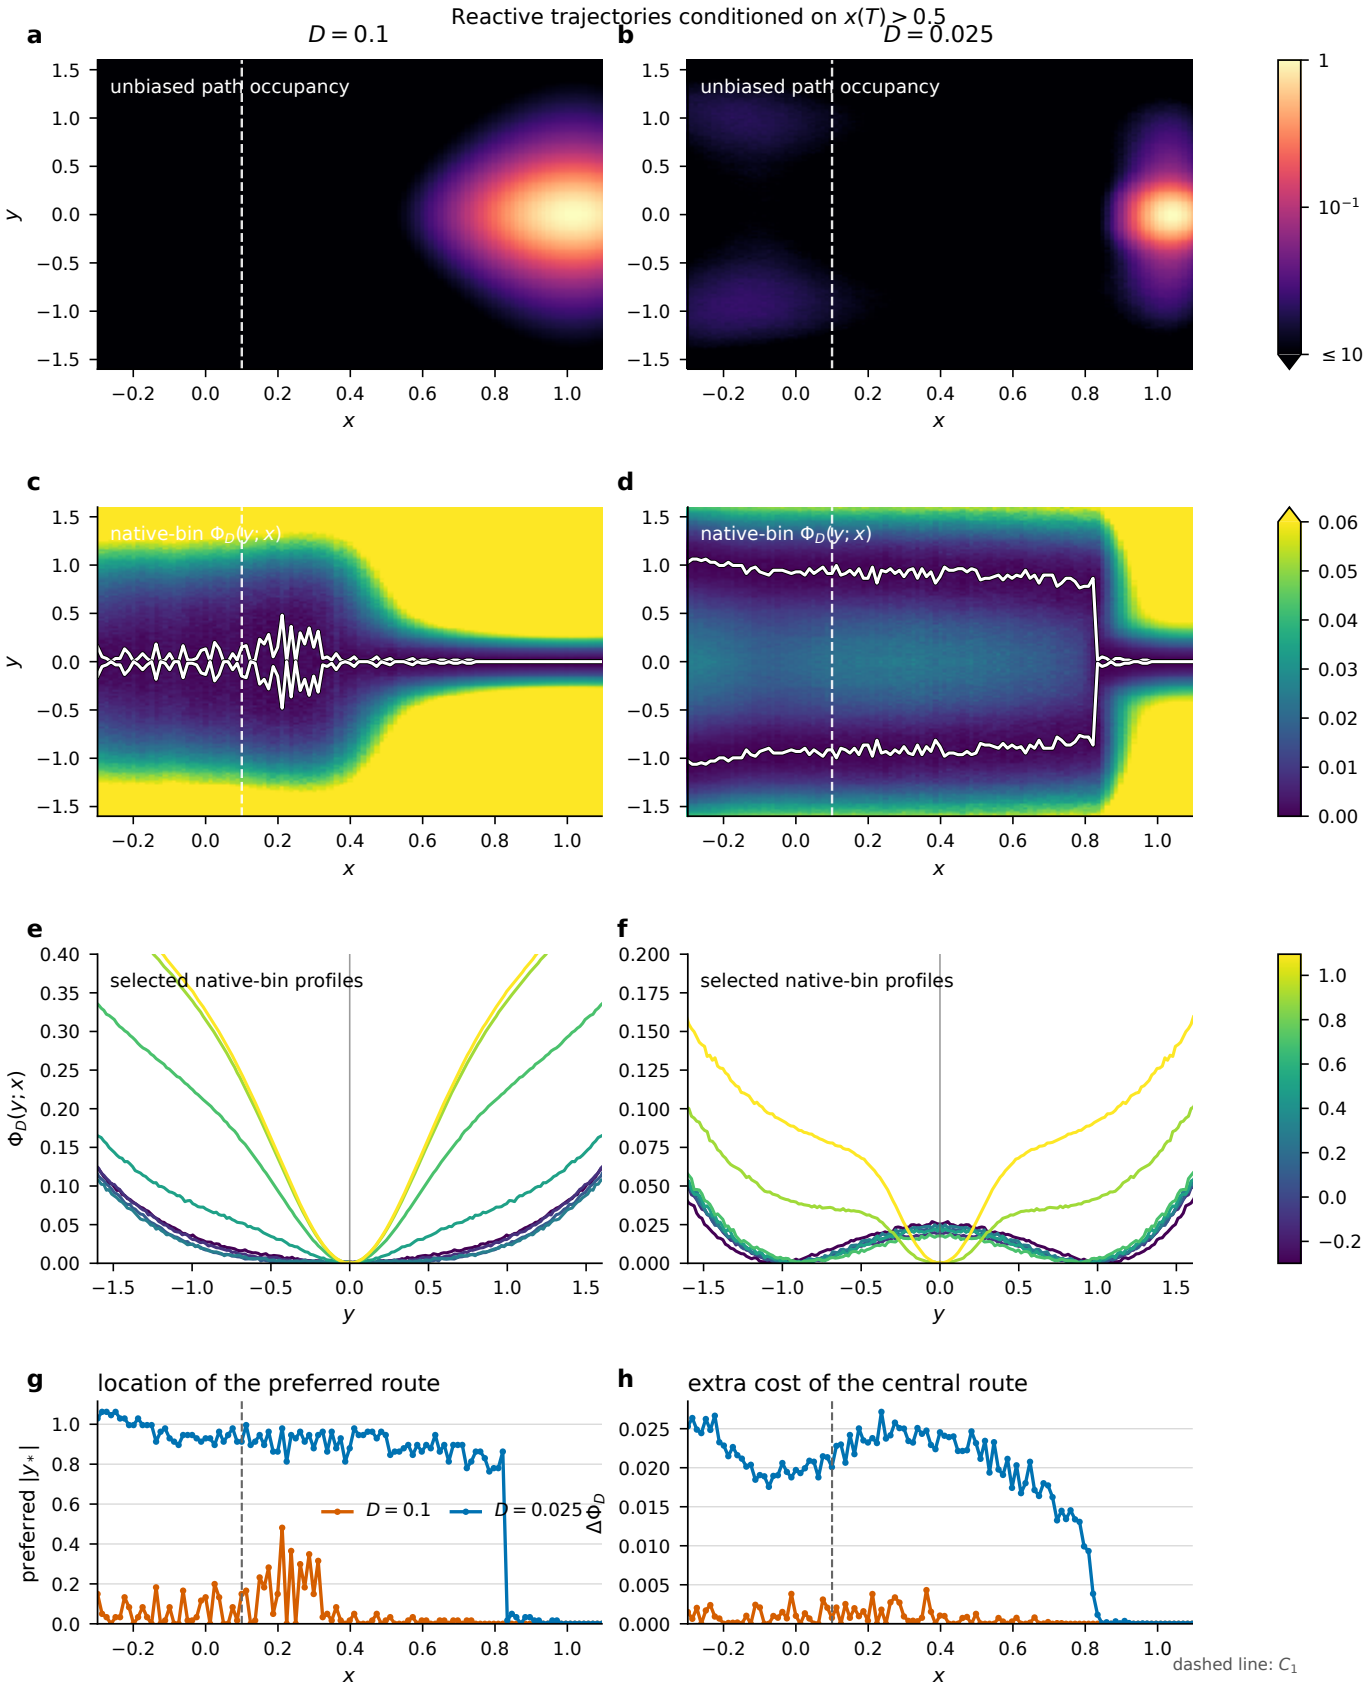
Reactive trajectories conditioned on $x(T) > 0.5$
a
$D = 0.1$
unbiased path occupancy
b
$D = 0.025$
unbiased path occupancy
c
native-bin $\Phi_D(y;x)$
d
native-bin $\Phi_D(y;x)$
e
selected native-bin profiles
$\Phi_D(y;x)$
f
selected native-bin profiles
g
location of the preferred route
preferred $|y_*|$
$D = 0.1$
$D = 0.025$
h
extra cost of the central route
$\Delta\Phi_D$
dashed line: C_1