




## EG 60T

### Description & Applications:

The world's best  $\text{CaCO}_3$  raw material, purity exceeds 99% , milled to a super thin powder with a sharp top cut. EG 60T is used mainly in fittings and master batch.

Physical Characteristics		Chemical Analysis	%
Brightness	96.50%	$\text{CaCO}_3$	99.6
Refractive index	1.59%	CaO	56.06
Oil absorption (ISO 787/5)	22.00g/10 g	MgO	0.01
DOP absorption (ISO 787/5)	35.00g/100g	$\text{Fe}_2\text{O}_3$	0.001
pH value (ISO 787/9)	9	$\text{Al}_2\text{O}_3$	0.001
Bulk density	0.45 g/cm <sup>3</sup>	$\text{SiO}_2$	0.001
Hardness in Mohs*	3	L.O.I	43.89
Moisture	0.2%		

\*Measurement applied on untreated material

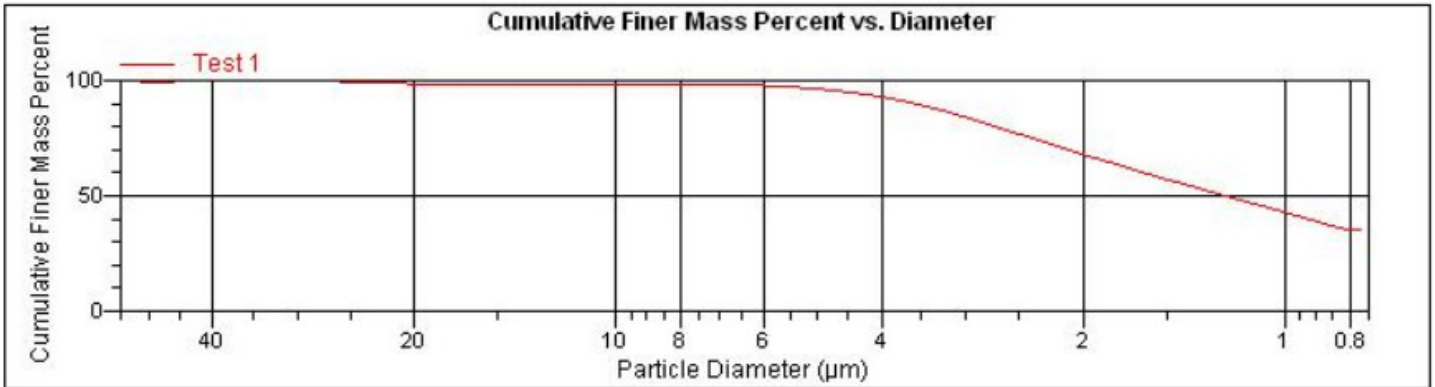

D97: 5 μm  
D50: 1.5 μm  
Finer than 2 μm: 60%