




EG 60

Description & Applications:

The world's best CaCO_3 raw material, purity exceeds 99% , milled to a super thin powder with a sharp top cut. EG 60 is used mainly in high quality Paints & Inks

Physical Characteristics		Chemical Analysis	%
Brightness	96.50%	CaCO_3	99.6
Refractive index	1.59%	CaO	56.06
Oil absorption (ISO 787/5)	22.00g/10 g	MgO	0.01
DOP absorption (ISO 787/5)	35.00g/100g	Fe_2O_3	0.001
pH value (ISO 787/9)	9	Al_2O_3	0.001
Bulk density	0.45 g/cm ³	SiO_2	0.001
Hardness in Mohs*	3	L.O.I	43.89
Moisture	0.2%		

*Measurement applied on untreated material

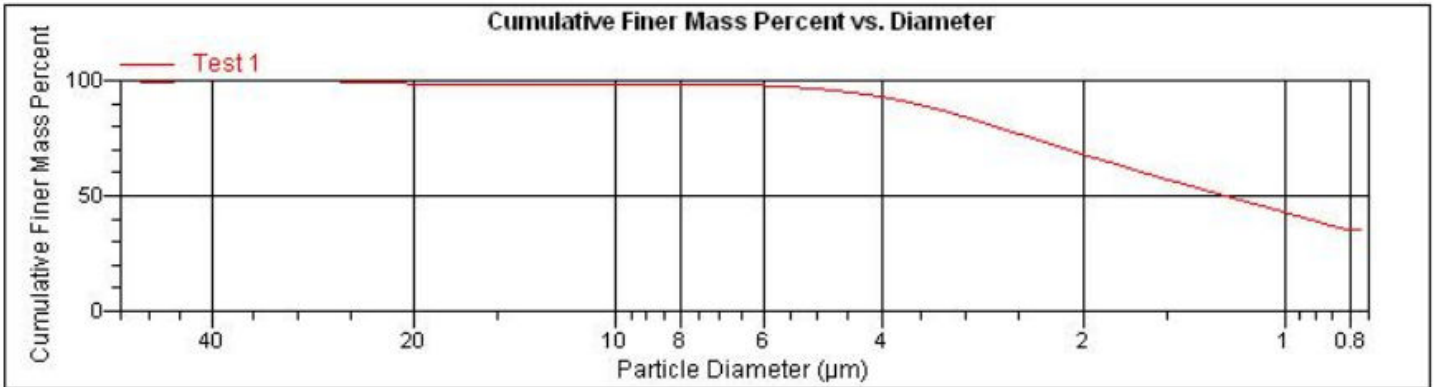

D97: 5 μm
D50: 1.6 μm
Finer than 2 μm: 60%