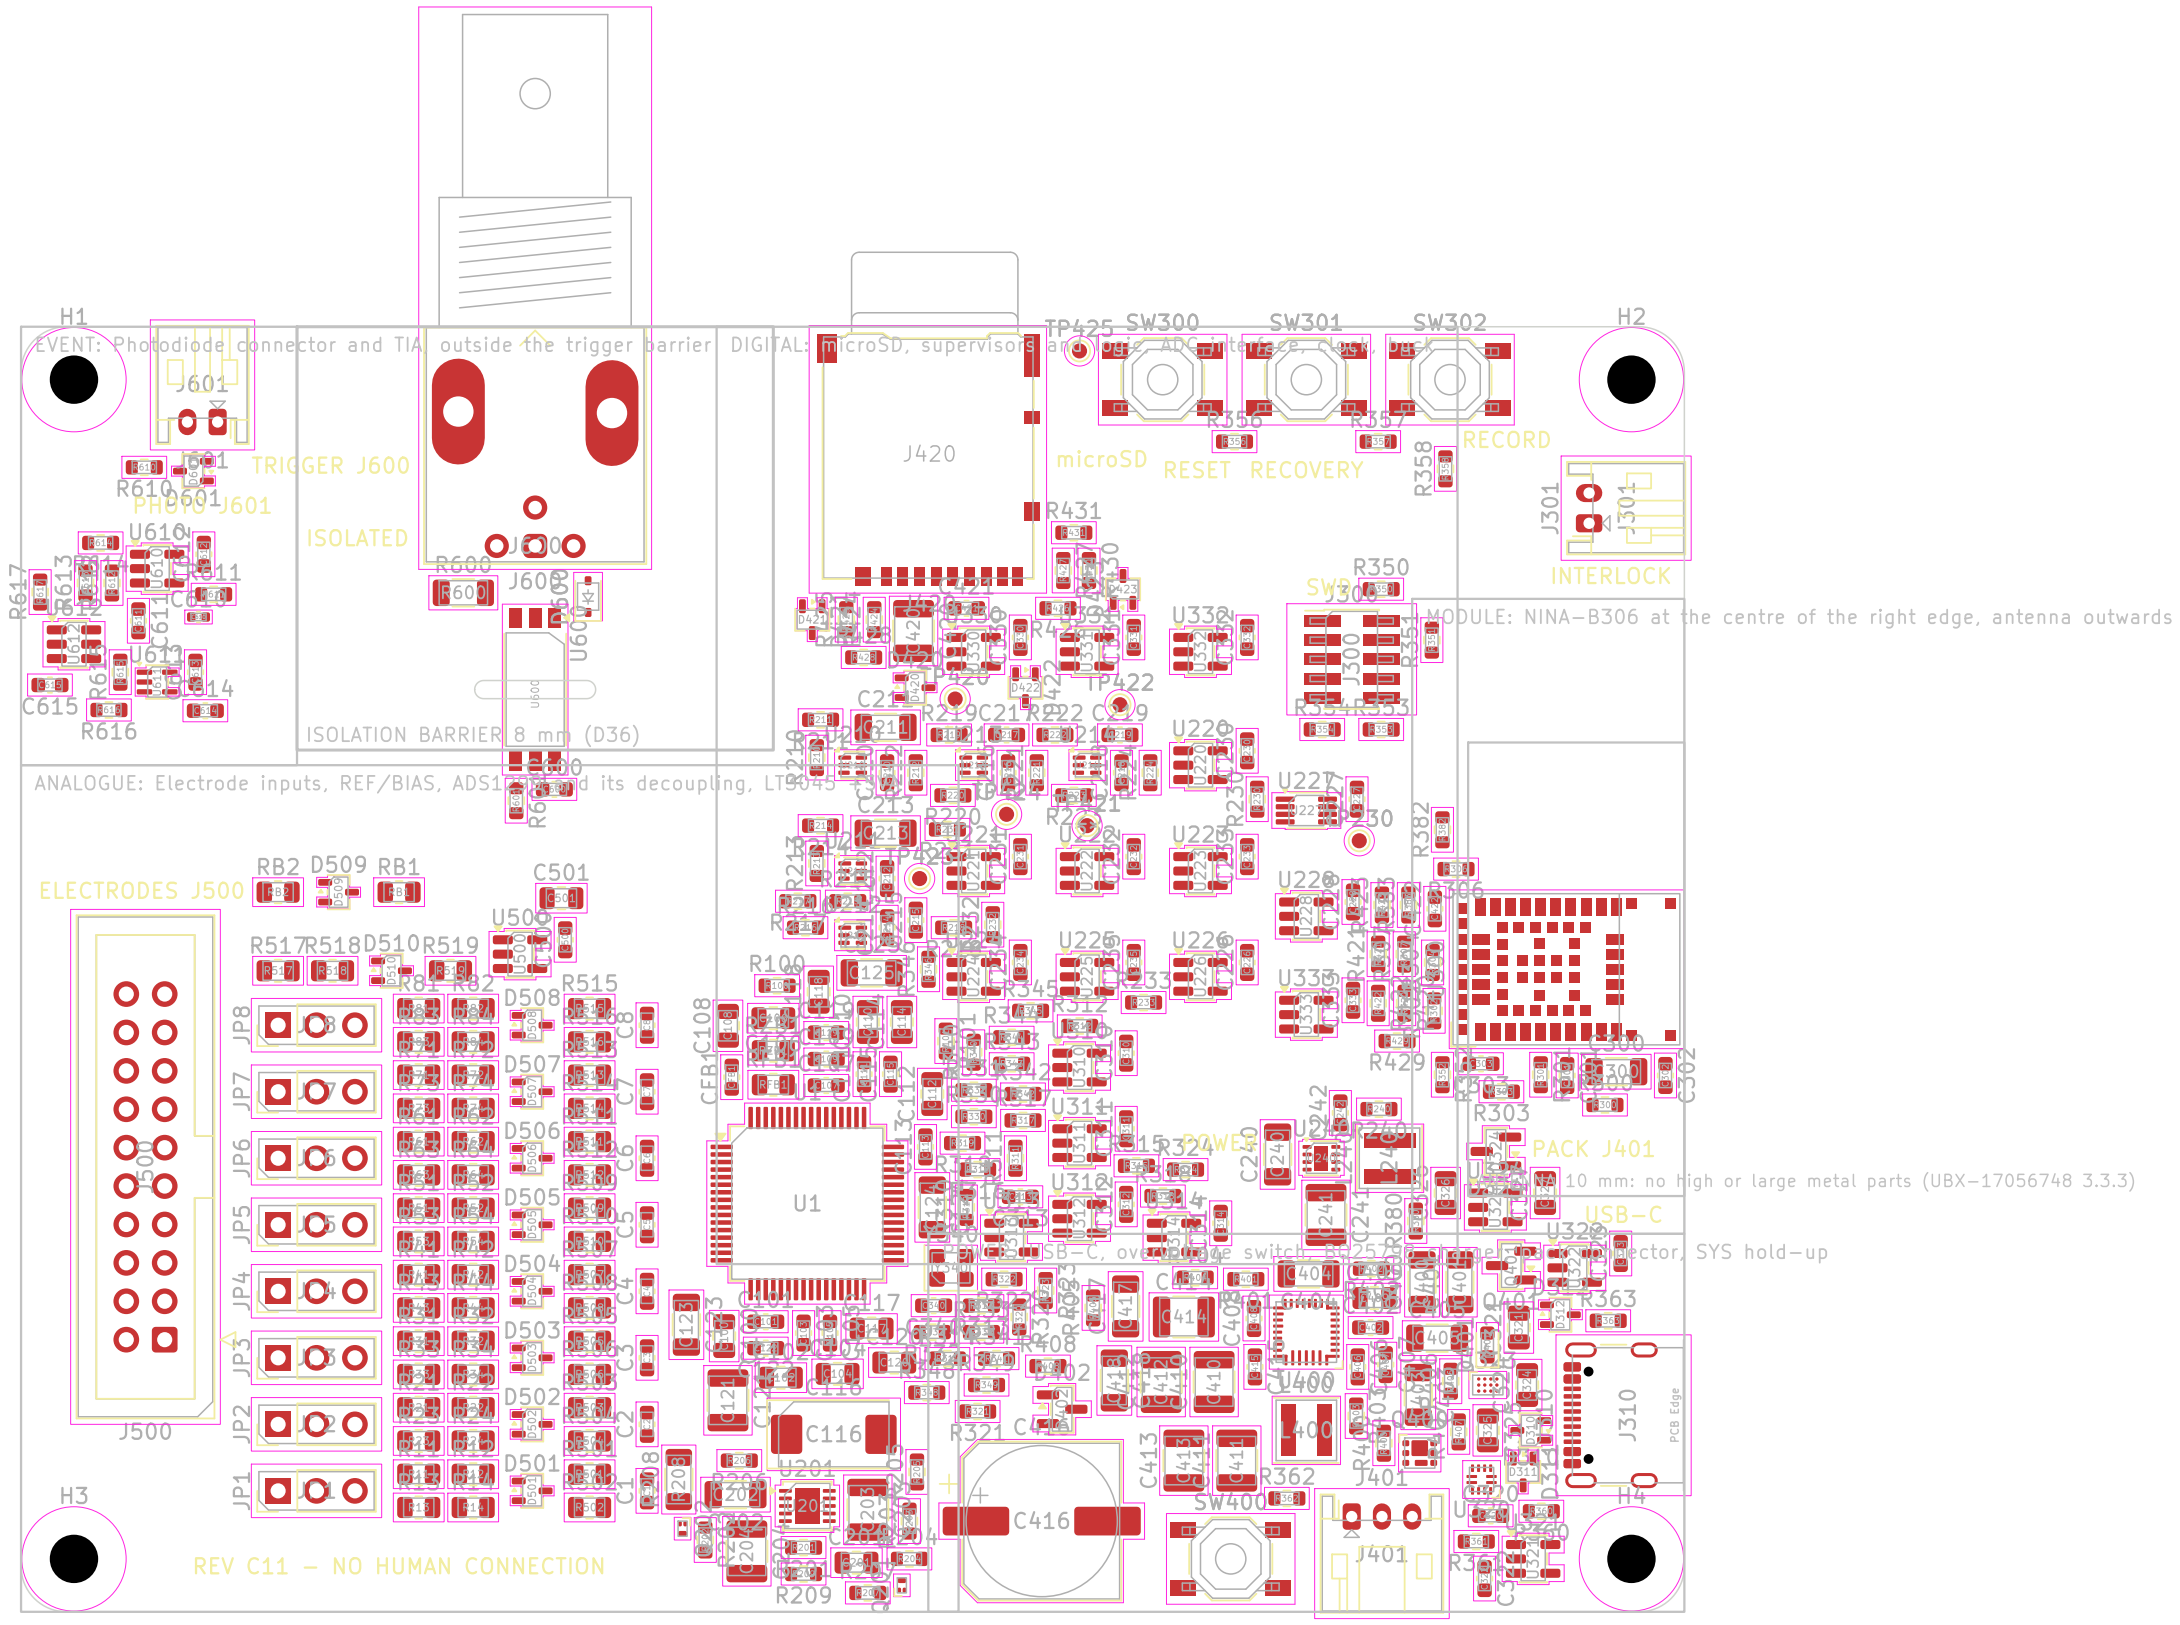
H1
H2
H3
H4
J601
EVENT: Photodiode connector and TIA outside the trigger barrier
DIGITAL: microSD, supervisor
TRIGGER J600
PHOTO J601
ISOLATED
ISOLATION BARRIER 8 mm (D36)
J420
microSD
SW300
SW301
SW302
RESET
RECOVERY
RECORD
J301
INTERLOCK
MODULE: NINA-B306 at the centre of the right edge, antenna outwards
ANALOGUE: Electrode inputs, REF/BIAS, ADS1299 and its decoupling, LT
ELECTRODES J500
J500
JP1
JP2
JP3
JP4
JP5
JP6
JP7
JP8
U1
C116
C416
PACK J401
J401
10 mm: no high or large metal parts (UBX-17056748 3.3.3)
USB-C
SYS hold-up
J310
SW400
U400
REV C11 — NO HUMAN CONNECTION

Placed, not routed. Generated by scripts/pcb_place.py.
8-channel ADS1299, NINA-B306, microSD, USB-C charging. Bench draft, no human connection.

Sheet:
File: EEG_RevC.kicad_pcb

Title: EEG recorder Rev C11 — placement (Step 14)

Size: A4
Date: 2026-11-08
Rev: C11
KiCad E.D.A. 10.0.8
Id: 1/1