

Edifício Cristal, Rua Calvet Magalhães
Nº245, Bloco B
2774-550 Paço de Arcos - Portugal

Uncontrolled Copy when Printed

All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of NetJets Transportes Aéreos, S.A.

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

Table of Contents

ROR Record of Revisions.....	ROR-1
1 Updates and Approval.....	1-1
1.1 Authority for Issue.....	1-1
1.2 Nominated Persons.....	1-2
1.3 Synonyms, Terms and Definitions.....	1-3
2 General Considerations.....	2-1
2.1 Conditions Requiring a Maintenance Check Flight.....	2-1
2.1.1 Conditions Requiring an MCF(A).....	2-1
2.1.2 Conditions requiring an MCF(B).....	2-1
2.2 Maintenance Release Before the Maintenance Check Flight.....	2-2
2.3 MCF Flight Authorisation and Scheduling.....	2-3
2.3.1 Maintenance Tracking Software Application Procedures.....	2-3
2.3.2 MCF(A/B) Authorisation Workflow.....	2-4
2.3.3 Flight Scheduling MCF(A) & MCF(B).....	2-5
2.3.4 Release for MCF(A) Flight.....	2-6
2.3.5 Release for MCF(B) Flight.....	2-7
2.3.6 Release for MCF(A) & MCF(B) Taxi Check.....	2-8
2.3.7 Release for MCF(A) & MCF(B) Engine Run or Ground Operation.....	2-9
2.3.8 Summary of Release / Briefing Requirements.....	2-10
2.3.9 Type of flight.....	2-10
2.4 Process to Develop a Flight Programme and Procedures.....	2-11
2.5 Relevant Procedures to Document Maintenance Check Flights in the Aircraft	
Records.....	2-12
2.6 Policy for the Determination of 'Level A' or 'Level B' Maintenance Check	
Flights.....	2-13
2.7 Operating Procedures and Limitations.....	2-14
3 Aircraft Status.....	3-1
3.1 Status of the Aircraft Prior to MCF.....	3-1
3.2 Fuel Loading.....	3-2
3.3 Mass and Balance.....	3-3
3.4 Specific Test and Safety Equipment.....	3-4
4 Crew Selection and Other Persons On Board.....	4-1
4.1 Qualification Requirements.....	4-1
4.1.1 MCF(A) Qualification Requirements.....	4-1
4.1.2 MCF(B) Qualification Requirements.....	4-1
4.2 Recency.....	4-2
4.3 Selection, Experience and Training.....	4-3
4.3.1 MCF(A) Pilot Selection and Experience.....	4-3
4.3.2 Training.....	4-3
4.3.3 Fleet Change.....	4-4
4.3.4 New Types.....	4-5
4.3.5 MCF Instructor Requirements.....	4-5
4.4 Crew Composition.....	4-6
4.5 Persons on Board.....	4-7
5 Briefings.....	5-1
5.1 Briefing from Maintenance to Flight Operations.....	5-1
5.2 Flight Ops Briefing to PIC.....	5-2
5.3 Crew Initial Briefing.....	5-3
5.4 Briefing Documentation.....	5-4
5.5 Information to ATC.....	5-5
5.6 Post-flight De-briefing.....	5-6
6 Flight Programme and Procedures.....	6-1

6.1 Flight Programme.....	6-1
6.2 Procedures for MCF.....	6-2
6.2.1 Limitations.....	6-2
6.2.2 General Procedures.....	6-2
6.2.3 High Power Engine Ground Runs.....	6-2
6.2.4 High-speed Taxi / Brake Check.....	6-2
6.3 Task Sharing and Call-outs.....	6-5
6.4 Roles and Responsibilities.....	6-6
6.5 Potential Risks and Contingency Plans.....	6-7
6.6 Information Available to Crew.....	6-8
6.7 Adequate Available Airspace and Coordination with ATC.....	6-9
7 External Conditions.....	7-1
7.1 Weather Runway and Performance Requirements.....	7-1
7.2 ATC, Airspace, and Airport.....	7-2
8 Documentation.....	8-1
8.1 In-flight Recordings.....	8-1
8.2 Results of the Maintenance Check Flight.....	8-2
8.3 Recording of Required Maintenance Actions After the Flight.....	8-3
ANNEX I List of Events Requiring a Maintenance Check Flight (A).....	ANNEX I-1
ANNEX II List of Events Requiring a Maintenance Check Flight (B).....	ANNEX II-1
ANNEX III High-speed Taxi Check - Req.for Subsequent High-speed Taxi Run.....	ANNEX III-1
ANNEX IV High Speed Taxi - MCF(B) Program / Checklist.....	ANNEX IV-1

List of Effective Pages

Page Number	Revision Date	Revision Number	Page Number	Revision Date	Revision Number
Cover Page			2-13	07 OCT 2024	8.0.0
APPR-1	07 OCT 2024	8.0.0	2-14	29 AUG 2023	7.0.0
APPR-2	07 OCT 2024	8.0.0	Chapter 3 - Aircraft Status		
Table of Contents			3-1	18 JAN 2022	4.0.0
TOC-1	07 OCT 2024	8.0.0	3-2	18 JAN 2022	4.0.0
TOC-2	07 OCT 2024	8.0.0	3-3	18 JAN 2022	4.0.0
			3-4	18 JAN 2022	4.0.0
List of Effective Pages			Chapter 4 - Crew Selection and Other Persons On Board		
LEP-1	07 OCT 2024	8.0.0	4-1	29 AUG 2023	7.0.0
LEP-2	07 OCT 2024	8.0.0	4-2	06 FEB 2023	6.0.0
Revision Highlights			4-3	06 FEB 2023	6.0.0
RH-1	07 OCT 2024	8.0.0	4-4	06 FEB 2023	6.0.0
Abbreviations			4-5	06 FEB 2023	6.0.0
ABBR-1	07 OCT 2024	8.0.0	4-6	29 AUG 2023	7.0.0
Chapter ROR - Record of Revisions			4-7	18 JAN 2022	4.0.0
ROR-1	07 OCT 2024	8.0.0	4-8	18 JAN 2022	4.0.0
ROR-2	07 OCT 2024	8.0.0	Chapter 5 - Briefings		
Chapter 1 - Updates and Approval			5-1	07 OCT 2024	8.0.0
1-1	07 OCT 2024	8.0.0	5-2	29 AUG 2023	7.0.0
1-2	18 JAN 2022	4.0.0	5-3	07 OCT 2024	8.0.0
1-3	18 JAN 2022	4.0.0	5-4	18 JAN 2022	4.0.0
1-4	18 JAN 2022	4.0.0	5-5	18 JAN 2022	4.0.0
			5-6	29 JUL 2022	5.0.0
Chapter 2 - General Considerations			Chapter 6 - Flight Programme and Procedures		
2-1	29 AUG 2023	7.0.0	6-1	29 AUG 2023	7.0.0
2-2	18 JAN 2022	4.0.0	6-2	29 AUG 2023	7.0.0
2-3	07 OCT 2024	8.0.0	6-3	29 AUG 2023	7.0.0
2-4	29 AUG 2023	7.0.0	6-4	29 AUG 2023	7.0.0
2-5	29 AUG 2023	7.0.0	6-5	18 JAN 2022	4.0.0
2-6	29 AUG 2023	7.0.0	6-6	07 OCT 2024	8.0.0
2-7	29 AUG 2023	7.0.0	6-7	18 JAN 2022	4.0.0
2-8	29 AUG 2023	7.0.0	6-8	18 JAN 2022	4.0.0
2-9	29 AUG 2023	7.0.0	6-9	18 JAN 2022	4.0.0
2-10	29 AUG 2023	7.0.0	6-10	18 JAN 2022	4.0.0
2-11	29 AUG 2023	7.0.0	Chapter 7 - External Conditions		
2-12	18 JAN 2022	4.0.0	7-1	18 JAN 2022	4.0.0

Uncontrolled Copy when Printed

Page Number	Revision Date	Revision Number	Page Number	Revision Date	Revision Number
7-2	18 JAN 2022	4.0.0	ANNEX II-2	07 OCT 2024	8.0.0
Chapter 8 - Documentation			Chapter ANNEX III - High-speed Taxi Check - Req.for Subsequent High-speed Taxi Run		
8-1	18 JAN 2022	4.0.0	ANNEX III-1	29 JUL 2022	5.0.0
8-2	18 JAN 2022	4.0.0	ANNEX III-2	18 JAN 2022	4.0.0
8-3	18 JAN 2022	4.0.0	ANNEX III-3	18 JAN 2022	4.0.0
8-4	18 JAN 2022	4.0.0	ANNEX III-4	18 JAN 2022	4.0.0
Chapter ANNEX I - List of Events Requiring a Maintenance Check Flight (A)			Chapter ANNEX IV - High Speed Taxi - MCF(B) Program / Checklist		
■ ANNEX I-1	07 OCT 2024	8.0.0	ANNEX IV-1	18 JAN 2022	4.0.0
■ ANNEX I-2	07 OCT 2024	8.0.0	ANNEX IV-2	18 JAN 2022	4.0.0
■ ANNEX I-3	07 OCT 2024	8.0.0			
ANNEX I-4	07 OCT 2024	8.0.0			
Chapter ANNEX II - List of Events Requiring a Maintenance Check Flight (B)					
■ ANNEX II-1	07 OCT 2024	8.0.0			

Highlights

ROR Record of Revisions	ROR
New revision.	
1.1 Authority for Issue	1.1
Updated approval table to reflect new company structure.	
2.3.1 Maintenance Tracking Software Application Procedures	2.3.1
Updated bullet point with process for loading details into Mx work order.	
2.6 Policy for the Determination of 'Level A' or 'Level B' Maintenance Check Flights	2.6
Updated section.	
5.1 Briefing from Maintenance to Flight Operations	5.1
Updated bullet point.	
Updated Part-M to Part-CAMO.	
5.3 Crew Initial Briefing	5.3
Updated Part-M to Part-CAMO.	
Updated Part-M to Part-CAMO.	
Updated Part-M to Part-CAMO.	
6.4 Roles and Responsibilities	6.4
Updated Part-M to Part-CAMO.	
Updated Part-M to Part-CAMO.	
ANNEX I List of Events Requiring a Maintenance Check Flight (A)	ANNEX I
Updated table.	
Updated table.	
Updated table.	
Updated table.	
ANNEX II List of Events Requiring a Maintenance Check Flight (B)	ANNEX II
Updated table.	

Uncontrolled Copy when Printed

Abbreviations

ABBREVIATION	DESCRIPTION
AFM	Aeroplane Flight Manual
AMM	Aircraft Maintenance Manual
AMO	Approved Maintenance Organisation
AOA	Angle of Attack
ATC	Air Traffic Control
ATL	Aircraft Technical Log
ATS	Air Traffic Service
CP	Chief Pilot
CRM	Crew Resource Management
DOA	Design Organisation Approval
EASA	European Aviation Safety Agency
FCF	Functional Check Flight
FOSM	Flight Operations Support Manager
LH	Left Hand
MCC	Maintenance Control Centre
MCF	Maintenance Check Flight
NJMP	NetJets Maintenance Procedures
NTA	NetJets Transportes Aéreos, S.A.
OCC	Operations Control Centre
OEM	Original Equipment Manufacturer
OM-A	Operations Manual Part A
OM-B	Operations Manual Part B
PDCS	Performance Data Computation System
PIC	Pilot-In-Command
PM	Pilot Monitoring
POM	Pilot Operating Manual
RCC	Runway Condition Code
RH	Right Hand
RTO	Rejected Take-Off
RTS	Return To Service
SIC	Second In Command
SOP	Standard Operating Procedures
TCH	Type Certificate Holder
TMS	Training Management System
WX	WEATHER

Uncontrolled Copy when Printed

Record of Revisions

I

Rev. No.	Issue Date
Original	07 May 15
1	20 Jan 16
2	29 Jun 17
3	26 Dec 19
4	18 Jan 22
5	29 Jul 22
6	06 Feb 2023
7.0.0	29 Aug 2023
8.0.0	07 Oct 2024

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

Chapter 1 - Updates and Approval

This document shall be revised when necessary to be in compliance with technical and administrative requirements. All personnel affected should check for updates periodically and specifically before carrying out Check Flights, High-speed Taxi, Engine Ground Runs, and / or Flight Controls Checks.

The procedures described in this document shall not conflict with those approved in the NetJets Maintenance Procedures (NJMPs) which form part of the Continuing Airworthiness Management Exposition. If for any reason a conflict occurs, the procedures referred to in the Continuing Airworthiness Management Exposition shall be followed.

1.1 Authority for Issue

	Name	Title	Signature
Approved by:	Achim Hofmann	Director of Operations	DocuSigned by: Achim Hofmann E59513EAFB7744F... Signed by:
Approved by:	Cláudia Cabaço	Head of Aviation Safety	Signed by: Cláudia Cabaço A7BED9B33D5246C... Signed by:
Approved by:	Christopher Poppleton	Director of Training	Signed by: Christopher Poppleton 7405994EF8DC42D... Signed by:
Approved by:	Bruce Turner	Director of Maintenance Operations	Signed by: Bruce Turner FE20EB8168714F5... Signed by:

Uncontrolled Copy when Printed

1.2 Nominated Persons

Names of nominated managers

Position	Department
Responsible Manager	Operations Regulatory and Technical Support
Reviewer	Maintenance

Uncontrolled Copy when Printed

1.3 Synonyms, Terms and Definitions

Please refer to OM-A, Chapter 0.

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

Chapter 2 - General Considerations

Regulation (EU) No 965/2012 ANNEX I - Definitions (76a)

Maintenance Check Flight (MCF) means a flight of an aircraft, with an airworthiness certificate or with a permit to fly, which is carried out for troubleshooting purposes or to check the functioning of one or more systems, parts, or appliances after maintenance, if the functioning of the systems, parts, or appliances cannot be established during ground checks and which is carried out in any of the following situations:

- a. as required by the Aircraft Maintenance Manual (AMM) or any other maintenance data issued by a design approval holder being responsible for the continuing airworthiness of the aircraft;
- b. after maintenance, as required by the operator or proposed by the organisation responsible for the continuing airworthiness of the aircraft;
- c. as requested by the maintenance organisation for verification of a successful defect rectification;
- d. to assist with fault isolation or troubleshooting.

NOTE

Permit to Fly is required.

For a maintenance check flight of an aircraft otherwise used for CAT operations (as NTA aircraft are), the provisions for cockpit voice recorders (CVR), flight data recorders (FDR) and data link recorders (DLR) of Annex IV (Part-CAT) (as detailed in OM-A) shall continue to apply.

2.1 Conditions Requiring a Maintenance Check Flight

2.1.1 Conditions Requiring an MCF(A)

- Where the use of abnormal or emergency procedures, as defined in the aircraft flight manual, is expected, or where a flight is required to prove the functioning of a backup system or other safety devices;
- For any of the conditions listed in [Annex I - List of Events Requiring a Maintenance Check Flight \(A\)](#) of this document.

2.1.2 Conditions requiring an MCF(B)

- Any maintenance check flights other than a 'Level A' maintenance check flight;
- For any of the conditions listed in [Annex II - List of Events Requiring a Maintenance Check Flight \(B\)](#) of this document.

Uncontrolled Copy when Printed

2.2 Maintenance Release Before the Maintenance Check Flight

Whenever an MCF is required following a maintenance intervention, it is necessary that the aircraft is first released by the maintenance organisation and finally by NTA Maintenance, prior to the intended flight. Depending on the aircraft defect and the status of the maintenance intervention performed, different scenarios for releasing the aircraft are possible:

- a. MCF required to be performed before completion of the maintenance ordered - A certificate of release to service after incomplete maintenance when in compliance with M.A.801(g) or 145.A.50(e) should be issued by the maintenance organisation and the aircraft can be flown for this purpose under its airworthiness certificate. In this case, a new entry in the aircraft technical log to identify the need for a MCF is required and shall contain, as necessary, data relevant to perform the MCF, such as: aircraft limitations due to incomplete maintenance, maintenance data reference and maintenance actions to be performed after the flight. After the successful MCF, the maintenance records shall be completed, the remaining maintenance actions finalised and the aircraft released to service in accordance with the maintenance organisation approved procedures.
- b. MCF by operator's request for safety considerations and / or quality assurance, after certain maintenance while maintenance data does not call for such flight - A certificate of release to service is issued and the aircraft airworthiness certificate remains valid for this flight.
- c. MCF after troubleshooting of a system on ground, proposed by the maintenance organisation to confirm that the solution applied has restored the airworthiness of the aircraft. During the maintenance performed, the maintenance instructions were followed for the complete restoration of the system and, therefore, a certificate of release to service is issued before the flight. The airworthiness certificate is valid for the flight. An entry in the aircraft technical log shall be recorded.
- d. MCF due to an aircraft system has been found to fail and the dispatch of the aircraft was not possible in accordance with maintenance data and the satisfactory diagnosis of the cause of the fault. The process for the troubleshooting is not described in the maintenance data and, therefore, scenario (a) does not apply. In such situations, the aircraft potentially falls outside of the Type Certificate requirements, which then requires a dispensation from the OEM and a Permit to Fly is required. This shall be issued in accordance with NJMP 1.09. Following a successful MCF and the corresponding maintenance actions performed, the aircraft can be released to service and continue to operate under its original certificate of airworthiness.

2.3 MCF Flight Authorisation and Scheduling

2.3.1 Maintenance Tracking Software Application Procedures

This paragraph defines the Maintenance Tracking Software Application procedures carried out by those within the Maintenance Operations responsible for fulfilling the applicable requirements for the respective MCF. Refer to the [flow chart on figure 1 on 2.3.2](#).

- a. The applicable Maintenance group¹ shall generate an MCF Work Order within the Maintenance Tracking Software Application. This Work Order automatically generates a 'maintenance line' in the Flight Following Software Application. The Work Order summary shall state 'MCF(A) i.a.w applicable Check (xx) List' or 'MCF(B) i.a.w applicable Check (xx) List' and the WO task shall have details entered as defined below.

NOTE

1. For Maintenance Check Flights with a standard checklist, related to Scheduled Maintenance, Mx Scheduling shall load into the MCF WO the task specifically related to the requested MCF (see Annex I or II for details).
2. For Maintenance Check Flights with a standard checklist, related to Unscheduled Maintenance, Mx OPS shall load into the MCF WO the task specifically related to the requested MCF (see Annex I or II for details).
3. For Maintenance Check Flights with a custom checklist, the Fleet Product Support Manager (FPSM) shall define the relevant information for the MCF, in coordination with the Fleet Program Manager (FPM).
4. The iJetII – MCF Line shall always contain the relevant information for the flight.

- b. Maintenance Operations Controllers shall request the AMO or the assigned flight crew to open an ATL stating the item on the Work Order relating to the MCF. The proposed flight line and time shall commence immediately after the Work Order line.
- c. Maintenance Operations Controllers shall then defer the MCF item for one cycle in the Work Order within the Maintenance Tracking Software Application, indicating that the ATL documentation was received and awaiting the post flight paperwork for review in the Corrective Action block;
- d. Maintenance Operations Controllers shall then release and adjust the MCF line according to the scheduled time and date after flight crew is briefed by the relevant Chief Pilot, or designate;
- e. After the MCF, Maintenance Operations Controllers will open a new second MCF line in the Maintenance Tracking Software Application in order to include the previously deferred MCF item for sign off purposes. After post-flight de-briefing ([Post-flight De-briefing](#)), Maintenance Operations Controllers will receive the completed ATL from the flight crew relating to the MCF; proceed to signoff the description with the applicable corrective action and, after completion, release the Work Order. At this stage, the aircraft flown hours will be recorded by this second MCF line.

¹


Maintenance Scheduling shall generate the Work Orders for the MCFs required for the maintenance that will be carried out during the Base and Scheduled Maintenance Work Orders following Maintenance Check Flight Manual.

Maintenance Operations RTS Controllers shall generate the Work Orders for the MCFs required for any maintenance added to the Base or Scheduled Maintenance Work Orders.

Maintenance Operations MCC Controllers shall generate the Work Orders for the MCFs required for any maintenance carried out during Unscheduled Maintenance Work Orders.

2.3.2 MCF(A/B) Authorisation Workflow

Figure 1

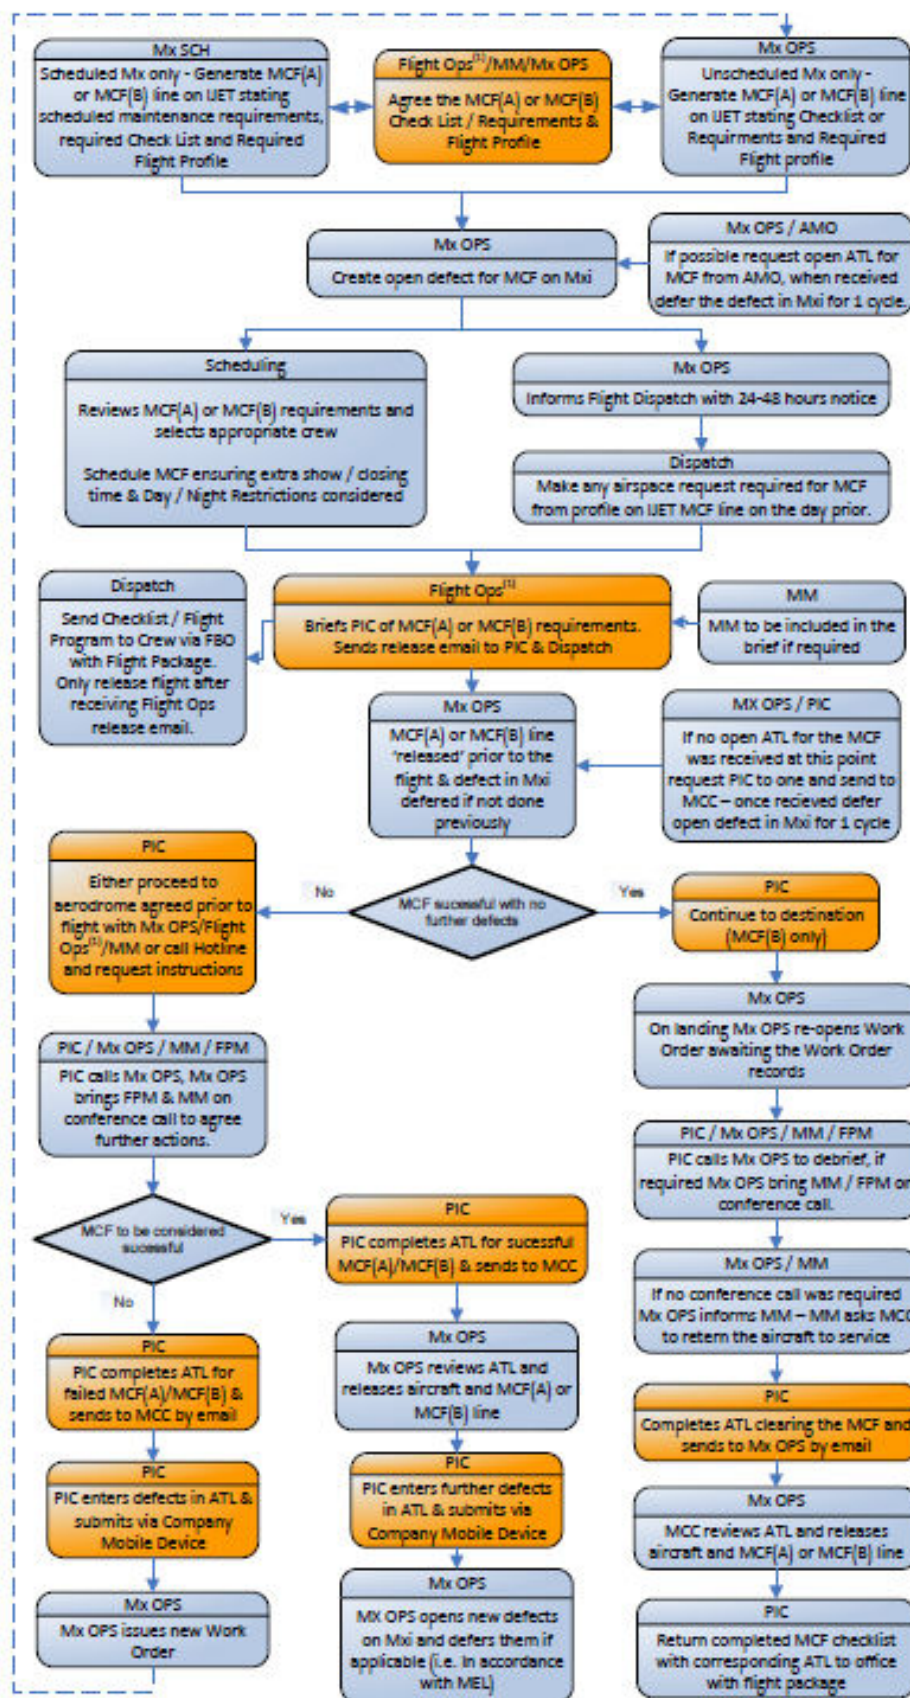

Uncontrolled Copy when Printed

NOTE

Flight Ops = The applicable person described in [2.3.8 Summary of Release / Briefing Requirements](#).

2.3.3 Flight Scheduling MCF(A) & MCF(B)

- An MCF(A) should, where practicable, end at the same location as departure. For any instances where a different destination is more appropriate, including in the event of in-flight component failure, this should be communicated to the flight crew beforehand. For all other situations, the safety of the aircraft is paramount and any deviations from the plan reside with the PIC.
- An MCF(B) does not require the aircraft to return to the departure airport.
- Increased scheduled shown time and close down time for MCF flights as detailed in OM-A, Chapter 7 shall be adhered to.
- When planning flights after an MCF, consideration should be given to the possibility that the MCF may be unsuccessful.

Uncontrolled Copy when Printed

2.3.4 Release for MCF(A) Flight

MCF(A) with standard checklist

The MCF(A) checks listed in the table below have a standard checklist, they shall not depart / occur without previously being released by both:

- Flight Dispatch as described in OM-A; and
- The FOSM².

Type	Item #	Description
Cessna 560XLS	1	Safe Flight Angle of Attack Computer replacement - requiring a calibration flight, and is only applicable if the AOA computers are replaced with an upgraded model number.
	2	48 Month Inspection
Falcon 2000EX	1	C inspection or multiple.
Challenger 650	1	AIR-DRIVEN GENERATOR CHECKS To be performed in accordance with FCOM1 09-02
Global 5000 and Global 6000	1	RAT DROP DOWN TEST - TO BE PERFORMED IN ACCORDANCE TO GL 6000 FCOM VOLUME 1, Section 09-02 or GL 5000 FCOM VOLUME 1, Section 09-02

MCF(A) without pre-defined / standard checklist

Any MCF(A) flight, which is not listed in the table above, shall not depart / occur without previously being released by both:

- Flight Dispatch as described in OM-A; and
- The Fleet Program Manager.³

² The FOSM release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the FOSM. In case the FOSM is not available then this release may be given by a Fleet Program Manager, the Chief Pilot or DO.

³

The Fleet Program Manager release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the Fleet Program Manager. In case the Fleet Program Manager is not available then this release may be given by another Fleet Program Manager, the Chief Pilot or DO.

2.3.5 Release for MCF(B) Flight

No MCF(B) flight shall depart / occur without previously being released by both:

- Flight Dispatch as described in OM-A; and
- The Fleet Program Manager.⁴

Uncontrolled Copy when Printed

⁴

The Fleet Program Manager release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the Fleet Program Manager. In case the Fleet Program Manager is not available then this release may be given by another Fleet Program Manager, the Chief Pilot or DO.

2.3.6 Release for MCF(A) & MCF(B) Taxi Check

MCF(A) Taxi Check

No MCF(A) taxi check shall depart without previously being released by the relevant Fleet Program Manager.⁵

MCF(B) Taxi Check – Normal Taxi Speed (≤ 20 kt)

No normal-speed taxi check MCF(B) shall depart without previously being released by the FOSM.⁶

MCF(B) Taxi Check - High Speed (> 20 kt)

No high-speed taxi check MCF(B) shall depart without previously being released by the relevant Fleet Program Manager¹.

Uncontrolled Copy when Printed

⁵

The Fleet Program Manager release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the Fleet Program Manager. In case the Fleet Program Manager is not available then this release may be given by another Fleet Program Manager, the Chief Pilot or DO.

⁶ *The FOSM release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the FOSM. In case the FOSM is not available then this release may be given by a Fleet Program Manager, the Chief Pilot or DO.*

2.3.7 Release for MCF(A) & MCF(B) Engine Run or Ground Operation

The following applies to engine runs and other checks requiring an engine run-up.

MCF(A) Engine Run or Ground Operation

No MCF(A) engine run shall occur without previously being released by the relevant Fleet Program Manager.⁷

MCF(B) Idle only Engine Run or Ground Operation

No idle only MCF(B) shall occur without previously being released by the FOSM⁸.

MCF(B) High Power Engine Run or Ground Operation

No High Power engine run MCF(B) shall occur without previously being released by the relevant Fleet Program Manager⁷.

Uncontrolled Copy when Printed

⁷

The Fleet Program Manager release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the Fleet Program Manager. In case the Fleet Program Manager is not available then this release may be given by another Fleet Program Manager, the Chief Pilot or DO.

⁸ *The FOSM release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the FOSM. In case the FOSM is not available then this release may be given by a Fleet Program Manager, the Chief Pilot or DO.*

2.3.8 Summary of Release / Briefing Requirements

Type of MCF	MCF Description	Flight Ops - Release / Briefing Required by	Normal OM-A Dispatch Release required
MCF(A)	Flight with a standard MCF checklist	FOSM ¹	Yes
	Flight without a standard MCF checklist	Fleet Program Manager ²	
	Taxi check		No
	Engine run or ground operation		
MCF(B)	Flight	Fleet Program Manager ²	Yes
	High Speed Taxi Check (>20 kt)		No
	High Power (>Idle) engine run of ground operation		
	Normal Speed Taxi Check (≤20 kt)	FOSM ¹	
	Idle only Engine Run or Ground Operation		

¹ The FOSM release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the FOSM. In case the FOSM is not available then this release may be given by a Fleet Program Manager, the Chief Pilot or DO.

² The Fleet Program Manager release shall take the form of an email to Dispatch CCing the applicable flight crew stating that all the applicable briefings have been completed in accordance with the MCF Manual and the flight, taxi check, engine run or ground operation is released by the Fleet Program Manager. In case the Fleet Program Manager is not available then this release may be given by another Fleet Program Manager, the Chief Pilot or DO.

2.3.9 Type of flight

An MCF shall be a non-revenue flight. See also [Persons on Board](#) for further restrictions.

Uncontrolled Copy when Printed

2.4 Process to Develop a Flight Programme and Procedures

The Fleet Program Manager on each fleet is responsible for developing a written flight programme and procedures for the most common MCF types on their fleet; this shall be done in coordination with a Chief Flying Instructor, Maintenance Fleet Product Support and a pilot on the applicable fleet who is MCF(A) qualified as appropriate.

In the case where the flight programme is in accordance with the AMM, the Fleet Program Manager and, in case the Fleet Program Manager is not MCF(A) qualified, an MCF(A) qualified pilot shall assess how the requirements of the AMM can safely be achieved and provide the flight crew with instructions appropriate to the complexity of the check to be carried out.

Ad-hoc flight programmes may need to be developed to check a specific system, in which case the Fleet Program Manager will assess how this can safely be achieved and provide the flight crew with instructions appropriate to the complexity of the check to be carried out. In case the Fleet Program Manager is not MCF(A) qualified then depending on the complexity of the check they may consider liaising with an MCF(A) qualified pilot on their fleet for guidance.

When developing a flight programme as detailed above, the Fleet Program Manager (and MCF(A) qualified pilot if applicable) shall assess whether a task specialist and / or additional pilot is required in the flight crew compartment to assist the flight crew members, this assessment shall be based on:

- Whether the aircraft configuration permits an additional person in the flight crew compartment;
- The level of complexity of the flight program and workload it places on the pilots;
- Any requirement from the NTA Maintenance department.

Where a task specialist and / or additional pilot is required by a particular flight program, this requirement will be stated in the flight program along with the tasks that person is required to fulfil, where no requirement is stated, it will be assumed that no task specialist and / or additional pilot is required.

NOTE

In case the Fleet Program Manager of the specific fleet in question is not available, these tasks may be delegated to a Fleet Program Manager from another fleet, the Chief Pilot or Director of Operations. When carrying out these tasks they shall consider their knowledge of the aircraft in question, as well as of MCF procedures and may consider liaising with a fleet MCF(A) qualified pilot who can provide additional expertise.

Uncontrolled Copy when Printed

2.5 Relevant Procedures to Document Maintenance Check Flights in the Aircraft Records

The MCF(A) or MCF(B) shall be documented in the Aircraft Technical Log in accordance with the procedures described in NJMP 1.01. The PIC is responsible for documenting the discrepancies and / or results of the MCF(A) or MCF(B) in the Aircraft Technical Log immediately after performing the flight and forward to MCC.

Uncontrolled Copy when Printed

2.6 Policy for the Determination of 'Level A' or 'Level B' Maintenance Check Flights

MCF (A)

An MCF (A) is any flight check, taxi check, engine run or ground operation that requires the use of abnormal or emergency procedures as defined in the AFM, or is required to prove the functioning of a backup system or other safety devices. MCF(A) shall be performed by specially qualified flight crew members.

MCF (B)

An MCF(B) is a flight check, taxi check, engine ground run or ground operation that will generally fall within the remit of Standard Operating Procedures but may include some deviation provided it is properly briefed in advance. The use of abnormal or emergency procedures, or actions required to prove the functioning of a backup system or other safety devices as defined in the AFM is prohibited during an MCF(B). There is no special qualification required for crewmembers performing an MCF(B), but they shall meet the experience requirements detailed in [4.1.2 MCF\(B\) Qualification Requirements](#).

Taxi MCF

Low and High-speed (greater than 20 kts) taxi checks which do not fall under the conditions to be considered MCF(A) are an MCF(B).

Stationery Ground Check

A stationary Ground Check with engines running following maintenance troubleshooting could be considered as an MCF(A) or MCF(B), depending whether it meets the conditions described above for MCF(A) and the complexity of the check. Normally, a stationary ground check with engines running will be considered an MCF(B), but, in case there is any doubt, then the decision regarding the classification will lie with the Chief Pilot or their designate.

2.7 Operating Procedures and Limitations

Except where a difference in a particular procedure or limitation is explicitly defined in this manual or a written MCF flight program, all MCF flights shall be performed in accordance with all limitations and procedures stipulated in the OMs (including but not limited to OM-A, OM-B, OM-C and AFM).

NOTE

A procedure or limitation in this manual or an MCF flight program only replaces exactly the same procedure or limitation in the OMs. If a procedure or limitation only replaces part of a procedure or limitation in the OMs, the remaining part(s) of that procedure or limitation in the OM shall still be applied and / or adhered to.

Uncontrolled Copy when Printed

Chapter 3 - Aircraft Status

3.1 Status of the Aircraft Prior to MCF

The aircraft shall be released by maintenance in accordance with paragraph [Maintenance Release Before the Maintenance Check Flight](#).

The PIC shall ensure that a thorough visual inspection of all accessible components and their associated systems is carried out during pre-flight checks and tests. Particular attention should be paid to those components / areas that are known to have been disturbed during the maintenance work preceding the MCF. However, areas that may not have been disturbed should not be neglected as maintenance work may have covered more systems / areas than the flight crew is aware of.

For any maintenance action which has not been fully completed, stop and inform the NTA Maintenance Control Centre.

Uncontrolled Copy when Printed

3.2 Fuel Loading

A sufficient fuel load is required to ensure correct operation of squat switch logic during ground checks, high power engine runs, and taxi checks.

Fuel burn is difficult to estimate during an MCF. The PIC shall thoroughly pre-plan fuel requirements, including in this plan a break-off point where the activity must stop and a landing be performed as soon as practical, should the fuel on board have fallen below a pre-determined level.

Uncontrolled Copy when Printed

3.3 Mass and Balance

Mass and Balance shall be in accordance with the limitations of the AFM, OM-A, and OM-B.

Uncontrolled Copy when Printed

3.4 Specific Test and Safety Equipment

On occasions, a Part 145 technician may need to use specific test equipment on board in-flight. This equipment will remain under the control of the Part 145 technician but shall only be used in-flight when permitted by the PIC.

The PIC shall be briefed prior to the flight on the equipment the Part 145 technician intends to use. If the PIC has any doubts regarding the in-flight use of such equipment, then he shall contact their Chief Pilot or designate before continuing further.

Uncontrolled Copy when Printed

Chapter 4 - Crew Selection and Other Persons On Board

4.1 Qualification Requirements

4.1.1 MCF(A) Qualification Requirements

The PIC shall hold a valid MCF(A) qualification shown on TMS, have performed an MCF(A) within the last 36 months, and have 50 hours PIC on Type, unless exempted from the hours requirement by paragraph [New Types](#) below.

The SIC shall not be an Inexperienced Flight Crew Member as defined in OM-A.

4.1.2 MCF(B) Qualification Requirements

The PIC and SIC of an MCF(B) shall not be an inexperienced FCM as described in paragraph 4.1.8 Crewing of Inexperienced Flight Crew Members of OM-A, unless exempted from this requirement by the Fleet Program Manager, Chief Pilot or Director of Operations.

There are no other specific requirements for MCF(B) Flight Crew.

Uncontrolled Copy when Printed

4.2 Recency

Once qualified, in order to perform an MCF(A) as PIC, a pilot must have completed an MCF(A) within the last 36 months.

Recency may be regained by performing an MCF(A) in the aircraft as SIC (with a qualified PIC), or by performing an MCF(A) as PIC in a simulator.

The recency shall be controlled through the TMS.

Uncontrolled Copy when Printed

4.3 Selection, Experience and Training

4.3.1 MCF(A) Pilot Selection and Experience

The respective Chief Pilot nominates pilots based on a number of factors. These include, but are not limited to, previous flight test experience, current experience on type, motivation, training records, familiarity with specific operating areas and procedures, command and CRM skills, analytical skills, flexibility, and writing skills. MCF pilots shall have a minimum of 1000 flight hours on aircraft within the same aircraft category as the aircraft to be flown, of which at least 400 hours were PIC on complex motor powered aircraft and 50 hours PIC on the particular aircraft type. The nominees are then scheduled to enter the MCF training programme. Upon completion of the programme, the pilots are registered in TMS and they retain their currency for a period of 3 years after the qualification, or the last MCF(A) they performed.

4.3.2 Training

4.3.2.1 Full Initial Course

The initial MCF course consists of the following:

- Ground School;
- Simulator Training.

This training shall be given by an MCF instructor authorised by the Training department.

- An MCF(A) as Observer or PM (Pilot Monitoring).

The MCF(A) as Observer or PM (Pilot Monitoring) can be conducted with any MCF(A) qualified pilot on that fleet.

Through the course of their training, MCF(A) pilots shall be briefed on and become comfortable with the following items, as a minimum.

1. OM-A requirements;
2. Types of MCF flights applicable to the fleet;
3. Interaction with the Maintenance department;
4. Aircraft Technical Log;
5. Interaction with Operations Planning & Control;
6. MCF Flight Management;
7. Type-specific procedures.

The MCF pilot shall be familiar with all applicable documentation, have thorough knowledge of aeroplane systems and demonstrate capable handling of aeroplane malfunctions in a variety of scenarios. Whilst MCF checklist procedures will follow normal procedures to the maximum practical extent, MCF pilots must be prepared, where required, to operate the aeroplane outside of SOPs and still exercise sound command and CRM skills. Throughout the execution of the check flight, MCF pilots must be aware that they are not to exceed the operational limitations of the aeroplane as stated in the AFM or POM, unless the checklist calls for it.

Training Department is responsible for:

- Creation of a training package to reflect the items carried out on the most comprehensive checklist and scheduling of training events.
- Update of training records and TMS.

4.3.2.2 Abbreviated Course for Pilots with Previous MCF(A) Experience

According to Regulation (EU) 2019/1387, article 9aa, A pilot having acted, before 25 September 2019, as a pilot-in-command on a maintenance check flight that in accordance with the definition in point SPO.SPEC.MCF.100 in Annex VIII is categorised as a Level A maintenance check flight, shall be given credit for the purpose of complying with point SPO.SPEC.MCF.115(a)(1) of that Annex.

Pilots meeting these requirements may be exempted from completing the full MCF training as detailed in [Full Initial Course](#) but shall instead receive a ground-based briefing (or e-learning) covering in the context of NetJets operation, the following items, as a minimum:

1. Differences between MCF(A) operating practices established before 25th September 2019 and present NetJets MCF(A) practices and requirements.
2. OM-A requirements;
3. Types of MCF flights applicable to the fleet;
4. Interaction with Maintenance Operations;
5. Aircraft Technical Log;
6. Interaction with Operations Planning and Control;
7. MCF Flight Management;
8. Type-specific procedure.

Training department is responsible for:

- Recording details of the crew members previous MCF(A) experience being used to justify the application of this exemption;
- Recording details of ground-based training / briefing performed in accordance with this paragraph;
- Updating the training management system to reflect that the crew member is MCF(A) qualified.

4.3.3 Fleet Change

When changing fleets, a pilots MCF qualification will be removed and will not be re-instated until they are reselected in accordance with [Selection and Experience](#) above. Specifically, they will require to accumulate 50hours PIC on type prior to regaining the qualification, unless the fleet is under implementation as detailed in [New Types](#) below.

The pilot will, however, retain the credit for the MCF training carried out whilst on their previous fleet.

Once selected and meeting the training and hours requirements above, the pilot shall carry out an MCF(A) as observer or PM (pilot monitoring) in the aircraft or as PIC in the simulator on the new aircraft type, prior to having their MCF(A) qualification reinstated.

4.3.4 New Types

When a new type is added to the operation (defined as the period a fleet is considered to be under implementation) the 50hours PIC on type referenced in [MCF\(A\) Pilot Selection and Experience](#) and [Fleet Change](#) is waived, but all other training and hours requirements apply.

4.3.5 MCF Instructor Requirements

MCF Instructors will be selected and authorised by the Training department, they shall meet at least one of the following requirements;

1. Be a type rating instructor currently authorised by the operator to conduct MCFs; or
2. Be a pilot assigned by an aircraft manufacturer and experienced in conducting pre-delivery check flights; or
3. Be a qualified test pilot.

Uncontrolled Copy when Printed

4.4 Crew Composition

When performing an MCF(A) or (B) flight check, taxi check or ground operation, regardless of whether an actual flight will take place, the flight crew shall meet the OM-A requirements to operate a flight.

Specifically, two pilots are always required when carrying out an MCF and a PIC + SIC who are qualified to operate the aircraft and meet any additional requirements described in the manual shall be designated.

Uncontrolled Copy when Printed

4.5 Persons on Board

Only personnel essential to the MCF should be on-board, irrespective whether ground or airborne checks.

Cabin crew, unless required to operate emergency equipment or position with the aircraft on an MCF, are considered to be non-essential personnel and should not be present on board during an MCF(A) or high-speed taxi check.

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

Chapter 5 - Briefings

5.1 Briefing from Maintenance to Flight Operations

For scheduled maintenance events requiring an MCF flight, the Maintenance Scheduling team shall create the appropriate MCF line in iJet II with all the relevant information.

For scheduled maintenance events, when specific faults are identified and require an MCF flight, the Maintenance Operations RTS Supervisor or Controller shall create the appropriate MCF line in iJet II with all the relevant information.

For unscheduled maintenance events requiring an MCF flight, the Maintenance Operations Supervisor or designee, shall create the appropriate MCF line in iJetII with all the relevant information.

In both cases, Maintenance shall brief the person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#) on the following as appropriate to the MCF being carried out:

- i. Aircraft status - including the release status of the aircraft as per paragraph [Maintenance Release Before the Maintenance Check Flight](#).
- ii. Summary of maintenance performed since the aircraft was last in service, in particular, specific note shall be made of any maintenance tasks that have a direct effect on the aircraft's handling and performance.
- iii. Required flight program, specific procedures and limitations, when based on a written checklist the details of the checklist to be used, details of the data to be recorded, and the requirement to accurately record any defects or requests for maintenance. Where the required flight program follows a standard checklist, basic details of the flight program are listed in Annex I or II and the actual checklist is held separately on company DMS.

IMPORTANT: A written checklist, or equivalent is ALWAYS required for MCF flights Level A.

- iv. Crew members responsibilities and coordination, in cases where a Part 145 technician and / or a Part-CAMO designee is required to be on board, the role of the EASA Part 145 Technician(s) and / or the Part-CAMO designee must be discussed, agreed, and fully understood by all parties.
- v. Documents on board that are not normally required, e.g. permit to fly, etc.
- vi. Contingencies, e.g. the preferred location for the aircraft to land in the event that the MCF is unsuccessful / further defects are found.

Uncontrolled Copy when Printed

5.2 Flight Ops Briefing to PIC

The person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#) will then brief the flight crew as appropriate, taking into consideration the type of MCF being performed, the topics briefed to him by Maintenance Operations, and the additional topics listed below:

- Weather limitations vs weather on the day.
- Airport ATC, airspace; and
- Airport (runway, equipment) / operating site.
- In case of a High Speed Taxi - Brake cooling limitations and use for the High Speed Taxi Checklist.
- Any requirement to carry an additional crewmember / task specialist.
- Any other topic considered relevant to the Chief Pilot or flight crew.

Parts of this briefing may be conducted in conjunction with Maintenance (i.e. by conference call) or by Maintenance briefing the flight crew directly, provided that the person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#) can assure himself that the flight crew has been briefed on all required items to an appropriate level prior to releasing the flight.

Uncontrolled Copy when Printed

5.3 Crew Initial Briefing

An 'initial briefing' as described in OM-A 'Instructions for crew briefings' shall be conducted before any MCF flight.

This shall be an interactive briefing led by the Commander and shall include all persons who will be on board the aircraft for the MCF (i.e. all flight crew, cabin crew if carried, and the EASA Part 145 Technician(s) and / or the Part-CAMO designee if carried).

This briefing shall be performed as described in the OM-A and, in addition to the items covered in the OM-A, shall cover as appropriate the items briefed to him by the person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#) and the following items:

- Which checks / checklists are required to be completed along with any special flight profile requirements;
- Specific task allocations and responsibilities in respect of the MCF including for the EASA Part 145 Technician(s) and / or the Part-CAMO designee and / or additional flight crew member, if carried;
- The flight test area and routing to/from, airspace, and ATS;
- The ground areas for engine ground runs & taxi checks, as appropriate.;
- Contingencies (including system abnormalities, pressurisation problems, oxygen mask use, lostcomms, emergency descent / MSA, alternate airports, etc.);
- Mass & balance and performance;
- Weather Limitations for the MCF;
- Safety briefing for the EASA Part 145 Technician(s) and / or the Part-CAMO designee, if carried, including a jump seat briefing if they are to be carried on the jump seat;
- Any concerns the crew might have.

5.4 Briefing Documentation

Flight Dispatch will provide the flight crew with the applicable checklist, including any additional required documentation notified by the Chief Pilot or his designate.

The checklist sent to the flight crew should be obtained from the NTA Documentation folder on the G: drive or as notified / provided by the Chief Pilot or his designate.

Uncontrolled Copy when Printed

5.5 Information to ATC

Where a written checklist / flight programme containing the required flight profile is available on the G: drive, MCC will copy the details of the required flight programme into the iJet line for the MCF on the day prior to the flight, so that Flight Dispatch is aware of the requirements that need to be coordinated with ATC.

For MCF flights where the flight profile is not already published, the Chief Pilot or their designate will establish the required flight profile and notify this to dispatch, as appropriate, on the day prior to the MCF.

Flight Dispatch shall notify the relevant Air Traffic Service Unit(s) of the intention to carry out the MCF and the required flight profile on the day prior in order to ensure the availability of the required airspace.

Uncontrolled Copy when Printed

5.6 Post-flight De-briefing

The PIC will de-brief all findings with the Maintenance Operations Manager and / or the Maintenance Operations Supervisor and / or Chief Pilot or their designate, no matter how insignificant they may seem.

This debrief should be recorded in writing and all the details should be forwarded to Maintenance Operations (MCC or RTS) to append it to the respective Work Order.

In addition, a copy of the completed MCF checklist shall be returned to Maintenance Operations (MCC or RTS) with the corresponding ATL to be stored in the respective work order.

After an MCF(A) has been performed, send the scanned copy signed to the applicable email address below for record keeping and planning purposes:

- Incomplete or unsatisfactory MCF (A) has been performed:

- attach the MCF checklist to the ATL.

NOTE

The intention is to avoid doing tests on systems that have already been tested and found satisfactory.

- Satisfactory full MCF(A) has been performed:

- remove the MCF checklist from the ATL

Fleet	Email
Phenom 300	Lis-MxEmbraer@netjets.com
Citation XLS	Lis-MxCitation@netjets.com
Citation Latitude	
Challenger 350	Lis-MxBombardier@netjets.com
Falcon 2000EASy	
Global 5000 / 6000	
Challenger 650	

Chapter 6 - Flight Programme and Procedures

6.1 Flight Programme

The flight programme will either be in accordance with the written programme developed by the Fleet Program Manager as described in [Process to Develop a Flight Programme and Procedures](#), or as described in the AMM, or as notified to the flight crew by the Fleet Program Manager or their designate.

Uncontrolled Copy when Printed

6.2 Procedures for MCF

6.2.1 Limitations

- Consider all aircraft limitations. For example: brake energy limits, maximum continuous power limits, as per Aircraft Flight Manual - aircraft limitations shall only be exceeded if explicitly required by a written MCF checklist.
- Consider any performance constraints.
- The aircraft shall be operated in accordance with the SOPs and the AFM, unless exempted or augmented by MCF operating procedures.

6.2.2 General Procedures

- On the day of the MCF, the FOSM and PIC will liaise with the OCC on the timeline.
- Crew shall ensure availability of sufficient show time, in accordance with OM-A, and ensure proper preparation, communication, planning, and pre-flight, all of which are essential.

NOTE

Do not hesitate to delay the flight if not completely satisfied with the time allocated for a thorough preparation.

- Regardless of the maintenance personnel on board, the ultimate responsibility for the safe operation of the aircraft remains with the PIC, who shall brief all members on board of their responsibilities.

6.2.3 High Power Engine Ground Runs

- As per [4.4 Crew Composition](#), 2 pilots meeting the applicable requirements to operate the aircraft are required for an idle or high power ground run.
- A High Power engine ground run is defined as a ground run where power in excess of idle thrust is required for the applicable checks or tests (this paragraph is not applicable to an idle only ground run which only requires FOSM briefing and release).
- During high power engine runs, apply parking brakes / maximum brakes and LH & RH main landing gear wheel chocks. Ensure the area behind the aircraft is clear and use an engine running location approved by the airport authorities.
- For High Power Engine Ground Runs, the flight crew shall be briefed by the person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#) for all procedures and necessary precautions, as deemed applicable.
- Engine Ground Runs do not require any specific qualification for flight crews, unless they meet the criteria to be designated an MCF(A). A Work Order will not be generated at this point.

6.2.4 High-speed Taxi / Brake Check

High-speed Taxis are checks that may be used to identify defects that cannot be duplicated with the aircraft being stationary/ or during a normal speed taxi or to confirm that these defects were corrected satisfactorily.

A high-speed taxi check is any check that is intended to be carried out faster than 20 kts ground speed.

Prior to a high-speed taxi check taking place the crew shall receive a briefing from the applicable person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#).

Limitations:

- As per 4.4 Crew Composition, 2 pilots meeting the applicable requirements to operate the aircraft are required for any low speed or high speed taxi check.
- Taxi checks, including high-speed taxi checks are classified as MCF(B) and may be carried out by regular flight crew members. (Qualified maintenance personnel may carry out checks at below 10 kts ground speed, but this will be under the authority and procedures of the AMO).
- All high-speed taxi checks (>20 kt) must be carried out on a runway with good braking action (RCC 5 or 6). Normal taxi checks (<20 kt) may be carried out on suitable taxiways with good braking action.
- High-speed taxi checks shall not be carried out at a mass which exceeds the maximum take-off mass for the runway being used to perform the check.
- The maximum speed for a high-speed taxi check is the lower of 80 kt or 60% of V1 at the maximum takeoff mass for the runway being used for the check.
- No high- speed taxi run shall be performed unless the brake cooling / energy requirements for a take-off are met at that time.
- The rejected take-off brake cooling time specified within the AFM shall be considered when repeating a High-speed Taxi or returning the aircraft to service.
- The minimum time between high- speed taxi runs shall be 15min or as detailed in [ANNEX III High-Speed Taxi Check](#) - requirements for subsequent high-speed taxi run, whichever is greater.
- The weather must allow for good visual contact between the tower and / or the emergency services throughout the event (low visibility operation is forbidden).
- All taxi limitations specified in the OM-B shall be considered, with the exception of the speed limits.

Procedures:

- Use / completion of the high-speed Taxi program / checklist document is MANDATORY, the completed checklist shall be scanned and returned to Maintenance Operations after the check was completed.
- The flight crew shall pay special attention to the aircraft weight, brake energy tables, and allowable taxi speeds.
- When bringing the aircraft to a stop from a high- speed taxi check, flight crew shall consider that all performance data is based on using maximum braking to a stop (as for landing), and will brief in advance the technique that will be used to stop from that high speed run in order that any abnormality can be quickly identified.
- If maintenance personnel are required on board, then particular attention shall be made to the emergency evacuation procedures and crews should avoid using the jump seat. The same must be said of cabin crew who are, for the most part, non-essential personnel.

Uncontrolled Copy when Printed

- The conditions of success or failure of a particular brake check shall be communicated to the PIC before the check begins. For example, under normal circumstances, a brake check will have considered to fail as soon as abnormality is detected, and the test should be terminated. Any repetition of the check, whether successful or unsuccessful, must be agreed with the Maintenance Manager, and the person required to provide the Flight Ops – Release / Briefing as described in [2.3.8 Summary of Release / Briefing Requirements](#), or designate, beforehand.

Uncontrolled Copy when Printed

6.3 Task Sharing and Call-outs

Task sharing and call-outs will be as per OM-A and OM-B, unless differences and explicitly prescribed in the relevant MCF checklist.

Uncontrolled Copy when Printed

6.4 Roles and Responsibilities

The roles and responsibilities of the personnel on board involving the activities of MCF and High-speed Taxi should be clear to all parties before the commencement of such activities.

The responsibilities of the personnel carried on board in addition to those prescribed in the OM-A are detailed below:

Flight Crew

The Commander has the ultimate responsibility for safe conduct of the flight / taxi check or engine ground run and under their responsibility must:

- Attend the briefing;
- Be fully aware of all aircraft flight limitations and the requirements for the check or flight;
- Brief everyone on the flight in the emergency procedures;
- Alert maintenance technician of any finding during the check or flight (in case technician on board);
- Take notes of technical/operational findings.

EASA Part 145 Maintenance Technician and / or Part-CAMO designee

In cases which require a check or flight with an EASA Part 145 maintenance technician and / or a Part-CAMO designee to observe any findings or to record details within for further troubleshooting, the following responsibilities apply:

- Attend the briefing;
- Familiarise themselves with the checks or flight to be carried out;
- Alert the flight crew of any possible safety related event during the check or flight and its planning;
- Where adjustments / maintenance are to be carried out in-flight, ensure that there are only commenced / continued with the PICs agreement;
- Record flight parameters where the flight crew could not perform that task.

6.5 Potential Risks and Contingency Plans

Potential risks will be considered and contingency plans developed prior to the flight taking place, this should include, but not be limited to the following:

- Specific attention must be drawn to any maintenance tasks that may have had a direct effect on the flight controls (primary and secondary) or the engines of the aircraft.
- If any crew member has concerns with the requested task, the procedure should be interrupted and discussed with the Chief Pilot or their designate. If concerns occur in-flight, the MCF shall be discontinued and PIC should initiate a return to the airport of departure, where practicable.
- Consider and discuss all the scenarios that could happen if things do not go as planned and be prepared to take mitigating action if the aircraft diverges from the expected flight path or approaches airframe/ airspeed limits.
- The PM must, at all times, be aware that component failure is a distraction that may well lead to airframe exceedances. As such, the PM must be prepared to take the necessary action to mitigate these exceedances - this, again, shall be briefed by the PIC in their task allocation.
- If a defect is discovered during an MCF, the aircraft should preferably return to the departure airport to be assisted by the same Approved Maintenance Organisation for further troubleshooting or repair, unless otherwise briefed. A subsequent MCF shall be considered.

Uncontrolled Copy when Printed

6.6 Information Available to Crew

When applicable, the flight crew and maintenance personnel must be in possession of the appropriate MCF checklist and understand thoroughly what is required to be checked and what is required to accomplish the check.

Where possible, the flight crew will be provided with the checklist / flight programme on the day prior to the MCF.

Uncontrolled Copy when Printed

6.7 Adequate Available Airspace and Coordination with ATC

Attention should be given to any special navigation and airspace considerations based on the route of flight and the required MCF. Ensure this is coordinated with Flight Dispatch and reflected in the Operational Flight Plan.

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

Chapter 7 - External Conditions

7.1 Weather Runway and Performance Requirements

Specific weather runway and performance requirements apply to MCF(A) flights.

In addition to all events detailed in [Annex I](#), the following restrictions apply:

- Visibility: 5 KM or as designated by the CP;
- Ceiling: 1500' AAL at non-mountainous aerodromes, MSA at mountainous aerodromes, or as designated by the CP;
- Crosswind: Less than 15 Kt;
- Runway: Not contaminated;
- Take-off mass: Should be kept as low as reasonably possible considering the flight profile;
- Time of day: SR-30 to SS+30;
- In-flight WX: Well defined horizon and clear of clouds during in-flight FCF checks.

For all MCF(B) the normal Operations Manual - Part A shall apply.

Uncontrolled Copy when Printed

7.2 ATC, Airspace, and Airport

Details of procedures for MCF flights at commonly used airports & areas (e.g. maintenance bases, etc.) should be documented by the Chief Pilot of the respective fleet so as to assist crew in their planning.

When an MCF is planned to take place at an Airport / Area that does not have any instructions, due consideration should be given to the Airport Facilities and Airspace available.

Uncontrolled Copy when Printed

Chapter 8 - Documentation

8.1 In-flight Recordings

During an MCF, the PM shall record any items / values required by the MCF programme / checklist in addition to any defects found.

Uncontrolled Copy when Printed

8.2 Results of the Maintenance Check Flight

Once the MCF is complete, the PIC shall notify the Maintenance Operations (MCC or RTS) of the outcome and enter any defects into the ATL. MCFs are considered as having been carried out satisfactorily, unless the component that required the check flight has failed the check. In other words, major inspections may require large numbers of items to be checked. These items, ordinarily, can be entered afterwards as separate ATL entries after the MCF has been signed off as satisfactory. If the purpose of the MCF is to check individual items such as flight controls or emergency pressurisation, then any failure of the relevant item will require a further check flight.

Uncontrolled Copy when Printed

8.3 Recording of Required Maintenance Actions After the Flight

Defects that are found during an MCF shall be entered in the ATL in accordance with normal NTA practices and procedures.

Where multiple defects are present, a separate ATL page should be used for each defect.

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

List of Events Requiring a Maintenance Check Flight (A)

NOTE

The Aircraft Maintenance Manual or any other maintenance data issued by the design approval holder shall always be referenced, used whenever applicable, and will take precedence over the requirements listed below in case of conflict.

Phenom 300, Citation Latitude, and Challenger 350

It is **not permitted** to carry out any MCF on these aircraft types where the use of abnormal or emergency procedures, as defined in the aircraft flight manual, is expected, or where a flight is required to prove the functioning of a backup system or other safety devices (i.e. any MCF(A)).

Cessna 560XL (Citation 560XLS)

Item	Description	Required by	Task Code	Task (WO) Name (to be displayed in iJetII)
1	Safe Flight Angle of Attack Computer replacement - requiring a calibration flight, and is only applicable if the AOA computers are replaced with an upgraded model number.	AMM	MCFA-01	[MCF] A01-SAFE FLIGHT ANGLE OF ATTACK COMPUTER REPLACEMENT-CALIBRATION FLIGHT. ACFT WEIGHT MUST BE ACCURATE IN 50 POUNDS OR LESS. CG LESS THAN 0.50%. ALTITUDE OF 10,000 FEET (OR LESS) IN SMOOTH AIR.
2	48 Month Inspection	AMM	MCFA-02	[MCF] A02-48 MONTH INSPECTION. PLEASE USE CHECKLIST NTA-FOC 108C. CLIMB TO FL410, DESCEND TO FL240, FL200, FL160, FL100. RTB VIA ILS TO FULL STOP LANDING. FLIGHT DURATION: 02:30.
3	Any other MCF where the use of abnormal or emergency procedures, as defined in the aircraft flight manual, is expected, or where a flight is required to prove the functioning of a backup system or other safety devices.	EASA	MCFA-03	[MCF] A03-USE OF ABNORMAL OR EMERGENCY PROCEDURES REQUIRED TO PROVE THE FUNCTIONING OF A BACKUP SYSTEM OR OTHER SAFETY DEVICES – SYSTEM TO BE TESTED: <ENTER DESCRIPTION>.

Uncontrolled Copy when Printed

Falcon 2000EX EASy

Item	Description	Required by	Task Code	Task (WO) Name (to be displayed in iJetII)
1	C inspection or multiple.	AMM	MCFA-04	[MCF] A04-C INSPECTION OR MULTIPLE. PLEASE USE AIRCRAFT CHECK FLIGHT ON AMM TASK 05-50-00-920-801. CLIMB TO FL 410/420, DESCENT TO FL 310/320, DESCENT TO FL 170/180, DESCENT TO FL 150/160.
2	Significant repair or modification of the airframe (on completion).	TCH/ STCH/ DOA/ EASA/ NTA	MCFA-05	[MCF] A05-SIGNIFICANT REPAIR/MOD OF THE AIRFRAME. USE AIRCRAFT CHECK FLIGHT ON AMM TASK05-50-00-920-801. CLIMB TO FL 410/420, DESCENT TO FL 310/320, DESCENT TO FL 170/180, DESCENT TO FL 150/160.
3	Any other MCF where the use of abnormal or emergency procedures, as defined in the aircraft flight manual, is expected, or where a flight is required to prove the functioning of a backup system or other safety devices.	EASA	MCFA-06	[MCF] A06-USE OF ABNORMAL OR EMERGENCY PROCEDURES REQUIRED TO PROVE THE FUNCTIONING OF A BACKUP SYSTEM OR OTHER SAFETY DEVICES – SYSTEM TO BE TESTED: <ENTER DESCRIPTION>.

Uncontrolled Copy when Printed

Challenger 650

Item	Description	Required by	Task Code	Task (WO) Name (to be displayed in iJetII)
1	AIR-DRIVEN GENERATOR CHECKS To be performed in accordance with FCOM1 09-02	EASA	MCFA-07	[MCF] A07-AIR-DRIVEN GENERATOR CHECKS. TO BE PERFORMED IAW FCOM1 09-02. ONLY PERFORM THIS CHECK IN VISUAL MET. CONDITIONS (VMC). ENSURE THAT THIS CHECK IS NOT PERFORMED DURING ICING CONDITIONS.
2	Any other MCF where the use of abnormal or emergency procedures, as defined in the aircraft flight manual, is expected, or where a flight is required to prove the functioning of a backup system or other safety devices.	EASA	MCFA-08	[MCF] A08-USE OF ABNORMAL OR EMERGENCY PROCEDURES REQUIRED TO PROVE THE FUNCTIONING OF A BACKUP SYSTEM OR OTHER SAFETY DEVICES – SYSTEM TO BE TESTED: <ENTER DESCRIPTION>.

Global 5000 and Global 6000

Item	Description	Required by	Task Code	Task (WO) Name (to be displayed in iJetII)
1	RAT DROP DOWN TEST - TO BE PERFORMED IN ACCORDANCE TO GL 6000 FCOM VOLUME 1, Section 09-02 or GL 5000 FCOM VOLUME 1, Section 09-02	EASA	MCFA-09	[MCF] A09-RAT DROP DOWN TEST TO BE PERFORMED IAW GL 6000/5000 FCOM1, 09-02. ONLY PERFORM THIS CHECK IN VISUAL MET. CONDITIONS (VMC). ENSURE THAT THIS CHECK IS NOT PERFORMED DURING ICING CONDITIONS.
2	Any other MCF where the use of abnormal or emergency procedures, as defined in the aircraft flight manual, is expected, or where a flight is required to prove the functioning of a backup system or other safety devices.	EASA	MCFA-10	[MCF] A10-USE OF ABNORMAL OR EMERGENCY PROCEDURES REQUIRED TO PROVE THE FUNCTIONING OF A BACKUP SYSTEM OR OTHER SAFETY DEVICES – SYSTEM TO BE TESTED: <ENTER DESCRIPTION>.

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

List of Events Requiring a Maintenance Check Flight (B)

NOTE

The Aircraft Maintenance Manual or any other maintenance data issued by the design approval holder shall always be referenced, used whenever applicable, and will take precedence over the requirements listed below in case of conflict.

All fleet				
Item	Description	Required by	Task Code	Task (WO) Name (to be displayed in iJetII)
1	Pressurisation test flights using normal NTA SOPs	NTA	MCFB-01	[MCF] B01-PRESSURISATION TEST FLIGHTS USING NORMAL NTA SOPs.
2	High-speed Taxi (Additional requirements apply - see High-speed Taxi / Brake Check)	NTA	MCFB-02	[MCF] B02-HIGH-SPEED TAXI (ADDITIONAL REQUIREMENTS APPLY - SEE HIGHSPEED TAXI / BRAKE CHECK).
3	Extensive components removals not requiring an MCF(A), as determined by the Mx Operations Manager / Supervisor or required by NTA Director of operations, Director of Maintenance or Accountable Manager	NTA	MCFB-03	[MCF] B03-EXTENSIVE COMPONENTS REMOVALS NOT REQUIRING AN MCF(A), AS DETERMINED BY THE MX OPERATIONS MANAGER / SUPERVISOR OR REQUIRED BY DIRECTOR OF OPS, DIRECTOR OF MAINTENANCE OR ACCOUNTABLE MANAGER.
4	Flight Neutral Check	AMM/NTA	MCFB-04	[MCF] B04-FLIGHT NEUTRAL CHECK
5	Other normal operating procedures	AMM/NTA	MCFB-05	[MCF] B05-OTHER NORMAL OPERATING PROCEDURES.
6	Double Engine Change	NTA	MCFB-06	[MCF] B06-DOUBLE ENGINE CHANGE.
7	Flight Controls check on the ground (after maintenance performed on flight controls)	NTA	MCFB-07	[MCF] B07-FLIGHT CONTROLS CHECK ON THE GROUND (AFTER MAINTENANCE PERFORMED ON FLIGHT CONTROLS)

NOTE

Effective for all of the above: NTA could assign additional items requiring MCF(B) as determined by both the Director of Maintenance and the Director of Flight Operations, or their nominated deputies.

Uncontrolled Copy when Printed

**THIS
PAGE
INTENTIONALLY
LEFT
BLANK**

Uncontrolled Copy when Printed

High-speed Taxi Check - Req.for Subsequent High-speed Taxi Run

- Any High-speed Taxi run is treated as rejected take-off for brake cooling purposes regardless of the speed attained or type of braking used.
- The brake cooling criteria for carrying out a subsequent High-speed Taxi run is the same as for carrying out a take-off following a rejected take-off.
- The absolute minimum time between High-speed Taxi runs is 15mins or as per the tables below whichever is greater.

Challenger 650 required time between subsequent MCF High-speed Taxi runs

Requirement	Limitation / Reference	
AFM Reference (if applicable):	AFM – Chapter 6 – Performance - Turn-Around Time - 1. Cooling of wheels, brakes and tires	
Minimum¹ Brake Cooling time between high-speed taxi runs:	15 min	Minimum brake cooling time shall be the greater of 15min or as calculated from 'AFM – Chapter 6 – Performance - Turn-Around Time - 1. Cooling of wheels, brakes and tires'.
Further Criteria for subsequent High-speed Taxi runs:	As calculated from 'AFM – Chapter 6 – Performance - Turn-Around Time - 1. Cooling of wheels, brakes and tires' considering the previous RTO brake energy and the required RTO brake energy.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-speed Taxi runs', may result in a longer time being required.

Global 5000/6000 required time between subsequent MCF High-speed Taxi runs

Requirement	Limitation / Reference	
AFM Reference (if applicable):	AFM - Chapter 6 - Performance / 4. Maximum Allowable Brake Temperature / A. Maximum Allowable Brake Temperature for Take-off.	
Minimum¹ Brake Cooling time between high-speed taxi runs:	15 min	As per AFM statement 'A minimum brake cooling time of fifteen (15) minutes must be observed between a landing stop or rejected take-off and the subsequent take-off'.
Further Criteria for subsequent High-speed Taxi runs:	The BTMS temperature of the warmest brake is at or below the level that would be required for a take-off to be performed considering airport pressure altitude, temperature, reported wind, runway gradient and actual take-off weight.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-speed Taxi runs', may result in a longer time being required.

Uncontrolled Copy when Printed

Falcon 2000 required time between subsequent MCF High-speed Taxi runs

Requirement	Limitation / Reference	
AFM Reference (if applicable):	AFM - Chapter 5 - Performance / 5-800-00 Minimum Turn-around Time	
Minimum¹ Brake Cooling time between high-speed taxi runs:	20 min (can be reduced with conditions but note the NetJets absolute minimum is 15 min)	As per AFM statement 'a minimum waiting time of 20 minutes must be observed after last braking. If a fuse plug releases, the wheels, brakes and tires must be inspected and any damage rectified before next take-off. <i>This minimum waiting time can be reduced to 5 minutes when both of the following conditions are met:</i> - E1 is below 8.80 x 106 ft.lb (11.9 MJ), and ¹The temperature of each brake displayed in the HYD synoptic has not exceeded 545°C in between landing or previous rejected takeoff and 5 minutes after last brake application.'
Further Criteria for subsequent High-speed Taxi runs:	Before taxiing out Minimum turn-around time: The minimum turn-around time is the greater of the brake cooling time not to exceed the brake energy absorption capability and the required time to check fuse plug integrity (5 or 20 minutes). Brake Temperature: The temperature of each brake must not exceed 545°C decreased by 25°C per full stop (from a taxiing speed of 20 kt), to prevent from exceeding fuse plug melting temperature during taxiing.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-speed Taxi runs', may result in a longer time being required.

Challenger 350 required time between subsequent MCF High-speed Taxi runs

¹ Requirement	Limitation / Reference	
AFM Reference (if applicable):	Quick Reference Handbook - 1 / P-43-44 / Main Wheel Brake cooling time following an RTO	
Minimum¹ Brake Cooling time between high-speed taxi runs:	15 min	Minimum brake cooling time shall be the greater of 15min or as calculated from 'MAIN WHEEL BRAKE COOLING TIME FOLLOWING AN RTO' in the QRH.
Further Criteria for subsequent High-speed Taxi runs:	As calculated from the graph 'MAIN WHEEL BRAKE COOLING TIME FOLLOWING AN RTO' considering the Previous RTO brake energy and Required RTO brake energy.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-Speed Taxi runs', may result in a longer time being required.

Uncontrolled Copy when Printed

Citation Latitude required time between subsequent MCF High-speed Taxi runs

Requirement	Limitation / Reference	
AFM Reference (if applicable):	AFM Section IV - Performance - Take-off - Minimum Turn-Around Time (Page 4-312-1)	
Minimum¹ Brake Cooling time between high-speed taxi runs:	15 min	Minimum brake cooling time shall be the greater of 15 min or as calculated from AFM Section IV - Performance - Take-off - Minimum Turn-Around Time (Page 4-312-1).
Further Criteria for subsequent High-speed Taxi runs:	As calculated from AFM Section IV - Performance - Take-off - Minimum Turn-Around Time (Page 4-312-1) using Figure 4-312-2 and Figure 4-312-3* considering the Previous RTO brake energy and Required RTO brake energy.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-Speed Taxi runs', may result in a longer time being required.

Citation XLS required time between subsequent MCF High-speed Taxi runs

Requirement	Limitation / Reference	
AFM Reference (if applicable):	None.	
Minimum¹ Brake Cooling time between high-speed taxi runs:	20 min	There is no reference in the AFM, so this is a limit set by NetJets.
Further Criteria for subsequent High-speed Taxi runs:	None.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-Speed Taxi runs', may result in a longer time being required.

Uncontrolled Copy when Printed

Phenom 300 required time between subsequent MCF High-speed Taxi runs

Requirement	Limitation / Reference	
AFM Reference (if applicable):	As per Pilots Operating Handbook - Page 3-45-50 - Brake Cooling Time.	
Minimum¹ Brake Cooling time between high-speed taxi runs:	20 min	Please note that the graph on page 3-45-50 is not applicable to an aborted take-off, only a turnaround which will have consisted of a taxi in, shut down and taxi out again, hence this should not be used for determining the time between high-speed taxi runs.
Further Criteria for subsequent High-speed Taxi runs:	None.	

¹ This is the absolute minimum time between high-speed taxi runs, compliance with the 'Further Criteria for subsequent High-Speed Taxi runs', may result in a longer time being required.

High Speed Taxi - MCF(B) Program / Checklist

Date		Tail		PIC	
Aerodrome		Runway to be used			
Briefing / Release received from Chief Pilot or his designate					YES / NO
MCF Manual Chapters 5, 6, 7 & 8 and High-speed Taxi / Brake Check and if more than one run Annex III - High-speed Taxi Check - Requirements for Subsequent High-speed Taxi Run reviewed:					YES / NO
Maximum take-off mass (MTOM) for runway to be used (from PDCS):					LBS
V1 at MTOM for runway to be used:		KTS	60% of V1 at MTOM for runway to be used:		KTS
Maximum permitted speed - lowest of 60% of V1 at MTOW or 80 kt:					KTS
Planned Max Speed:		KTS	Planned Mass:		LBS
Description of the issue being checked and criteria for determining whether a high-speed taxi check was successful:					
Max No. of high-speed runs authorised by Maintenance Operations:			1 / 2 / 3 (3 is Max)		
High Speed Run #1					
Time run completed:			Maximum speed:		KTS
Description of the outcome of the run:					
Req Brake cool time:		Mins	Earliest time next run:		
Additional criteria for subsequent high-speed taxi run:					
High Speed Run #2					
Time run completed:			Maximum speed:		KTS
Description of the outcome of the run:					
Req Brake cool time:		Mins	Earliest time next run:		
Additional criteria for subsequent high-speed taxi run:					
High Speed Run #3					

Uncontrolled Copy when Printed

Time run completed:		Maximum speed:	KTS
Description of the outcome of the run:			

Uncontrolled Copy when Printed