

PHENOM[®] 300

BY EMBRAER

EASA QUICK REFERENCE HANDBOOK

QRH-2669-354
NOVEMBER 17, 2025
ORIGINAL - NOVEMBER 17, 2025

EMERGENCY EVACUATION

In connection with the use of this document, Embraer does not provide any express or implied warranties and expressly disclaims any warranty of merchantability or fitness for a particular purpose.

This document contains trade secrets, confidential, proprietary information of Embraer and technical data subject to U.S. Export Administration Regulation ("EAR") and other countries export control laws and regulations. Diversion contrary to the EAR and other laws and regulations is strictly forbidden. The above restrictions may apply to data on all pages of this document.

NORMAL

SMOKE

NON - ANNUNCIATED

INDEX MESSAGE

PERFORMANCE

GROUND RESETS

TRANSMITTAL LETTER

Subject: Original Issue of the QRH-2669-354 Quick Reference Handbook.

Dear Operator,

Due to recent changes in our editorial system, you are receiving a complete reissue of the QRH. Because new QRH PNs had to be created, you are receiving the original issue of the QRH-2669-354, which supersedes QRH-2669-03. Please, discard the previous revision in full.

Please note that, under the new editorial system, revision bars will no longer be displayed in the QRH to indicate changes. All updates can be verified in the POH in the future.

The modifications introduced in this revision are primarily structural, rather than specific technical updates. Below is a summary of the main points to be aware of:

- Revision control is now managed by blocks instead of individual pages. Refer to LIST OF EFFECTIVE BLOCKS.
- The GROUND RESETS section of the POH is now reflected in the QRH.
- Deleted all electrical diagrams from ELECTRICAL annunciated procedures.
- Updated all the performance data.

In case of question, please contact:
Embraer Executive Flight Operations Support
E-mail: contact.center@embraer.com

THIS PAGE IS NOT PART OF THE MANUAL AND MUST NOT BE INCORPORATED IN YOUR QRH. PLEASE DISCARD IT AFTER READING.

LIST OF EFFECTIVE BLOCKS

Block	Page	Change Number	Status
APP	1-2	Rev. 0	N
NP0	1-2	Rev. 0	N
NP1	1-6	Rev. 0	N
NP5	1-10	Rev. 0	N
NP10	1-2	Rev. 0	N
I	1-4	Rev. 0	N
S1	1-8	Rev. 0	N
NAP1	1-30	Rev. 0	N
EAP0	1-6	Rev. 0	N
EAP1	1-2	Rev. 0	N
EAP2	1-16	Rev. 0	N
EAP3	1-6	Rev. 0	N
EAP4	1-14	Rev. 0	N
EAP5	1-4	Rev. 0	N
EAP6	1-4	Rev. 0	N
EAP7	1-10	Rev. 0	N
EAP8	1-14	Rev. 0	N
EAP9	1-6	Rev. 0	N
EAP10	1-4	Rev. 0	N
EAP11	1-8	Rev. 0	N
EAP12	1-6	Rev. 0	N
EAP13	1-2	Rev. 0	N
EAP14	1-4	Rev. 0	N
PD20	1-120	Rev. 0	N
PD25	1-2	Rev. 0	N
PD35	1-24	Rev. 0	N
GR1	1-20	Rev. 0	N
QAP1	1-2	Rev. 0	N

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

QRH 2669-354

Revision Status: U-Unchanged, R - Revised, N - New, D - Deleted.

ORIGINAL

A

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

Revision Status: U-Unchanged, R - Revised, N - New, D - Deleted.

B

ORIGINAL

QRH 2669-354

This handbook is applicable to the PHENOM 300 airplanes with Garmin G3000 Avionics System equipped with PW535E engines.

The Emergency/Abnormal Procedures published in the Quick Reference Handbook (QRH) are intended to guide the pilots on the right path to solve emergency and abnormal situations and conditions.

The abbreviated procedures contained in this handbook have been developed by the manufacturer for use during operation of the PHENOM 300. These procedures are provided as guidance and should not be construed as prohibiting the development of equivalent procedures provided they are in accordance with the approved Airplane Flight Manual (AFM) procedures.

The use of the on board checklist is based on the assumption that pilots have been properly trained on the type of airplane and therefore have a thorough knowledge of the airplane's systems and procedures.

It further assumes that they know the consequences of not performing the right actions at the right time.

This handbook may be also used during flight training program, preparing the students for airplane qualification and/or rating check-ride (or equivalent).

In case of conflicting information between this handbook and the AFM, the latest approved edition/revision of the AFM must prevail.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

INTRODUCTION

The normal checklist is just a memory aid to assist the pilots so they do not forget actions which, if not carried out, can result in some type of risk to the airplane, to the operational environment, to any of its systems, to its occupants or to the passengers comfort. Specific regulations also ask for items to be included in the checklist.

The normal checklist assumes that the pilots previously accomplished all normal procedures.

The normal checklist is named and divided according to each specific phase of flight and should follow the normal checklist philosophy.

When a disagreement between the response and the checklist answer is found, the checklist should be interrupted until the item is resolved.

Upon completion of the checklist the pilot reading it should state: " Checklist Complete."

One complete separated normal checklist is presented for operation with no icing conditions and another for operation in icing conditions.

Special operations such as "Steep Approach Landing" and "RNP AR" are not covered by the normal checklist. For more information about special operations, refer to AFM.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

COCKPIT SAFETY INSPECTION

Emergency Door Locking Pin..... REMOVE
 Emergency Door..... SECURED AND LOCKED
 Documents, Manuals and Charts..... CKD ON BOARD
 Maintenance Status..... CKD
 Emergency Equipment..... CKD
 FCE RESET Knob (if applicable)..... SET TO NONE
 IFE/REFRESHMENT CTR Switch..... OFF
 OXY SUPPLY Handle..... PUSH TO RESTORE
 OXY SUPPLY CONTROL Knob..... PAX AUTO
 OXY MASK Regulator..... CKD 100%
 BATT 1 & 2 Switches..... OFF
 BUS TIE Knob..... AUTO
 GEN 1 & 2 Switches..... AUTO
 GPU Button..... AS REQUIRED
 BLEED 1 & 2 Switches..... AUTO
 XBLEED Knob..... AUTO
 TEST Selector..... OFF
 Circuit Breakers..... CKD ALL IN
 FUEL PUMP 1 & 2 Switches..... AUTO
 XFEED Knob..... OFF
 HYD PUMP SOV 1 & 2 Switches..... OPEN
 ELT Switch..... ARMED
 PUSHER CUTOFF Button..... PUSHED OUT
 Gust Lock Pin..... REMOVE
 Rudder Pedals..... CHECK UNLOCKED
 WSHLD 1 & 2 Switches..... OFF
 ADS PROBES Selector..... AUTO
 ENG 1 & 2 ICE PROT Switches..... OFF
 WINGSTAB Switch..... OFF
 LDG GEAR Lever..... DN
 PRESN MODE Switch..... AUTO
 ECS Knob..... BOTH
 DUMP Button..... PUSHED OUT
 AIR CONDITIONING Control Panel..... AS REQUIRED
 Flap..... ZERO
 SPEED BRAKE Switch..... CLOSE
 EMER/PARKING BRAKE Handle..... SET
 ENG START/STOP Knobs..... STOP
 SHUTOFF 1 & 2 Buttons..... CKD
 BOTTLE Switch..... OFF
 Seats and Belts..... CONDITION

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

POWER UP

BATT 1 & 2 Switches..... ON
 GPU Button..... AS REQUIRED
 IFE/REFRESHMENT CTR Switch..... AS REQUIRED

Make sure that the cabin temperature is between 10°C and 34°C before you turn on the IFE.

CVR/TEST Switch..... TEST
 Transponder..... AS REQUIRED

Set transponder to ALT mode or as required by local rules.

For operations requiring ADS-B Out, the transponder should be in ALT mode.

TCAS II (if applicable)..... AS REQUIRED

If the airplane is equipped with TCAS II, verify TCAS II in STBY mode.

If TCAS II is in STBY mode, the ADS-B In function is inhibited.

Electronic Checklist (if operative)..... CKD

BEFORE START

Oxygen Mask Flow and Microphone..... CKD
 TEST Control Panel (except SWPS and ice)..... TEST
 Fire Protection..... TEST
 Smoke Detector..... TEST
 Annunciator..... TEST
 TEST Selector..... OFF
 Fasten Seat Belts Signs..... ON
 External Lights..... AS REQUIRED
 EMER Lights Switch..... ARM
 Fuel Quantity and Balance..... CKD
 Oxygen Pressure for Dispatch..... CKD
 THRUST Levers..... IDLE
 EMER/PARKING BRAKE Handle..... SET
 ENG IGNITION Switches..... AUTO
 Doors..... CLOSED

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

AFTER START

GPU (if applicable)..... DISCONNECT
 ELEC EMER Button..... PUSH IN
 Batteries 1 & 2 Voltage..... CKD

CAUTION: EACH BATTERY VOLTAGE MUST BE AT LEAST 23.5 VOLTS.

ELEC EMER Button..... PUSH OUT
 SWPS (TEST Control Panel)..... TEST
 TEST Selector..... OFF
 AFCS Control Panel..... SET
 Engine Takeoff Data (OAT and ATR)..... SET
 LFE..... SET
 Takeoff Speeds (V_1 , V_R , V_2 , V_{FS})..... SET

CAUTION: SET THE SPEEDS IN SEQUENCE. IF IT IS NECESSARY TO CORRECT ONE OF THE SPEEDS OUT OF THE SEQUENCE, ALL THE OTHERS MUST BE VERIFIED.

SPD Knob (if applicable)..... AS REQUIRED

NOTE: For airplanes equipped with G3000 system version prior to 3305.07, the SPD Knob must be set to MAN.

Transponder..... SET

Set transponder CODE and Flight ID.

For operations requiring ADS-B Out, the transponder should be in ALT mode.

TCAS II (if applicable)..... SET

If the airplane is equipped with TCAS II, verify TCAS II in STBY mode.

If TCAS II is in STBY mode, the ADS-B In function is inhibited.

Altimeters (pilots and IESI)..... SET & X-CKD
 Flight Controls..... CKD FREE
 Trims (normal & backup)..... CKD & SET
 Flap..... SET T/O
 External Lights..... AS REQUIRED
 Ice Protection..... AS REQUIRED

TAKEOFF PITCH TRIM SETTING									
CG % MAC		19	24	27	30	33	36	39	42
Pitch Trim Scale	Flap 1	7.7	8.9	9.6	10.3	11.0	11.7	12.4	12.4
	Flap 2	6.8	8.2	9.0	9.9	10.7	11.5	12.4	12.4

BEFORE TAKEOFF

Takeoff Configuration..... CKD
 CAS Messages..... CKD
 Fasten Seat Belts Signs..... ON
 Yaw Damper..... OFF
 Autothrottle (if applicable)..... CHECK DISARMED
 SHORTLY BEFORE TAKEOFF.....
 Transponder..... SET

Verify transponder mode as required by local rules.

TCAS II (if applicable)..... SET

If the airplane is equipped with TCAS II, make sure that it is not in STBY mode.

Passengers..... ADVISE
 Lights..... AS REQUIRED

AFTER TAKEOFF/CLIMB

LDG GEAR Lever..... CKD UP
 Flap..... ZERO
 THRUST Levers..... CON/CLB
 Autothrottle (if applicable)..... AS REQUIRED
 SPD Knob (if applicable)..... AS REQUIRED
 Altimeters (pilots and IES)..... SET & X-CKD
 Yaw Damper..... ON
 ABOVE 10000 ft.....
 Fasten Seat Belts Signs..... AS REQUIRED
 External Lights..... AS REQUIRED
 Weather Radar (if installed)..... AS REQUIRED
 Airspeed..... AS REQUIRED
 WSHLD 1 & 2 Switches..... AS REQUIRED

DESCENT

WSHLD 1 & 2 Switches..... ON
 Pressurization..... CHECK LFE
 Landing Speeds (V_{REF} , V_{AC} , V_{FS})..... SET

CAUTION: SET THE SPEEDS IN SEQUENCE. IF IT IS NECESSARY TO CORRECT ONE OF THE SPEEDS OUT OF THE SEQUENCE, ALL THE OTHERS MUST BE VERIFIED.

..... BELOW 10000 ft.....
 Fasten Seat Belts Signs..... ON

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

APPROACH

External Lights..... AS REQUIRED
 Passengers..... ADVISE
 XFEED Knob..... OFF
 Altimeters (pilots and IESI)..... SET & X-CKD
 WSHLD 1 & 2 Switches..... AS REQUIRED

BEFORE LANDING

Yaw Damper..... OFF
 LDG GEAR Lever..... DN AND CKD
 Flap..... SET LDG
 Airspeed..... V_{REF}

AFTER LANDING

Flap..... ZERO
 Lights..... AS REQUIRED
 Transponder..... AS REQUIRED

For operations requiring ADS-B Out, the transponder should be in ALT mode.

TCAS II (if applicable)..... AS REQUIRED

If the airplane is equipped with TCAS II, verify TCAS II in STBY mode.

If TCAS II is in STBY mode, the ADS-B In function is inhibited.

SHUTDOWN

THRUST Levers..... IDLE
 EMER/PARKING BRAKE Handle..... APPLY
 WSHLD 1 & 2 Switches..... OFF
 ADS PROBES Selector..... AUTO
 ENG 1 & 2 ICE PROT Switches..... OFF
 WINGSTAB Switch..... OFF
 ENG START/STOP Knobs..... STOP
 MFD Status Page..... CHECK
 Fasten Seat Belts Signs..... OFF

LEAVING THE AIRPLANE

IFE/REFRESHMENT CTR Switch..... OFF
 OXY SUPPLY Handle..... PULL TO CUTOUT
 EMER Lights Switch..... OFF
 BATT 1 & 2 Switches..... OFF
 Gust Lock Pin..... INSTALL
 Rudder Pedals..... LOCK
 Lights..... OFF

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

OPERATION IN ICING CONDITIONS

SUPPLEMENTARY NORMAL CHECKLIST FOR OPERATION IN
ICING CONDITIONS

**COCKPIT SAFETY INSPECTION (ICING
CONDITIONS)**

Emergency Door Locking Pin..... REMOVE
 Emergency Door..... SECURED AND LOCKED
 Documents, Manuals and Charts..... CKD ON BOARD
 Maintenance Status..... CKD
 Emergency Equipment..... CKD
 FCE RESET Knob (if applicable)..... SET TO NONE
 IFE/REFRESHMENT CTR Switch..... OFF
 OXY SUPPLY Handle..... PUSH TO RESTORE
 OXY SUPPLY CONTROL Knob..... PAX AUTO
 OXY MASK Regulator..... CKD 100%
 BATT 1 & 2 Switches..... OFF
 BUS TIE Knob..... AUTO
 GEN 1 & 2 Switches..... AUTO
 GPU Button..... AS REQUIRED
 BLEED 1 & 2 Switches..... AUTO
 XBLEED Knob..... AUTO
 TEST Selector..... OFF
 Circuit Breakers..... CKD ALL IN
 FUEL PUMP 1 & 2 Switches..... AUTO
 XFEED Knob..... OFF
 HYD PUMP SOV 1 & 2 Switches..... OPEN
 ELT Switch..... ARMED
 PUSHER CUTOUT Button..... PUSHED OUT
 Gust Lock Pin..... REMOVE
 Rudder Pedals..... CHECK UNLOCKED
 WSHLD 1 & 2 Switches..... OFF
 ADS PROBES Selector..... AUTO
 ENG 1 & 2 ICE PROT Switches..... OFF
 WINGSTAB Switch..... OFF
 LDG GEAR Lever..... DN
 PRESN MODE Switch..... AUTO
 ECS Knob..... BOTH
 DUMP Button..... PUSHED OUT
 AIR CONDITIONING Control Panel..... AS REQUIRED

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

...CONTINUED

Flap..... ZERO
 SPEED BRAKE Switch..... CLOSE
 EMER/PARKING BRAKE Handle..... SET
 ENG START/STOP Knobs..... STOP
 SHUTOFF 1 & 2 Buttons..... CKD
 BOTTLE Switch..... OFF
 Seats and Belts..... CONDITION

POWER UP (ICING CONDITIONS)

BATT 1 & 2 Switches..... ON
 GPU Button..... AS REQUIRED
 IFE/REFRESHMENT CTR Switch..... AS REQUIRED

Make sure that the cabin temperature is between 10°C and 34°C before you turn on the IFE.

21
12:44:21
CVR/TEST Switch..... TEST
 Transponder..... AS REQUIRED

Set transponder to ALT mode or as required by local rules.

For operations requiring ADS-B Out, the transponder should be in ALT mode.

TCAS II (if applicable)..... AS REQUIRED

If the airplane is equipped with TCAS II, verify TCAS II in STBY mode.

If TCAS II is in STBY mode, the ADS-B In function is inhibited.

Electronic Checklist (if operative)..... CKD

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

BEFORE START (ICING CONDITIONS)

Oxygen Mask Flow and Microphone..... CKD
 TEST Control Panel (except SWPS and
 ice)..... TEST
 Fire Protection..... TEST
 Smoke Detector..... TEST
 Annunciator..... TEST
 TEST Selector..... OFF
 Fasten Seat Belts Signs..... ON
 External Lights..... AS REQUIRED
 EMER Lights Switch..... ARM
 Fuel Quantity and Balance..... CKD
 Oxygen Pressure for Dispatch..... CKD
 THRUST Levers..... IDLE
 EMER/PARKING BRAKE Handle..... SET
 ENG IGNITION Switches..... AUTO
 Doors..... CLOSED
 ADS PROBES Selector..... ON

NOTE: It is recommended to turn on the ADS PROBES Selector immediately before engine start.

AFTER START (ICING CONDITIONS)

GPU (if applicable)..... DISCONNECT
 ELEC EMER Button..... PUSH IN
 Batteries 1 & 2 Voltage..... CKD

CAUTION: EACH BATTERY VOLTAGE MUST BE AT LEAST 23.5 VOLTS.

ELEC EMER Button..... PUSH OUT
 SWPS (TEST Control Panel)..... TEST
 TEST Selector..... OFF
 AFCS Control Panel..... SET
 Engine Takeoff Data (OAT and ATR)..... SET
 LFE..... SET
 Takeoff Speeds (V_1 , V_R , V_2 , V_{FS})..... SET

CAUTION: SET THE SPEEDS IN SEQUENCE. IF IT IS NECESSARY TO CORRECT ONE OF THE SPEEDS OUT OF THE SEQUENCE, ALL THE OTHERS MUST BE VERIFIED.

SPD Knob (if applicable)..... AS REQUIRED

NOTE: For airplanes equipped with G3000 Avionics System version prior to 3305.07, the SPD Knob must be set to MAN.

Transponder..... SET

Set transponder CODE and Flight ID.

For operations requiring ADS-B Out, the transponder should be in ALT mode.

TCAS II (if applicable)..... SET

If the airplane is equipped with TCAS II, verify TCAS II in STBY mode.

If TCAS II is in STBY mode, the ADS-B In function is inhibited.

Altimeters (pilots and IES)..... SET & X-CKD
 Flight Controls..... CKD FREE
 Trims (normal & backup)..... CKD & SET
 Flap..... SET T/O
 External Lights..... AS REQUIRED
 Ice Protection..... AS REQUIRED

TAKEOFF PITCH TRIM SETTING									
CG % MAC		19	24	27	30	33	36	39	42
Pitch Trim Scale	Flap 1	7.7	8.9	9.6	10.3	11.0	11.7	12.4	12.4
	Flap 2	6.8	8.2	9.0	9.9	10.7	11.5	12.4	12.4

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

BEFORE TAKEOFF (ICING CONDITIONS)

NOTE: Contamination check of wing upper surface and leading edge must be performed for takeoff.

With engines running check the ice protection system as follows:

WSHLD 1 & 2 Switches..... ON

The CAS messages WSHLD 1 (2) HTR FAIL must not be displayed.

WSHLD 1 & 2 Switches..... OFF

ENG 1 & 2 ICE PROT Switches..... ON

The CAS messages A-I E1 (E2) ON must be displayed (after 10 seconds).

ENG 1 & 2 ICE PROT Switches..... OFF

The CAS messages must disappear.

BLEED 1 & 2 Switches..... AS REQUIRED

WINGSTAB Switch..... ON

The CAS message A-I WINGSTB ARM or A-I WINGSTB INHB may be displayed.

WINGSTAB Switch..... OFF

The CAS message A-I WINGSTB ARM or A-I WINGSTB INHB must disappear.

If ice detector is available:

TEST Selector..... ICE PROT

START TEST Button..... PRESS

The CAS messages ICE CONDITION must be displayed.

TEST Selector..... OFF

After completing a successful test:

If SAT is between 5°C and 10°C with visible moisture:

ENG 1 & 2 ICE PROT Switches..... ON

WINGSTAB Switch..... OFF

WSHLD 1 & 2 Switches..... OFF

If SAT is below 5°C with visible moisture:

ENG 1 & 2 ICE PROT Switches..... ON

WINGSTAB Switch..... ON

WSHLD 1 & 2 Switches..... ON

ADS PROBES Selector..... AUTO

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

...CONTINUED

WARNING: TAKEOFF MUST NOT BE PERFORMED WITH CAS MESSAGE A-I WINGSTB INHB PRESENTED. REFER TO A-I WINGSTB INHB PROCEDURE.

Takeoff Configuration..... CKD
 CAS Messages..... CKD
 Fasten Seat Belts Signs..... ON
 Yaw Damper..... OFF
 Autothrottle (if applicable)..... CHECK DISARMED
 SHORTLY BEFORE TAKEOFF.....

Transponder..... SET

Verify transponder mode as required by local rules.

TCAS II (if applicable)..... SET

If the airplane is equipped with TCAS II, make sure that it is not in STBY mode.

Passengers..... ADVISE
 Lights..... AS REQUIRED

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ICING CONDITIONS IN FLIGHT

NOTE: This procedure is applicable to the After Takeoff/Climb, Cruise, Descent or Approach phase of flight.

The crew must activate the ice protection system when flying in icing conditions or if icing conditions are forecasted as follows:

If TAT is between 5°C and 10°C with visible moisture:

ENG 1 & 2 ICE PROT Switches..... ON
WINGSTAB Switch..... OFF
WSHLD 1 & 2 Switches..... OFF

If TAT is below 5°C with visible moisture, or at first sign of ice accretion anywhere on the airplane, or ICE CONDITION message is displayed (if applicable), whichever occurs first:

ENG 1 & 2 ICE PROT Switches..... ON
WINGSTAB Switch..... ON
WSHLD 1 & 2 Switches..... ON

NOTE: – Check the CAS message for proper system activation.
– In-flight, the windshield is the best indication of early ice formation detection. If the airplane is not flying in icing condition, no ice is building up in the windshield and if the windshield heater is not required for defog, leave the WSHLD 1 & 2 Switches OFF, turning it ON when required.

After leaving ice conditions and if there is no ice accretion on the airplane:

ENG 1 & 2 ICE PROT Switches..... OFF
WINGSTAB Switch..... OFF
WSHLD 1 & 2 Switches..... OFF
WINGSTAB Switch..... ICE SPEED RESET

WARNING: THE ICE PROTECTION SYSTEM MUST BE KEPT ON AND ICE SPEED MUST NOT BE RESET UNTIL CREW IS CERTAIN ALL ICE HAS BEEN REMOVED.

AFTER TAKEOFF/CLIMB (ICING CONDITIONS)

LDG GEAR Lever..... CKD UP
 Flap..... ZERO
 THRUST Levers..... CON/CLB
 Autothrottle (if applicable)..... AS REQUIRED
 SPD Knob (if applicable)..... AS REQUIRED
 Altimeters (pilots and IESl)..... SET & X-CKD
 Yaw Damper..... ON
 ABOVE 10000 ft.....
 Fasten Seat Belts Signs..... AS REQUIRED
 External Lights..... AS REQUIRED
 Weather Radar (if installed)..... AS REQUIRED
 Airspeed..... AS REQUIRED

DESCENT (ICING CONDITIONS)

WSHLD 1 & 2 Switches..... ON
 Pressurization..... CHECK LFE
 Landing Speeds (V_{REF} , V_{AC} , V_{FS})..... SET
CAUTION: SET THE SPEEDS IN SEQUENCE. IF IT IS
 NECESSARY TO CORRECT ONE OF THE SPEEDS
 OUT OF THE SEQUENCE, ALL THE OTHERS MUST
 BE VERIFIED.
 BELOW 10000 ft.....
 Fasten Seat Belts Signs..... ON

APPROACH (ICING CONDITIONS)

External Lights..... AS REQUIRED
 Passengers..... ADVISE
 XFEED Knob..... OFF
 Altimeters (pilots and IESl)..... SET & X-CKD

HOLDING CONFIGURATION (ICING CONDITIONS)

LDG GEAR Lever..... UP
 Flap..... UP

Recommended airspeed:

Above 30000 ft..... MIN 165 KIAS
 Below 30000 ft..... MIN 150 KIAS

BEFORE LANDING (ICING CONDITIONS)

Yaw Damper..... OFF
 LDG GEAR Lever..... DN AND CKD
 Flap..... SET LDG
 Airspeed..... V_{REF}

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

AFTER LANDING (ICING CONDITIONS)

Flap..... ZERO
 Lights..... AS REQUIRED
 Transponder..... AS REQUIRED

For operations requiring ADS-B Out, the transponder should be in ALT mode.

TCAS II (if applicable)..... AS REQUIRED

If the airplane is equipped with TCAS II, verify TCAS II in STBY mode.

If TCAS II is in STBY mode, the ADS-B In function is inhibited.

SHUTDOWN (ICING CONDITIONS)

THRUST Levers..... IDLE
 EMER/PARKING BRAKE Handle..... APPLY
 WSHLD 1 & 2 Switches..... OFF
 ADS PROBES Selector..... AUTO
 ENG 1 & 2 ICE PROT Switches..... OFF
 WINGSTAB Switch..... OFF
 ENG START/STOP Knobs..... STOP
 MFD Status Page..... CHECK
 Fasten Seat Belts Signs..... OFF

LEAVING THE AIRPLANE (ICING CONDITIONS)

IFE/REFRESHMENT CTR Switch..... OFF
 OXY SUPPLY Handle..... PULL TO CUTOUT
 EMER Lights Switch..... OFF
 BATT 1 & 2 Switches..... OFF
 Gust Lock Pin..... INSTALL
 Rudder Pedals..... LOCK
 Lights..... OFF
 EMER/PARKING BRAKE Handle..... AS REQUIRED

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

TURBULENT AIR PENETRATION

SUPPLEMENTARY NORMAL CHECKLIST FOR TURBULENT AIR PENETRATION

TURBULENT AIR PENETRATION

Fasten Seat Belts Signs..... ON

Autothrottle (if applicable)..... DISENGAGE

Set the airspeed as follows:

At or Below 32000 ft..... MAX 232 KIAS

Above 32000 ft..... MAX 232 KIAS/0.65 M

Set thrust for penetration and avoid large thrust variations. Set trim for target speed and do not change it.

Use attitude indicator as the primary instrument. Allow altitude and airspeed to vary and maintain attitude. Avoid abrupt and large control inputs.

NOTE: Do not extend flap except for approach and landing.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

INTRODUCTION

The Emergency/Abnormal Procedures published in the Quick Reference Handbook (QRH), based on the approved Airplane Flight Manual (AFM) procedures, are intended to guide the pilots on the right path to solve emergency and abnormal situations and conditions.

In case a discrepancy is found between the QRH and the approved AFM, the AFM shall prevail.

In order to use the QRH pilots have to be properly trained in the execution of all operational, emergency and abnormal procedures set forth in the approved AFM and also have a thorough knowledge of the airplane and its systems.

Three blocks of procedures are contained in this manual:

- **Smoke Procedures:** contain all the non-annunciated smoke related procedures.
- **Non-Annunciated Procedures:** procedures, which are not related to a CAS message but rather to a condition present in the airplane. Although non-annunciated, these procedures have the same priority of the CAS messages that is identified by the color of the titles.
- **Annunciated Procedures:** procedures related to a CAS message. These procedures are grouped by system, priority and alphabetic order. They are titled with the corresponding CAS message wording.

There are four message priority levels:

- **WARNING (red):** indicates an emergency operational or airplane system conditions that require immediate crew awareness and immediate corrective or compensatory crew action.
- **CAUTION (yellow):** indicates an abnormal operational or airplane system conditions that require immediate crew awareness and subsequent corrective or compensatory action.
- **ADVISORY (white):** indicates operational or airplane conditions that require crew awareness. Subsequent or future crew action may be required.
- **GOLDEN (red/yellow/white):** these messages are considered root cause of other failures and their procedures, when applicable, must be accomplished by crew firstly does not matter the order of presentation. They are identified as a steady reverse video after acknowledgement by the crew.

The emergency/abnormal procedures have priority over the normal checklist.

Messages with the higher priority precede other messages when shown simultaneously and the procedures must be accomplished according to this presentation, except in case of a GOLDEN message presentation when only the GOLDEN message procedure must be accomplished.

Some CAS messages do not have an associated procedure, as they comprise crew awareness alerts. In those cases, a “Crew Awareness” wording identifies the CAS message in the Index Table. These messages increase the pilot’s situational awareness about system status or failure and indicate that subsequent or future crew action may be required. If a message identified as “Crew Awareness” is displayed on the PFD, takeoff is prohibited, unless at least one of the following conditions is met:

- The message is an expected result of an intentional operation.
- Flight crew action is taken to clear the message.
- Maintenance personnel take action to clear the message.
- Airplane dispatch is allowed by an approved MEL or another authorized special condition.

Some procedures bring a characterization below the title in case any relevant emergency/abnormal condition occurs, such as aural warnings, lights, CAS indications, flight instrument flags and the airplane condition itself.

The actions contained in the bold square boxes are recall items. They must be performed expeditiously, from memory. After these actions are executed, they must be crosschecked with QRH for proper completion. The other actions should be performed as soon as the condition permits.

Some procedures require “LAND AS SOON AS POSSIBLE”. This statement may be presented below the associated emergency/abnormal characterization or at the beginning of a task that requires so. When this emergency is declared, a landing should be accomplished at the nearest suitable airfield considering the severity of the emergency, weather conditions, field facilities, ambient lighting, airplane gross weight and command guidance. Depending on the situation criticality, a landing off the runway should be attempted considering the occupants safety.

Some procedures may advise “LAND AS SOON AS PRACTICAL”. In this case the emergency conditions are less urgent, and although the mission is to be terminated, the degree of the emergency is such that an immediate landing at the nearest adequate airfield may not be necessary.

Throughout this manual, a text followed by “()” means that either condition applies.

Some procedures may contain a “list of relevant inoperative equipment/functions” for that particular condition. This list has the informative purpose only since the associated procedure is completed and already presents all tasks to be accomplished by the crew. Some items of this informative list are distinguished (with the equipment/function enclosed by the mark “♦”) as they are related with the airplane controllability, configuration or performance influence.

Procedures for failures affecting the landing distance present an “abnormal landing correction factor”. This factor must be entered in the Landing Distance Correction table to determine the minimum required landing distance. Additional factors for other conditions are also presented in the performance section of this manual.

Flying the airplane is always the priority in any emergency/ abnormal situation. Checklists should only be called by the crew after the flight path is under control, critical phases of flight (takeoff and landing) have ended and all recall items have been accomplished.

The procedures contained herein assume that:

- Airplane systems were operating normally prior to the failure.
- All emergency/abnormal actions are performed in the order they are presented in the procedure.
- Some emergency or abnormal procedures require a correction in landing distance or landing reference speed. The reference for such correction is always flap FULL, even for those airplanes that do not have flap FULL selection available.
- Normal procedures have been properly accomplished.
- System controls were in normal condition prior to beginning of the associated procedure.
- Aural warnings are silenced as applicable. Any MSG warning button is acknowledged as soon as the failure is recognized.
- In case of depressurization and presence of smoke, oxygen masks and smoke goggles (if applicable) have been donned and communication has been established.
- Circuit breakers must not be reset, unless it is requested by the procedure.

All tasks foreseen in the procedures have the indication END stating that the specific task for that condition is over. No task is over until END has been reached.

In case the current procedure requires or recommends that another procedure be done before its end, you must do the required or recommended procedure, and then, return and finish the previous procedure to make sure that all procedures are complete.

In case of dual pilot operation, upon completion of the procedure the pilot reading it should state: “_____Procedure Complete”.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

TABLE OF CONTENTS

EMERGENCY

SMOKE EVACUATION.....	S1-1
SMOKE/FIRE/FUME.....	S1-3

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

SMOKE EVACUATION

Oxygen Masks.....	DON, EMERGENCY
Dilution Valve.....	CLOSED
Smoke Goggles (if available).....	DON
Communication.....	ESTABLISH OXY SUPPLY
CONTROL Knob.....	CREW ONLY
DUMP Button.....	PUSH IN
ECS Knob.....	OFF VENT

LAND AS SOON AS POSSIBLE.**After 2 minutes at EMERGENCY:**

Oxygen Masks.....	100%
Fasten Seat Belts	
Signs.....	ON
Altitude.....	MAX 10000 FT OR MEA, WHICHEVER IS HIGHER

...CONTINUED

NOTE: – Check for obstacle clearance in lower altitudes before descending.

- The Emergency Descent Mode (EDM) may engage during the procedure. For airplanes equipped with Autothrottle (A/T), the A/T IDLE (FLC) mode is engaged when EDM is activated.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

THRUST Levers.....	IDLE
SPEED BRAKE Switch..	OPEN
Airspeed.....	MAX
	250 KIAS/M _{MO}
LDG GEAR Lever.....	DN
Transponder.....	7700
ATC.....	NOTIFY

At 10000 ft or MEA:

OXY SUPPLY
CONTROL Knob..... AS REQUIRED

If there is no evidence of fire in the cabin, set the OXY SUPPLY CONTROL Knob to PAX AUTO.

SPEED BRAKE
Switch..... CLOSE

END

SMOKE/FIRE/FUME

Oxygen Masks.....	DON, EMERGENCY
Dilution Valve.....	CLOSED
Smoke Goggles (if available).....	DON
Communication.....	ESTABLISH
DUMP Button.....	PUSH IN

LAND AS SOON AS POSSIBLE.

After 2 minutes at EMERGENCY:


Oxygen Masks..... 100%

**WARNING: ANY TIME SMOKE OR
FUMES BECOME THE
GREATEST THREAT,
ACCOMPLISH THE SMOKE
EVACUATION
PROCEDURE.**

NOTE: – The Emergency Descent Mode (EDM) may engage during the procedure. For airplanes equipped with Autothrottle (A/T), the A/T IDLE (FLC) mode is engaged when EDM is activated.

– Smoke will initially decrease due to pressurization dumping, even if the correct source has not been eliminated.

...CONTINUED

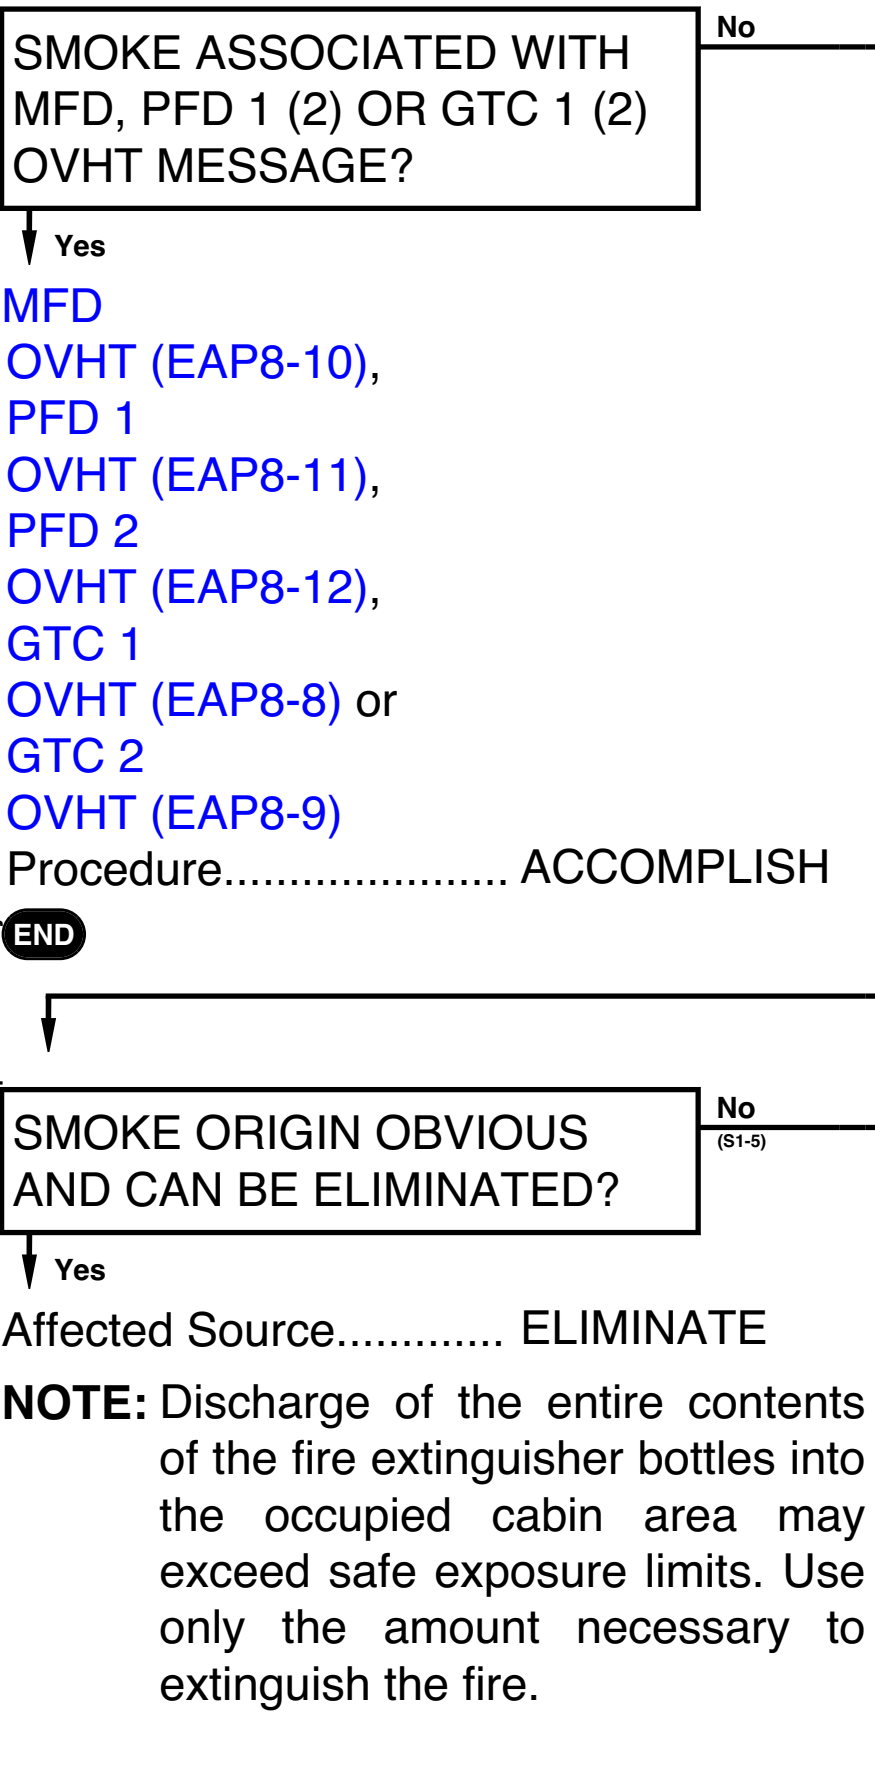

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

CONTINUED...

QRH 2669-354

...CONTINUED

If smoke source has been eliminated:

DUMP Button..... PUSH OUT

SMOKE

EVACUATION (S1-1)

Procedure..... AS REQUIRED

END

Fasten Seat Belts

Signs..... ON

Altitude..... MAX 10000 FT
OR MEA,
WHICHEVER IS
HIGHER

NOTE: Check for obstacle clearance in
lower altitudes before descending.

THRUST Levers..... IDLE

SPEED BRAKE Switch.. OPEN

Airspeed..... MAX
250 KIAS/M_{MO}

LDG GEAR Lever..... DN

Transponder..... 7700

ATC..... NOTIFY

At 10000 ft or MEA:

SPEED BRAKE

Switch..... CLOSE

Smoke

...CONTINUED

SMOKE STOPS OR
DECREASES?

No

Yes

END

GEN 2 Switch..... OFF
 BUS TIE Knob..... 2 OPEN

..... Wait 1 minute.....

SMOKE STOPS OR
DECREASES?

No

Yes

Relevant Inoperative Items

Autopilot	Stall Protection
GIA 2	Ventral Rudder
Pressurization AUTO	Yaw Damper

Refer to **DC BUS 2 OFF (EAP4-10)**
 Procedure for additional guidance.

END

GEN 2 Switch..... AUTO
 GEN 1 Switch..... OFF
 BUS TIE Knob..... 1 OPEN

..... Wait 1 minute.....

CONTINUED...

...CONTINUED

SMOKE STOPS OR
DECREASES?

No

↓ Yes

Relevant Inoperative Items

Flap System	Stall Protection
Speed Brake/Roll Spoiler	

Refer to **DC BUS 1 OFF (EAP4-8)**
Procedure for additional guidance.

END

GEN 1 Switch..... AUTO

BATT 1 & 2 Switches..... OFF

..... Wait 1 minute.....

SMOKE STOPS OR
DECREASES?

No

↓ Yes

Relevant Inoperative Items

Autopilot	Ground Spoiler
Fuel Shutoff Valves	LDG Control Lever
GIA 1	Main Brake

Refer to **EMER BUS OFF (EAP4-12)**
Procedure for additional guidance.

END

QRH 2669-354

CONTINUED...

...CONTINUED

BUS TIE Knob..... AUTO
BATT 1 & 2 Switches..... ON
Non-Essential
Equipment..... OFF
Passenger Oxygen
Supply..... AS REQUIRED

NOTE: Even turning on the EMERGENCY BUS, the main brake will be inoperative and the Emergency/ Parking Brake must be used for landing. If situation permits in flight, the main brake may be recovered by cycling the BRAKE Circuit Breaker (B32) with the landing gear extended.

END

TABLE OF CONTENTS**EMERGENCY**

BAGGAGE COMPARTMENT FIRE.....	NAP1-1
DITCHING.....	NAP1-2
DUAL ENGINE FAILURE.....	NAP1-3
EMERGENCY DESCENT.....	NAP1-5
EMERGENCY EVACUATION.....	NAP1-5
ENGINE ABNORMAL START.....	NAP1-6
ENGINE FIRE, SEVERE DAMAGE OR SEPARATION.....	NAP1-7
FORCED LANDING.....	NAP1-8
FUEL LEAKAGE.....	NAP1-9

ABNORMAL

ABNORMAL LANDING GEAR EXTENSION.....	NAP1-10
BLANK DISPLAY UNIT WITH AUTOMATIC REVERSION.....	NAP1-11
BLANK DISPLAY UNIT WITHOUT AUTOMATIC REVERSION.....	NAP1-12
DUAL DUCT OVERTEMPERATURE.....	NAP1-13
ENGINE ABNORMAL VIBRATION.....	NAP1-14
ENGINE IN-FLIGHT START.....	NAP1-15
ENGINE ITT OVERTEMPERATURE.....	NAP1-17
ENGINE SHUTDOWN.....	NAP1-17
FUEL TEMPERATURE INDICATION FAILURE.....	NAP1-17
FUEL TEMPERATURE OUT OF RANGE.....	NAP1-18
GEAR LEVER CANNOT BE MOVED UP.....	NAP1-18
GPS NAV SYSTEM FAILURE.....	NAP1-18
GTC 1 (2) FAILURE.....	NAP1-19
IMPAIRED OR CRACKED WINDSHIELD.....	NAP1-19
INADVERTENT PUSHER ACTUATION.....	NAP1-19
LOSS OF FLAP INDICATION.....	NAP1-20

ABNORMAL

LOSS OF FUEL QUANTITY INDICATION.....	NAP1-20
LOSS OF PRESSURIZATION INDICATION.....	NAP1-21
LOSS OF SPOILER INDICATION.....	NAP1-22
ONE ENGINE INOPERATIVE APPROACH AND LANDING.....	NAP1-23
ONE ENGINE INOPERATIVE IN ICING CONDITIONS.....	NAP1-24
OXYGEN LEAKAGE.....	NAP1-25
PARTIAL OR GEAR UP LANDING.....	NAP1-26
STRUCTURAL DAMAGE.....	NAP1-27
UNRELIABLE AIRSPEED.....	NAP1-27

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

BAGGAGE COMPARTMENT FIRE

LAND AS SOON AS POSSIBLE.

END

DITCHING

During descent:

Passengers..... PREPARE/LIFE VESTS,
 IF AVAILABLE, DON
 ATC..... NOTIFY
 Transponder..... 7700
 Fasten Seat Belts Signs..... ON
 ELT..... ON
 Water Barrier..... INSTALL

At 10000 ft or MEA:

DUMP Button..... PUSH IN

Ditching configuration:

LDG GEAR Lever..... UP
 Flap..... MAXIMUM AVAILABLE
 OXY SUPPLY Handle..... PULL TO CUTOUT

If it is not possible to achieve the selected flap position, maintain airspeed according to the following:

	FLAP POSITION	V _{REF}
NO ICING	0	V _{REF} FULL NO ICE + 27 KIAS
	1	V _{REF} FULL NO ICE + 19 KIAS
	2 and 3	V _{REF} FULL NO ICE + 6 KIAS
	FULL	V _{REF} FULL NO ICE
IN ICING/ WITH ICE	0	V _{REF} FULL NO ICE + 38 KIAS
	1	V _{REF} FULL NO ICE + 27 KIAS
	2 and 3	V _{REF} FULL NO ICE + 15 KIAS
	FULL	V _{REF} FULL NO ICE + 10 KIAS

- NOTE:** – If flap stops between two positions, use the minimum airspeed associated with the next retracted position and the V_{FE} associated with the next extended position.
- Disregard green circle indication, as it may indicate slower speeds.

Just before water contact:

Passengers..... ANNOUNCE IMPACT

After ditching:

THRUST Levers..... IDLE
 ENG START/STOP Knobs..... STOP
 Fire Extinguishing System..... AS REQUIRED
EMERGENCY
EVACUATION (NAP1-5)
 Procedure..... ACCOMPLISH

END

DUAL ENGINE FAILURE

Engine Indication: FAIL icon inside both N1 indicators.

CAS Message: E1 FAIL and E2 FAIL messages.

THRUST Levers.....	IDLE
Oxygen Masks.....	DON, 100%
Communication.....	ESTABLISH

LAND AS SOON AS POSSIBLE.

BOTH ENGINES SUCCESSFUL AUTO RELIGHT?

No

↓ Yes

Engine Parameters..... MONITOR

Monitor the engines' parameters for the remainder of the flight.

END

Altitude..... MAX 30000 FT
Airspeed..... MAX 250 KIAS
XFEED Knob..... LO2

CAUTION: IF N2 DROPS BELOW 9% IT CANNOT BE RECOVERED BY INCREASING THE AIRPLANE SPEED. IN THIS CASE, WINDMILLING IS NO LONGER POSSIBLE AND AN ASSISTED START SHOULD BE ATTEMPTED.

NOTE: Start the engines one at a time, initiating the in-flight start sequence through the right engine, if possible.

Windmilling engine start:

N2..... ABOVE 9%
Airspeed..... MIN 200 KIAS
ENG START/STOP Knob..... STOP
ENG START/STOP Knob..... RUN


Assisted engine start:

N2..... AT OR BELOW 9%
ENG START/STOP Knob..... STOP
ENG START/STOP Knob..... START, THEN RUN

NOTE: In electrical emergency condition, the 45 minutes batteries duration was demonstrated with only one assisted engine start attempt. Further assisted start attempts decrease battery duration.

Non-Annunciated

...CONTINUED

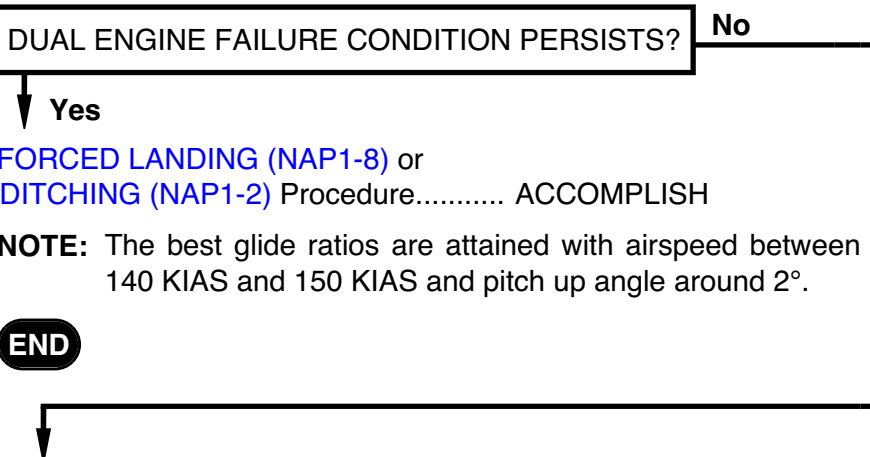

XFEED Knob..... OFF
Engine Parameters..... MONITOR

Monitor the engines' parameters for the remainder of the flight.

When appropriate:

Transponder..... TA ONLY
Autothrottle (if applicable)..... AS REQUIRED
**ONE ENGINE INOPERATIVE
APPROACH AND
LANDING (NAP1-23) Procedure..... ACCOMPLISH**
**ONE ENGINE INOPERATIVE IN
ICING CONDITIONS (NAP1-24)
Procedure..... ACCOMPLISH**

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

QRH 2669-354

**EMERGENCY AND ABNORMAL
PROCEDURES**

Non-Annunciated

EMERGENCY DESCENT

Fasten Seat Belts Signs.....	ON
Altitude.....	MAX 10000 FT OR MEA, WHICHEVER IS HIGHER
THRUST Levers.....	IDLE
SPEED BRAKE Switch.....	OPEN
Airspeed.....	MAX 250 KIAS/M _{MO}
LDG GEAR Lever.....	DN
Transponder.....	7700
ATC.....	NOTIFY

- NOTE:** – Check for obstacle clearance in lower altitudes before descending.
- The Emergency Descent Mode (EDM) may engage during the procedure. Altitude, airspeed and heading should be manually selected as required.
 - For airplanes equipped with Autothrottle (A/T), the A/T IDLE (FLC) mode is engaged when EDM is activated.

At 10000 ft or MEA:

SPEED BRAKE Switch.....	CLOSE
Airplane Configuration.....	AS REQUIRED

END**EMERGENCY EVACUATION**

THRUST Levers.....	IDLE
Emergency/Parking Brake.....	ON
ENG START/STOP Knobs.....	STOP
SHUTOFF 1 & 2 Buttons.....	PUSH IN
PRESN MODE Switch.....	MAN
DUMP Button.....	PUSH IN
ATC.....	NOTIFY
Evacuation.....	PERFORM
BATT 1 & 2 Switches.....	OFF

END

Non-Annunciated

ENGINE ABNORMAL START**Affected engine:**

ENG START/STOP Knob..... STOP

DRY MONITORING CONSIDERED ON GROUND?

No

↓ Yes

Associated engine:

ENG IGNITION Switch..... OFF

ENG START/STOP Knob..... START, THEN RUN

..... Wait 30 seconds.....

ENG START/STOP Knob..... STOP

ENG IGNITION Switch..... AUTO

NOTE: Consider each dry motoring as a motoring number and the respective required cool-down time.**END**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

QRH 2669-354

ENGINE FIRE, SEVERE DAMAGE OR SEPARATION

Engine Indication: FIRE icon on the associated ITT indicator may be displayed.

Light: Associated SHUTOFF Button may be illuminated.

Aural Warning: FIRE, FIRE

Autothrottle (if applicable)..... DISENGAGE

Affected engine:

THRUST Lever..... IDLE
ENG START/STOP Knob..... STOP
SHUTOFF Button..... PUSH IN

Wait 30 seconds and if fire persists:

BOTTLE Switch..... DISCH

LAND AS SOON AS POSSIBLE.

Altitude..... MAX 36000 FT
ECS Knob..... UNAFFECTED SIDE
THRUST Lever (operative engine)..... AS REQUIRED

AIRPLANE HIGH VIBRATION?

No

Yes

Airspeed..... REDUCE

Reduce the airspeed but maintain it above 140 KIAS.

Transponder..... TA ONLY
Fuel Balance..... MONITOR

If in icing conditions:

ONE ENGINE INOPERATIVE IN
ICING CONDITIONS (NAP1-24)

Procedure..... ACCOMPLISH

When appropriate:

Autothrottle (if applicable)..... AS REQUIRED

ONE ENGINE INOPERATIVE
APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

FORCED LANDING

This procedure is recommended for landings with all engines inoperative or for landings on unprepared surfaces. Landing on unprepared surfaces is not recommended. However, if specific circumstances render such landing inevitable, accomplish the procedures below:

Passengers..... NOTIFY
 ATC..... NOTIFY
 Transponder..... 7700
 Fasten Seat Belts Signs..... ON
 ELT..... ON
 Landing Data..... SET

At 10000 ft or MEA:

DUMP Button..... PUSH IN

Before landing:

LDG GEAR Lever..... AS REQUIRED
 Flap..... MAXIMUM AVAILABLE

If it is not possible to achieve the selected flap position, maintain airspeed according to the following:

	FLAP POSITION	V _{REF}
NO ICING	0	V _{REF} FULL NO ICE + 27 KIAS
	1	V _{REF} FULL NO ICE + 19 KIAS
	2 and 3	V _{REF} FULL NO ICE + 6 KIAS
	FULL	V _{REF} FULL NO ICE
IN ICING/ WITH ICE	0	V _{REF} FULL NO ICE + 38 KIAS
	1	V _{REF} FULL NO ICE + 27 KIAS
	2 and 3	V _{REF} FULL NO ICE + 15 KIAS
	FULL	V _{REF} FULL NO ICE + 10 KIAS

- NOTE:** – If flap stops between two positions, use the minimum airspeed associated with the next retracted position and the V_{FE} associated with the next extended position.
- Disregard green circle indication, as it may indicate slower speeds.

OXY SUPPLY Handle..... PULL TO CUTOUT

Just before touchdown:

Passengers..... ANNOUNCE IMPACT

Reduce the vertical speed as much as possible.

After landing, if condition permits:

THRUST Levers..... IDLE

CONTINUED...

**EMERGENCY AND ABNORMAL
PROCEDURES**

Non-Annunciated

...CONTINUED

ENG START/STOP Knobs..... STOP

SHUTOFF 1 & 2 Buttons..... PUSH IN

EMERGENCY**EVACUATION (NAP1-5)**

Procedure..... ACCOMPLISH

END**FUEL LEAKAGE****LAND AS SOON AS POSSIBLE.**

XFEED Knob..... OFF

THRUST Lever..... SAME N1 SET ON BOTH
ENGINES**If N1 and fuel flow indications from both engines
match, but one side is leaking:**

Autothrottle (if applicable)..... DISENGAGE

Asymmetric Thrust..... AS REQUIRED TO
CONTROL FUEL
IMBALANCE**If the fuel leakage continues and is severe:**

Affected Engine Shutdown..... CONSIDER

**If N1 from both engines match, but fuel flow
indications are discrepant:**

Affected Engine..... SHUTDOWN

Refer to **ENGINE SHUTDOWN (NAP1-17)** Procedure.**If engine shutdown is performed:**

Affected Engine SHUTOFF

Button..... PUSH IN

END

Non-Annunciated

ABNORMAL LANDING GEAR EXTENSION

LDG GEAR Lever..... DN

FREE FALL Handle..... PULL UNTIL STOP

If gear does not lock down:

Airspeed..... MIN 140 KIAS

NOTE: Side-slips at higher speeds are suggested, provided the airplane remains within the limiting speeds as defined by the limitations and below the maneuvering speed V_o .

Slip the airplane to attempt to lock the main gear.

LG INDICATIONS DOWN?

No

Yes

END

PARTIAL OR GEAR UP

LANDING (NAP1-26) Procedure..... ACCOMPLISH


END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**BLANK DISPLAY UNIT WITH AUTOMATIC
REVERSION**

PFD 1 (2) MODE Switch..... CYCLE (REV THEN
AUTO)

NOTE: Only one attempt to return to a normal condition is allowed.

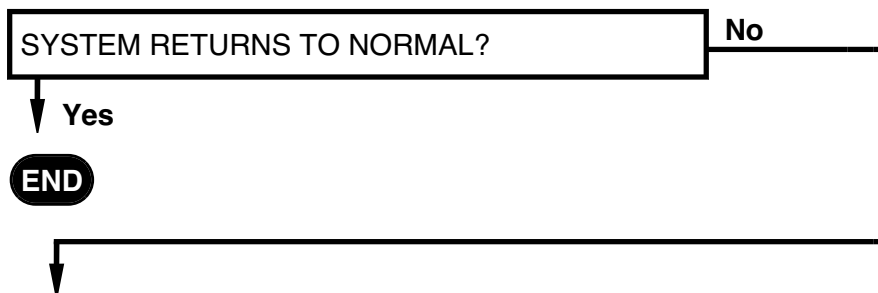

PFD 1 (2) MODE Switch..... AS REQUIRED
Airplane..... FLY MANUALLY

If in RVSM airspace, notify the ATC and coordinate an appropriate
action plan.

Icing Conditions..... EXIT/AVOID

If in single pilot operation, LAND AS SOON AS PRACTICAL.

Relevant Inoperative Items in case of PFD 1 or MFD failure

PFD 1 FAILURE	MFD FAILURE
Autopilot	Autopilot
COM 1 Tuning	COM 2 Tuning
DME 1	DME 2
Flap Indication	Flight Director 2
Flight Director 1	GIA 2
GIA 1	NAV 2/GPS 2 Indications
NAV 1/GPS 1 Indications	Pitch Trim Indication
Pitch Trim Indication	Radio Altimeter (if installed)
TCAS II (if installed)	Spoiler Indication
Transponder 1 Selection	TCAS II (if installed)
Yaw Damper	Transponder 2 Selection

NOTE: Yaw damper may be recovered by pressing the CPL Button
on AFCS Control Panel.

END

BLANK DISPLAY UNIT WITHOUT AUTOMATIC REVERSION

PFD 1 (2) MODE Switch..... AS REQUIRED

If reversion does not occur, use the IESI as required.

Airplane..... FLY MANUALLY

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

Icing Conditions..... EXIT/AVOID

If in single pilot operation, LAND AS SOON AS PRACTICAL.

Relevant Inoperative Items in case of PFD 1 or MFD failure

PFD 1 FAILURE	MFD FAILURE
Autopilot	Autopilot
COM 1 Tuning	COM 2 Tuning
DME 1	DME 2
Flap Indication	Flight Director 2
Flight Director 1	GIA 2
GIA 1	NAV 2/GPS 2 Indications
NAV 1/GPS 1 Indications	Pitch Trim Indication
Pitch Trim Indication	Radio Altimeter (if installed)
TCAS II (if installed)	Spoiler Indication
Transponder 1 Selection	TCAS II (if installed)
Yaw Damper	Transponder 2 Selection

NOTE: Yaw damper may be recovered by pressing the CPL Button on AFCS Control Panel.

END

DUAL DUCT OVERTEMPERATURE

CAS Message: DUCT 1 OVERTEMP and DUCT 2 OVERTEMP messages.

ECS Knob..... OFF VENT

If above 10000 ft:

Oxygen Masks..... DON, 100%

Communication..... ESTABLISH

Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS
HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

Wait 1 minute after the ECS Knob is positioned on OFF VENT.

DUCT 1 OVERTEMP AND/OR DUCT 2
OVERTEMP MESSAGES PERSIST?

No

↓ Yes

BLEED 1 & 2 Switches..... OFF

Icing Conditions..... EXIT/AVOID

NOTE: Do not perform the DUCT 1 OVERTEMP or DUCT 2 OVERTEMP Procedures.

At 10000 ft or MEA:

DUMP Button..... PUSH IN

LAND AS SOON AS PRACTICAL.

END

Non-Annunciated

ENGINE ABNORMAL VIBRATION

CAUTION: IF ENGINE ABNORMAL VIBRATION IS ASSOCIATED WITH ONE OF THE FOLLOWING CAS MESSAGES: BATT DISCHARGE, BATT EXCEEDANCE, GEN 1 (2) OFF BUS, PERFORM THE ASSOCIATED PROCEDURE INSTEAD OF THIS ONE.

Autothrottle (if applicable)..... DISENGAGE
THRUST Lever..... IDLE

NOTE: Reduce the THRUST Levers one at a time to attempt identifying the affected engine.

If the affected engine abnormal vibration persists:

ENGINE SHUTDOWN (NAP1-17)

Procedure..... ACCOMPLISH

CAUTION: CONTINUOUS HIGH VIBRATION MAY DAMAGE THE ENGINE.


END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

QRH 2669-354

ENGINE IN-FLIGHT START

Engine In-Flight Start Envelope..... CHECK

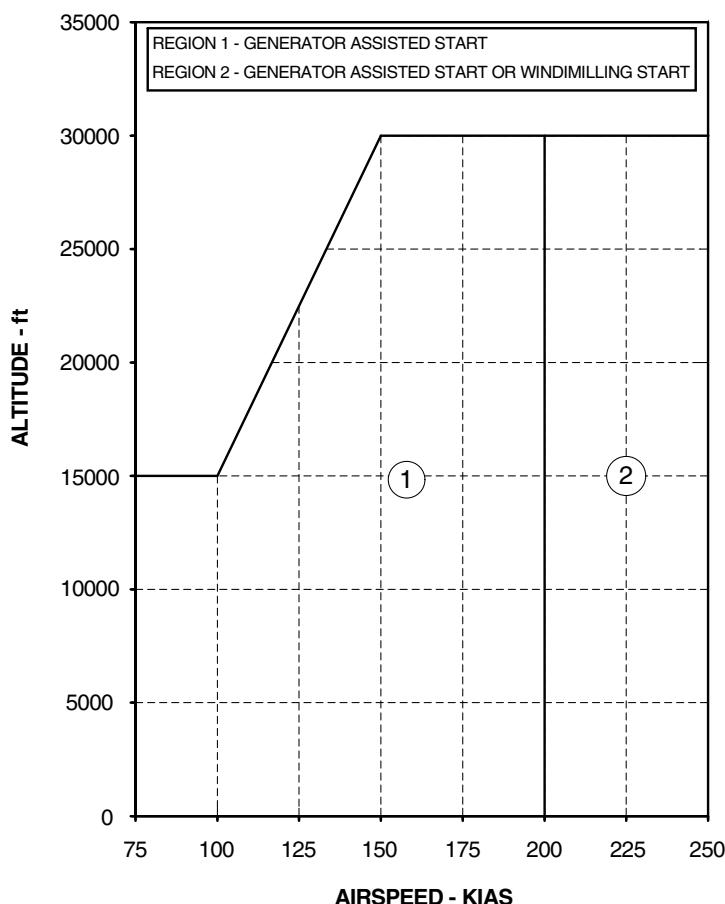

EM500ENAO010025A.IDR

CAUTION: – IF N2 DROPS BELOW 9% IT CANNOT BE RECOVERED BY INCREASING THE AIRPLANE SPEED. IN THIS CASE, WINDMILLING IS NO LONGER POSSIBLE AND AN ASSISTED START SHOULD BE ATTEMPTED.

- SHOULD THE ENGINE FAIL TO LIGHT-UP WITHIN 10 SECONDS OF FUEL ON, OR ACHIEVE STABILIZED FLIGHT IDLE WITHIN 60 SECONDS FROM FUEL ON, THE ENGINE START IS DEEMED TO HAVE BEEN UNSUCCESSFUL AND MUST BE ABORTED MANUALLY.

Autothrottle (if applicable)..... DISENGAGE

Assisted engine airstart:

N2 (operative engine)..... MIN 72%

Inoperative engine:

THRUST Lever..... IDLE

ENG START/STOP Knob..... STOP

Associated FUEL PUMP Switch..... ON

QRH 2669-354

CONTINUED...

...CONTINUED

ENG START/STOP Knob..... START, THEN RUN

Windmilling engine airstart:**Inoperative engine:**

N2..... MIN 9%

THRUST Lever..... IDLE

ENG START/STOP Knob..... STOP

Associated FUEL PUMP Switch..... ON

ENG START/STOP Knob..... RUN

NORMAL ENGINE START?

No

Yes

THRUST Levers..... AS REQUIRED

Autothrottle (if applicable)..... AS REQUIRED

FUEL PUMP Switches..... AUTO

Transponder..... AS REQUIRED

END

FUEL LEAKAGE SUSPECTED?

No

Yes
FUEL LEAKAGE (NAP1-9)

Procedure..... ACCOMPLISH

END**Inoperative engine:****ENGINE SHUTDOWN (NAP1-17)**

Procedure..... ACCOMPLISH

END

ENGINE ITT OVERTEMPERATURE

Engine Indication: ITT gray quadrant indication becomes red.

Autothrottle (if applicable)..... DISENGAGE

Associated THRUST Lever..... REDUCE

If the affected engine is still out of limits:

ENGINE SHUTDOWN (NAP1-17)

Procedure..... ACCOMPLISH

END

ENGINE SHUTDOWN

LAND AS SOON AS POSSIBLE.

Autothrottle (if applicable)..... DISENGAGE

Affected engine:

THRUST Lever..... IDLE

ENG START/STOP Knob..... STOP

THRUST Lever (operative engine)..... AS REQUIRED

Fuel..... BALANCE

Airspeed..... MIN 140 KIAS

Fuel Balance..... MONITOR

Transponder..... TA ONLY

If in icing conditions:

ONE ENGINE INOPERATIVE IN

ICING CONDITIONS (NAP1-24)

Procedure..... ACCOMPLISH

When appropriate:

Autothrottle (if applicable)..... AS REQUIRED

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

FUEL TEMPERATURE INDICATION FAILURE

In flight, descend to lower altitudes if TAT is below -37°C.

END

Non-Annunciated

FUEL TEMPERATURE OUT OF RANGE

In flight:

If fuel temperature is below -37°C:

Descend to lower altitudes.

If fuel temperature is above 80°C:

LAND AS SOON AS PRACTICAL.

END

GEAR LEVER CANNOT BE MOVED UP

If associated with engine failure and obstacle clearance, simultaneously proceed:

DN LCK REL Button..... PRESS

LDG GEAR Lever..... UP

If the LG WOW SYS FAIL message is not presented above 400 ft:

DN LCK REL Button..... PRESS

LDG GEAR Lever..... UP

END

GPS NAV SYSTEM FAILURE

LOCATION	ANNUNCIATION	ACTION
PFD (HSI) or MFD reversionary (HSI)	LOI (Loss of Integrity) (yellow)	Crosscheck navigation with other NAV sources.
	DR (Dead Reckoning) (yellow)	Navigation data may become increasingly unreliable. Do not use it as the sole means of navigation.
	VDI (Vertical Deviation Indicator) removed and approach downgraded from LPV to LNAV	Vertical Guidance provided by WAAS is unavailable. Use LNAV minimums.

END

GTC 1 (2) FAILURE

BOTH GTCs FAIL?

No

Yes

LAND AS SOON AS PRACTICAL.

The FMS function becomes unavailable and communication is switched to emergency frequency.

END

The remaining GTC will provide interface to the system.

END**IMPAIRED OR CRACKED WINDSHIELD**

Affected WSHLD Switch..... OFF

Airspeed..... MAX 220 KIAS

Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

During descent:

PRESN MODE Switch..... MAN

Cabin Altitude..... INCREASE

Maintain cabin altitude at 10000 ft.

At or below 10000 ft:

ECS Knob..... OFF VENT

END**INADVERTENT PUSHER ACTUATION**

PUSHER CUTOUT Button..... PUSH IN

Avoid side slipping the airplane and high angle of attack.

NOTE: Low Speed Awareness cues (yellow and red band) and Stall aural warning will still be available.

END

LOSS OF FLAP INDICATION

FLAP FAIL (EAP7-1) Procedure..... ACCOMPLISH

END**LOSS OF FUEL QUANTITY INDICATION****If both fuel tank quantity indications are lost:**

LAND AS SOON AS PRACTICAL.

**When one wing fuel tank quantity indication is lost,
the total fuel quantity indication will also be lost.**

XFEED Knob..... OFF

Roll Trim..... AS REQUIRED

If required roll trim increases:

LAND AS SOON AS PRACTICAL.

FUEL USED INFORMATION AVAILABLE?

No

Yes

Monitor fuel used and fuel quantity indication on the operative side.

If fuel leakage suspected:

FUEL LEAKAGE (NAP1-9)

Procedure..... ACCOMPLISH

END

LAND AS SOON AS PRACTICAL.

If fuel leakage suspected:

FUEL LEAKAGE (NAP1-9)

Procedure..... ACCOMPLISH

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

LOSS OF PRESSURIZATION INDICATION

PRESN MODE Switch..... MAN

During pressurization manual controlling, use the table below as a reference when cabin altitude or cabin delta pressure is not being presented.

AIRPLANE ALTITUDE (ft)	CABIN ALTITUDE (ft)	DIFFERENTIAL PRESSURE (psid)
10000	700	4.2
11000	800	4.6
12000	900	4.9
13000	1000	5.2
14000	1100	5.5
15000	1200	5.8
16000	1300	6.1
17000	1400	6.3
18000	1600	6.5
19000	1700	6.8
20000	1800	7.0
21000	1900	7.2
22000	2100	7.4
23000	2300	7.6
24000	2400	7.8
25000	2600	7.9
26000	2800	8.1
27000	3000	8.2
28000	3100	8.3
29000	3300	8.5
30000	3400	8.6
31000	3600	8.7
32000	3800	8.8
33000	4000	8.9
34000	4200	9.0
35000	4300	9.1
36000	4600	9.1
37000	4800	9.2
38000	5100	9.2
39000	5400	9.2
40000	5700	9.2
41000	6000	9.2
42000	6200	9.2
43000	6400	9.3
44000	6500	9.3
45000	6600	9.4

END

Non-Annunciated

LOSS OF SPOILER INDICATION

GND SPLR FAIL (EAP7-5)

Procedure..... ACCOMPLISH

END

**ONE ENGINE INOPERATIVE APPROACH AND
LANDING****Descent:**

ROAAS (if applicable)..... INHIBIT

If ROAAS is installed and ROAAS FAIL message is not displayed, inhibit ROAAS on GTC. Check the CAS message ROAAS INHIB displayed.

Landing Field Elevation..... SET

Landing Speeds..... SET

Set V_{REF} , V_{AC} , V_{FS} .

CAUTION: SET THE SPEEDS IN SEQUENCE. IF IT IS NECESSARY TO CORRECT ONE OF THE SPEEDS OUT OF THE SEQUENCE, ALL THE OTHERS MUST BE VERIFIED.

Fasten Seat Belts Signs (below

10000 ft)..... ON

Approach Aids..... SET

Passengers..... ADVISE

XFEED Knob..... OFF

Altimeters..... SET/CHECK

Before landing:

Yaw Damper..... OFF

LDG GEAR Lever..... DN

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V_{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	3	$V_{REF \text{ FULL NO ICE }} + 12 \text{ KIAS}$	1.25
IN ICING/ WITH ICE	3	$V_{REF \text{ FULL NO ICE }} + 22 \text{ KIAS}$	1.45

NOTE: For V_{AC} , use FLAP 3 table.

If a go-around is required:

Autothrottle (if applicable)..... DISENGAGE

TO/GA Button..... PRESS

Non-Annunciated

...CONTINUED

- NOTE:** – For airplanes with G3000 Avionics System version prior to 3305.07, when the TO/GA Button is pressed in the air, the Flight Director activates GA and ROL (Wings Level) modes.
- For airplanes with G3000 Avionics System version 3305.07 and on, when pressing the TO/GA Button while in the air, during an approach with navigation or approach mode, automatic activation of FMS mode occurs, provided the approach procedure is previously loaded in the flight plan. Otherwise, GA and ROL (Wings Level) modes will be engaged.

THRUST Levers..... TO/GA

Rotate the airplane to 8° nose up.

Flap..... 1

With positive rate of climb:

LDG GEAR Lever..... UP

Airspeed..... APPROACH CLIMB
SPEED**After flaps zero, when appropriate:**

Autothrottle (if applicable)..... AS REQUIRED

END**ONE ENGINE INOPERATIVE IN ICING CONDITIONS**

XBLEED Knob..... AUTO

Airspeed:Wing and Stabilizer Anti-Ice System
Inhibited or Armed (flap and gear
up)..... MIN 165 KIASWing and Stabilizer Anti-Ice System
Uninhibited (flap and gear up)..... MIN 150 KIAS

Altitude..... MAX 15000 FT

N1..... ABOVE WAI BUG

- NOTE:** For airplanes equipped with Autothrottle (A/T), if it is not possible to maintain N1 above WAI bug, disengage the Autothrottle.

If it is not possible to descend below 15000 ft:

Ice Conditions..... EXIT/AVOID

When appropriate:

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

OXYGEN LEAKAGE

MFD Indication: Leakage may be identified through the pressure indication on MFD.

No Smoking..... COMMUNICATE

Altitude..... MAX 14000 FT OR MEA,
WHICHEVER IS HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

OXY SUPPLY Handle..... PULL TO CUTOUT

As smoke mask protection is no more assured, LAND AS SOON AS PRACTICAL.

END

Non-Annunciated

PARTIAL OR GEAR UP LANDING

Burn off fuel to reduce touchdown speed.

Passengers..... NOTIFY

Prior to approach:

DUMP Button..... PUSH IN

LDG GEAR Lever..... AS REQUIRED

NOTE: The decision to land with all gears up or with any gear extended is left to pilots. The choice of configuration is based on the number of gears available, airplane load distribution, controllability and conditions of the landing field.

Flap..... FULL

Just before touchdown:

Passengers..... ANNOUNCE

Maximum Vertical Speed..... 300 FT/MIN

NOTE: Reduce the vertical speed as much as possible at the touchdown.

After landing:

THRUST Levers..... IDLE

ENG START/STOP Knobs..... STOP

Fire Extinguishing System..... AS REQUIRED

EMERGENCY

EVACUATION (NAP1-5)

Procedure..... ACCOMPLISH

If a go-around is required:

LDG GEAR Lever..... MAINTAIN
CONFIGURATION

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

STRUCTURAL DAMAGE**LAND AS SOON AS POSSIBLE.**

Airspeed..... MAX 170 KIAS

FUSELAGE IS DAMAGED?

No

↓ Yes

Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER**NOTE:** Check for obstacle clearance in lower altitudes before descending.**When reaching 10000 ft:**

DUMP Button..... PUSH IN

ECS Knob..... OFF VENT

Establish landing configuration early.

END**UNRELIABLE AIRSPEED**

Autothrottle (if applicable)..... DISENGAGE

Autopilot..... DISENGAGE

Flight Director..... OFF

Pitch Trim..... AS REQUIRED

CAUTION: AVOID USING THE SPEED BRAKE.

Altitude/Thrust..... ADJUST

Fly the airplane manually and if in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

If in single pilot operation, LAND AS SOON AS PRACTICAL.

Maintain airplane control. Refer to Unreliable Airspeed tables below.

As the Altitude and/or Vertical Speed indications may also be unreliable, crew may compare the indications (PFD 1, PFD 2 or IESI) and use the one that seems more dependable.

Ground speed indication is available on the PFD for reference.

...CONTINUED

PW535E ENGINES

UNRELIABLE AIRSPEED (Climb)							
Flap Up - Max Climb Thrust							
PRESSURE ALTITUDE (ft)		WEIGHT (lb)					
		14100	15000	15900	16800	17600	18300
10000 (225 KIAS)	Pitch (deg)	11.0	10.5	10.1	9.8	9.5	9.3
	V/S (ft/min)	4689	4373	4088	3830	3624	3460
15000 (225 KIAS)	Pitch (deg)	9.4	9.0	8.6	8.4	8.2	8.0
	V/S (ft/min)	4219	3928	3666	3428	3238	3088
20000 (225 KIAS)	Pitch (deg)	7.8	7.5	7.3	7.1	7.0	6.9
	V/S (ft/min)	3722	3458	3220	3004	2831	2696
25000 (225 KIAS)	Pitch (deg)	6.1	5.9	5.7	5.6	5.6	5.5
	V/S (ft/min)	2973	2752	2549	2366	2222	2109
30000 (0.60 M)	Pitch (deg)	6.0	5.8	5.7	5.6	5.5	5.5
	V/S (ft/min)	3110	2864	2638	2438	2284	2154
35000 (0.60 M)	Pitch (deg)	5.7	5.6	5.6	5.6	5.6	5.6
	V/S (ft/min)	2299	2093	1902	1731	1588	1476
40000 (0.60 M)	Pitch (deg)	5.4	5.5	5.6	5.7	5.8	5.9
	V/S (ft/min)	1437	1274	1124	982	858	759
45000 (0.60 M)	Pitch (deg)	6.0	6.2	6.4	6.6	6.8	-
	V/S (ft/min)	905	737	569	422	307	-

UNRELIABLE AIRSPEED (Cruise)							
Flap Up - % N1 for Level Flight							
PRESSURE ALTITUDE (ft)		WEIGHT (lb)					
		14100	15000	15900	16800	17600	18300
10000 (215 KIAS)	Pitch (deg)	1.1	1.4	1.6	1.8	2.0	2.2
	N1 (%)	60.3	60.7	61.0	61.4	61.7	62.1
15000 (210 KIAS)	Pitch (deg)	1.3	1.6	1.8	2.0	2.2	2.4
	N1 (%)	63.0	63.4	63.8	64.3	64.7	65.2
20000 (205 KIAS)	Pitch (deg)	1.5	1.8	2.0	2.3	2.5	2.7
	N1 (%)	66.4	66.9	67.4	68.0	68.6	69.1
25000 (200 KIAS)	Pitch (deg)	1.8	2.0	2.3	2.5	2.8	3.0
	N1 (%)	69.6	70.1	70.6	71.1	71.6	72.0
30000 (195 KIAS)	Pitch (deg)	2.0	2.3	2.6	2.9	3.1	3.3
	N1 (%)	72.2	72.7	73.3	73.9	74.4	74.8
35000 (0.55 M)	Pitch (deg)	2.7	3.1	3.4	3.7	4.0	4.2
	N1 (%)	73.7	74.4	75.1	75.8	76.5	77.0
40000 (0.60 M)	Pitch (deg)	3.1	3.4	3.8	4.1	4.4	4.7
	N1 (%)	78.1	78.8	79.6	80.5	81.3	82.0
45000 (0.65 M)	Pitch (deg)	3.5	3.9	4.3	4.7	5.0	5.3
	N1 (%)	83.1	83.9	84.8	85.9	86.9	88.3

User: andreiap0t - Feb 13/26 - 12:44:21

CONTINUED...

**EMERGENCY AND ABNORMAL
PROCEDURES**

Non-Annunciated

...CONTINUED

PW535E ENGINES

UNRELIABLE AIRSPEED (Descent)								
Flap Up - Idle Thrust								
PRESSURE ALTITUDE (ft)		WEIGHT (lb)						
		13200	14100	15000	15900	16800	17600	18000
10000 (250 KIAS)	Pitch (deg)	-5.8	-5.7	-5.3	-4.9	-4.5	-4.1	-4.0
	V/S (ft/min)	-3000	-3000	-2887	-2757	-2644	-2552	-2509
15000 (250 KIAS)	Pitch (deg)	-5.4	-5.2	-4.8	-4.4	-4.1	-3.8	-3.6
	V/S (ft/min)	-3000	-3000	-2896	-2768	-2657	-2568	-2526
20000 (250 KIAS)	Pitch (deg)	-4.9	-4.8	-4.5	-4.1	-3.7	-3.4	-3.3
	V/S (ft/min)	-3000	-3000	-2914	-2791	-2680	-2592	-2550
25000 (250 KIAS)	Pitch (deg)	-4.5	-4.3	-4.0	-3.6	-3.3	-3.0	-2.9
	V/S (ft/min)	-3000	-3000	-2907	-2777	-2668	-2582	-2542
30000 (250 KIAS)	Pitch (deg)	-4.1	-3.9	-3.6	-3.3	-2.9	-2.7	-2.5
	V/S (ft/min)	-3000	-3000	-2906	-2789	-2683	-2603	-2567
35000 (250 KIAS)	Pitch (deg)	-3.7	-3.5	-3.2	-2.8	-2.5	-2.2	-2.1
	V/S (ft/min)	-3000	-3000	-2865	-2746	-2644	-2563	-2525
40000 (0.75 M)	Pitch (deg)	-2.8	-2.4	-2.1	-1.7	-1.4	-1.2	-1.0
	V/S (ft/min)	-2800	-2699	-2605	-2519	-2450	-2403	-2383
45000 (0.75 M)	Pitch (deg)	-0.8	-0.5	-0.2	0.1	0.4	0.7	0.8
	V/S (ft/min)	-1959	-1926	-1925	-1933	-1918	-1909	-1910

UNRELIABLE AIRSPEED (Holding)								
Flap Up - % N1 for Level Flight								
PRESSURE ALTITUDE (ft)		WEIGHT (lb)						
		13200	14100	15000	15900	16800	17600	18000
5000 (160 KIAS)	Pitch (deg)	3.5	3.9	4.2	4.6	5.0	5.4	5.6
	N1 (%)	48.9	49.6	50.3	51.1	51.8	52.4	52.7
10000 (160 KIAS)	Pitch (deg)	3.5	3.9	4.3	4.7	5.1	5.4	5.6
	N1 (%)	52.1	52.8	53.3	53.9	54.6	55.2	55.5

UNRELIABLE AIRSPEED (Terminal Area)								
5000 ft - % N1 for Level Flight								
FLAP CONFIGURATION & SPEED (KIAS)		WEIGHT (lb)						
		13200	14100	15000	15900	16800	17600	18000
Flap 0 V _{REF} FULL+20	Pitch (deg)	7.5	7.6	7.7	7.8	8.0	8.0	8.1
	N1 (%)	45.0	46.3	47.6	48.9	50.1	51.2	51.7
Flap 1 V _{REF} FULL+10	Pitch (deg)	7.8	7.9	8.0	8.1	8.2	8.3	8.3
	N1 (%)	46.9	48.3	49.7	51.0	52.3	53.4	53.9
Flap 2 V _{REF} FULL+5	Pitch (deg)	4.2	4.3	4.4	4.5	4.5	4.6	4.6
	N1 (%)	52.6	54.1	55.4	56.7	57.9	59.0	59.6

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

CONTINUED...

Non-Annunciated

...CONTINUED

PW535E ENGINES

UNRELIABLE AIRSPEED (Final Approach)								
1500 ft - Gear Down and % N1 for 3° Glideslope								
FLAP CONFIGURATION & SPEED (KIAS)		WEIGHT (lb)						
		13200	14100	15000	15900	16800	17600	18000
Flap 3	Pitch (deg)	-0.2	-0.1	0.1	0.1	0.2	0.3	0.3
V _{REF} FULL+10	N1 (%)	43.5	44.8	46.1	47.2	48.2	49.1	49.6
Flap FULL	Pitch (deg)	-1.7	-1.5	-1.3	-1.2	-1.1	-1.1	-1.0
V _{REF} FULL+10	N1 (%)	47.4	48.8	50.1	51.3	52.4	53.3	53.7

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INDEX BY EICAS MESSAGE

TYPE	MESSAGE	PAGE
WARNING	BAG SMK	EAP6-1
	CAB ALTITUDE HI	EAP2-1
	DOOR EMER OPEN	EAP1-1
	DOOR PAX OPEN	EAP1-1
	E1 FIRE	EAP6-2
	E1 OIL LO PRES	EAP5-1
	E2 FIRE	EAP6-2
	E2 OIL LO PRES	EAP5-1
	ELEC EMERGENCY	EAP4-1
	ELEC XFR FAIL	EAP4-3
	LG LEVER DISAG	EAP12-1
	NO TO CONFIG	EAP14-1

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

CAUTION

TYPE	MESSAGE	PAGE
	A-I E1 FAIL	EAP11-1
	A-I E2 FAIL	EAP11-1
	A-I LO CAPACITY	EAP11-2
	A-I WINGSTB FAIL	EAP11-3
	A-I WINGSTB INHB	EAP11-4
	A-I WINGSTB LEAK	EAP11-6
	ADS 1 FAIL	EAP8-1
	ADS 1 HTR FAIL	EAP8-2
	ADS 2 FAIL	EAP8-1
	ADS 2 HTR FAIL	EAP8-2
	AHRS 1 FAIL	EAP8-3
	AHRS 2 FAIL	EAP8-3
	AMS CTRL FAIL	EAP2-2
	ANTI-SKID FAIL	EAP12-3
	AP FAIL	EAP3-1
	AP PITCH MISTRIM	EAP3-1
	AP ROLL MISTRIM	EAP3-1
	AT FAIL	EAP3-1
	AUDIO PNL 1 FAIL	EAP8-4
	AUDIO PNL 2 FAIL	EAP8-4
	AURAL WRN FAIL	EAP14-1
	AUTO PTRIM FAIL	EAP3-2
	BAG SMK FAIL	EAP6-3
	BARO MISCOMP	EAP8-4
	BATT 1 OFF BUS	EAP4-3
	BATT 2 OFF BUS	EAP4-3
	BATT DISCHARGE	EAP4-4
	BATT EXCEEDANCE	EAP4-5
	BLEED 1 FAIL	EAP2-2
	BLEED 1 LEAK	EAP2-3
	BLEED 1 OVERPRES	EAP2-6
	BLEED 2 FAIL	EAP2-2
	BLEED 2 LEAK	EAP2-5
	BLEED 2 OVERPRES	EAP2-6
	BRK FAIL	EAP12-4
	CAB DELTA-P FAIL	EAP2-7
	CONFIG MDL FAIL	EAP8-5
	DOORBAG AFT OPEN	EAP1-1
	DOORBAG LH OPEN	EAP1-1
	DOORBAG RH OPEN	EAP1-1
	DUCT 1 OVERTEMP	EAP2-8
	DUCT 2 OVERTEMP	EAP2-10
	E1 CTRL FAULT	EAP5-1
	E1 FAIL	EAP5-2
	E1 FIRE DET FAIL	EAP6-3
	E1 FIREX FAIL	EAP6-3
	E1 FUEL IMP BYP	EAP5-3
	E1 TLA FAIL	EAP5-3
	E1 TT0 HTR FAIL	EAP5-3
	E1 TT0 PROBE ICE	EAP5-4
	E2 CTRL FAULT	EAP5-1
	E2 FAIL	EAP5-2

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

QRH 2669-354

TYPE	MESSAGE	PAGE
CAUTION	E2 FIRE DET FAIL	EAP6-3
	E2 FIREX FAIL	EAP6-3
	E2 FUEL IMP BYP	EAP5-3
	E2 TLA FAIL	EAP5-3
	E2 TT0 HTR FAIL	EAP5-3
	E2 TT0 PROBE ICE	EAP5-4
	EBAY LEAK	EAP2-11
	EBAY OVHT	EAP2-12
	ECS 1 VALVE FAIL	EAP2-13
	ECS 2 VALVE FAIL	EAP2-14
	EMER BRK LO PRES	EAP12-5
	EMER LT NOT ARM	EAP1-1
	ENG NO TO DATA	EAP5-4
	ENG TLA NOT TOGA	EAP5-4
	FLAP FAIL	EAP7-1
	FMS LANDING DISAG	EAP8-5
	FMS TAKEOFF DISAG	EAP8-5
	FUEL 1 LO LEVEL	EAP9-1
	FUEL 1 LO PRES	EAP9-2
	FUEL 1 SOV FAIL	EAP9-2
	FUEL 2 LO LEVEL	EAP9-1
	FUEL 2 LO PRES	EAP9-2
	FUEL 2 SOV FAIL	EAP9-2
	FUEL IMBALANCE	EAP9-3
	FUEL PUMP 1 FAIL	EAP9-5
	FUEL PUMP 2 FAIL	EAP9-5
	FUEL XFEED FAIL	EAP9-6
	GEN 1 OFF BUS	EAP4-6
	GEN 2 OFF BUS	EAP4-6
	GEN OVLD	EAP4-7
	GEN START FAULT	EAP4-7
	GIA 1 FAIL	EAP8-6
	GIA 1 OVHT	EAP8-5
	GIA 2 FAIL	EAP8-7
	GIA 2 OVHT	EAP8-5
	GND SPLR FAIL	EAP7-5
	GTC 1 OVHT	EAP8-8
	GTC 2 OVHT	EAP8-9
	HYD HI TEMP	EAP10-1
	HYD LO PRES	EAP10-3
	HYD SOV 1 FAIL	EAP10-4
	HYD SOV 2 FAIL	EAP10-4
	ICE CONDITION	EAP11-7
	LG WOW SYS FAIL	EAP12-5
	MFD CONFIG	EAP8-9
	MFD FAULT	EAP8-9
	MFD OVHT	EAP8-10
	OXY LO PRES	EAP13-1
	PARK BRK NOT REL	EAP12-5
	PAX OXY NO PRES	EAP13-1
	PFD 1 CONFIG	EAP8-10
	PFD 1 FAULT	EAP8-10
	PFD 1 OVHT	EAP8-11

TYPE	MESSAGE	PAGE
CAUTION	PFD 2 CONFIG	EAP8-10
	PFD 2 FAULT	EAP8-10
	PFD 2 OVHT	EAP8-12
	PRESN AUTO FAIL	EAP2-15
	PTRIM BKP FAIL	EAP7-6
	PTRIM NML FAIL	EAP7-7
	PUSHER FAIL	EAP14-1
	PUSHER OFF	EAP14-1
	RUD GUST LOCKED	EAP7-8
	RUD OVERBOOST	EAP7-9
	STBY HTR FAIL	EAP8-12
	STEEP FAIL	EAP7-9
	SURFWATCH NODATA	EAP14-2
	SWPS FAIL	EAP14-2
	SWPS FAULT	EAP14-3
	SWPS UNTESTED	EAP14-4
	TCAS FAIL	EAP14-4
	WSHLD 1 HTR FAIL	EAP11-7
	WSHLD 2 HTR FAIL	EAP11-7
	XPDR FAIL	EAP8-12
	XPDR IN STBY	EAP8-13
	YD FAIL	EAP3-3
	YD MISTRIM	EAP3-4

User: andreiap0t - Feb 13/26 - 12:44:21

EMERGENCY AND ABNORMAL
PROCEDURES

INDEX

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

TYPE	MESSAGE	PAGE
A D V I S O R Y	A-I E1 FAULT	Crew Awareness
	A-I E1 ON	Crew Awareness
	A-I E2 FAULT	Crew Awareness
	A-I E2 ON	Crew Awareness
	A-I WINGSTB ARM	EAP11-8
	A-I WINGSTB ON	Crew Awareness
	ADS 1 SLIP FAIL	Crew Awareness
	ADS 2 SLIP FAIL	Crew Awareness
	ADS HTR SW ON	Crew Awareness
	ADS-B IN AIR NOT AVAIL	EAP8-13
	ADS-B IN SURF NOT AVAIL	EAP8-13
	ADS-B NOT AVAIL	EAP8-13
	ADS-B OUT NOT AVAIL	EAP8-13
	AHRS 1 FAULT	EAP8-13
	AHRS 2 FAULT	EAP8-13
	AMS CTRL FAULT	Crew Awareness
	AT FAULT	Crew Awareness
	AT HOLD PROT FAIL	EAP3-4
	ATC DLK FAIL	Crew Awareness
	AUDIO PNL 1 FAULT	Crew Awareness
	AUDIO PNL 2 FAULT	Crew Awareness
	AURAL WRN FAULT	Crew Awareness
	AVNX FAN FAIL	Crew Awareness
	BAG SMK FAULT	Crew Awareness
	BLEED 1 OFF	Crew Awareness
	BLEED 2 OFF	Crew Awareness
	CSC FAIL	Crew Awareness
	DC BUS 1 OFF	EAP4-8
	DC BUS 2 OFF	EAP4-10
	DOOR REFUEL OPEN	Crew Awareness
	E1 CHIP DETECTED	Crew Awareness
	E1 FADEC FAULT	Crew Awareness
	E1 OIL IMP BYP	Crew Awareness
	E2 CHIP DETECTED	Crew Awareness
	E2 FADEC FAULT	Crew Awareness
	E2 OIL IMP BYP	Crew Awareness
	ECS 1 OFF	Crew Awareness
	ECS 2 OFF	Crew Awareness
	ELEC SYS FAULT	Crew Awareness
	EMER BUS OFF	EAP4-12
	ENG EXCEEDANCE	Crew Awareness
	ENG FIREX DISCH	Crew Awareness
	ENG NO DISPATCH	Crew Awareness
	FANS FAIL	Crew Awareness
	FLAP NOT AVAIL	Crew Awareness
	FUEL 1 FEED FAULT	Crew Awareness
	FUEL 1 PSW FAIL	Crew Awareness
	FUEL 2 FEED FAULT	Crew Awareness
	FUEL 2 PSW FAIL	Crew Awareness
	FUEL EQUAL	Crew Awareness
	FUEL PUMP 1 FAIL	Not Applicable
	FUEL PUMP 2 FAIL	Not Applicable

QRH 2669-354

A D V I S O R Y

TYPE	MESSAGE	PAGE
	GEA 1 FAIL	Crew Awareness
	GEA 2 FAIL	Crew Awareness
	GEA 3 FAIL	Crew Awareness
	GPU CONNECTED	Crew Awareness
	GSD 1 FAIL	Crew Awareness
	GSD 2 FAIL	Crew Awareness
	GTC 1 FAN FAIL	Crew Awareness
	GTC 1 FAULT	Crew Awareness
	GTC 2 FAN FAIL	Crew Awareness
	GTC 2 FAULT	Crew Awareness
	HSDB FAULT	Crew Awareness
	HSDB SW REV POS	Crew Awareness
	HYD SYS FAULT	Crew Awareness
	ICE DET FAIL	Crew Awareness
	MFD FAN FAIL	Crew Awareness
	NAV 1 FAIL	Crew Awareness
	NAV 2 FAIL	Crew Awareness
	OXY SW NOT AUTO	Crew Awareness
	PFD 1 FAN FAIL	Crew Awareness
	PFD 2 FAN FAIL	Crew Awareness
	PREDCT WSHEAR NOT AVAIL	Crew Awareness
	PTRIM LO RATE	Crew Awareness
	PTRIM SW 1 FAIL	EAP7-10
	PTRIM SW 2 FAIL	EAP7-10
	RALT FAIL	Crew Awareness
	RAM AIR FAIL	EAP2-16
	ROAAS FAIL	Crew Awareness
	ROAAS INHIB	Crew Awareness
	ROAAS NO DATA	Crew Awareness
	RUD BOOST FAIL	Crew Awareness
	SHED BUS OFF	Crew Awareness
	SPDBRK SW DISAG	EAP7-10
	SPOILER FAULT	Crew Awareness
	STAB APPR FAIL	Crew Awareness
	STAB APPR INHIB	Crew Awareness
	STBY BARO NOCOMP	EAP8-14
	STEEP NOT AVAIL	EAP7-10
	SURFWATCH FAIL	Crew Awareness
	SURFWATCH INHIB	Crew Awareness
	SURFWATCH NODATA	Crew Awareness
	SWPS ICE SPEED	Crew Awareness
	VENTRAL RUD FAIL	EAP3-5
	VHF 3 FAIL	Crew Awareness
	WSHEAR NOT AVAIL	Crew Awareness
	XBLEED FAIL	Crew Awareness
	XBLEED SW OFF	Crew Awareness
	XPDR 1 FAIL	EAP8-14
	XPDR 2 FAIL	EAP8-14
	XPDR FAULT	Crew Awareness

TABLE OF CONTENTS**WARNING**

DOOR EMER OPEN.....	EAP1-1
DOOR PAX OPEN.....	EAP1-1

CAUTION

DOORBAG AFT OPEN.....	EAP1-1
DOORBAG LH (RH) OPEN.....	EAP1-1
EMER LT NOT ARM.....	EAP1-1

INTENTIONALLY BLANK

DOOR EMER OPEN

Fasten Seat Belts Signs..... ON

LAND AS SOON AS POSSIBLE.Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER**NOTE:** Check for obstacle clearance in lower altitudes before
descending.**END****DOOR PAX OPEN**

Fasten Seat Belts Signs..... ON

LAND AS SOON AS POSSIBLE.Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER**NOTE:** Check for obstacle clearance in lower altitudes before
descending.**At 10000 ft or MEA:**

DUMP Button..... PUSH IN

ECS Knob..... OFF VENT

END**DOORBAG AFT OPEN****LAND AS SOON AS PRACTICAL.**

Airspeed..... REDUCE TO 160 KIAS

END**DOORBAG LH (RH) OPEN****LAND AS SOON AS PRACTICAL.**

Airspeed..... REDUCE TO 160 KIAS

END**EMER LT NOT ARM**

EMER Lights Switch..... ARM

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

TABLE OF CONTENTS**WARNING**

CAB ALTITUDE HI.....	EAP2-1
----------------------	--------

CAUTION

AMS CTRL FAIL.....	EAP2-2
BLEED 1 (2) FAIL.....	EAP2-2
BLEED 1 LEAK.....	EAP2-3
BLEED 1 OVERPRES.....	EAP2-6
BLEED 2 LEAK.....	EAP2-5
BLEED 2 OVERPRES.....	EAP2-6
CAB DELTA-P FAIL.....	EAP2-7
DUCT 1 OVERTEMP.....	EAP2-8
DUCT 2 OVERTEMP.....	EAP2-10
EBAY LEAK.....	EAP2-11
EBAY OVHT.....	EAP2-12
ECS 1 VALVE FAIL.....	EAP2-13
ECS 2 VALVE FAIL.....	EAP2-14
PRESN AUTO FAIL.....	EAP2-15

ADVISORY

RAM AIR FAIL.....	EAP2-16
-------------------	---------

INTENTIONALLY BLANK

CAB ALTITUDE HI

MFD Indication: Cabin Altitude indication in red.

Aural Warning: CABIN

Oxygen Masks.....	DON, 100%
Communication.....	ESTABLISH
Fasten Seat Belts Signs.....	ON
Altitude.....	MAX 10000 FT OR MEA, WHICHEVER IS HIGHER
THRUST Levers.....	IDLE
SPEED BRAKE Switch.....	OPEN
Airspeed.....	MAX 250 KIAS/M _{MO}
LDG GEAR Lever.....	DN
Transponder.....	7700
ATC.....	NOTIFY

- NOTE:** – Check for obstacle clearance in lower altitudes before descending.
- The Emergency Descent Mode (EDM) may engage during the procedure. Altitude, airspeed and heading should be manually selected as required.
- For airplanes equipped with Autothrottle (A/T), the A/T IDLE (FLC) mode is engaged when EDM is activated.

PAX MASKS DEPLOYED?

No

Yes

At 10000 ft or MEA:

DUMP Button.....	PUSH IN
ECS Knob.....	OFF VENT
SPEED BRAKE Switch.....	CLOSE
LDG GEAR Lever.....	AS REQUIRED

If landing is not soon, consider retracting landing gear.

END

OXY SUPPLY CONTROL Knob..... PAX OVRD

At 10000 ft or MEA:

DUMP Button.....	PUSH IN
ECS Knob.....	OFF VENT
SPEED BRAKE Switch.....	CLOSE
LDG GEAR Lever.....	AS REQUIRED

If landing is not soon, consider retracting landing gear.

END

AMS CTRL FAIL

If above 10000 ft:

Oxygen Masks.....	DON, 100%
Communication.....	ESTABLISH
Altitude.....	MAX 10000 FT OR MEA, WHICHEVER IS HIGHER
Icing Conditions.....	EXIT/AVOID

NOTE: Check for obstacle clearance in lower altitudes before descending.

Consider an **EMERGENCY DESCENT (NAP1-5)** Procedure, if necessary.

At 10000 ft or MEA:

DUMP Button.....	PUSH IN
ECS Knob.....	OFF VENT

END

BLEED 1 (2) FAIL

Affected BLEED Switch..... OFF

.....Wait 1 minute.....

Affected BLEED Switch..... AUTO

BLEED 1 (2) FAIL MESSAGE EXTINGUISHES?

No

Yes

END

Affected BLEED Switch..... OFF

Altitude..... MAX 36000 FT

If below 30000 ft:

Icing Conditions.....	EXIT/AVOID
-----------------------	------------


END

BLEED 1 LEAK

BLEED 1 Switch..... OFF
 XBLEED Knob..... OFF
 ECS Knob..... 2
 WINGSTAB Switch..... OFF
 Altitude..... MAX 36000 FT

If below 30000 ft:

Icing Conditions..... EXIT/AVOID

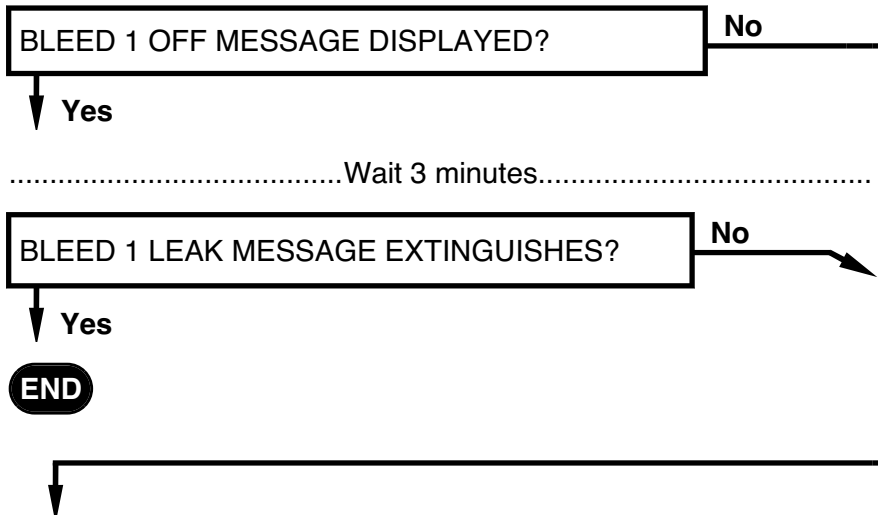


Oxygen Masks..... DON, 100%
 Communication..... ESTABLISH
 Autothrottle (if applicable)..... DISENGAGE
 THRUST Lever 1..... IDLE
 BLEED 2 Switch..... OFF
 Altitude..... MAX 10000 FT OR MEA,
 WHICHEVER IS HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

At 10000 ft or MEA:

DUMP Button..... PUSH IN
 ECS Knob..... OFF VENT

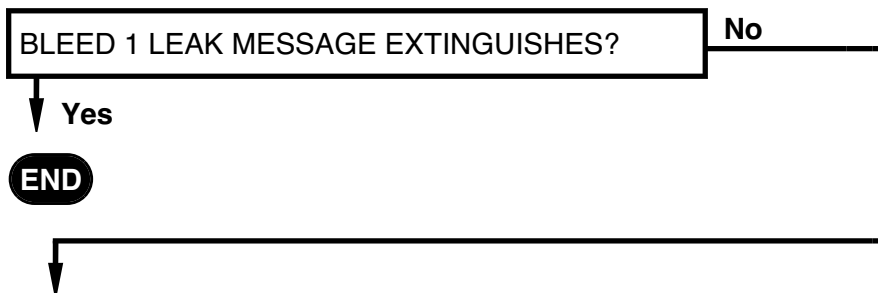

ENGINE 1..... SHUTDOWN

Refer to [ENGINE SHUTDOWN \(NAP1-17\)](#) Procedure.

*...CONTINUED***When applicable:**

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH


END

BLEED 2 LEAK

BLEED 2 Switch..... OFF
 XBLEED Knob..... OFF
 ECS Knob..... 1
 WINGSTAB Switch..... OFF
 Altitude..... MAX 36000 FT

If below 30000 ft:

Icing Conditions..... EXIT/AVOID

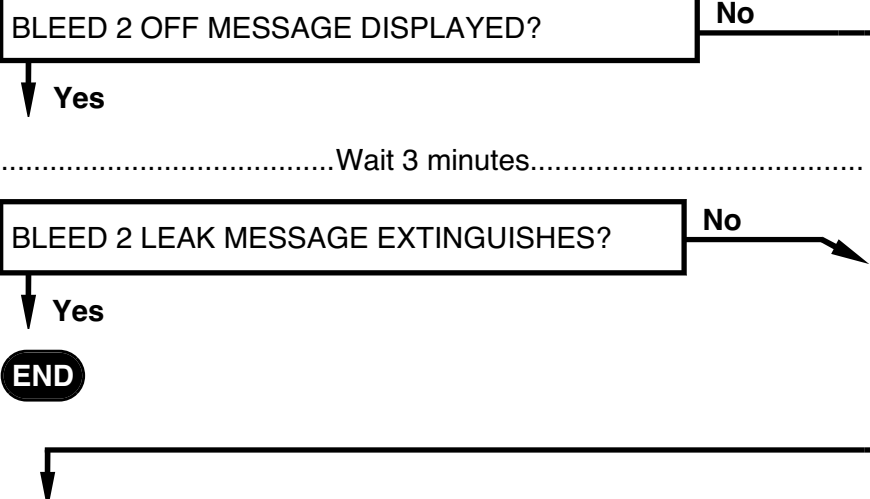


Oxygen Masks..... DON, 100%
 Communication..... ESTABLISH
 Autothrottle (if applicable)..... DISENGAGE
 THRUST Lever 2..... IDLE
 BLEED 1 Switch..... OFF
 Altitude..... MAX 10000 FT OR MEA,
 WHICHEVER IS HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

At 10000 ft or MEA:

DUMP Button..... PUSH IN
 ECS Knob..... OFF VENT

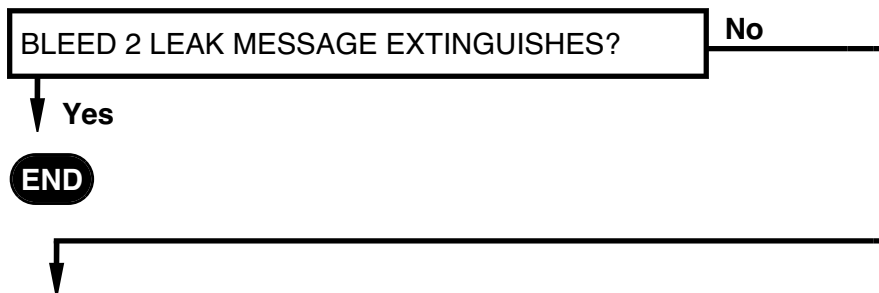

ENGINE 2..... SHUTDOWN

Refer to [ENGINE SHUTDOWN \(NAP1-17\)](#) Procedure.

EMERGENCY AND ABNORMAL PROCEDURES

PHENOM[®] 300
BY EMBRAER

AMS (Air Conditioning, Pneumatics and Pressurization)

...CONTINUED

When applicable:

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

BLEED 1 OVERPRES

BLEED 1 Switch..... OFF

..... Wait 30 seconds.....

BLEED 1 Switch..... AUTO

BLEED 1 OVERPRES MESSAGE PERSISTS?

No

Yes

BLEED 1 Switch..... OFF

XBLEED Knob..... OFF

ECS Knob..... 2

Altitude..... MAX 36000 FT

If below 30000 ft:

Icing Conditions..... EXIT/AVOID

END

BLEED 2 OVERPRES

BLEED 2 Switch..... OFF

..... Wait 30 seconds.....

BLEED 2 Switch..... AUTO

BLEED 2 OVERPRES MESSAGE PERSISTS?

No

Yes

BLEED 2 Switch..... OFF

XBLEED Knob..... OFF

ECS Knob..... 1

Altitude..... MAX 36000 FT

If below 30000 ft:

Icing Conditions..... EXIT/AVOID

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

CAB DELTA-P FAIL

MFD Indication: Abnormal cabin altitude indication may be presented.

POSITIVE CABIN DIFFERENTIAL PRESSURE?

No

Yes

PRESN MODE Switch..... MAX

CAB ALT Selector Switch..... UP

If not possible to modulate cabin altitude:

ECS Knob..... OFF VENT

If above 10000 ft:

Oxygen Masks..... DON, 100%

Communication..... ESTABLISH

Altitude..... MAX 10000 FT OR
MEA, WHICHEVER IS
HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

At 10000 ft or MEA:

DUMP Button..... PUSH IN

END

Airplane Descent Rate..... REDUCE

Adjust the rate of descent to keep the differential pressure at 0 psi.

END

DUCT 1 OVERTEMP

BOTH DUCT 1 OVERTEMP AND DUCT 2
OVERTEMP MESSAGES DISPLAYED?

No

Yes

DUAL DUCT
OVERTEMPERATURE (NAP1-13)

Procedure..... ACCOMPLISH

END

Air Cond MODE Switch..... MAN

TEMP MANUAL Switch..... COLD FOR 5 SECONDS

.....Wait 1 minute.....

DUCT 1 OVERTEMP MESSAGE EXTINGUISHES?

No

Yes

Air Cond MODE Switch..... AUTO

Adjust the temperature as required.

END

ECS Knob..... 2

Altitude..... MAX 36000 FT

Wait 1 minute after the ECS Knob is positioned on 2.

DUCT 1 OVERTEMP MESSAGE EXTINGUISHES?

No

Yes

END

BLEED 1 Switch..... OFF

XBLEED Knob..... OFF

If below 30000 ft:

Icing Conditions..... EXIT/AVOID


.....Wait 1 minute.....

CONTINUED...

PHENOM[®] 300 *EMERGENCY AND ABNORMAL
PROCEDURES*
BY EMBRAER

AMS (Air Conditioning, Pneumatics and Pressurization)

...CONTINUED

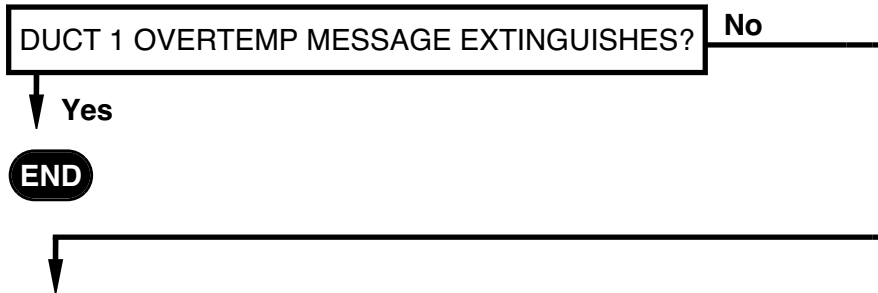

Autothrottle (if applicable)..... DISENGAGE
Associated THRUST Lever..... IDLE

When applicable:

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

DUCT 2 OVERTEMP

BOTH DUCT 1 OVERTEMP AND DUCT 2
OVERTEMP MESSAGES DISPLAYED?

No

Yes

DUAL DUCT
OVERTEMPERATURE (NAP1-13)

Procedure..... ACCOMPLISH

END

Air Cond MODE Switch..... MAN

TEMP MANUAL Switch..... COLD FOR 5 SECONDS

User: andreia0t - Printed by TechPubs - Feb 13/26 - 12:44:21

.....Wait 1 minute.....

DUCT 2 OVERTEMP MESSAGE EXTINGUISHES?

No

Yes

Air Cond MODE Switch..... AUTO

Adjust the temperature as required.

END

ECS Knob..... 1

Altitude..... MAX 36000 FT

Wait 1 minute after the ECS Knob is positioned on 1.

DUCT 2 OVERTEMP MESSAGE EXTINGUISHES?

No

Yes

END

BLEED 2 Switch..... OFF

XBLEED Knob..... OFF

If below 30000 ft:

Icing Conditions..... EXIT/AVOID


.....Wait 1 minute.....

CONTINUED...

**EMERGENCY AND ABNORMAL
PROCEDURES**

AMS (Air Conditioning, Pneumatics and Pressurization)

...CONTINUED

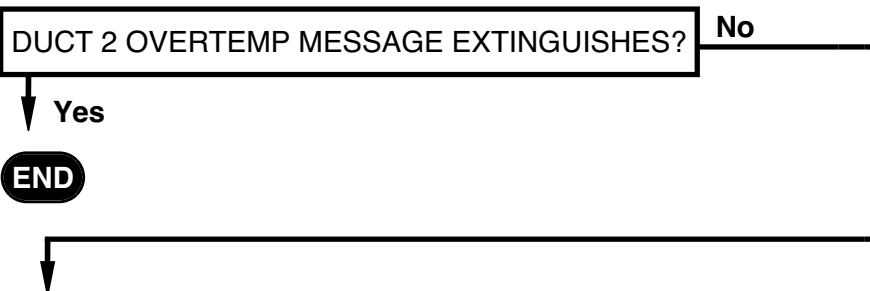

Autothrottle (if applicable)..... DISENGAGE
Associated THRUST Lever..... IDLE

When applicable:

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

EBAY LEAK

ECS Knob..... OFF VENT

If above 10000 ft:

Oxygen Mask..... DON, 100%


Communication..... ESTABLISH

Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS
HIGHER

NOTE: Check for obstacle clearance in lower altitudes before
descending.

At 10000 ft or MEA:

DUMP Button..... PUSH IN

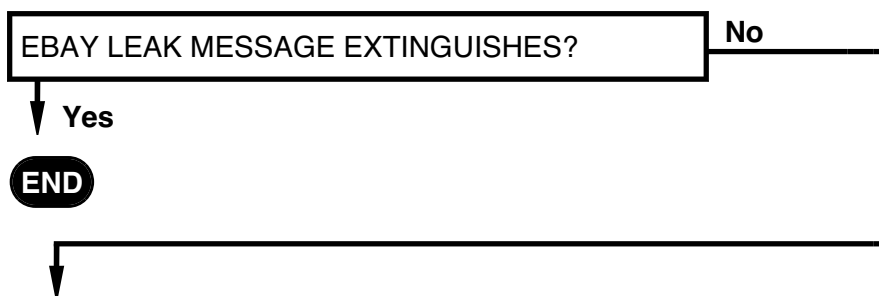

BLEED 1 & 2 Switches..... OFF
Icing Conditions..... EXIT/AVOID

END

EBAY OVHT

Air Cond MODE Switch..... MAN
 TEMP MANUAL Switch..... COLD FOR 5 SECONDS
 Wait 90 seconds.....

EBAY OVHT MESSAGE EXTINGUISHES?

No

Yes

Air Cond MODE Switch..... AUTO
 CAB TEMP Controller..... FULL COLD

END

Non-Essential Equipment..... OFF

..... Wait 5 minutes.....

EBAY OVHT MESSAGE EXTINGUISHES?

No

Yes

END

Oxygen Masks..... DON, 100%
 Communication..... ESTABLISH
 Altitude..... MAX 10000 FT OR MEA,
 WHICHEVER IS HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

At 10000 ft or MEA:

DUMP Button..... PUSH IN
 ECS Knob..... OFF VENT

LAND AS SOON AS PRACTICAL.

END

ECS 1 VALVE FAIL

ECS 2 AVAILABLE?

No

Yes

ECS Knob..... 2

..... Wait 1 minute.....

ECS Knob..... BOTH

CKPT TEMP Controller..... FULL HOT

CAB TEMP Controller..... FULL HOT

..... Wait 2 minutes.....

ECS 1 VALVE FAIL MESSAGE EXTINGUISHES?

No

Yes

CKPT TEMP Controller..... OPERATE NORMALLY

CAB TEMP Controller..... OPERATE NORMALLY

END

ECS Knob..... 2

CKPT TEMP Controller..... OPERATE NORMALLY

CAB TEMP Controller..... OPERATE NORMALLY

Altitude..... MAX 36000 FT

ENDAltitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER

ECS Knob..... OFF VENT

END

ECS 2 VALVE FAIL

ECS 1 AVAILABLE?

No

Yes

ECS Knob..... 1

..... Wait 1 minute.....

ECS Knob..... BOTH

CKPT TEMP Controller..... FULL HOT

CAB TEMP Controller..... FULL HOT

..... Wait 2 minutes.....

ECS 2 VALVE FAIL MESSAGE EXTINGUISHES?

No

Yes

CKPT TEMP Controller..... OPERATE NORMALLY

CAB TEMP Controller..... OPERATE NORMALLY

END



ECS Knob..... 1

CKPT TEMP Controller..... OPERATE NORMALLY

CAB TEMP Controller..... OPERATE NORMALLY

Altitude..... MAX 36000 FT

END

Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER

ECS Knob..... OFF VENT

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PRESN AUTO FAIL

PRESN MODE Switch..... MAN, THEN AUTO

PRESN AUTO FAIL MESSAGE EXTINGUISHES?

No

Yes

END

MANUAL PRESSURIZATION MODE OPERATIVE?

No

(EAP2-16)

Yes

SINGLE PILOT OPERATION?

No

Yes

ABOVE 10000 FT?

No

Yes

Oxygen Mask..... DON, NORMAL
Communication..... ESTABLISHPRESN MODE Switch..... MAN
CAB ALT Selector Switch..... AS REQUIREDOperate the CAB ALT Selector Switch to set pressurization
according to conversion table provided in the **LOSS OF
PRESSURIZATION INDICATION (NAP1-21)** Procedure.Altitude..... MAX 25000 FT
Cabin Pressurization Indications..... MONITOR**If cabin altitude increases above 10000 ft:****CAB ALTITUDE HI (EAP2-1)**

Procedure..... ACCOMPLISH

**If in single pilot operation, consider to LAND AS SOON AS
PRACTICAL.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

...CONTINUED

When appropriate before landing:CAB ALT Selector Switch..... HOLD UP FOR 15
SECONDS**END**

Oxygen Masks..... DON, 100%
Communication..... ESTABLISH
ATC..... NOTIFY
ECS Knob..... OFF VENT
Altitude..... MAX 10000 FT OR MEA,
WHICHEVER IS HIGHER

NOTE: Check for obstacle clearance in lower altitudes before descending.

END**RAM AIR FAIL**

Report to maintenance after landing.

If associated with both ECS or bleed valves failure:**LAND AS SOON AS PRACTICAL.****END**

TABLE OF CONTENTS

CAUTION

AP FAIL.....	EAP3-1
AP PITCH MISTRIM.....	EAP3-1
AP ROLL MISTRIM.....	EAP3-1
AT FAIL.....	EAP3-1
AUTO PTRIM FAIL.....	EAP3-2
YD FAIL.....	EAP3-3
YD MISTRIM.....	EAP3-4

ADVISORY

AT HOLD PROT FAIL.....	EAP3-4
VENTRAL RUD FAIL.....	EAP3-5

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

AP FAIL

Autopilot..... DISCONNECT

Fly the airplane manually and if in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

If in single pilot operation, LAND AS SOON AS PRACTICAL.

END**AP PITCH MISTRIM**

Control Wheel..... HOLD FIRMLY

QUICK DISCONNECT Button..... PRESS

Pitch Trim..... AS REQUIRED

Autopilot..... AS REQUIRED

If normal pitch trim is inoperative:

PITCH TRIM MODE Switch..... BKP

NOTE: Autopilot engagement is inhibited after Pitch Backup Mode selection.

END**AP ROLL MISTRIM**

Roll Trim..... AS REQUIRED

END**AT FAIL**

Autothrottle..... DISENGAGE

Manually operate the THRUST Levers.

NOTE: If the Autothrottle (A/T) of the opposite AFCS source is operative, the A/T may be used as required. When the AFCS source changes, the active FD modes revert to PIT and ROL using the new AFCS source, and the AP follows the new active FD source and modes.

END

AUTO PTRIM FAIL

Control Wheel..... HOLD FIRMLY

QUICK DISCONNECT Button..... PRESS

Pitch Trim..... AS REQUIRED

NOTE: Autopilot engagement is inhibited after its disengagement.**If normal pitch trim is inoperative:**

PITCH TRIM MODE Switch..... BKP

END

YD FAILASSOCIATED WITH VENTRAL RUD FAIL
MESSAGE?

No

Yes

ABOVE 25000 FT?

No

Yes

Rudder Pedals..... FIXED
 THRUST Levers..... IDLE
 SPEED BRAKE Switch..... OPEN
 Airspeed..... MAX 210 KIAS
 Control Wheel..... AS REQUIRED

To neutralize the oscillations, apply a rapid roll command against the upcoming wing, then quickly center the Control Wheel. Several cycles may be required to damp the oscillations.

Altitude..... MAX 25000 FT

CAUTION: THE OSCILLATIONS SEVERITY DECREASES IN LOWER ALTITUDES.

When at or below 25000 ft:

Speed Brake..... AS REQUIRED
 THRUST Levers..... AS REQUIRED
 Rudder Pedals..... AS REQUIRED

Maintain the airspeed according to the following table:

ALTITUDE	AIRSPEED
From 20000 ft to 25000 ft	290 KIAS Minimum
From 15000 ft to 20000 ft	200 KIAS Minimum
Below 15000 ft	As Required

NOTE: Values above are also valid for icing conditions.

END**When in icing conditions:**

Airspeed..... MAX 180 KIAS

END

YD MISTRIM

Yaw Trim..... AS REQUIRED

END**AT HOLD PROT FAIL**

Do not engage the Autothrottle for takeoff.

In flight, after takeoff:

Autothrottle..... AS REQUIRED

END

VENTRAL RUD FAIL

Yaw Damper..... ENGAGE

ASSOCIATED WITH YD FAIL MESSAGE?

No

Yes

ABOVE 25000 FT?

No

Yes

Rudder Pedals..... FIXED

THRUST Levers..... IDLE

SPEED BRAKE Switch..... OPEN

Airspeed..... MAX 210 KIAS

Control Wheel..... AS REQUIRED

To neutralize the oscillations, apply a rapid roll command against the upcoming wing, then quickly center the Control Wheel. Several cycles may be required to damp the oscillations.

Altitude..... MAX 25000 FT

CAUTION: THE OSCILLATIONS SEVERITY DECREASES IN LOWER ALTITUDES.

When at or below 25000 ft:

Speed Brake..... AS REQUIRED

THRUST Levers..... AS REQUIRED

Rudder Pedals..... AS REQUIRED

Maintain the airspeed according to the following table:

ALTITUDE	AIRSPEED
From 20000 ft to 25000 ft	290 KIAS Minimum
From 15000 ft to 20000 ft	200 KIAS Minimum
Below 15000 ft	As Required

NOTE: Values above are also valid for icing conditions.

END

INTENTIONALLY BLANK

TABLE OF CONTENTS

WARNING

ELEC EMERGENCY.....	EAP4-1
ELEC XFR FAIL.....	EAP4-3

CAUTION

BATT 1 (2) OFF BUS.....	EAP4-3
BATT DISCHARGE.....	EAP4-4
BATT EXCEEDANCE.....	EAP4-5
GEN 1 (2) OFF BUS.....	EAP4-6
GEN OVLD.....	EAP4-7
GEN START FAULT.....	EAP4-7

ADVISORY

DC BUS 1 OFF.....	EAP4-8
DC BUS 2 OFF.....	EAP4-10
EMER BUS OFF.....	EAP4-12

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

ELEC EMERGENCY

PRESN MODE Switch..... MAN
 CAB ALT Selector Switch..... HOLD DOWN FOR 10
 SECONDS

If at or above 25000 ft:

Rudder Pedals..... FIXED

If above 10000 ft:

CAB ALTITUDE HI (EAP2-1)

Procedure..... ACCOMPLISH

At 10000 ft or MEA:

DUMP Button..... PUSH IN
 ECS Knob..... OFF VENT
 LDG GEAR Lever..... AS REQUIRED

Generators 1 and 2..... OFF, THEN AUTO

ELEC EMERGENCY MESSAGE EXTINGUISHES?

No

Yes

END

LAND AS SOON AS POSSIBLE.

CAUTION: – WITH VENTRAL RUDDER AND YAW DAMPER
 FAILED SIMULTANEOUSLY, LATERAL/
 DIRECTIONAL OSCILLATIONS MAY OCCUR. IN
 THIS CASE, KEEPING A 20° TURN BANK HELP
 TO DAMP THE OSCILLATION.

- SEVERITY OF OSCILLATIONS DECREASES
 WITH DECREASING ALTITUDE.
- BATTERY DURATION IS 45 MINUTES MAXIMUM.

EMER Lights Switch..... OFF
 Airplane..... FLY MANUALLY
 Icing Conditions..... EXIT/AVOID

If IESI has not reverted, select ADCSTBY on PFD.

Avoid side slipping the airplane and high angle of attack.

Before landing:

EMER Lights Switch..... ON

...CONTINUED

When landing, maintain airspeed according to the following:

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	0 and 1	V _{REF} FULL NO ICE + 17 KIAS	1.35
	2 and 3		1.60
	FULL		1.70
IN ICING/ WITH ICE	0 and 1	V _{REF} FULL NO ICE + 28 KIAS	1.55
	2 and 3		1.90
	FULL		2.15

NOTE: – If flap stops between two positions, use the V_{FE} associated with the next extended position.
 – Disregard green circle indication, as it may indicate slower speeds.

If a go-around is required, maintain the minimum airspeed presented in the applicable flap configuration, according to the previous table, until the acceleration altitude is reached.

Relevant Inoperative Items

AHRS 2	Landing Lights
Air Conditioning	Navigation/Taxi Lights
♦ AMS Controller ♦	Passenger Signs
♦ Anti-Ice System ♦	PFD 2
Audio Control Panel 2	Pitch Trim System
♦ Autopilot ♦	♦ Pressurization AUTO ♦
♦ Autothrottle ♦	Red Beacon
Baggage Heater	Roll Trim
Communication System 2	Rudder Booster
DME 1/2	♦ Spoiler System ♦
Engine 1/2 Fuel Flow	♦ Stall Protection ♦
♦ Flap System ♦	♦ Stall Warning ♦
Flight Director	Strobe Lights
Fuel Pump 2	Transponder 2
♦ GIA 2 ♦	♦ Ventral Rudder ♦
GPS 2/VOR 2/ILS 2	Windshields Heater
GTC 2	WX Radar
♦ IASP 1/2 ♦	♦ Yaw Damper ♦
Ice Detector (if installed)	Yaw Trim

END

ELEC XFR FAIL

ELEC EMER Button..... PUSH IN

LAND AS SOON AS POSSIBLE.

ELEC XFR FAIL MESSAGE EXTINGUISHES?

No

Yes

ELEC EMERGENCY (EAP4-1)

Procedure..... ACCOMPLISH

END

Electrical Load..... REDUCE

CAUTION: IF EITHER PFD 2 OR MFD IS STILL ENERGIZED
WITH ELEC XFR FAIL MESSAGE SHOWN, BATTERY
DURATION IS LESS THAN 45 MINUTES.**END****BATT 1 (2) OFF BUS**

Associated BATT Switch..... OFF, THEN ON

If messages persists:

Associated BATT Switch..... ON

END

BATT DISCHARGE**LAND AS SOON AS PRACTICAL.**

Check BATT 1 and BATT 2 voltage on MFD.

BATT 1 OR BATT 2 VOLTAGE OUT OF RANGE
(YELLOW COLOR)?

No

Yes

Associated GEN Switch..... OFF

BATT DISCHARGE MESSAGE PERSISTS?

No

Yes

LAND AS SOON AS POSSIBLE.

ELEC EMER Button..... PUSH IN

CAUTION: BATTERY DURATION IS 45 MINUTES.**CAUTION:** MONITOR THE ENGINE VIBRATION AND NOISE
FOR REMAINDER OF THE FLIGHT. IF THERE IS
ANY ENGINE ABNORMAL VIBRATION AND/OR
NOISE, SHUTDOWN THE ASSOCIATED ENGINE.ENGINE ABNORMAL VIBRATION AND/OR NOISE
EXIST?

No

Yes

ENGINE SHUTDOWN (NAP1-17)

Procedure..... ACCOMPLISH

END

BATT EXCEEDANCE**LAND AS SOON AS PRACTICAL.**

Check BATT 1 and BATT 2 voltage on MFD.

BATT 1 OR BATT 2 VOLTAGE OUT OF RANGE
(YELLOW COLOR)?

No

↓ Yes

Associated GEN Switch..... OFF

BATT EXCEEDANCE MESSAGE PERSISTS?

No

↓ Yes

LAND AS SOON AS POSSIBLE.

ELEC EMER Button..... PUSH IN

CAUTION: BATTERY DURATION IS 45 MINUTES.**CAUTION:** MONITOR THE ENGINE VIBRATION AND NOISE
FOR REMAINDER OF THE FLIGHT. IF THERE IS
ANY ENGINE ABNORMAL VIBRATION AND/OR
NOISE, SHUTDOWN THE ASSOCIATED ENGINE.ENGINE ABNORMAL VIBRATION AND/OR NOISE
EXIST?

No

↓ Yes

ENGINE SHUTDOWN (NAP1-17)

Procedure..... ACCOMPLISH

END

GEN 1 (2) OFF BUS

Associated GEN Switch..... OFF, THEN AUTO

GEN 1 (2) OFF BUS MESSAGE PERSISTS?

No

Yes

LAND AS SOON AS PRACTICAL.

Associated GEN Switch..... OFF

CAUTION: MONITOR THE ENGINE VIBRATION AND NOISE FOR REMAINDER OF THE FLIGHT. IF THERE IS ANY ENGINE ABNORMAL VIBRATION AND/OR NOISE, SHUTDOWN THE ASSOCIATED ENGINE.

ENGINE ABNORMAL VIBRATION AND/OR NOISE EXIST?

No

Yes

ENGINE SHUTDOWN (NAP1-17)

Procedure..... ACCOMPLISH

END

GEN OVLD

Air Cond MODE Switch..... OFF

GEN OVLD MESSAGE EXTINGUISHES?

No

Yes

END

WSHLD 2 Switch..... OFF

GEN OVLD MESSAGE EXTINGUISHES?

No

Yes

END

Non-Essential Equipment..... OFF

END**GEN START FAULT**

BATT 2 Switch..... OFF

ELEC EMER Button..... PUSH IN

[ELEC EMERGENCY \(EAP4-1\)](#)

Procedure..... ACCOMPLISH

CAUTION: BATTERY DURATION IS 45 MINUTES MAXIMUM.**END**

DC BUS 1 OFF

Airplane..... FLY MANUALLY

Flight Director..... SELECT FD2

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

Icing Conditions..... EXIT/AVOID

Altitude..... MAX 36000 FT

Avoid side slipping the airplane and high angle of attack.

If in single pilot operation, LAND AS SOON AS PRACTICAL.

When landing, maintain airspeed according to the following:

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	0 and 1	V _{REF FULL NO ICE} + 17 KIAS	1.30
	2 and 3		1.35
	FULL		1.35
IN ICING/ WITH ICE	0 and 1	V _{REF FULL NO ICE} + 28 KIAS	1.50
	2 and 3		1.60
	FULL		1.60

NOTE: – If flap stops between two positions, use the V_{FE} associated with the next extended position.

- Disregard green circle indication, as it may indicate slower speeds.

Relevant Inoperative Items

AMS Controller Channel A	IASP 1
♦ Autopilot ♦	Landing Lights
♦ Autothrottle ♦	Passenger Signs
Baggage Heater	Pitch Trim (Back-Up)
Cockpit Evaporator	Roll Trim
Cockpit FCSOV	♦ Stall Protection ♦
DME 1	Strobe Lights
Engine 1 Anti-Ice Valve (Open)	WX Radar
Engine 1 Fuel Flow	Yaw Trim
♦ Flap System ♦	

CONTINUED...

EMERGENCY AND ABNORMAL PROCEDURES

Electrical

...CONTINUED

NOTE: Only one half of the left windshield panel will remain heated.

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

DC BUS 2 OFF

PRESN MODE Switch..... MAN

Airplane..... FLY MANUALLY

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

Control Wheel..... HOLD FIRMLY

Prepare to overcome the pitch command from backup system setting.

PITCH TRIM MODE Switch..... BKP

Use the PITCH TRIM BKP Switch as required.

Icing Conditions..... EXIT/AVOID

Avoid slide slipping the airplane and high angle of attack.

If in single pilot operation, LAND AS SOON AS PRACTICAL.

ABOVE 25000 FT?

No

↓ Yes

Rudder Pedals..... FIXED

THRUST Levers..... IDLE

Airspeed..... MAX 210 KIAS

Control Wheel..... AS REQUIRED

To neutralize the oscillations, apply a rapid roll command against the upcoming wing, then quickly center the Control Wheel. Several cycles may be required to damp the oscillations.

Altitude..... MAX 25000 FT

CAUTION: THE OSCILLATIONS SEVERITY DECREASES IN LOWER ALTITUDES.

When at or below 25000 ft:

THRUST Levers..... AS REQUIRED

Rudder Pedals..... AS REQUIRED

Maintain the airspeed according to the following table:

ALTITUDE	AIRSPEED
From 20000 ft to 25000 ft	290 KIAS Minimum
From 15000 ft to 20000 ft	200 KIAS Minimum
Below 15000 ft	As Required

CONTINUED...

...CONTINUED

When landing, maintain airspeed according to the following:

Flap..... MAXIMUM AVAILABLE

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF FULL NO ICE} + 17 KIAS.	1.80
IN ICING/ WITH ICE	MAXIMUM AVAILABLE	V _{REF FULL NO ICE} + 28 KIAS	2.20

Relevant Inoperative Items

AHRS 2	GTC 2
AMS Controller Channel B	IASP 2
Audio Control Panel 2	Ice Detector (if installed)
♦ Autopilot ♦	LH Navigation/Taxi Lights
Cabin Evaporator	PFD 2
Cabin FCSOV	Pitch Trim (Normal)
Communication System 2	♦ Pressurization AUTO ♦
DME 2	Red Beacon
Engine 2 Anti-Ice Valve (Open)	Rudder Booster
Engine 2 Fuel Flow	Spoiler System
Flight Director 2	♦ Stall Protection ♦
Fuel Pump 2	Transponder 2
♦ GIA 2 ♦	♦ Ventral Rudder ♦
GPS 2/VOR 2/ILS 2	♦ Yaw Damper ♦

NOTE: Only one half of the left windshield panel will remain heated.

END

EMER BUS OFF

Airplane..... FLY MANUALLY

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

Icing Conditions..... EXIT/AVOID

If in single pilot operation, LAND AS SOON AS PRACTICAL.

Before landing:

LDG GEAR Lever..... DN

FREE FALL Handle..... PULL UNTIL STOP

If gear does not lock down:

Airspeed..... MIN 140 KIAS

Slip the airplane to attempt to lock the main gear.

Landing configuration:

Flap..... MAXIMUM AVAILABLE

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 2 KIAS	2.00
IN ICING/ WITH ICE	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 11 KIAS	2.30

Immediately after MLG touches down:

Control Wheel..... FORWARD

NLG..... TOUCH DOWN

Directional Control..... ESTABLISH

Guarantee the NLG on ground and align the airplane with the Runway Centerline.

CAUTION: THE ANTISKID PROTECTION IS DISABLED WITH THE EMERGENCY/PARKING BRAKE.

During landing run:

EMER/PARKING BRAKE Handle..... APPLY GENTLY

Carefully pull the EMER/PARKING BRAKE Handle until initial deceleration is confirmed. The EMER/PARKING BRAKE Indicator is inoperative. To maintain deceleration, when

CONTINUED...

**EMERGENCY AND ABNORMAL
PROCEDURES**

Electrical

...CONTINUED

necessary, slowly and gradually increase the handle displacement. Consider the runway conditions and remaining runway length to regulate the brake application.

CAUTION: HARSH BRAKE APPLICATION MAY CAUSE TIRE BLOWOUT. IF TIRES BLOW OUT, DO NOT RELEASE THE HANDLE UNTIL THE AIRPLANE STOPS.

NOTE: The emergency/parking brake accumulator allows 6 actuations.

Relevant Inoperative Items

AHRS 1	◆ LDG Control Lever ◆
Audio Control Panel 1	◆ Main Brake ◆
◆ Autopilot ◆	Oxygen Transducer
EFCU 1	PAX Mask Deploy (AUTO)
Engines Fire Detection	PFD 1
Flight Director 1/2	Pressurization Manual
Fuel Pump 1	Ram Air Valve
◆ Fuel Shutoff Valves ◆	Transponder 1
◆ GIA 1 ◆	VHF 1 (Normal)
GPS 1/VOR 1/ILS 1	WOW
◆ Ground Spoiler ◆	XFEED Valve
GTC 1	Yaw Damper

END

INTENTIONALLY BLANK

TABLE OF CONTENTS

WARNING

E1 (E2) OIL LO PRES.....	EAP5-1
--------------------------	--------

CAUTION


E1 (E2) CTRL FAULT.....	EAP5-1
E1 (E2) FAIL.....	EAP5-2
E1 (E2) FUEL IMP BYP.....	EAP5-3
E1 (E2) TLA FAIL.....	EAP5-3
E1 (E2) TT0 HTR FAIL.....	EAP5-3
E1 (E2) TT0 PROBE ICE.....	EAP5-4
ENG NO TO DATA.....	EAP5-4
ENG TLA NOT TOGA.....	EAP5-4

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21


INTENTIONALLY BLANK

E1 (E2) OIL LO PRES

Engine Indication: Oil Pressure indication in red.

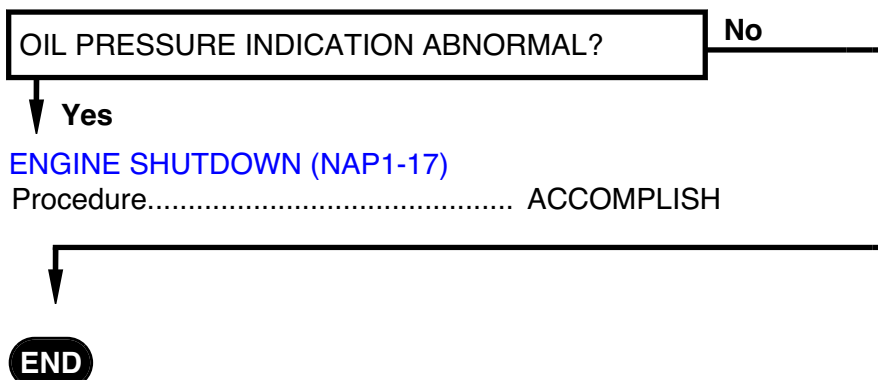**E1 (E2) CTRL FAULT****LAND AS SOON AS PRACTICAL.**

Autothrottle (if applicable)..... DISENGAGE

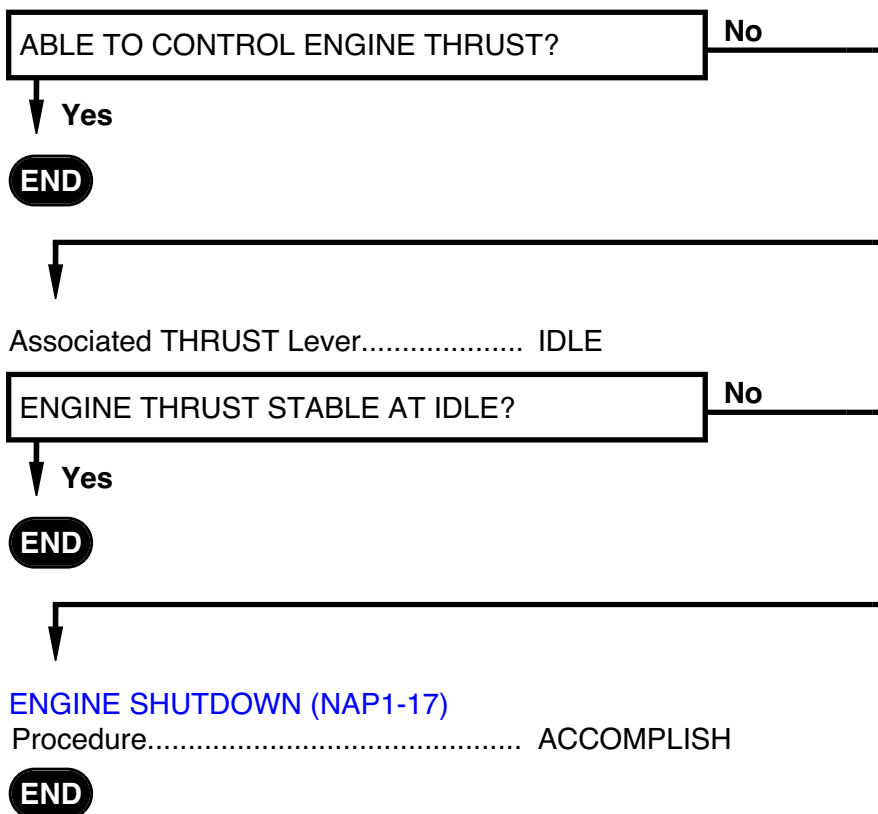CAUTION: AVOID QUICK THRUST LEVER MOVEMENT AND
HIGH ENGINE THRUST OPERATION.

Engine

E1 (E2) FAIL

Engine Indication: FAIL icon on N1 indication.

LAND AS SOON AS POSSIBLE.

Associated THRUST Lever..... IDLE

ENGINE SUCCESSFUL AUTO RELIGHT?

No

Yes

NOTE: If flight conditions permit, operate the engine at idle for 2 minutes prior to apply engine thrust.

END

User: andreia0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ENG START/STOP Knob..... STOP

If not accomplishing takeoff procedure:

THRUST Lever (operative engine)..... CON/CLB

Transponder..... TA ONLY

FUEL LEAKAGE SUSPECTED?

No

Yes

FUEL LEAKAGE (NAP1-9)

Procedure..... ACCOMPLISH

END

RESTART CONSIDERED?

No

Yes

ENGINE IN-FLIGHT

START (NAP1-15) Procedure..... ACCOMPLISH

END

Fuel Balance..... MONITOR

If in icing conditions:

**ONE ENGINE INOPERATIVE IN
ICING CONDITIONS (NAP1-24)**

Procedure..... ACCOMPLISH

CONTINUED...

...CONTINUED

When appropriate:ONE ENGINE INOPERATIVE
APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END**E1 (E2) FUEL IMP BYP**

Report to the maintenance personnel.

**WARNING: IF BOTH E1 FUEL IMP BYP AND E2 FUEL IMP BYP
MESSAGES ARE DISPLAYED, LAND AS SOON AS
POSSIBLE.****END****E1 (E2) TLA FAIL**

Condition: Associated engine thrust control is lost.

The engine thrust will be set to idle automatically.

Fuel Balance..... MONITOR

When appropriate:ONE ENGINE INOPERATIVE
APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END**E1 (E2) TT0 HTR FAIL**

Icing Conditions..... EXIT/AVOID

END

Engine

E1 (E2) TT0 PROBE ICE

ICING CONDITIONS?

No

Yes

Icing Conditions..... EXIT

ENG 1 & 2 ICE PROT Switches..... OFF

CAUTION: BEFORE ENTERING IN ICING CONDITIONS AT A LATER POINT, TURN ON ENG 1 & 2 ICE PROT SWITCHES AND MAKE SURE THE E1 (E2) TT0 PROBE ICE MESSAGE IS NOT DISPLAYED.

END**ENG NO TO DATA**

Engine Takeoff Data..... ENTER

END**ENG TLA NOT TOGA****On ground:****Below 70 KIAS:**

Do not takeoff.

At or above 70 KIAS:

THRUST Levers..... TO/GA

In flight:

THRUST Levers..... TO/GA

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

TABLE OF CONTENTS

WARNING

BAG SMK.....	EAP6-1
E1 (E2) FIRE.....	EAP6-2

CAUTION

BAG SMK FAIL.....	EAP6-3
E1 (E2) FIRE DET FAIL.....	EAP6-3
E1 (E2) FIREX FAIL.....	EAP6-3

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

BAG SMK

LAND AS SOON AS POSSIBLE.

END

E1 (E2) FIRE

Engine Indication: FIRE icon on the associated ITT indicator is displayed.

Light: Associated SHUTOFF Button illuminated.

Aural Warning: FIRE, FIRE

Autothrottle (if applicable)..... DISENGAGE

Affected engine:

THRUST Lever..... IDLE

ENG START/STOP Knob..... STOP

SHUTOFF Button..... PUSH IN

On ground or if fire persists after 30 seconds in flight:

BOTTLE Switch..... DISCH

LAND AS SOON AS POSSIBLE.

Altitude..... MAX 36000 FT

ECS Knob..... UNAFFECTED SIDE

THRUST Lever (operative engine)..... AS REQUIRED

AIRPLANE HIGH VIBRATION?

No

Yes

Airspeed..... REDUCE

Reduce the airspeed but maintain it above 140 KIAS.

Fuel Balance..... MONITOR

Transponder..... TA ONLY

If in icing conditions:

ONE ENGINE INOPERATIVE IN
ICING CONDITIONS (NAP1-24)

Procedure..... ACCOMPLISH

When appropriate:

Autothrottle (if applicable)..... AS REQUIRED

ONE ENGINE INOPERATIVE
APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

BAG SMK FAIL

If baggage compartment is not empty:

LAND AS SOON AS PRACTICAL.

END

E1 (E2) FIRE DET FAIL

If engine fire or overheat is suspected or if E1 (E2) FIRE DET FAIL appears simultaneously with engine failure:

E1 (E2) FIRE (EAP6-2) Procedure..... ACCOMPLISH

END

E1 (E2) FIREX FAIL

LAND AS SOON AS PRACTICAL.

END

INTENTIONALLY BLANK

TABLE OF CONTENTS

CAUTION

FLAP FAIL.....	EAP7-1
GND SPLR FAIL.....	EAP7-5
PTRIM BKP FAIL.....	EAP7-6
PTRIM NML FAIL.....	EAP7-7
RUD GUST LOCKED.....	EAP7-8
RUD OVERBOOST.....	EAP7-9
STEEP FAIL.....	EAP7-9

ADVISORY

PTRIM SW 1 (2) FAIL.....	EAP7-10
SPDBRK SW DISAG.....	EAP7-10
STEEP NOT AVAIL.....	EAP7-10

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21


INTENTIONALLY BLANK

QRH 2669-354

FLAP FAIL

MFD Indication: Flap indication missing or yellow.

CAS Message: SWPS FAULT may also be displayed.

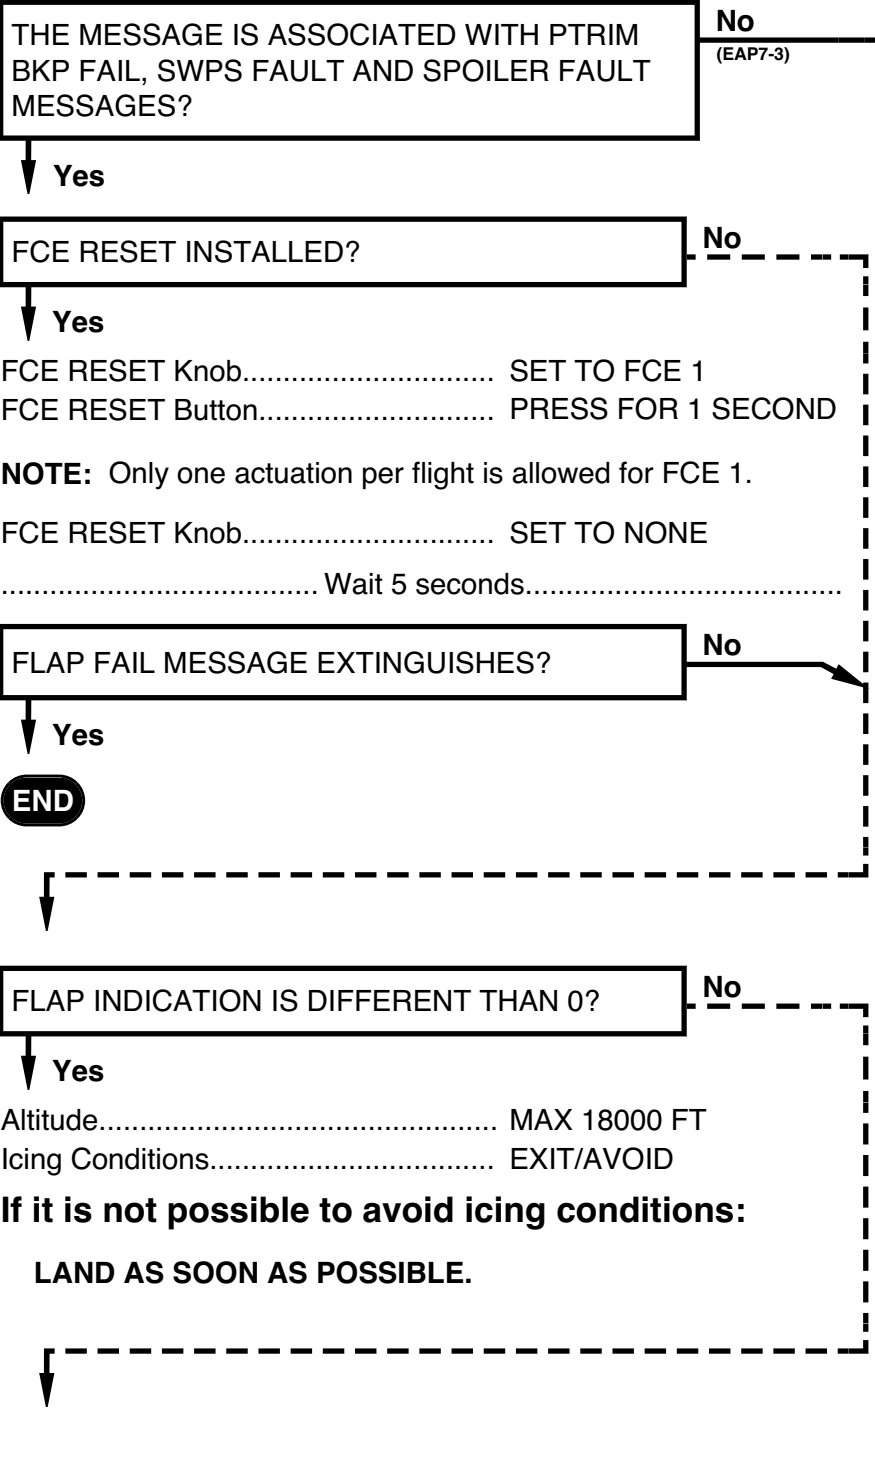

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

...CONTINUED

For landing:

- Check the available airports within the current range and choose the one that best matches the required runway length. Considerations for uphill slope and occurrence of headwind should be also made.
- Burn as much fuel as possible to reduce the landing weight.
- Maintain bank angle below 40°.
- If applicable, press the TAWS FLAP OVRD Button.
- If applicable, press the Stabilized APPR Flap Override Button.
- Maintain the airspeed according to the following:

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	0	V _{REF} FULL NO ICE + 27 KIAS	1.55
	1	V _{REF} FULL NO ICE + 19 KIAS	1.30
	2 and 3	V _{REF} FULL NO ICE + 6 KIAS	1.15
	FULL	V _{REF} FULL NO ICE	1.00
IN ICING/ WITH ICE	0	V _{REF} FULL NO ICE + 38 KIAS	1.70
	1	V _{REF} FULL NO ICE + 27 KIAS	1.45
	2 and 3	V _{REF} FULL NO ICE + 15 KIAS	1.30
	FULL	V _{REF} FULL NO ICE + 10 KIAS	1.20

- NOTE:** – If flap stops between two positions, use the minimum airspeed associated with the next retracted position and the V_{FE} associated with the next extended position.
- Disregard green circle indication, as it may indicate slower speeds.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

CONTINUED...

...CONTINUED

If a go-around is required, maintain the minimum airspeed presented in the applicable flap configuration, according to the previous table, until the acceleration altitude is reached.

END

Altitude..... MAX 18000 FT

When below 18000 ft:

FLAP Lever..... CYCLE

Up to 3 cycles may be attempted.

FLAP FAIL MESSAGE EXTINGUISHES?

No

Yes

END

FLAP INDICATION IS DIFFERENT THAN 0?

No

Yes

Altitude..... MAX 18000 FT

Icing Conditions..... EXIT/AVOID

If it is not possible to avoid icing conditions:**LAND AS SOON AS POSSIBLE.****For landing:**

- Check the available airports within the current range and choose the one that best matches the required runway length. Considerations for uphill slope and occurrence of headwind should be also made.
- Burn as much fuel as possible to reduce the landing weight.
- Maintain bank angle below 40°.
- If applicable, press the TAWS FLAP OVRD Button.
- If applicable, press the Stabilized APPR Flap Override Button.
- Maintain the airspeed according to the following:

CONTINUED...

...CONTINUED

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	0	V _{REF} FULL NO ICE + 27 KIAS	1.55
	1	V _{REF} FULL NO ICE + 19 KIAS	1.30
	2 and 3	V _{REF} FULL NO ICE + 6 KIAS	1.15
	FULL	V _{REF} FULL NO ICE	1.00
IN ICING/ WITH ICE	0	V _{REF} FULL NO ICE + 38 KIAS	1.70
	1	V _{REF} FULL NO ICE + 27 KIAS	1.45
	2 and 3	V _{REF} FULL NO ICE + 15 KIAS	1.30
	FULL	V _{REF} FULL NO ICE + 10 KIAS	1.20

NOTE: – If flap stops between two positions, use the minimum airspeed associated with the next retracted position and the V_{FE} associated with the next extended position.

– Disregard green circle indication, as it may indicate slower speeds.

If a go-around is required, maintain the minimum airspeed presented in the applicable flap configuration, according to the previous table, until the acceleration altitude is reached.

END

 User: andreiap0t - Feb 13/26 - 12:44:21
 Printed by TechPubs

GND SPLR FAIL

THE MESSAGE IS ASSOCIATED WITH PTRIM
NML FAIL AND SPOILER FAULT MESSAGES AND
FCE RESET IS INSTALLED?

No

Yes

FCE RESET Knob..... SET TO FCE 2

FCE RESET Button..... PRESS FOR 1 SECOND

NOTE: Only one actuation per flight is allowed for FCE 2.

FCE RESET Knob..... SET TO NONE

..... Wait 5 seconds.....

GND SPLR FAIL MESSAGE EXTINGUISHES?

No

Yes

END**Before landing:**

Flap..... 3

CAUTION: TO DETERMINE THE MINIMUM SUITABLE
LANDING DISTANCE, MULTIPLY THE
UNFACTORED LANDING DISTANCE FOR FLAP
FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	3	V _{REF FULL NO ICE} + 2 KIAS	1.20
IN ICING/ WITH ICE	3	V _{REF FULL NO ICE} + 11 KIAS	1.40

END

PTRIM BKP FAIL

THE MESSAGE IS ASSOCIATED WITH FLAP
FAIL, SWPS FAULT AND SPOILER FAULT
MESSAGES AND FCE RESET IS INSTALLED?

No**Yes**

FCE RESET Knob..... SET TO FCE 1
FCE RESET Button..... PRESS FOR 1 SECOND

NOTE: Only one actuation per flight is allowed for FCE 1.

FCE RESET Knob..... SET TO NONE

..... Wait 5 seconds.....

PTRIM BKP FAIL MESSAGE EXTINGUISHES?

No**Yes****END**

PITCH TRIM BKP Switch..... OFF
PITCH TRIM Switches..... USE AS REQUIRED

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PTRIM NML FAIL

THE MESSAGE IS ASSOCIATED WITH GND
SPLR FAIL AND SPOILER FAULT MESSAGES
AND FCE RESET IS INSTALLED?

No

Yes

FCE RESET Knob..... SET TO FCE 2

FCE RESET Button..... PRESS FOR 1 SECOND

NOTE: Only one actuation per flight is allowed for FCE 2.

FCE RESET Knob..... SET TO NONE

..... Wait 5 seconds.....

PTRIM NML FAIL MESSAGE EXTINGUISHES?

No

Yes

END

Control Wheel..... HOLD FIRMLY

QUICK DISCONNECT Button..... PRESS

PITCH TRIM MODE Switch..... BKP

Use the PITCH TRIM BKP Switch as required.

NOTE: Autopilot engagement is inhibited.**END**

RUD GUST LOCKED

IN FLIGHT?

No

↓ Yes

LAND AS SOON AS POSSIBLE.**NOTE:** Avoid landing with crosswinds higher than 15 kt.**END**Gust Lock Pin..... CHECK REMOVED
Rudder Pedals..... CHECK UNLOCKED

RUD GUST LOCKED MESSAGE PERSISTS?

No

↓ Yes

Do not takeoff.

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

RUD OVERBOOST

Airspeed (flap and gear up)..... MIN 135 KIAS

Avoid large rudder pedals deflection.

Before landing:

Flap..... MAXIMUM AVAILABLE

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 17 KIAS	1.40
IN ICING/ WITH ICE	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 28 KIAS	1.60

NOTE: Avoid landing with crosswinds higher than 15 kt.

END

STEEP FAIL

Perform a missed approach procedure and divert to an airport that does not require steep approach.

NOTE: The demonstrated height loss during go-around is 37 ft.

END

PTRIM SW 1 (2) FAIL

DUAL PILOT OPERATION?

No

Yes

Remaining PITCH TRIM Switch..... USE AS REQUIRED

NOTE: The Pitch Trim Backup Mode may also be used if available.**END**

PTRIM SW 1 FAIL MESSAGE PRESENTED?

No

Yes

PITCH TRIM MODE Switch..... BKP

Use the PITCH TRIM BKP Switch as required.

END**SPDBRK SW DISAG**

SPEED BRAKE Switch..... CLOSE

END**STEEP NOT AVAIL**

Divert to an airport that does not require steep approach.

END

TABLE OF CONTENTS**CAUTION**

ADS 1 (2) FAIL.....	EAP8-1
ADS 1 (2) HTR FAIL.....	EAP8-2
AHRS 1 (2) FAIL.....	EAP8-3
AUDIO PNL 1 (2) FAIL.....	EAP8-4
BARO MISCOMP.....	EAP8-4
CONFIG MDL FAIL.....	EAP8-5
FMS LANDING DISAG.....	EAP8-5
FMS TAKEOFF DISAG.....	EAP8-5
GIA 1 (2) OVHT.....	EAP8-5
GIA 1 FAIL.....	EAP8-6
GIA 2 FAIL.....	EAP8-7
GTC 1 OVHT.....	EAP8-8
GTC 2 OVHT.....	EAP8-9
MFD CONFIG.....	EAP8-9
MFD FAULT.....	EAP8-9
MFD OVHT.....	EAP8-10
PFD 1 (2) CONFIG.....	EAP8-10
PFD 1 (2) FAULT.....	EAP8-10
PFD 1 OVHT.....	EAP8-11
PFD 2 OVHT.....	EAP8-12
STBY HTR FAIL.....	EAP8-12
XPDR FAIL.....	EAP8-12
XPDR IN STBY.....	EAP8-13

ADVISORY

ADS-B IN AIR NOT AVAIL.....	EAP8-13
ADS-B IN SURF NOT AVAIL.....	EAP8-13
ADS-B NOT AVAIL.....	EAP8-13
ADS-B OUT NOT AVAIL.....	EAP8-13

ADVISORY

AHRS 1 FAULT.....	EAP8-13
AHRS 2 FAULT.....	EAP8-13
STBY BARO NOCOMP.....	EAP8-14
XPDR 1 (2) FAIL.....	EAP8-14

ADS 1 (2) FAIL

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

BOTH ADS 1 AND ADS 2 FAILED?

No

(EAP8-2)

↓ **Yes**

LAND AS SOON AS PRACTICAL.

NOTE: The airspeed and pressure altitude from IES1 may be used.

ABOVE 25000 FT?

No

↓ **Yes**

Rudder Pedals..... FIXED
THRUST Levers..... IDLE
SPEED BRAKE Switch..... OPEN
Airspeed..... MAX 210 KIAS
Control Wheel..... AS REQUIRED

To neutralize the oscillations, apply a rapid roll command against the upcoming wing, then quickly center the Control Wheel. Several cycles may be required to damp the oscillations.

Altitude..... MAX 25000 FT

CAUTION: THE OSCILLATIONS SEVERITY DECREASES IN LOWER ALTITUDES.

When at or below 25000 ft:

Speed Brake..... AS REQUIRED
THRUST Levers..... AS REQUIRED
Rudder Pedals..... AS REQUIRED

END

Maintain the airspeed according to the following table:

ALTITUDE	AIRSPEED
From 20000 ft to 25000 ft	290 KIAS Minimum
From 15000 ft to 20000 ft	200 KIAS Minimum
Below 15000 ft	As Required

...CONTINUED

NOTE: Values above are also valid for icing conditions.



Confirm the affected ADS automatic reversion.

If necessary:

Manual Reversion..... AS REQUIRED

END

ADS 1 (2) HTR FAIL

Monitor the air data indications. If the information seems to be unreliable, revert to the not affected ADS.

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

If more than one ADS heater is failed, set the ADS PROBES Selector to ON position and pull the PSTAT HTR CTRL circuit breaker (B6). If messages persist, leave and avoid icing conditions.

END

AHRS 1 (2) FAIL

BOTH AHRS 1 AND AHRS 2 FAILED?

No

(EAP8-4)

Yes**NOTE:** The airspeed and pressure altitude from IESI may be used.

ABOVE 25000 FT?

No**Yes**

Rudder Pedals..... FIXED
 THRUST Levers..... IDLE
 SPEED BRAKE Switch..... OPEN
 Airspeed..... MAX 210 KIAS
 Control Wheel..... AS REQUIRED

To neutralize the oscillations, apply a rapid roll command against the upcoming wing, then quickly center the Control Wheel. Several cycles may be required to damp the oscillations.

Altitude..... MAX 25000 FT

CAUTION: THE OSCILLATIONS SEVERITY DECREASES IN LOWER ALTITUDES.**When at or below 25000 ft:**

Speed Brake..... AS REQUIRED
 THRUST Levers..... AS REQUIRED
 Rudder Pedals..... AS REQUIRED

Maintain the airspeed according to the following table:

ALTITUDE	AIRSPEED
From 20000 ft to 25000 ft	290 KIAS Minimum
From 15000 ft to 20000 ft	200 KIAS Minimum
Below 15000 ft	As Required

NOTE: Values above are also valid for icing conditions.

If both AHRS failed simultaneously, they may reset automatically and AHRS 1 (2) FAIL message may disappear. If airspeed is below 200 KIAS and wings leveled, the automatic reset occurs in approximately 5 minutes. If oscillations do not allow this configuration, it may take longer. If any AHRS is recovered, manual reversion may be necessary to engage it to the airplane

...CONTINUED

systems. If the systems are recovered, the airspeed and altitude restrictions no longer apply. Consider recovered systems as fully operational.

END

Confirm the affected AHRS automatic reversion.

If necessary:

Manual Reversion..... AS REQUIRED

END
AUDIO PNL 1 (2) FAIL

Use headset as required.

NOTE: For affected side, the following items are operative:

- On-side VHF transmission/reception.
- Cross-side VHF reception.

END
BARO MISCOMP

Altimeters (pilots and IESI)..... SET & X-CHECK

BARO MISCOMP MESSAGE PERSISTS OR IS
DISPLAYED AGAIN?

No
Yes
On GTC:

BARO SYNC..... OFF

Altimeters (pilots and IESI)..... SET & X-CHECK

Use the PFD that displays the reliable altitude reading.

NOTE: Flight Director source must be used according to the PFD in use.

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

CONFIG MDL FAIL

Do not takeoff.

END**FMS LANDING DISAG**

Check FMS/TOLD landing input parameters against the current airplane configuration.

END**FMS TAKEOFF DISAG**

Check FMS/TOLD takeoff input parameters against the current airplane configuration.

END**GIA 1 (2) OVHT**

Affected Side Radios..... AVOID USE

END

GIA 1 FAIL

ASSOCIATED WITH EMER BUS OFF MESSAGE?

No

Yes

EMER BUS OFF (EAP4-12)

Procedure..... ACCOMPLISH

END

Airplane..... FLY MANUALLY

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

Icing Conditions..... EXIT/AVOID

If in single pilot operation, LAND AS SOON AS PRACTICAL.

Relevant Inoperative Items

♦ Autopilot ♦	GPS 1
Crossfeed (AUTO)	♦ TCAS ♦
DME 1	VHF 1/NAV 1
Flight Director 1	Yaw Damper

END

GIA 2 FAIL

ASSOCIATED WITH DC BUS 2 OFF MESSAGE?

No

Yes

DC BUS 2 OFF (EAP4-10)

Procedure..... ACCOMPLISH

END

Airplane..... FLY MANUALLY

If in RVSM airspace, notify the ATC and coordinate an appropriate action plan.

Icing Conditions..... EXIT/AVOID

If in single pilot operation, LAND AS SOON AS PRACTICAL.

Relevant Inoperative Items

♦ Autopilot ♦	♦ TCAS ♦
DME 2	VHF 2/NAV 2
Flight Director 2	Yaw Damper
GPS 2	

END

GTC 1 OVHT

ASSOCIATED WITH SMOKE ON GTC?

No**Yes**Oxygen Masks..... DON, EMERGENCY
THEN 100%EMERGENCY may be selected 2 minutes maximum then set to
100%.Dilution Valve..... CLOSED
Smoke Goggles (if available)..... DON
Communication..... ESTABLISH
GTC 1 Circuit Breaker (B8)..... PULL**SMOKE EVACUATION (S1-1)**

Procedure..... AS REQUIRED

END

GTC 1..... MONITOR

Monitor the GTC 1 for the remainder of the flight.

END

GTC 2 OVHT

ASSOCIATED WITH SMOKE ON GTC?

No

Yes

Oxygen Masks..... DON, EMERGENCY
THEN 100%EMERGENCY may be selected 2 minutes maximum then set to
100%.

Dilution Valve..... CLOSED

Smoke Goggles (if available)..... DON

Communication..... ESTABLISH

GTC 2 Circuit Breaker (B26)..... PULL

SMOKE EVACUATION (S1-1)

Procedure..... AS REQUIRED

END

GTC 2..... MONITOR

Monitor the GTC 2 for the remainder of the flight.

END**MFD CONFIG**

On ground, report to the maintenance personnel.

In flight:

PFD 1 (2) MODE Switch..... REV OR SPLIT

END**MFD FAULT**

On ground, report to the maintenance personnel.

In flight:

PFD 1 (2) MODE Switch..... REV OR SPLIT

END

MFD OVHT

ASSOCIATED WITH SMOKE ON MFD?

No

Yes

Oxygen Masks..... DON, EMERGENCY
THEN 100%EMERGENCY may be selected 2 minutes maximum then set to
100%.Dilution Valve..... CLOSED
Smoke Goggles (if available)..... DON
Communication ESTABLISH
MFD Circuit Breakers (A9 and A24)..... PULL**SMOKE EVACUATION (S1-1)**

Procedure..... AS REQUIRED

END

MFD..... MONITOR

Monitor the MFD for the remainder of the flight.

END**PFD 1 (2) CONFIG**

On ground, report to the maintenance personnel.

In flight and associated with flying pilot:

PFD 1 (2) MODE Switch..... REV OR SPLIT

END**PFD 1 (2) FAULT**

On ground, report to the maintenance personnel.

In flight and associated with flying pilot:

PFD 1 (2) MODE Switch..... REV OR SPLIT

END

PFD 1 OVHT

ASSOCIATED WITH SMOKE ON PFD 1?

No

Yes

Oxygen Masks..... DON, EMERGENCY
THEN 100%EMERGENCY may be selected 2 minutes maximum then set to
100%.

Dilution Valve..... CLOSED

Smoke Goggles (if available)..... DON

Communication..... ESTABLISH

PFD 1 Circuit Breaker (A7)..... PULL

PFD 1 MODE Switch..... AS REQUIRED

[SMOKE EVACUATION \(S1-1\)](#)

Procedure..... AS REQUIRED

END

PFD 1..... MONITOR

Monitor the associated PFD for the remainder of the flight.

END

PFD 2 OVHT

ASSOCIATED WITH SMOKE ON PFD 2?

No

Yes

Oxygen Masks..... DON, EMERGENCY
THEN 100%

EMERGENCY may be selected 2 minutes maximum then set to
100%.

Dilution Valve..... CLOSED
Smoke Goggles (if available)..... DON
Communication..... ESTABLISH
PFD 2 Circuit Breaker (B24)..... PULL
PFD 2 MODE Switch..... AS REQUIRED
SMOKE EVACUATION (S1-1)
Procedure..... AS REQUIRED

END

PFD 2..... MONITOR

Monitor the associated PFD for the remainder of the flight.

END**STBY HTR FAIL**

Monitor the air data indications. If the information seems to be
unreliable, disregard IESI altitude and airspeed indication.

If more than one ADS heater is failed, set the ADS PROBES
Selector to ON position and pull the PSTAT HTR CTRL circuit
breaker (B6). If messages persist, leave and avoid icing conditions.

END**XPDR FAIL**

Select and use the remaining Transponder, if available.

END

XPDR IN STBY

Transponder..... AS REQUIRED

END**ADS-B IN AIR NOT AVAIL**

ATC..... NOTIFY

END**ADS-B IN SURF NOT AVAIL**

ATC..... NOTIFY

END**ADS-B NOT AVAIL**

ATC..... NOTIFY

END**ADS-B OUT NOT AVAIL**

ATC..... NOTIFY

END**AHRS 1 FAULT**

ASSOCIATED WITH AHRS 2 FAULT MESSAGE?

No

↓ Yes

Airspeed..... MAX 240 KIAS/0.63 M

END**AHRS 2 FAULT**

ASSOCIATED WITH AHRS 1 FAULT MESSAGE?

No

↓ Yes

Airspeed..... MAX 240 KIAS/0.63 M

END

STBY BARO NOCOMP**On GTC:**

BARO SYNC..... OFF

STBY BARO setting input is not available for comparison.

END**XPDR 1 (2) FAIL****On GTC:**

XPDR Screen..... SELECT

Active XPDR Button..... PRESS

Active the XPDR related to the CAS message:

XPDR 1 (2)..... ACTIVATE

If message persists, the XPDR is actually failed.

END

TABLE OF CONTENTS

CAUTION

FUEL 1 (2) LO LEVEL.....	EAP9-1
FUEL 1 (2) LO PRES.....	EAP9-2
FUEL 1 (2) SOV FAIL.....	EAP9-2
FUEL IMBALANCE.....	EAP9-3
FUEL PUMP 1 (2) FAIL.....	EAP9-5
FUEL XFEED FAIL.....	EAP9-6

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

FUEL 1 (2) LO LEVEL

MFD Indication: Associated fuel quantity indication in yellow.

Associated FUEL PUMP Switch..... ON

THRUST Levers..... REDUCE TO LONG
RANGE


Attitude..... WINGS LEVEL

Both Fuel Quantities..... CHECK

If the fuel quantity is not sufficient:

LAND AS SOON AS POSSIBLE.

CAUTION: AVOID EXCESSIVE NOSE UP AND DOWN
ATTITUDES, UNCOORDINATED MANEUVERS AND
NEGATIVE G'S.

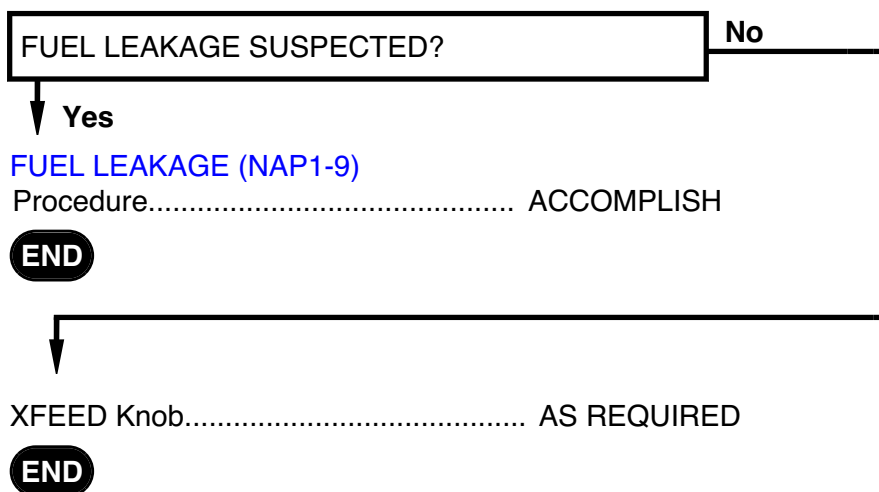

Fuel

FUEL 1 (2) LO PRES

Associated FUEL PUMP Switch..... ON

FUEL 1 (2) LO PRES PERSISTS?

No

Yes

XFEED Knob..... OFF
 Autothrottle (if applicable)..... DISENGAGE
 Associated THRUST Lever..... AS REQUIRED
 Engine Parameters..... MONITOR

**If unable to maintain desired thrust or engine
 parameters fluctuate:**

Altitude..... DESCEND AS
 REQUIRED

If condition persists:**LAND AS SOON AS PRACTICAL.****If fuel leakage is suspected:**

FUEL LEAKAGE (NAP1-9)..... ACCOMPLISH

END**FUEL 1 (2) SOV FAIL**

ASSOCIATED WITH ENGINE FIRE?

No

Yes

LAND AS SOON AS POSSIBLE.

Associated FUEL PUMP Switch..... OFF
 XFEED Knob..... OFF

END

FUEL IMBALANCE

FUEL LEAKAGE SUSPECTED?

No

Yes

FUEL LEAKAGE (NAP1-9)

Procedure..... ACCOMPLISH

END

Attitude..... WINGS LEVEL

RIGHT WING LOW LEVEL?

No

Yes

XFEED Knob..... LO2

If associated with FUEL PUMP 1 FAIL message:

FUEL PUMP 1 Switch..... ON

Fuel Quantity..... MONITOR

FUEL IMBALANCE DECREASES?

No

Yes

When balance is achieved:

XFEED Knob..... OFF

FUEL PUMP 1 & 2 Switches..... AUTO

Fuel Quantity..... MONITOR

END

XFEED Knob..... OFF

Use asymmetric thrust as required to achieve fuel balance. If Autothrottle (A/T) is installed, disengage the A/T before asymmetric thrust application.

If asymmetric thrust can not be used:**LAND AS SOON AS PRACTICAL.****END**

XFEED Knob..... LO1

CONTINUED...

...CONTINUED

If associated with FUEL PUMP 2 FAIL message:

FUEL PUMP 2 Switch..... ON

Fuel Quantity..... MONITOR

FUEL IMBALANCE DECREASES?

No

Yes

When balance is achieved:

XFEED Knob..... OFF

FUEL PUMP 1 & 2 Switches..... AUTO

Fuel Quantity..... MONITOR

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

XFEED Knob..... OFF

Use asymmetric thrust as required to achieve fuel balance. If Autothrottle (A/T) is installed, disengage the A/T before asymmetric thrust application.

If asymmetric thrust can not be used:**LAND AS SOON AS PRACTICAL.****END**

FUEL PUMP 1 (2) FAIL

IN FLIGHT?

No

Yes

FUEL PUMP 1 (2) FAIL MESSAGE DISPLAYED
DURING FUEL IMBALANCE PROCEDURE?

No

Yes

Associated FUEL PUMP Switch..... ON

**After FUEL IMBALANCE Procedure is
accomplished:**

FUEL PUMP 1 & 2 Switches..... AUTO

ENDFUEL PUMP 1 (2) FAIL MESSAGE DISPLAYED
DURING ENGINE IN-FLIGHT START
PROCEDURE?

No

Yes

Associated FUEL PUMP Switch..... ON

**After ENGINE IN-FLIGHT START Procedure is
accomplished:**

FUEL PUMP 1 & 2 Switches..... AUTO

END

Do not takeoff.

END

FUEL XFEED FAIL

FUEL XFEED FAIL MESSAGE DISPLAYED WHEN
OPENING THE CROSSFEED VALVE FOR
BALANCING PROCEDURE?

No

↓ Yes

XFEED Knob..... OFF
Fuel Quantity..... MONITOR
THRUST Levers..... ADJUST

Use asymmetric thrust to improve or maintain the fuel balance.
If Autothrottle (A/T) is installed, disengage the A/T before
asymmetric thrust application.

FUEL XFEED FAIL MESSAGE DISPLAYED AFTER
PERFORMING A FUEL IMBALANCE
PROCEDURE?

No

↓ Yes

FUEL PUMP 1 & 2 Switches..... ON
XFEED Knob..... OFF
Fuel Quantity..... MONITOR

If further fuel balancing is required:

FUEL PUMP Switch (low level
wing)..... OFF
FUEL PUMP Switch (high level
wing)..... ON

After fuel balancing:

FUEL PUMP 1 & 2 Switches..... ON

END

TABLE OF CONTENTS

CAUTION

HYD HI TEMP.....	EAP10-1
HYD LO PRES.....	EAP10-3
HYD SOV 1 (2) FAIL.....	EAP10-4

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

HYD HI TEMP

HYD PUMP SOV 1 & 2 Switches..... CLOSED

.....Wait 7 minutes.....

HYD HI TEMP MESSAGE EXTINGUISHES?

No

↓ Yes

HYD PUMP SOV 2 Switch..... OPEN

Monitor the system.

HYD HI TEMP MESSAGE DISPLAYED AGAIN?

No

↓ Yes

HYD PUMP SOV 2 Switch..... CLOSED

Wait up to 7 minutes for the HYD HI TEMP message to extinguish.

HYD PUMP SOV 1 Switch..... OPEN

Monitor the system.

HYD HI TEMP MESSAGE DISPLAYED AGAIN?

No

↓ Yes

HYD PUMP SOV 1 Switch..... CLOSED

HYD LO PRES (EAP10-3)

Procedure..... ACCOMPLISH

After landing, shut down both engines as soon as possible.

END

HYD SOV 1 (2) FAIL MESSAGE DISPLAYED?

No

(EAP10-2)

↓ Yes

LAND AS SOON AS POSSIBLE.

Autothrottle (if applicable)..... DISENGAGE

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

QRH 2669-354

CONTINUED...

Hydraulic

...CONTINUED

Associated THRUST Lever..... IDLE

Associated ENG START/STOP

Knob..... STOP

If the HYD HI TEMP message extinguishes:HYD PUMP SOV Switch (non-
associated engine)..... OPEN**When appropriate:**

Autothrottle (if applicable)..... AS REQUIRED

ONE ENGINE INOPERATIVE

APPROACH AND

LANDING (NAP1-23) Procedure..... ACCOMPLISH

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

LAND AS SOON AS POSSIBLE.

END

HYD LO PRES

NOTE: Expect low roll rates and no speedbrake action.

Avoid side slipping the airplane and high angle of attack.

For landing:

ABNORMAL LANDING GEAR

EXTENSION (NAP1-10) Procedure.... ACCOMPLISH

Before landing:

Flap..... MAXIMUM AVAILABLE

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF FULL NO ICE} + 17 KIAS	2.70
IN ICING/ WITH ICE	MAXIMUM AVAILABLE	V _{REF FULL NO ICE} + 28 KIAS	3.10

Immediately after MLG touches down:

Control Wheel..... FORWARD

NLG..... TOUCH DOWN

Directional Control..... ESTABLISH

Guarantee the NLG on ground and align the airplane with the Runway Centerline.

CAUTION: THE ANTISKID PROTECTION IS DISABLED WITH THE EMERGENCY/PARKING BRAKE.

During landing run:

Emergency/Parking Brake..... APPLY GENTLY

Carefully pull the EMER/PARKING BRAKE Handle until the EMER/PARKING BRAKE Indicator is on. To maintain deceleration, when necessary, slowly and gradually increase the handle displacement. Consider the runway conditions and remaining runway length to regulate the brake application.

CAUTION: HARSH BRAKE APPLICATION MAY CAUSE TIRE BLOWOUT. IF TIRES BLOW OUT, DO NOT RELEASE THE HANDLE UNTIL THE AIRPLANE STOPS.

...CONTINUED

NOTE: The emergency/parking brake accumulator allows 6 actuations.

Relevant Inoperative Items

Multifunction Spoiler	Pusher Actuator
♦ Normal Brakes ♦	Rudder Booster
Normal Landing Gear Operation	

END**HYD SOV 1 (2) FAIL**

Associated Engine..... MONITOR

Hydraulic System..... MONITOR

If associated with fire or HYD HI TEMP message:

Associated HYD PUMP SOV

Switch..... CLOSED

END

TABLE OF CONTENTS

CAUTION

A-I E1 (E2) FAIL.....	EAP11-1
A-I LO CAPACITY.....	EAP11-2
A-I WINGSTB FAIL.....	EAP11-3
A-I WINGSTB INHB.....	EAP11-4
A-I WINGSTB LEAK.....	EAP11-6
ICE CONDITION.....	EAP11-7
WSHLD 1 (2) HTR FAIL.....	EAP11-7

ADVISORY

A-I WINGSTB ARM.....	EAP11-8
----------------------	---------

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

A-I E1 (E2) FAIL

Affected ENG ICE PROT Switch..... OFF, THEN ON

A-I E1 (E2) FAIL MESSAGE EXTINGUISHES?

No

Yes

END

Affected ENG ICE PROT Switch..... ON

Icing Conditions..... EXIT/AVOID

After exiting icing conditions:

Affected ENG ICE PROT Switch..... OFF

HIGH ENGINE VIBRATION DEVELOPS?

No

Yes

Autothrottle (if applicable)..... DISENGAGE

Associated THRUST Lever..... IDLE

If abnormal vibration persists:**ENGINE SHUTDOWN (NAP1-17)**

Procedure..... ACCOMPLISH

END

A-I LO CAPACITY

Autothrottle (if applicable)..... DISENGAGE

THRUST Levers..... ADVANCE

Advance THRUST Levers until reach N1 anti-icing bug, if displayed.

..... Wait 15 seconds.....

A-I LO CAPACITY MESSAGE PERSISTS?

No

Yes

WINGSTAB Switch..... OFF

Icing Conditions..... EXIT/AVOID

Airspeed..... MIN 165 KIAS

Landing configuration:**WARNING: DO NOT SELECT FLAP 2 OR HIGHER.**

Bank Angle..... MAX 30°

Flap..... 1

TAWS FLAP OVRD Button (if applicable)..... PRESS

Stabilized APPR Flap Override

Button (if applicable)..... PRESS

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY THE FACTOR BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	1	V _{REF} FULL NO ICE + 30 KIAS	1.50
IN ICING/ WITH ICE			

END

A-I WINGSTB FAIL

Airspeed..... MIN 165 KIAS
 THRUST Levers..... SYMMETRIC POSITION
 WINGSTAB Switch..... OFF, THEN ON

ASYMMETRIC THRUST IS REQUIRED?

No

Yes

Autothrottle (if applicable)..... DISENGAGE
 BLEED Switch (lower thrust engine)..... OFF
 WINGSTAB Switch..... OFF, THEN ON
 Altitude..... MAX 15000 FT

A-I WINGSTB FAIL MESSAGE PERSISTS?

No

Yes

Icing Conditions..... EXIT/AVOID

Landing configuration:**WARNING: DO NOT SELECT FLAP 2 OR HIGHER.**

Bank Angle..... MAX 30°

Flap..... 1

TAWS FLAP OVRD Button (if applicable)..... PRESS

Stabilized APPR Flap Override Button (if applicable)..... PRESS

CAUTION: TO DETERMINE THE MINIMUM SUITABLE
 LANDING DISTANCE, MULTIPLY THE
 UNFACTORED LANDING DISTANCE FOR FLAP
 FULL BY THE FACTOR BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	1	V _{REF} FULL NO ICE + 30 KIAS	1.50
IN ICING/ WITH ICE			

END

A-I WINGSTB INHB

IN FLIGHT?

No

Yes

Airspeed..... MIN 165 KIAS
 Flap..... UP
 WINGSTAB Switch..... KEEP ON
 Below 30000 ft..... EXIT/AVOID ICING
 CONDITIONS

After leaving icing conditions and if there is no ice accretion on the airplane:

WINGSTAB Switch..... OFF, THEN ICE SPEED RESET

WARNING: THE WINGSTAB SWITCH MUST BE KEPT ON UNTIL CREW IS CERTAIN THAT ALL ICE HAS BEEN REMOVED.

Before landing:

If icing conditions are presented or there is ice accretion:

WARNING: DO NOT SELECT FLAP 2 OR HIGHER.

Bank Angle..... MAX 30°
 Flap..... 1
 TAWS FLAP OVRD Button (if applicable)..... PRESS
 Stabilized APPR Flap Override Button (if applicable)..... PRESS

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY THE FACTOR BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
IN ICING/ WITH ICE	1	V _{REF} FULL NO ICE + 30 KIAS	1.50

END

Below 6°C:

Do not takeoff.

CONTINUED...

**EMERGENCY AND ABNORMAL
PROCEDURES**

Ice and Rain Protection

...CONTINUED**At or above 6°C:**WINGSTAB Switch..... OFF, THEN ICE SPEED
RESET**NOTE:** If SAT is below 10°C, keep ENG 1 & 2 ICE PROT
Switches ON.**WARNING: TAKEOFF MUST NOT BE PERFORMED WITH
THE MESSAGE PRESENTED.****END**

A-I WINGSTB LEAK

Airspeed..... MIN 165 KIAS
 WINGSTAB Switch..... OFF
 Icing Conditions..... EXIT/AVOID

A-I WINGSTB LEAK MESSAGE PERSISTS?

No

Yes

BLEED 1 Switch..... OFF
 XBLEED Knob..... OFF
 Altitude..... MAX 36000 FT

A-I WINGSTB LEAK MESSAGE PERSISTS?

No

Yes

BLEED 1 Switch..... AUTO
 BLEED 2 Switch..... OFF

A-I WINGSTB LEAK MESSAGE PERSISTS?

No

Yes

BLEED 1 Switch..... OFF
 Oxygen Masks..... DON, 100%
 Communication..... ESTABLISH
 Altitude..... MAX 10000 FT OR MEA,
 WHICHEVER IS
 HIGHER

At 10000 ft or MEA:

DUMP Button..... PUSH IN
 ECS Knob..... OFF VENT

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Landing configuration:

WARNING: DO NOT SELECT FLAP 2 OR HIGHER.

Bank Angle..... MAX 30°
 Flap..... 1
 TAWS FLAP OVRD Button (if
 applicable)..... PRESS
 Stabilized APPR Flap Override Button
 (if applicable)..... PRESS

CAUTION: TO DETERMINE THE MINIMUM SUITABLE
 LANDING DISTANCE, MULTIPLY THE
 UNFACTORED LANDING DISTANCE FOR FLAP
 FULL BY THE FACTOR BELOW.

CONTINUED...

EMERGENCY AND ABNORMAL
PROCEDURES

Ice and Rain Protection

...CONTINUED

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	1	V _{REF} FULL NO ICE + 30 KIAS	1.50
IN ICING/ WITH ICE			

END**ICE CONDITION**

ENG 1 & 2 ICE PROT Switches..... ON

WINGSTAB Switch..... ON

WSHLD 1 & 2 Switches..... ON

NOTE: Refer to the NORMAL OPERATION IN ICING CONDITIONS Procedure.**END****WSHLD 1 (2) HTR FAIL**

WSHLD 1 & 2 Switches..... OFF, THEN ON

WSHLD 1 (2) HTR FAIL MESSAGE
EXTINGUISHES?

No

Yes

END

Associated WSHLD Switch..... OFF

Icing Conditions (if required)..... EXIT/AVOID

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

A-I WINGSTB ARM

IN FLIGHT?

No

↓ Yes

Airspeed..... MIN 165 KIAS
Flap..... ZERO
WINGSTAB Switch..... KEEP ON

After leaving icing conditions and if there is no ice accretion on the airplane:

WINGSTAB Switch..... OFF, THEN ICE SPEED RESET

WARNING: THE WINGSTAB SWITCH MUST BE KEPT ON UNTIL CREW IS CERTAIN THAT ALL ICE HAS BEEN REMOVED.

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

TABLE OF CONTENTS

WARNING

LG LEVER DISAG.....	EAP12-1
---------------------	---------

CAUTION

ANTI-SKID FAIL.....	EAP12-3
BRK FAIL.....	EAP12-4
EMER BRK LO PRES.....	EAP12-5
LG WOW SYS FAIL.....	EAP12-5
PARK BRK NOT REL.....	EAP12-5

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

LG LEVER DISAG

MFD Indication: One or more LG indications disagree with the LDG GEAR Lever.

Airspeed..... MAX 250 KIAS

LDG GEAR Lever..... CYCLE

LG LEVER DISAG MESSAGE EXTINGUISHES?

No

Yes

END

LG LEVER DISAG MESSAGE DISPLAYED AFTER
LG EXTENSION?

No

Yes

LDG GEAR Lever..... DN

FREE FALL Handle..... PULL UNTIL STOP

If LG does not lock down:

Airspeed..... MIN 140 KIAS

NOTE: Side-slips at higher speeds are suggested, provided the airplane remains within the limiting speeds as defined by the limitations and below the maneuvering speed V_o .

Slip the airplane to attempt to lock the MLG.

LG INDICATIONS DOWN?

No

Yes

END

**PARTIAL OR GEAR UP
LANDING (NAP1-26)** Procedure..... ACCOMPLISH

END

LDG GEAR Lever..... DN

CONTINUED...

...CONTINUED

Icing Conditions..... EXIT/AVOID

LAND AS SOON AS PRACTICAL.**NOTE:** Refer to the LDG DOWN SPECIFIC RANGE Table below.**PW535E ENGINES**

LANDING GEAR DOWN SPECIFIC RANGE (NM/lb)		
150 KIAS and Thrust for Level Flight		
Altitude (ft)	Specific Range (NM/lb)	Range Decreasing in Relation to Gear Up (%)
10000	0.15	29
15000	0.16	31
20000	0.18	32
25000	0.20	34
30000	0.22	35
35000	0.24	37

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ANTI-SKID FAIL

During landing run, apply the main brakes progressively until deceleration is felt and from this point, start to modulate the brakes to avoid tire blowout.

Before landing:

Flap..... MAXIMUM AVAILABLE

CAUTION: – TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

- MAIN BRAKES AVAILABLE WITH POSSIBLE CHANGED PEDAL RESPONSE. IF NO DECELERATION IS FELT DURING INITIAL APPLICATION OF THE PEDAL, CONTINUE APPLYING THE MAIN BRAKES PROGRESSIVELY UNTIL DECELERATION IS FELT (APPROXIMATELY HALF PEDAL COURSE) AND FROM THIS POINT, START TO MODULATE THE BRAKES TO AVOID TIRE BLOWOUT.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 2 KIAS	1.65
IN ICING/ WITH ICE	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 11 KIAS	1.85

END

BRK FAIL

Burn fuel to reduce the landing speed.

Before landing:

Flap..... MAXIMUM AVAILABLE

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF FULL NO ICE} + 2 KIAS	1.65
IN ICING/ WITH ICE	MAXIMUM AVAILABLE	V _{REF FULL NO ICE} + 11 KIAS	1.85

Immediately after MLG touches down:

Control Wheel..... FORWARD
 NLG..... TOUCH DOWN
 Directional Control..... ESTABLISH

Guarantee the NLG on ground and align the airplane with the Runway Centerline.

CAUTION: THE ANTISKID PROTECTION IS DISABLED WITH THE EMERGENCY/PARKING BRAKE.

During landing run:

EMER/PARKING BRAKE Handle..... APPLY GENTLY

Carefully pull the EMER/PARKING BRAKE Handle until the EMER/PARKING BRAKE Indicator is on. To maintain deceleration, when necessary, slowly and gradually increase the handle displacement. Consider the runway conditions and remaining runway length to regulate the brake application.

CAUTION: HARSH BRAKE APPLICATION MAY CAUSE TIRE BLOWOUT. IF TIRES BLOW OUT, DO NOT RELEASE THE HANDLE UNTIL THE AIRPLANE STOPS.

NOTE: The EMER/PARKING BRAKE Handle accumulator allows 6 actuations.

END

EMER BRK LO PRES

Emergency/Parking Brake is inoperative.

When parking the airplane, use the wheel chocks.

END**LG WOW SYS FAIL**

If associated with engine failure and obstacle clearance, simultaneously proceed:

DN LCK REL Button..... PRESS

LDG GEAR Lever..... UP

The Weight on Wheel system failure may affect the functionality of the systems as listed below. In this case, their associated failure procedures must be accomplished, at crew discretion.

Relevant affected systems:

Environmental Control System	Pressurization System
Ice Protection System	Stall Warning and Protection System

END**PARK BRK NOT REL**

Before landing:

EMER/PARKING BRAKE Handle..... RELEASE

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

TABLE OF CONTENTS

CAUTION

OXY LO PRES.....	EAP13-1
PAX OXY NO PRES.....	EAP13-1

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Oxygen

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

OXY LO PRES

OXY SUPPLY Handle..... PRESS TO RESTORE

OXY LO PRES MESSAGE EXTINGUISHES?

No

Yes

ENDAltitude..... MAX 14000 FT OR MEA,
WHICHEVER IS HIGHER**As smoke mask protection is no more assured, LAND AS
SOON AS PRACTICAL.****END****PAX OXY NO PRES**

OXY SUPPLY CONTROL Knob..... PAX OVRD

END

INTENTIONALLY BLANK

TABLE OF CONTENTS

WARNING

NO TO CONFIG.....	EAP14-1
-------------------	---------

CAUTION

AURAL WRN FAIL.....	EAP14-1
PUSHER FAIL.....	EAP14-1
PUSHER OFF.....	EAP14-1
SURFWATCH NODATA.....	EAP14-2
SWPS FAIL.....	EAP14-2
SWPS FAULT.....	EAP14-3
SWPS UNTESTED.....	EAP14-4
TCAS FAIL.....	EAP14-4

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Warning

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

Warning

NO TO CONFIG

Configure the airplane for takeoff.

END**AURAL WRN FAIL**

Monitor visual alert indications.

NOTE: Aural warnings, including TCAS, TAWS, TIS and Stall Callouts are lost.

END**PUSHER FAIL**

PUSHER CUTOUT Button..... PUSH IN

Avoid side slipping the airplane and high angle of attack.

NOTE: Low Speed Awareness cues (yellow and red band) and Stall aural warning will still be available.

END**PUSHER OFF**

If pusher was inadvertently cut off:

PUSHER CUTOUT Button..... PUSH OUT

If pusher was intentionally cut off:

Avoid side slipping the airplane and high angle of attack.

NOTE: Low Speed Awareness cues (yellow and red band) and Stall aural warning will still be available.

END

Warning

SURFWATCH NODATA

USE OF SURFACE WATCH CONSIDERED?

No

Yes

If before takeoff:

Takeoff Data..... SET/CHK

If before landing:

Landing Data..... SET/CHK

END

SurfaceWatch Alerts..... INHIBIT

END**SWPS FAIL**

Avoid side slipping the airplane and high angle of attack.

NOTE: Low Speed Awareness cues (yellow and red band) and green circle will not be shown on airspeed tape. Stall aural message will not be activated.**END**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

SWPS FAULT

THE MESSAGE IS ASSOCIATED WITH FLAP FAIL, PTRIM BKP FAIL AND SPOILER FAULT MESSAGES AND FCE RESET IS INSTALLED?

No

Yes

FCE RESET Knob..... SET TO FCE 1

FCE RESET Button..... PRESS FOR 1 SECOND

NOTE: Only one actuation per flight is allowed for FCE 1.

FCE RESET Knob..... SET TO NONE

..... Wait 5 seconds.....

SWPS FAULT MESSAGE EXTINGUISHES?

No

Yes

END

Avoid side slipping the airplane and high angle of attack.

Before landing:

Flap..... MAXIMUM AVAILABLE

Maintain airspeed according to the following:

CAUTION: TO DETERMINE THE MINIMUM SUITABLE LANDING DISTANCE, MULTIPLY THE UNFACTORED LANDING DISTANCE FOR FLAP FULL BY ONE OF THE FACTORS BELOW.

	FLAP POSITION	V _{REF}	LANDING DISTANCE CORRECTION FACTOR
NO ICING	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 6 KIAS	1.20
IN ICING/ WITH ICING	MAXIMUM AVAILABLE	V _{REF} FULL NO ICE + 15 KIAS	1.30

END

Warning

SWPS UNTESTED

Pre-Flight SWPS Test..... ACCOMPLISH

SWPS UNTESTED MESSAGE EXTINGUISHES?

No

Yes

END

Do not takeoff.

END**TCAS FAIL**

Increase awareness in relation to the other airplanes proximity.

END

FLAP 1 - DRY RWY - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2461	2550	2705	2939	3221	3721	18387
	104/104/117	104/104/116	103/103/115	105/105/116	108/108/119	113/113/123	
5	2497	2583	2740	2981	3266	3774	18387
	104/104/117	103/103/116	103/103/115	105/105/116	108/108/119	113/113/123	
10	2532	2617	2775	3024	3314	3830	18387
	104/104/117	103/103/116	103/103/115	105/105/116	108/108/119	113/113/123	
15	2568	2651	2811	3067	3361	3886	18387
	104/104/116	103/103/116	103/103/115	105/105/116	108/108/119	113/113/123	
20	2604	2685	2847	3113	3411	3947	18387
	103/103/116	103/103/115	103/103/115	105/105/116	108/108/119	113/113/123	
25	2641	2720	2884	3158	3461	4005	18387
	103/103/116	103/103/115	103/103/114	105/105/116	108/108/119	113/113/123	
30	2666	2791	2971	3276	3614	4170	18387
	103/103/115	102/102/114	103/103/114	106/106/116	109/109/119	113/113/123	
35	2722	2949	3268	3641	4031	4618	18387
	99/99/111	100/100/111	103/103/114	107/107/116	110/110/119	114/114/123	
40	2907	3246	3651	4055	4465	5154	18387
	98/98/108	101/101/111	104/104/114	107/107/116	110/110/119	115/115/123	
45	3201	3628	4053	4479	4978	5744	18387
	99/99/108	102/102/111	105/105/114	108/108/116	111/111/119	115/115/123	
50	3587	4034	4502	5031	5566	6428	18387
	99/99/108	103/103/111	106/106/114	109/109/116	112/112/119	116/116/123	
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2544 104/104/117	2611 104/104/116	2771 103/103/115	3006 105/105/116	3294 108/108/119	3799 113/113/123	18387
5	2580 104/104/117	2646 104/104/116	2808 103/103/115	3051 105/105/116	3343 108/108/119	3858 113/113/123	18387
10	2617 104/104/117	2681 103/103/116	2845 103/103/115	3096 105/105/116	3393 108/108/119	3917 113/113/123	18387
15	2653 104/104/116	2717 103/103/116	2882 103/103/115	3142 105/105/116	3443 108/108/119	3977 113/113/123	18387
20	2691 103/103/116	2753 103/103/115	2920 103/103/115	3190 105/105/116	3496 108/108/119	4040 113/113/123	18387
25	2729 103/103/116	2817 103/103/115	2985 103/103/114	3277 106/106/116	3600 109/109/119	4161 113/113/123	18387
30	2730 100/100/112	2905 100/100/111	3213 103/103/114	3554 106/106/116	3945 109/109/119	4532 114/114/123	18387
35	2856 97/97/108	3193 101/101/111	3572 104/104/114	3977 107/107/116	4387 110/110/119	5036 114/114/123	18387
40	3146 98/98/108	3558 102/102/111	3983 105/105/114	4410 108/108/116	4871 111/111/119	5639 115/115/123	18387
45	3512 99/99/108	3961 103/103/111	4408 106/106/114	4919 109/109/116	5455 112/112/119	6278 116/116/123	18387
50	3919 100/100/108	4397 103/103/111	4955 106/106/114	5513 110/110/116	6098 112/112/119	- -	17658
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2624 104/104/117	2680 104/104/116	2843 103/103/115	3087 105/105/116	3383 108/108/119	3899 113/113/123	18387
5	2662 104/104/117	2715 103/103/116	2881 103/103/115	3133 105/105/116	3433 108/108/119	3959 113/113/123	18387
10	2700 104/104/117	2751 103/103/116	2918 103/103/115	3179 105/105/116	3484 108/108/119	4018 113/113/123	18387
15	2738 104/104/116	2787 103/103/116	2956 103/103/115	3226 105/105/116	3535 108/108/119	4079 113/113/123	18387
20	2777 103/103/116	2844 103/103/115	3014 103/103/114	3302 105/105/116	3621 109/109/119	4188 113/113/123	18387
25	2756 101/101/113	2934 101/101/112	3220 103/103/114	3549 106/106/116	3942 109/109/119	4532 113/113/123	18387
30	2852 98/98/109	3156 101/101/111	3509 104/104/114	3916 107/107/116	4328 110/110/119	4949 114/114/123	18387
35	3116 98/98/108	3505 101/101/111	3933 105/105/114	4361 108/108/116	4795 111/111/119	5562 115/115/123	18387
40	3458 99/99/108	3908 102/102/111	4358 105/105/114	4837 109/109/116	5375 112/112/119	6188 116/116/123	18387
45	3861 100/100/108	4335 103/103/111	4866 106/106/114	5426 109/109/116	5994 112/112/119	- -	17996
48	4117 100/100/108	4645 104/104/111	5223 107/107/114	5801 110/110/116	6440 113/113/119	- -	17282
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2701 104/104/117	2753 103/103/116	2920 103/103/115	3184 105/105/117	3489 108/108/119	4024 113/113/123	18387
5	2741 104/104/116	2789 103/103/116	2959 103/103/115	3230 105/105/117	3539 108/108/119	4083 113/113/123	18387
10	2780 103/103/116	2827 103/103/115	2998 103/103/115	3278 105/105/117	3592 108/108/119	4146 113/113/123	18387
15	2819 103/103/116	2868 103/103/115	3041 103/103/114	3333 105/105/117	3652 108/108/119	4223 113/113/123	18387
20	2801 101/101/113	2969 101/101/112	3243 103/103/114	3571 106/106/117	3965 109/109/119	4562 113/113/123	18387
25	2879 98/98/110	3154 100/100/111	3494 104/104/114	3902 107/107/117	4315 110/110/119	4940 114/114/123	18387
30	3079 98/98/108	3442 101/101/111	3872 104/104/114	4301 108/108/117	4737 111/111/119	5472 115/115/123	18387
35	3408 99/99/108	3861 102/102/111	4313 105/105/114	4766 108/108/117	5303 111/111/119	6118 116/116/123	18387
40	3810 100/100/108	4286 103/103/111	4786 106/106/114	5349 109/109/117	5919 112/112/119	- -	18326
45	4238 100/100/108	4788 104/104/111	5380 107/107/114	5974 110/110/117	- -	- -	17146
46	4328 100/100/108	4907 104/104/111	5505 107/107/114	6115 110/110/117	- -	- -	16911
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2755 103/103/115	2836 102/102/114	3018 102/102/114	3330 106/106/117	3654 109/109/119	4223 113/113/123	18387
5	2796 103/103/115	2874 102/102/114	3063 102/102/114	3380 106/106/117	3711 109/109/119	4287 113/113/123	18387
10	2837 102/102/115	2913 102/102/114	3109 102/102/114	3430 106/106/117	3768 109/109/119	4352 113/113/123	18387
15	2854 101/101/113	3003 101/101/113	3270 103/103/114	3602 106/106/117	3995 109/109/119	4599 113/113/123	18387
20	2910 99/99/110	3173 100/100/111	3518 104/104/114	3921 107/107/117	4339 110/110/119	4970 114/114/123	18387
25	3070 98/98/108	3429 101/101/111	3848 104/104/114	4280 107/107/117	4717 110/110/119	5424 115/115/123	18387
30	3358 98/98/108	3805 102/102/111	4258 105/105/114	4713 108/108/117	5218 111/111/119	6037 115/115/123	18387
35	3761 99/99/108	4239 103/103/111	4718 106/106/114	5274 109/109/117	5846 112/112/119	6738 116/116/123	18387
40	4187 100/100/108	4706 103/103/111	5301 107/107/114	5897 110/110/117	6531 113/113/119	- -	17466
44	4557 101/101/108	5181 104/104/111	5802 107/107/114	6468 110/110/117	- -	- -	16544
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2810 102/102/114	2928 101/101/113	3171 103/103/114	3496 106/106/117	3861 109/109/119	4451 113/113/123	18387
5	2850 101/101/114	2967 101/101/113	3220 103/103/114	3550 106/106/117	3922 109/109/119	4521 113/113/123	18387
10	2899 101/101/114	3031 101/101/113	3300 103/103/114	3636 106/106/117	4027 109/109/119	4639 113/113/123	18387
15	2945 99/99/110	3200 100/100/111	3549 103/103/114	3950 107/107/117	4373 110/110/119	5013 114/114/123	18387
20	3083 97/97/108	3446 101/101/111	3856 104/104/114	4292 107/107/117	4734 110/110/119	5434 115/115/123	18387
25	3328 98/98/108	3750 102/102/111	4205 105/105/114	4662 108/108/117	5132 111/111/119	5952 115/115/123	18387
30	3703 99/99/108	4183 102/102/111	4663 106/106/114	5187 109/109/117	5762 112/112/119	6631 116/116/123	18387
35	4139 100/100/108	4645 103/103/111	5225 106/106/114	5823 109/109/117	6430 112/112/119	- -	17817
40	4591 101/101/108	5222 104/104/111	5852 107/107/114	6516 110/110/117	- -	- -	16662
42	4826 101/101/108	5472 104/104/111	6117 107/107/114	- -	- -	- -	16208
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

FLAP 1 - WET RWY - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	3587 104/104/117	3616 104/104/116	3641 103/103/115	3666 103/105/116	3694 103/108/119	3740 102/113/123	18387
5	3646 104/104/117	3676 103/103/116	3703 103/103/115	3728 103/105/116	3757 103/108/119	3805 102/113/123	18387
10	3704 104/104/117	3735 103/103/116	3763 103/103/115	3789 103/105/116	3819 103/108/119	3869 102/113/123	18387
15	3762 104/104/116	3795 103/103/116	3824 103/103/115	3852 103/105/116	3883 103/108/119	3934 102/113/123	18387
20	3827 103/103/116	3860 103/103/115	3890 103/103/115	3918 103/105/116	3950 102/108/119	4003 102/113/123	18387
25	3891 103/103/116	3925 103/103/115	3956 103/103/114	3986 103/105/116	4018 102/108/119	4072 102/113/123	18387
30	3919 103/103/115	3956 102/102/114	3988 102/103/114	4020 102/106/116	4055 102/109/119	4170 101/113/123	18387
35	3757 99/99/111	3796 99/100/111	3832 99/103/114	3867 98/107/116	4031 98/110/119	4618 103/114/123	18387
40	3612 96/98/108	3654 96/101/111	3694 95/104/114	4055 97/107/116	4465 100/110/119	5154 105/115/123	18387
45	3476 93/99/108	3628 92/102/111	4053 95/105/114	4479 99/108/116	4978 102/111/119	5744 108/115/123	18387
50	3587 90/99/108	4034 94/103/111	4502 97/106/114	5031 101/109/116	5566 105/112/119	6428 110/116/123	18387
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	3730 104/104/117	3760 104/104/116	3788 103/103/115	3814 103/105/116	3844 103/108/119	3893 103/113/123	18387
5	3790 104/104/117	3822 104/104/116	3850 103/103/115	3878 103/105/116	3909 103/108/119	3960 102/113/123	18387
10	3850 104/104/117	3883 103/103/116	3913 103/103/115	3942 103/105/116	3974 103/108/119	4027 102/113/123	18387
15	3910 104/104/116	3945 103/103/116	3976 103/103/115	4006 103/105/116	4039 103/108/119	4093 102/113/123	18387
20	3976 103/103/116	4012 103/103/115	4044 103/103/115	4075 103/105/116	4109 102/108/119	4165 102/113/123	18387
25	4035 103/103/116	4073 103/103/115	4106 103/103/114	4139 102/106/116	4175 102/109/119	4234 102/113/123	18387
30	3912 100/100/112	3952 100/100/111	3988 100/103/114	4023 100/106/116	4062 99/109/119	4532 102/114/123	18387
35	3755 97/97/108	3798 97/101/111	3838 96/104/114	3977 96/107/116	4387 99/110/119	5036 104/114/123	18387
40	3612 94/98/108	3658 93/102/111	3983 94/105/114	4410 98/108/116	4871 101/111/119	5639 107/115/123	18387
45	3512 90/99/108	3961 93/103/111	4408 96/106/114	4919 100/109/116	5455 104/112/119	6278 109/116/123	18387
50	3919 91/100/108	4397 95/103/111	4955 99/106/114	5513 102/110/116	6098 106/112/119	- -	17658
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	3868	3901	3931	3959	3991	4043	18387
	104/104/117	104/104/116	103/103/115	103/105/116	103/108/119	103/113/123	
5	3931	3966	3996	4026	4059	4113	18387
	104/104/117	103/103/116	103/103/115	103/105/116	103/108/119	102/113/123	
10	3994	4030	4062	4093	4127	4183	18387
	104/104/117	103/103/116	103/103/115	103/105/116	103/108/119	102/113/123	
15	4058	4095	4128	4160	4196	4253	18387
	104/104/116	103/103/116	103/103/115	103/105/116	103/108/119	102/113/123	
20	4122	4161	4196	4230	4266	4326	18387
	103/103/116	103/103/115	103/103/114	103/105/116	102/109/119	102/113/123	
25	4024	4065	4102	4139	4178	4532	18387
	101/101/113	101/101/112	100/103/114	100/106/116	100/109/119	101/113/123	
30	3897	3941	3982	4021	4328	4949	18387
	98/98/109	98/101/111	97/104/114	97/107/116	98/110/119	103/114/123	
35	3743	3790	3933	4361	4795	5562	18387
	94/98/108	94/101/111	94/105/114	97/108/116	101/111/119	106/115/123	
40	3607	3908	4358	4837	5375	6188	18387
	91/99/108	92/102/111	96/105/114	99/109/116	103/112/119	108/116/123	
45	3861	4335	4866	5426	5994	-	17996
	90/100/108	94/103/111	98/106/114	102/109/116	105/112/119	-	
48	4117	4645	5223	5801	6440	-	17282
	91/100/108	95/104/111	99/107/114	103/110/116	106/113/119	-	
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4000 104/104/117	4035 103/103/116	4067 103/103/115	4098 103/105/117	4131 103/108/119	4187 102/113/123	18387
5	4067 104/104/116	4104 103/103/116	4137 103/103/115	4169 103/105/117	4204 103/108/119	4262 102/113/123	18387
10	4133 103/103/116	4172 103/103/115	4206 103/103/115	4239 103/105/117	4275 102/108/119	4335 102/113/123	18387
15	4200 103/103/116	4240 103/103/115	4275 103/103/114	4310 103/105/117	4347 102/108/119	4408 102/113/123	18387
20	4126 101/101/113	4168 101/101/112	4207 101/103/114	4245 100/106/117	4285 100/109/119	4562 101/113/123	18387
25	4018 98/98/110	4063 98/100/111	4105 98/104/114	4145 98/107/117	4315 98/110/119	4940 103/114/123	18387
30	3886 95/98/108	3934 95/101/111	3979 95/104/114	4301 96/108/117	4737 100/111/119	5472 105/115/123	18387
35	3737 92/99/108	3861 92/102/111	4313 95/105/114	4766 99/108/117	5303 102/111/119	6118 107/116/123	18387
40	3810 89/100/108	4286 93/103/111	4786 97/106/114	5349 101/109/117	5919 104/112/119	- -	18326
45	4238 91/100/108	4788 95/104/111	5380 99/107/114	5974 103/110/117	- -	- -	17146
46	4328 92/100/108	4907 96/104/111	5505 100/107/114	6115 103/110/117	- -	- -	16911
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4084 103/103/115	4122 102/102/114	4156 102/102/114	4189 102/106/117	4225 102/109/119	4284 101/113/123	18387
5	4153 103/103/115	4192 102/102/114	4228 102/102/114	4262 102/106/117	4300 102/109/119	4361 101/113/123	18387
10	4221 102/102/115	4262 102/102/114	4299 102/102/114	4334 102/106/117	4373 101/109/119	4436 101/113/123	18387
15	4222 101/101/113	4266 101/101/113	4306 101/103/114	4344 101/106/117	4386 100/109/119	4599 101/113/123	18387
20	4119 99/99/110	4166 99/100/111	4208 98/104/114	4250 98/107/117	4339 98/110/119	4970 102/114/123	18387
25	4008 96/98/108	4058 96/101/111	4104 96/104/114	4280 96/107/117	4717 99/110/119	5424 104/115/123	18387
30	3873 93/98/108	3926 93/102/111	4258 94/105/114	4713 98/108/117	5218 101/111/119	6037 106/115/123	18387
35	3761 90/99/108	4239 92/103/111	4718 96/106/114	5274 100/109/117	5846 104/112/119	6738 109/116/123	18387
40	4187 91/100/108	4706 95/103/111	5301 98/107/114	5897 102/110/117	6531 106/113/119	- -	17466
44	4557 92/101/108	5181 96/104/111	5802 100/107/114	6468 104/110/117	- -	- -	16544
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4166 102/102/114	4206 101/101/113	4243 101/103/114	4279 101/106/117	4318 101/109/119	4451 100/113/123	18387
5	4234 101/101/114	4276 101/101/113	4315 101/103/114	4351 101/106/117	4392 101/109/119	4521 100/113/123	18387
10	4305 101/101/114	4350 101/101/113	4391 101/103/114	4431 101/106/117	4473 100/109/119	4639 100/113/123	18387
15	4217 99/99/110	4266 99/100/111	4310 98/103/114	4353 98/107/117	4399 98/110/119	5013 102/114/123	18387
20	4119 96/97/108	4170 96/101/111	4217 96/104/114	4292 96/107/117	4734 99/110/119	5434 104/115/123	18387
25	4016 94/98/108	4070 94/102/111	4205 93/105/114	4662 97/108/117	5132 100/111/119	5952 106/115/123	18387
30	3870 91/99/108	4183 92/102/111	4663 95/106/114	5187 99/109/117	5762 103/112/119	6631 108/116/123	18387
35	4139 90/100/108	4645 94/103/111	5225 98/106/114	5823 101/109/117	6430 105/112/119	- -	17817
40	4591 92/101/108	5222 96/104/111	5852 100/107/114	6516 103/110/117	- -	- -	16662
42	4826 93/101/108	5472 97/104/111	6117 101/107/114	- -	- -	- -	16208
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

FLAP 1 - STD WATER (0.125 in) - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4681 103/103/116	4724 103/103/115	4761 103/103/114	4796 102/105/116	4833 102/108/119	4892 102/113/123	18387
5	4743 103/103/116	4788 103/103/115	4827 102/102/114	4864 102/105/116	4903 102/108/119	4965 102/113/123	18387
10	4803 103/103/116	4850 103/103/115	4892 102/102/114	4931 102/105/116	4972 102/108/119	5037 102/113/123	18387
15	4864 103/103/116	4914 102/102/115	4958 102/102/114	4999 102/105/116	5042 102/108/119	5110 102/113/123	18387
20	4940 103/103/115	4991 102/102/115	5036 102/102/114	5079 102/105/116	5123 102/108/119	5194 101/113/123	18387
25	5015 103/103/115	5068 102/102/114	5115 102/102/114	5159 102/105/116	5205 102/108/119	5277 101/113/123	18387
30	5051 102/102/114	5106 102/102/113	5155 101/103/114	5201 101/106/116	5250 101/109/119	5326 101/113/123	18387
35	4875 98/98/110	4931 98/100/111	4981 98/103/114	5029 98/107/116	5079 98/110/119	5727 103/114/123	18387
40	4713 95/98/108	4770 95/101/111	4821 95/104/114	4922 95/107/116	5491 100/110/119	6420 107/115/123	18387
45	4556 92/99/108	4614 92/102/111	4893 94/105/114	5491 99/108/116	6143 104/111/119	7202 111/115/123	18387
50	4401 89/99/108	4844 92/103/111	5479 98/106/114	6168 103/109/116	6914 108/112/119	8306 114/116/123	18387
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4839	4886	4927	4966	5006	5071	18387
	103/103/116	103/103/115	103/103/114	102/105/116	102/108/119	102/113/123	
5	4902	4951	4995	5035	5078	5146	18387
	103/103/116	103/103/115	102/102/114	102/105/116	102/108/119	102/113/123	
10	4965	5016	5062	5105	5150	5221	18387
	103/103/116	103/103/115	102/102/114	102/105/116	102/108/119	102/113/123	
15	5027	5081	5129	5174	5221	5295	18387
	103/103/116	102/102/115	102/102/114	102/105/116	102/108/119	102/113/123	
20	5105	5160	5210	5257	5305	5381	18387
	103/103/115	102/102/115	102/102/114	102/105/116	102/108/119	101/113/123	
25	5174	5232	5284	5333	5384	5464	18387
	102/102/115	102/102/114	102/102/114	102/106/116	101/109/119	101/113/123	
30	5044	5103	5155	5206	5258	5647	18387
	100/100/111	99/100/111	99/103/114	99/106/116	99/109/119	101/114/123	
35	4873	4932	4987	5038	5424	6336	18387
	96/97/108	96/101/111	96/104/114	96/107/116	99/110/119	106/114/123	
40	4711	4772	4842	5435	6077	7122	18387
	93/98/108	93/102/111	93/105/114	98/108/116	103/111/119	110/115/123	
45	4555	4788	5415	6098	6832	8201	18387
	90/99/108	91/103/111	96/106/114	102/109/116	106/112/119	113/116/123	
50	4707	5370	6095	6876	7759	-	17658
	90/100/108	95/103/111	100/106/114	105/110/116	110/112/119	-	
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4993 103/103/116	5044 103/103/115	5089 103/103/114	5131 102/105/116	5176 102/108/119	5246 102/113/123	18387
5	5059 103/103/116	5112 103/103/115	5160 102/102/114	5204 102/105/116	5251 102/108/119	5324 102/113/123	18387
10	5124 103/103/116	5180 103/103/115	5230 102/102/114	5277 102/105/116	5326 102/108/119	5402 102/113/123	18387
15	5192 103/103/116	5250 102/102/115	5302 102/102/114	5351 102/105/116	5402 102/108/119	5482 102/113/123	18387
20	5267 103/103/115	5327 102/102/114	5382 102/102/114	5433 102/105/116	5487 102/109/119	5569 101/113/123	18387
25	5165 100/100/112	5227 100/100/111	5283 100/103/114	5335 99/106/116	5390 99/109/119	5686 101/113/123	18387
30	5030 97/97/108	5093 97/101/111	5150 97/104/114	5204 97/107/116	5383 98/110/119	6285 104/114/123	18387
35	4860 94/98/108	4923 94/101/111	4982 93/105/114	5408 97/108/116	6045 102/111/119	7081 109/115/123	18387
40	4704 91/99/108	4769 90/102/111	5384 96/105/114	6058 101/109/116	6791 106/112/119	8156 112/116/123	18387
45	4673 89/100/108	5333 94/103/111	6051 99/106/114	6829 105/109/116	7669 109/112/119	- -	17996
48	5010 91/100/108	5731 96/104/111	6514 102/107/114	7363 107/110/116	8554 112/113/119	- -	17282
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5139 103/103/116	5194 102/102/115	5243 102/102/114	5289 102/105/117	5338 102/108/119	5413 102/113/123	18387
5	5209 103/103/116	5267 102/102/115	5318 102/102/114	5367 102/105/117	5418 102/108/119	5497 102/113/123	18387
10	5277 103/103/115	5337 102/102/115	5392 102/102/114	5443 102/105/117	5496 102/108/119	5578 101/113/123	18387
15	5349 102/102/115	5412 102/102/114	5468 102/102/114	5521 102/105/117	5576 102/108/119	5662 101/113/123	18387
20	5275 100/100/112	5340 100/100/111	5398 100/103/114	5453 100/106/117	5511 99/109/119	5761 101/113/123	18387
25	5162 98/98/109	5228 97/100/111	5287 97/104/114	5344 97/107/117	5405 97/110/119	6309 104/114/123	18387
30	5020 95/98/108	5086 94/101/111	5148 94/104/114	5367 96/108/117	5999 101/111/119	7022 108/115/123	18387
35	4853 91/99/108	4921 91/102/111	5363 95/105/114	6031 100/108/117	6761 105/111/119	8104 111/116/123	18387
40	4697 88/100/108	5306 93/103/111	6017 98/106/114	6791 104/109/117	7620 108/112/119	- -	18326
45	5220 92/100/108	5978 97/104/111	6802 102/107/114	7695 108/110/117	- -	- -	17146
46	5347 92/100/108	6130 98/104/111	6989 103/107/114	8060 108/110/117	- -	- -	16911
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5232 102/102/114	5291 102/102/114	5344 101/102/114	5394 101/106/117	5446 101/109/119	5527 101/113/123	18387
5	5304 102/102/114	5366 101/101/113	5421 101/102/114	5473 101/106/117	5528 101/109/119	5612 101/113/123	18387
10	5375 102/102/114	5439 101/101/113	5497 101/102/114	5552 101/106/117	5608 101/109/119	5696 100/113/123	18387
15	5378 100/100/113	5445 100/100/112	5506 100/103/114	5564 100/106/117	5624 100/109/119	5844 101/113/123	18387
20	5272 98/98/109	5340 98/100/111	5403 98/104/114	5462 97/107/117	5524 97/110/119	6387 104/114/123	18387
25	5155 95/98/108	5225 95/101/111	5289 95/104/114	5378 95/107/117	6010 100/110/119	7021 107/115/123	18387
30	5007 92/98/108	5078 92/102/111	5329 94/105/114	5994 99/108/117	6713 104/111/119	8044 110/115/123	18387
35	4845 89/99/108	5283 92/103/111	5990 98/106/114	6758 103/109/117	7606 108/112/119	9200 114/116/123	18387
40	5191 91/100/108	5943 96/103/111	6763 102/107/114	7643 107/110/117	8921 111/113/119	- -	17466
44	5714 94/101/108	6566 99/104/111	7490 105/107/114	8746 110/110/117	- -	- -	16544
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5324 101/101/113	5387 100/100/112	5444 100/103/114	5497 100/106/117	5553 100/109/119	5639 100/113/123	18387
5	5396 101/101/113	5461 100/100/112	5520 100/103/114	5576 100/106/117	5634 100/109/119	5754 100/113/123	18387
10	5470 100/100/113	5540 100/100/112	5603 100/103/114	5662 100/106/117	5724 100/109/119	5937 100/113/123	18387
15	5378 98/98/110	5450 98/100/111	5515 98/103/114	5577 98/107/117	5642 97/110/119	6480 103/114/123	18387
20	5276 96/97/108	5349 95/101/111	5416 95/104/114	5480 95/107/117	6071 100/110/119	7086 106/115/123	18387
25	5167 93/98/108	5241 93/102/111	5309 93/105/114	5960 98/108/117	6669 103/111/119	7982 109/115/123	18387
30	5005 90/99/108	5247 91/102/111	5950 97/106/114	6709 102/109/117	7594 106/112/119	9109 113/116/123	18387
35	5167 90/100/108	5914 95/103/111	6735 101/106/114	7658 106/109/117	8796 110/112/119	- -	17817
40	5823 94/101/108	6694 99/104/111	7634 105/107/114	9024 110/110/117	- -	- -	16662
42	6126 95/101/108	7050 101/104/111	8259 106/107/114	- -	- -	- -	16208
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 1 - STD WATER (0.250 in) - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4392	4452	4506	4558	4612	5270	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	107/113/123	
5	4449	4511	4568	4622	4678	5402	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	108/113/123	
10	4504	4568	4628	4685	4743	5544	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	109/113/123	
15	4560	4627	4689	4748	4809	5690	18387
	102/102/115	102/102/114	101/102/114	101/105/116	101/108/119	109/113/123	
20	4627	4696	4760	4822	4885	5855	18387
	102/102/115	101/101/114	101/102/114	101/105/116	101/108/119	110/113/123	
25	4695	4766	4832	4895	4991	6015	18387
	102/102/114	101/101/114	101/102/114	101/105/116	101/108/119	110/113/123	
30	4732	4806	4875	4942	5303	6428	18387
	101/101/113	101/101/113	101/103/114	100/106/116	103/109/119	112/113/123	
35	4592	4667	4737	5365	6168	6951	18387
	97/97/109	97/100/111	97/103/114	103/107/116	109/110/119	114/114/123	
40	4464	4634	5392	6089	6642	7493	18387
	94/98/108	95/101/111	102/104/114	107/107/116	110/110/119	115/115/123	
45	4553	5412	6012	6557	7152	-	17426
	93/99/108	100/102/111	105/105/114	108/108/116	111/111/119	-	
50	5285	5871	6459	-	-	-	16164
	99/99/108	103/103/111	106/106/114	-	-	-	
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4535	4599	4658	4715	4774	5510	18387
	102/102/115	102/102/114	102/102/114	102/105/116	101/108/119	108/113/123	
5	4592	4659	4721	4781	4842	5650	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	109/113/123	
10	4649	4719	4784	4846	4909	5803	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	109/113/123	
15	4707	4779	4846	4911	4977	5960	18387
	102/102/115	102/102/114	101/102/114	101/105/116	101/108/119	110/113/123	
20	4776	4851	4920	4987	5093	6159	18387
	102/102/115	101/101/114	101/102/114	101/105/116	101/108/119	110/113/123	
25	4841	4919	4991	5061	5334	6464	18387
	101/101/114	101/101/113	101/102/114	101/106/116	103/109/119	112/113/123	
30	4739	4817	4891	5270	6056	6950	18387
	99/99/110	98/100/111	98/103/114	101/106/116	108/109/119	114/114/123	
35	4604	4683	5322	6086	6637	7612	18387
	95/97/108	95/101/111	101/104/114	107/107/116	110/110/119	114/114/123	
40	4491	5307	6003	6565	7153	-	17715
	92/98/108	99/102/111	105/105/114	108/108/116	111/111/119	-	
45	5251	5889	6460	7082	-	-	16439
	98/99/108	103/103/111	106/106/114	109/109/116	-	-	
50	5727	6334	-	-	-	-	15241
	100/100/108	103/103/111	-	-	-	-	
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4673	4742	4807	4868	4931	5789	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	109/113/123	
5	4733	4805	4872	4936	5002	5946	18387
	102/102/115	102/102/114	102/102/114	101/105/116	101/108/119	109/113/123	
10	4793	4868	4938	5005	5076	6118	18387
	102/102/115	102/102/114	101/102/114	101/105/116	101/108/119	110/113/123	
15	4854	4932	5004	5074	5209	6276	18387
	102/102/115	102/102/114	101/102/114	101/105/116	102/108/119	111/113/123	
20	4924	5005	5080	5152	5432	6585	18387
	102/102/114	101/101/113	101/102/114	101/105/116	103/109/119	112/113/123	
25	4847	4929	5006	5315	6092	7124	18387
	99/99/111	99/100/111	99/103/114	101/106/116	107/109/119	113/113/123	
30	4742	4825	5250	6083	6671	7671	18387
	96/97/108	96/101/111	99/104/114	106/107/116	110/110/119	114/114/123	
35	4608	5251	6046	6597	7182	-	17987
	93/98/108	98/101/111	105/105/114	108/108/116	111/111/119	-	
40	5168	5900	6486	7105	-	-	16650
	97/99/108	102/102/111	105/105/114	109/109/116	-	-	
45	5742	6353	-	-	-	-	15446
	100/100/108	103/103/111	-	-	-	-	
48	6004	-	-	-	-	-	14759
	100/100/108	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4805	4879	4949	5015	5098	6138	18387
	102/102/115	102/102/114	101/102/114	101/105/117	101/108/119	110/113/123	
5	4869	4947	5019	5088	5229	6299	18387
	102/102/115	102/102/114	101/102/114	101/105/117	102/108/119	111/113/123	
10	4932	5012	5087	5159	5376	6489	18387
	102/102/114	101/101/114	101/102/114	101/105/117	102/108/119	111/113/123	
15	4997	5080	5157	5232	5531	6692	18387
	101/101/114	101/101/113	101/102/114	101/105/117	103/108/119	112/113/123	
20	4945	5031	5111	5419	6255	7306	18387
	99/99/111	99/100/111	99/103/114	101/106/117	107/109/119	113/113/123	
25	4859	4946	5281	6174	6726	7779	18387
	97/97/108	97/100/111	99/104/114	106/107/117	110/110/119	114/114/123	
30	4749	5198	6041	6622	7203	8386	18387
	94/98/108	97/101/111	104/104/114	108/108/117	111/111/119	115/115/123	
35	5144	5941	6522	7137	-	-	16846
	96/99/108	102/102/111	105/105/114	108/108/117	-	-	
40	5780	6382	7036	-	-	-	15634
	100/100/108	103/103/111	106/106/114	-	-	-	
45	6213	-	-	-	-	-	14504
	100/100/108	-	-	-	-	-	
46	6313	-	-	-	-	-	14285
	100/100/108	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4893 101/101/113	4972 101/101/113	5046 100/102/114	5117 100/106/117	5516 103/109/119	6665 112/113/123	18387
5	4959 101/101/113	5041 101/101/113	5118 100/102/114	5191 100/106/117	5666 104/109/119	6775 112/113/123	18387
10	5024 101/101/113	5109 100/100/112	5188 100/102/114	5265 100/106/117	5822 105/109/119	7087 113/113/123	18387
15	5037 100/100/112	5126 99/100/111	5209 99/103/114	5511 101/106/117	6322 108/109/119	7422 113/113/123	18387
20	4958 97/97/108	5048 97/100/111	5371 99/104/114	6247 106/107/117	6848 110/110/119	7925 114/114/123	18387
25	4869 94/98/108	5214 97/101/111	6072 104/104/114	6686 107/107/117	7404 110/110/119	8478 115/115/123	18387
30	5099 95/98/108	5983 102/102/111	6551 105/105/114	7162 108/108/117	- -	- -	17139
35	5814 99/99/108	6414 103/103/111	7065 106/106/114	- -	- -	- -	15816
40	6240 100/100/108	- -	- -	- -	- -	- -	14675
43	6541 101/101/108	- -	- -	- -	- -	- -	14031
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4981 100/100/112	5064 100/100/111	5143 99/103/114	5258 100/106/117	6023 106/109/119	7186 113/113/123	18387
5	5046 100/100/112	5133 99/99/111	5215 99/103/114	5405 100/106/117	6225 107/109/119	7408 113/113/123	18387
10	5119 99/99/112	5210 99/100/111	5296 99/103/114	5628 101/106/117	6521 108/109/119	7614 113/113/123	18387
15	5054 97/97/109	5147 97/100/111	5479 99/103/114	6375 106/107/117	7073 110/110/119	8083 114/114/123	18387
20	4979 95/97/108	5289 97/101/111	6151 103/104/114	6780 107/107/117	7548 110/110/119	8619 115/115/123	18387
25	5062 94/98/108	5972 101/102/111	6586 105/105/114	7296 108/108/117	8065 111/111/119	- -	17530
30	5802 99/99/108	6440 102/102/111	7087 106/106/114	- -	- -	- -	16025
35	6270 100/100/108	6960 103/103/111	- -	- -	- -	- -	14842
38	6568 100/100/108	- -	- -	- -	- -	- -	14190
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

FLAP 1 - STD WATER (0.375 in) - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4173 101/101/114	4248 101/101/113	4319 101/102/114	4760 105/105/116	5149 108/108/119	5778 113/113/123	18387
5	4227 101/101/114	4305 101/101/113	4379 101/102/114	4830 105/105/116	5240 108/108/119	5888 113/113/123	18387
10	4280 101/101/114	4361 101/101/113	4437 101/102/114	4930 105/105/116	5328 108/108/119	- -	18236
15	4334 101/101/114	4418 101/101/113	4538 101/102/114	5013 105/105/116	5428 108/108/119	- -	18066
20	4398 101/101/114	4484 101/101/113	4650 101/102/114	5097 105/105/116	5536 108/108/119	- -	17889
25	4461 101/101/113	4550 100/100/113	4763 102/102/114	5205 105/105/116	5645 108/108/119	- -	17716
30	4504 100/100/112	4597 100/100/112	4946 103/103/114	5372 106/106/116	5841 109/109/119	- -	17209
35	4394 97/97/108	4832 100/100/111	5285 103/103/114	- -	- -	- -	16026
40	4694 98/98/108	5174 101/101/111	- -	- -	- -	- -	14957
44	4954 98/98/108	- -	- -	- -	- -	- -	14177
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4308	4388	4465	4927	5329	-	18360
	101/101/114	101/101/113	101/102/114	105/105/116	108/108/119	-	
5	4363	4447	4568	5000	5427	-	18180
	101/101/114	101/101/113	101/102/114	105/105/116	108/108/119	-	
10	4418	4505	4672	5101	5525	-	18004
	101/101/114	101/101/113	102/102/114	105/105/116	108/108/119	-	
15	4473	4563	4735	5190	5626	-	17825
	101/101/114	101/101/113	101/102/114	105/105/116	108/108/119	-	
20	4539	4632	4852	5291	5740	-	17644
	101/101/114	101/101/113	102/102/114	105/105/116	108/108/119	-	
25	4605	4702	4976	5425	5902	-	17268
	100/100/113	100/100/112	102/102/114	105/106/116	109/109/119	-	
30	4527	4832	5279	-	-	-	16253
	98/98/109	100/100/111	103/103/114	-	-	-	
35	4693	5170	-	-	-	-	15144
	97/97/108	101/101/111	-	-	-	-	
40	5028	-	-	-	-	-	14141
	98/98/108	-	-	-	-	-	
V _{FS}	120	124	127	130	133	-	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4438	4525	4650	5094	5528	-	18054
	101/101/114	101/101/113	101/102/114	105/105/116	108/108/119	-	
5	4496	4586	4758	5196	5630	-	17877
	101/101/114	101/101/113	102/102/114	105/105/116	108/108/119	-	
10	4554	4648	4869	5287	5734	-	17705
	101/101/114	101/101/113	102/102/114	105/105/116	108/108/119	-	
15	4614	4710	4937	5376	5842	-	17534
	101/101/114	101/101/113	102/102/114	105/105/116	108/108/119	-	
20	4682	4783	5064	5510	5993	-	17208
	101/101/113	100/100/112	102/102/114	105/105/116	109/109/119	-	
25	4628	4890	5343	-	-	-	16275
	98/98/110	100/100/111	103/103/114	-	-	-	
30	4712	5184	-	-	-	-	15286
	97/97/108	101/101/111	-	-	-	-	
35	5046	-	-	-	-	-	14252
	98/98/108	-	-	-	-	-	
36	5120	-	-	-	-	-	14062
	98/98/108	-	-	-	-	-	
V _{FS}	121	124	127	130	133	-	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4565 101/101/114	4658 101/101/113	4879 102/102/114	5304 105/105/117	5753 108/108/119	- -	17684
5	4627 101/101/114	4723 101/101/113	4950 102/102/114	5390 105/105/117	5859 108/108/119	- -	17519
10	4687 101/101/113	4787 100/100/113	5058 102/102/114	5494 105/105/117	5970 108/108/119	- -	17346
15	4750 100/100/113	4854 100/100/112	5141 102/102/114	5599 105/105/117	- -	- -	17137
20	4721 98/98/110	4959 100/100/111	5421 103/103/114	- -	- -	- -	16215
25	4751 97/97/108	5237 100/100/111	- -	- -	- -	- -	15318
30	5059 98/98/108	- -	- -	- -	- -	- -	14383
V _{FS}	121	124	127	130	133	-	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4654 100/100/112	4752 100/100/112	5114 102/102/114	5560 106/106/117	- -	- -	17113
5	4718 100/100/112	4820 100/100/112	5204 102/102/114	5663 106/106/117	- -	- -	16945
10	4781 100/100/112	4887 99/99/111	5294 102/102/114	5768 106/106/117	- -	- -	16779
15	4808 99/99/111	5033 100/100/111	5505 103/103/114	- -	- -	- -	16143
20	4828 97/97/108	5313 100/100/111	- -	- -	- -	- -	15271
25	5105 98/98/108	- -	- -	- -	- -	- -	14429
V _{FS}	121	124	127	130	-	-	

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4744	4895	5367	5856	-	-	16499
	99/99/111	99/99/111	103/103/114	106/106/117	-	-	
5	4809	5002	5465	-	-	-	16332
	99/99/111	99/99/111	103/103/114	-	-	-	
10	4886	5116	5599	-	-	-	16064
	98/98/111	100/100/111	103/103/114	-	-	-	
15	4894	5396	-	-	-	-	15196
	97/97/108	100/100/111	-	-	-	-	
20	5174	-	-	-	-	-	14395
	97/97/108	-	-	-	-	-	
V _{FS}	121	124	127	130	-	-	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

Takeoff

FLAP 2 - DRY RWY - ICE PROT OFF

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2786	2682	2635	2644	2842	3153	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
5	2826	2721	2669	2682	2883	3200	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
10	2864	2758	2702	2721	2925	3248	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
15	2903	2796	2735	2760	2967	3296	18387
	106/106/118	103/103/115	100/100/112	98/99/110	101/102/112	107/107/116	
20	2944	2835	2767	2799	3011	3345	18387
	106/106/118	103/103/115	100/100/111	98/99/110	101/102/112	107/107/116	
25	2984	2874	2800	2838	3054	3394	18387
	106/106/118	103/103/114	100/100/111	98/99/110	101/102/112	107/107/116	
30	3006	2897	2831	2913	3137	3491	18387
	105/105/117	102/102/113	100/100/110	98/100/110	102/103/112	107/107/116	
35	2916	2842	2878	3111	3358	3867	18387
	101/101/112	99/99/109	97/98/107	100/101/110	104/104/112	108/108/116	
40	2862	2834	3078	3369	3731	-	17614
	98/98/108	95/95/104	99/99/107	102/102/110	105/105/112	-	
45	2847	3027	3366	3758	-	-	16518
	95/95/103	96/96/104	100/100/107	103/103/110	-	-	
50	2967	3350	-	-	-	-	15461
	94/94/102	97/97/104	-	-	-	-	
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2881 106/106/118	2772 103/103/115	2708 101/101/112	2716 98/99/110	2919 101/102/112	3239 107/107/116	18387
5	2921 106/106/118	2811 103/103/115	2743 101/101/112	2756 98/99/110	2962 101/102/112	3289 106/107/116	18387
10	2960 106/106/118	2850 103/103/115	2777 101/101/112	2795 98/99/110	3006 101/102/112	3338 106/107/116	18387
15	3000 106/106/118	2888 103/103/115	2811 100/100/112	2836 98/99/110	3050 101/102/112	3388 106/107/116	18387
20	3041 106/106/118	2928 103/103/115	2844 100/100/111	2877 98/99/110	3095 101/102/112	3439 106/107/116	18387
25	3081 106/106/117	2968 103/103/114	2883 100/100/111	2935 98/100/110	3160 101/103/112	3515 107/107/116	18387
30	3011 103/103/114	2905 100/100/110	2869 97/97/107	3094 99/100/110	3337 103/104/112	3788 108/108/116	18387
35	2927 99/99/109	2886 96/96/106	3063 98/98/107	3317 101/101/110	3659 105/105/112	- -	17992
40	2906 96/96/105	3017 96/96/105	3303 99/99/107	3679 102/102/110	- -	- -	16857
45	2954 94/94/102	3282 97/97/105	3686 100/100/107	- -	- -	- -	15788
50	3245 95/95/102	- -	- -	- -	- -	- -	14786
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	2970 106/106/118	2858 103/103/115	2781 101/101/112	2792 98/99/110	3002 101/102/112	3333 106/107/116	18387
5	3011 106/106/118	2899 103/103/115	2816 101/101/112	2832 98/99/110	3046 101/102/112	3384 106/107/116	18387
10	3052 106/106/118	2939 103/103/115	2851 100/100/112	2873 98/99/110	3091 101/102/112	3435 106/107/116	18387
15	3094 106/106/118	2979 103/103/115	2886 100/100/112	2915 98/99/110	3136 101/102/112	3486 106/107/116	18387
20	3136 106/106/118	3021 103/103/114	2923 100/100/111	2968 98/99/110	3195 101/103/112	3554 107/107/116	18387
25	3082 103/103/114	2973 100/100/111	2920 98/98/108	3120 99/100/110	3365 103/103/112	3789 108/108/116	18387
30	3014 100/100/111	2943 97/97/107	3057 97/98/107	3310 101/101/110	3604 104/104/112	- -	18348
35	2962 97/97/106	3015 95/96/105	3279 99/99/107	3633 102/102/110	- -	- -	17162
40	2952 93/93/102	3234 97/97/105	3630 100/100/107	- -	- -	- -	16087
45	3192 94/94/102	3611 98/98/105	- -	- -	- -	- -	15057
48	3417 95/95/102	- -	- -	- -	- -	- -	14490
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	3054 106/106/118	2940 103/103/115	2851 100/100/112	2876 98/99/110	3094 101/102/112	3439 106/107/116	18387
5	3098 106/106/118	2983 103/103/115	2888 100/100/112	2918 98/99/110	3140 101/102/112	3490 106/107/116	18387
10	3140 106/106/118	3025 103/103/115	2924 100/100/111	2960 98/99/110	3186 101/102/112	3543 106/107/116	18387
15	3183 106/106/118	3066 103/103/114	2964 100/100/111	3004 98/99/110	3234 101/102/112	3598 106/107/116	18387
20	3147 103/103/115	3035 101/101/112	2968 98/98/108	3152 99/100/110	3400 102/103/112	3814 108/108/116	18387
25	3090 101/101/111	2998 98/98/108	3077 97/98/107	3330 100/101/110	3598 104/104/112	4150 108/108/116	18387
30	3022 98/98/107	3009 95/95/105	3272 99/99/107	3578 102/102/110	3963 105/105/112	- -	17501
35	3009 94/94/103	3227 96/96/105	3588 100/100/107	- -	- -	- -	16372
40	3162 94/94/102	3564 97/97/105	- -	- -	- -	- -	15335
45	3521 95/95/102	- -	- -	- -	- -	- -	14383
46	3606 95/95/102	- -	- -	- -	- -	- -	14196
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	3108 105/105/117	2994 102/102/114	2907 99/99/110	2988 98/100/110	3217 101/103/112	3580 107/107/116	18387
5	3152 105/105/117	3038 102/102/113	2944 99/99/110	3032 98/100/110	3266 101/103/112	3635 107/107/116	18387
10	3196 105/105/117	3081 102/102/113	2982 99/99/110	3076 98/100/110	3314 101/103/112	3690 107/107/116	18387
15	3207 104/104/115	3094 101/101/112	3014 98/98/109	3188 99/100/110	3439 102/103/112	3845 108/108/116	18387
20	3155 101/101/112	3047 98/98/108	3109 96/98/107	3365 100/101/110	3636 104/104/112	4173 108/108/116	18387
25	3099 98/98/108	3043 96/96/105	3288 98/99/107	3566 102/102/110	3946 105/105/112	- -	17773
30	3067 95/95/104	3223 96/96/105	3537 99/99/107	3939 103/103/110	- -	- -	16700
35	3161 94/94/102	3520 97/97/105	3960 100/100/107	- -	- -	- -	15612
40	3474 95/95/102	- -	- -	- -	- -	- -	14639
43	3723 95/95/102	- -	- -	- -	- -	- -	14089
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	3160 104/104/116	3047 101/101/112	2964 98/98/109	3111 98/100/110	3354 102/103/112	3738 107/107/116	18387
5	3205 104/104/115	3091 101/101/112	3002 98/98/109	3158 98/100/110	3406 102/103/112	3797 107/107/116	18387
10	3256 104/104/115	3142 101/101/112	3052 98/98/109	3227 98/100/110	3481 102/103/112	3883 108/108/116	18387
15	3217 101/101/112	3107 98/98/109	3145 96/98/107	3404 100/101/110	3678 104/104/112	4208 108/108/116	18387
20	3169 99/99/109	3097 96/96/105	3319 98/98/107	3599 102/102/110	3959 105/105/112	- -	17897
25	3130 96/96/105	3224 95/96/105	3511 99/99/107	3891 102/102/110	- -	- -	17017
30	3156 93/93/102	3468 97/97/105	3891 100/100/107	- -	- -	- -	15947
35	3429 94/94/102	3887 98/98/105	- -	- -	- -	- -	14918
40	3849 95/95/102	- -	- -	- -	- -	- -	14000
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

Takeoff

FLAP 2 - WET RWY - ICE PROT OFF

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

User: andreia0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4087 106/106/118	3903 103/103/115	3727 101/101/112	3564 98/99/110	3416 96/102/112	3366 95/107/116	18387
5	4151 106/106/118	3964 103/103/115	3787 101/101/112	3621 98/99/110	3472 96/102/112	3422 95/107/116	18387
10	4213 106/106/118	4024 103/103/115	3845 101/101/112	3677 98/99/110	3526 96/102/112	3476 95/107/116	18387
15	4277 106/106/118	4086 103/103/115	3904 100/100/112	3734 98/99/110	3581 96/102/112	3531 95/107/116	18387
20	4348 106/106/118	4154 103/103/115	3968 100/100/111	3796 98/99/110	3639 96/102/112	3589 94/107/116	18387
25	4419 106/106/118	4222 103/103/114	4035 100/100/111	3860 98/99/110	3702 96/102/112	3651 94/107/116	18387
30	4445 105/105/117	4248 102/102/113	4060 100/100/110	3886 97/100/110	3727 95/103/112	3715 94/107/116	18387
35	4242 101/101/112	4055 99/99/109	3878 96/98/107	3714 94/101/110	3567 92/104/112	4079 97/108/116	18387
40	4058 98/98/108	3883 95/95/104	3717 93/99/107	3564 91/102/110	3905 94/105/112	- -	17614
45	3887 95/95/103	3723 92/96/104	3569 90/100/107	3884 93/103/110	- -	- -	16518
50	3724 91/94/102	3571 89/97/104	- -	- -	- -	- -	15461
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4248 106/106/118	4054 103/103/115	3870 101/101/112	3698 98/99/110	3543 96/102/112	3492 95/107/116	18387
5	4312 106/106/118	4117 103/103/115	3931 101/101/112	3757 98/99/110	3600 96/102/112	3549 95/107/116	18387
10	4377 106/106/118	4179 103/103/115	3991 101/101/112	3816 98/99/110	3657 96/102/112	3606 95/107/116	18387
15	4442 106/106/118	4242 103/103/115	4052 100/100/112	3875 98/99/110	3714 96/102/112	3663 95/107/116	18387
20	4515 106/106/118	4312 103/103/115	4119 100/100/111	3939 98/99/110	3776 96/102/112	3725 94/107/116	18387
25	4576 106/106/117	4373 103/103/114	4179 100/100/111	3999 98/100/110	3835 95/103/112	3785 94/107/116	18387
30	4420 103/103/114	4226 100/100/110	4041 97/97/107	3869 95/100/110	3714 93/104/112	4032 96/108/116	18387
35	4223 99/99/109	4040 96/96/106	3867 94/98/107	3707 92/101/110	3864 93/105/112	- -	17992
40	4043 96/96/105	3871 93/96/105	3710 91/99/107	3848 92/102/110	- -	- -	16857
45	3875 92/94/102	3715 90/97/105	3813 90/100/107	- -	- -	- -	15788
50	3712 89/95/102	- -	- -	- -	- -	- -	14786
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4400 106/106/118	4201 103/103/115	4011 101/101/112	3834 98/99/110	3674 96/102/112	3622 95/107/116	18387
5	4468 106/106/118	4266 103/103/115	4074 101/101/112	3895 98/99/110	3734 96/102/112	3681 95/107/116	18387
10	4536 106/106/118	4332 103/103/115	4138 100/100/112	3957 98/99/110	3793 96/102/112	3741 95/107/116	18387
15	4605 106/106/118	4399 103/103/115	4202 100/100/112	4019 98/99/110	3853 96/102/112	3801 94/107/116	18387
20	4675 106/106/118	4466 103/103/114	4267 100/100/111	4081 98/99/110	3913 95/103/112	3861 94/107/116	18387
25	4547 103/103/114	4347 100/100/111	4156 98/98/108	3979 95/100/110	3819 93/103/112	4059 95/108/116	18387
30	4387 100/100/111	4196 97/97/107	4016 95/98/107	3848 93/101/110	3839 92/104/112	- -	18348
35	4193 97/97/106	4014 94/96/105	3846 92/99/107	3831 91/102/110	- -	- -	17162
40	4022 93/93/102	3855 91/97/105	3793 90/100/107	- -	- -	- -	16087
45	3857 90/94/102	3737 88/98/105	- -	- -	- -	- -	15057
48	3759 88/95/102	- -	- -	- -	- -	- -	14490
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4544 106/106/118	4339 103/103/115	4144 100/100/112	3962 98/99/110	3797 96/102/112	3744 95/107/116	18387
5	4617 106/106/118	4409 103/103/115	4212 100/100/112	4028 98/99/110	3861 96/102/112	3808 94/107/116	18387
10	4687 106/106/118	4478 103/103/115	4278 100/100/111	4092 98/99/110	3923 96/102/112	3871 94/107/116	18387
15	4759 106/106/118	4548 103/103/114	4346 100/100/111	4158 98/99/110	3987 95/102/112	3934 94/107/116	18387
20	4661 103/103/115	4456 101/101/112	4261 98/98/108	4079 96/100/110	3915 93/103/112	4105 95/108/116	18387
25	4523 101/101/111	4326 98/98/108	4140 95/98/107	3967 93/101/110	3855 92/104/112	4427 97/108/116	18387
30	4357 98/98/107	4171 95/95/105	3995 93/99/107	3832 90/102/110	4201 94/105/112	- -	17501
35	4170 94/94/103	3996 92/96/105	3833 89/100/107	- -	- -	- -	16372
40	4002 91/94/102	3839 89/97/105	- -	- -	- -	- -	15335
45	3837 88/95/102	- -	- -	- -	- -	- -	14383
46	3804 87/95/102	- -	- -	- -	- -	- -	14196
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4629	4422	4224	4041	3874	3823	18387
	105/105/117	102/102/114	99/99/110	97/100/110	95/103/112	94/107/116	
5	4703	4494	4294	4108	3939	3888	18387
	105/105/117	102/102/113	99/99/110	97/100/110	95/103/112	94/107/116	
10	4777	4565	4363	4174	4003	3952	18387
	105/105/117	102/102/113	99/99/110	97/100/110	95/103/112	94/107/116	
15	4768	4559	4360	4174	4005	4156	18387
	104/104/115	101/101/112	98/98/109	96/100/110	94/103/112	95/108/116	
20	4637	4435	4243	4065	3905	4475	18387
	101/101/112	98/98/108	96/98/107	93/101/110	91/104/112	96/108/116	
25	4496	4303	4121	3952	4211	-	17773
	98/98/108	96/96/105	93/99/107	91/102/110	93/105/112	-	
30	4326	4144	3973	4169	-	-	16700
	95/95/104	93/96/105	90/99/107	92/103/110	-	-	
35	4148	3978	4139	-	-	-	15612
	92/94/102	89/97/105	90/100/107	-	-	-	
40	3982	-	-	-	-	-	14639
	89/95/102	-	-	-	-	-	
43	3886	-	-	-	-	-	14089
	87/95/102	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4710	4502	4304	4119	3951	4026	18387
	104/104/116	101/101/112	98/98/109	96/100/110	94/103/112	94/107/116	
5	4784	4573	4372	4185	4015	4101	18387
	104/104/115	101/101/112	98/98/109	96/100/110	94/103/112	94/107/116	
10	4860	4647	4444	4255	4084	4212	18387
	104/104/115	101/101/112	98/98/109	96/100/110	94/103/112	94/108/116	
15	4746	4540	4345	4163	3999	4533	18387
	101/101/112	98/98/109	96/98/107	94/101/110	91/104/112	96/108/116	
20	4620	4422	4234	4060	4249	-	17897
	99/99/109	96/96/105	94/98/107	91/102/110	93/105/112	-	
25	4490	4300	4122	4153	-	-	17017
	96/96/105	93/96/105	91/99/107	91/102/110	-	-	
30	4307	4130	4114	-	-	-	15947
	93/93/102	90/97/105	90/100/107	-	-	-	
35	4130	4063	-	-	-	-	14918
	89/94/102	88/98/105	-	-	-	-	
40	3977	-	-	-	-	-	14000
	86/95/102	-	-	-	-	-	
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

Takeoff

FLAP 2 - STD WATER (0.125 in) - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5145 105/105/118	4971 103/103/114	4798 100/100/111	4629 98/99/110	4470 95/102/112	4418 94/107/116	18387
5	5209 105/105/117	5035 103/103/114	4861 100/100/111	4691 98/99/110	4531 95/102/112	4480 94/107/116	18387
10	5271 105/105/117	5096 102/102/114	4921 100/100/111	4751 97/99/110	4590 95/102/112	4541 94/107/116	18387
15	5335 105/105/117	5159 102/102/114	4984 100/100/111	4813 97/99/110	4651 95/102/112	4603 94/107/116	18387
20	5416 105/105/117	5238 102/102/114	5060 100/100/111	4886 97/99/110	4722 95/102/112	4674 94/107/116	18387
25	5496 105/105/117	5316 102/102/114	5137 100/100/111	4962 97/99/110	4797 95/102/112	4749 94/107/116	18387
30	5531 104/104/116	5351 101/101/113	5171 99/99/110	4995 97/100/110	4829 94/103/112	4784 93/107/116	18387
35	5331 101/101/111	5154 98/98/108	4977 96/98/107	4805 93/101/110	4645 91/104/112	5189 96/108/116	18387
40	5146 97/97/107	4971 95/95/104	4799 92/99/107	4633 90/102/110	4964 93/105/112	- -	17614
45	4967 94/94/103	4797 91/96/104	4630 89/100/107	4964 92/103/110	- -	- -	16518
50	4790 91/94/102	4625 88/97/104	- -	- -	- -	- -	15461
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5316 105/105/118	5136 103/103/114	4956 100/100/111	4782 98/99/110	4617 95/102/112	4565 94/107/116	18387
5	5381 105/105/118	5200 103/103/114	5020 100/100/111	4845 98/99/110	4680 95/102/112	4630 94/107/116	18387
10	5446 105/105/117	5264 102/102/114	5084 100/100/111	4908 97/99/110	4742 95/102/112	4693 94/107/116	18387
15	5510 105/105/117	5328 102/102/114	5147 100/100/111	4971 97/99/110	4804 95/102/112	4757 94/107/116	18387
20	5593 105/105/117	5409 102/102/114	5226 100/100/111	5047 97/99/110	4879 95/102/112	4832 94/107/116	18387
25	5664 105/105/117	5480 102/102/113	5297 99/99/110	5118 97/100/110	4949 95/103/112	4904 94/107/116	18387
30	5515 102/102/113	5333 99/99/110	5154 97/97/107	4978 94/100/110	4814 92/104/112	5104 94/108/116	18387
35	5319 98/98/108	5142 96/96/105	4966 93/98/107	4797 91/101/110	4891 92/105/112	- -	17992
40	5134 95/95/104	4961 92/96/105	4791 90/99/107	4902 91/102/110	- -	- -	16857
45	4956 92/94/102	4788 89/97/105	4881 90/100/107	- -	- -	- -	15788
50	4776 88/95/102	- -	- -	- -	- -	- -	14786
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5478	5295	5113	4935	4768	4718	18387
	105/105/118	103/103/114	100/100/111	98/99/110	95/102/112	94/107/116	
5	5546	5363	5180	5001	4833	4784	18387
	105/105/118	102/102/114	100/100/111	97/99/110	95/102/112	94/107/116	
10	5615	5430	5246	5067	4898	4851	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	94/107/116	
15	5685	5499	5314	5134	4964	4918	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	94/107/116	
20	5765	5577	5390	5208	5036	4991	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/103/112	94/107/116	
25	5645	5461	5278	5100	4932	5136	18387
	102/102/114	100/100/110	97/97/107	95/100/110	93/103/112	94/108/116	
30	5490	5309	5130	4957	4843	-	18348
	99/99/110	97/97/107	94/98/107	92/101/110	90/104/112	-	
35	5294	5119	4946	4865	-	-	17162
	96/96/105	93/96/105	91/99/107	90/102/110	-	-	
40	5117	4946	4841	-	-	-	16087
	93/93/102	90/97/105	89/100/107	-	-	-	
45	4939	4792	-	-	-	-	15057
	89/94/102	87/98/105	-	-	-	-	
48	4831	-	-	-	-	-	14490
	87/95/102	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5632	5445	5260	5079	4909	4861	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	94/107/116	
5	5705	5518	5331	5150	4979	4932	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	94/107/116	
10	5775	5588	5401	5219	5046	5002	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	94/107/116	
15	5850	5662	5474	5290	5118	5074	18387
	105/105/117	102/102/114	99/99/111	97/99/110	95/102/112	94/107/116	
20	5762	5576	5391	5211	5041	5200	18387
	103/103/114	100/100/111	97/97/108	95/100/110	93/103/112	94/108/116	
25	5631	5448	5267	5091	4925	5714	18387
	100/100/111	97/97/107	95/98/107	93/101/110	90/104/112	97/108/116	
30	5468	5289	5112	4940	5411	-	17501
	97/97/107	94/95/105	92/99/107	90/102/110	94/105/112	-	
35	5278	5103	4931	-	-	-	16372
	93/93/102	91/96/105	89/100/107	-	-	-	
40	5100	4931	-	-	-	-	15335
	90/94/102	88/97/105	-	-	-	-	
45	4920	-	-	-	-	-	14383
	87/95/102	-	-	-	-	-	
46	4884	-	-	-	-	-	14196
	86/95/102	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5726 104/104/116	5538 101/101/113	5351 99/99/110	5170 96/100/110	4998 94/103/112	4953 93/107/116	18387
5	5801 104/104/116	5612 101/101/113	5425 99/99/110	5242 96/100/110	5069 94/103/112	5026 93/107/116	18387
10	5874 104/104/116	5685 101/101/113	5496 99/99/109	5313 96/100/110	5139 94/103/112	5097 93/107/116	18387
15	5872 103/103/114	5683 100/100/111	5496 98/98/108	5314 95/100/110	5142 93/103/112	5271 94/108/116	18387
20	5749 100/100/111	5563 98/98/108	5378 95/98/107	5199 93/101/110	5031 91/104/112	5782 97/108/116	18387
25	5613 97/97/107	5431 95/95/105	5251 93/99/107	5076 90/102/110	5415 93/105/112	- -	17773
30	5444 94/94/103	5266 92/96/105	5091 90/99/107	5391 92/103/110	- -	- -	16700
35	5260 91/94/102	5087 89/97/105	5387 91/100/107	- -	- -	- -	15612
40	5083 88/95/102	- -	- -	- -	- -	- -	14639
43	4992 86/95/102	- -	- -	- -	- -	- -	14089
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5817 103/103/115	5629 100/100/112	5442 98/98/108	5260 95/100/110	5088 93/103/112	5079 93/107/116	18387
5	5892 103/103/115	5702 100/100/111	5514 98/98/108	5331 95/100/110	5158 93/103/112	5187 93/107/116	18387
10	5969 103/103/114	5779 100/100/111	5590 98/98/108	5406 95/100/110	5233 93/103/112	5352 93/108/116	18387
15	5862 100/100/111	5674 98/98/108	5488 95/98/107	5307 93/101/110	5137 91/104/112	5865 97/108/116	18387
20	5743 98/98/108	5558 95/95/105	5374 93/98/107	5196 91/102/110	5466 93/105/112	- -	17897
25	5617 95/95/105	5435 93/96/105	5256 90/99/107	5352 91/102/110	- -	- -	17017
30	5432 92/93/102	5256 90/97/105	5337 90/100/107	- -	- -	- -	15947
35	5247 89/94/102	5301 88/98/105	- -	- -	- -	- -	14918
40	5211 87/95/102	- -	- -	- -	- -	- -	14000
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

Takeoff

FLAP 2 - STD WATER (0.250 in) - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4796 105/105/117	4658 102/102/114	4518 99/99/111	4380 97/99/110	4250 95/102/112	4594 98/107/116	18387
5	4854 104/104/117	4716 102/102/114	4576 99/99/110	4438 97/99/110	4307 95/102/112	4702 98/107/116	18387
10	4910 104/104/117	4772 102/102/113	4632 99/99/110	4494 97/99/110	4362 95/102/112	4816 99/107/116	18387
15	4969 104/104/116	4830 102/102/113	4689 99/99/110	4550 97/99/110	4418 94/102/112	4933 99/107/116	18387
20	5041 104/104/116	4900 101/101/113	4757 99/99/110	4617 97/99/110	4483 94/102/112	5064 100/107/116	18387
25	5112 104/104/116	4970 101/101/113	4827 99/99/110	4686 96/99/110	4552 94/102/112	5198 100/107/116	18387
30	5149 103/103/115	5007 101/101/112	4863 98/98/109	4722 96/100/110	4587 94/103/112	5529 102/107/116	18387
35	4989 100/100/111	4848 97/97/107	4707 95/98/107	4605 93/101/110	5281 99/104/112	6390 108/108/116	18387
40	4843 96/96/106	4704 94/95/104	4618 92/99/107	5340 99/102/110	6082 104/105/112	- -	17614
45	4701 93/93/102	4581 91/96/104	5392 98/100/107	6041 103/103/110	- -	- -	16518
50	4561 90/94/102	5350 97/97/104	- -	- -	- -	- -	15461
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4949	4806	4662	4520	4385	4783	18387
	105/105/117	102/102/114	99/99/111	97/99/110	95/102/112	98/107/116	
5	5008	4865	4721	4579	4444	4904	18387
	105/105/117	102/102/114	99/99/110	97/99/110	95/102/112	99/107/116	
10	5067	4923	4779	4637	4502	5027	18387
	104/104/117	102/102/113	99/99/110	97/99/110	95/102/112	99/107/116	
15	5126	4982	4838	4695	4560	5156	18387
	104/104/117	102/102/113	99/99/110	97/99/110	94/102/112	100/107/116	
20	5199	5054	4908	4765	4628	5300	18387
	104/104/116	101/101/113	99/99/110	97/99/110	94/102/112	100/107/116	
25	5266	5121	4976	4832	4696	5565	18387
	104/104/116	101/101/113	99/99/110	96/100/110	94/103/112	102/107/116	
30	5147	5004	4861	4720	5171	6329	18387
	101/101/112	98/98/109	96/97/107	94/100/110	98/104/112	107/108/116	
35	4993	4852	4712	5237	6073	-	17992
	98/98/108	95/95/105	93/98/107	97/101/110	104/105/112	-	
40	4848	4710	5261	6046	-	-	16857
	94/94/103	92/96/105	96/99/107	102/102/110	-	-	
45	4708	5242	5941	-	-	-	15788
	91/94/102	95/97/105	100/100/107	-	-	-	
50	5191	-	-	-	-	-	14786
	94/95/102	-	-	-	-	-	
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5094	4949	4804	4660	4524	5019	18387
	105/105/117	102/102/114	99/99/111	97/99/110	95/102/112	99/107/116	
5	5156	5011	4865	4721	4584	5148	18387
	104/104/117	102/102/114	99/99/110	97/99/110	95/102/112	100/107/116	
10	5218	5072	4926	4782	4645	5280	18387
	104/104/117	102/102/113	99/99/110	97/99/110	94/102/112	100/107/116	
15	5282	5135	4989	4844	4706	5418	18387
	104/104/116	101/101/113	99/99/110	97/99/110	94/102/112	101/107/116	
20	5355	5207	5059	4913	4774	5648	18387
	104/104/116	101/101/113	99/99/110	96/99/110	94/103/112	102/107/116	
25	5263	5118	4973	4830	5213	6378	18387
	101/101/113	99/99/110	96/97/107	94/100/110	97/103/112	107/108/116	
30	5141	4999	4856	5172	6014	-	18348
	99/99/109	96/96/106	94/98/107	96/101/110	103/104/112	-	
35	4989	4849	5213	6029	-	-	17162
	95/95/105	93/96/105	95/99/107	102/102/110	-	-	
40	4852	5201	5947	-	-	-	16087
	92/93/102	94/97/105	100/100/107	-	-	-	
45	5152	5831	-	-	-	-	15057
	92/94/102	98/98/105	-	-	-	-	
48	5504	-	-	-	-	-	14490
	95/95/102	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5232 104/104/117	5085 102/102/113	4938 99/99/110	4793 97/99/110	4655 94/102/112	5304 100/107/116	18387
5	5298 104/104/116	5151 101/101/113	5003 99/99/110	4858 97/99/110	4720 94/102/112	5440 101/107/116	18387
10	5363 104/104/116	5215 101/101/113	5067 99/99/110	4922 96/99/110	4783 94/102/112	5584 101/107/116	18387
15	5430 104/104/116	5282 101/101/113	5134 99/99/110	4988 96/99/110	4849 94/102/112	5751 102/107/116	18387
20	5367 102/102/113	5221 99/99/110	5074 97/97/107	4930 94/100/110	5298 97/103/112	6483 107/108/116	18387
25	5266 99/99/110	5122 96/96/107	4978 94/98/107	5200 95/101/110	6048 102/104/112	6962 108/108/116	18387
30	5140 96/96/106	4998 94/95/105	5148 94/99/107	6018 101/102/110	6615 105/105/112	- -	17501
35	4993 93/93/102	5144 93/96/105	5986 100/100/107	- -	- -	- -	16372
40	5065 92/94/102	5839 97/97/105	- -	- -	- -	- -	15335
45	5681 95/95/102	- -	- -	- -	- -	- -	14383
46	5772 95/95/102	- -	- -	- -	- -	- -	14196
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5320 103/103/115	5173 101/101/112	5025 98/98/109	4879 96/100/110	4740 94/103/112	5744 103/107/116	18387
5	5388 103/103/115	5240 100/100/112	5092 98/98/109	4946 96/100/110	4858 94/103/112	5898 103/107/116	18387
10	5455 103/103/115	5307 100/100/112	5158 98/98/109	5012 96/100/110	4981 94/103/112	6063 104/107/116	18387
15	5464 102/102/113	5317 99/99/110	5169 97/97/107	5024 95/100/110	5399 97/103/112	6610 107/108/116	18387
20	5372 99/99/110	5225 97/97/107	5079 94/98/107	5276 95/101/110	6118 102/104/112	7075 108/108/116	18387
25	5269 97/97/107	5125 94/95/105	5155 94/99/107	6035 100/102/110	6668 105/105/112	- -	17773
30	5139 94/94/103	5087 92/96/105	5968 99/99/107	6560 103/103/110	- -	- -	16700
35	5020 91/94/102	5876 97/97/105	6452 100/100/107	- -	- -	- -	15612
40	5716 95/95/102	- -	- -	- -	- -	- -	14639
43	5961 95/95/102	- -	- -	- -	- -	- -	14089
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5407 102/102/114	5260 99/99/111	5112 97/97/108	4966 95/100/110	5143 96/103/112	6284 105/107/116	18387
5	5475 102/102/114	5327 99/99/111	5179 97/97/107	5033 95/100/110	5284 96/103/112	6470 106/107/116	18387
10	5550 102/102/113	5402 99/99/110	5253 97/97/107	5107 94/100/110	5502 98/103/112	6725 107/108/116	18387
15	5473 100/100/110	5326 97/97/107	5178 95/98/107	5376 96/101/110	6219 102/104/112	7182 108/108/116	18387
20	5385 97/97/107	5239 94/95/105	5221 93/98/107	6105 100/102/110	6748 104/105/112	- -	17897
25	5290 94/94/104	5147 92/96/105	5954 98/99/107	6575 102/102/110	- -	- -	17017
30	5150 91/93/102	5861 96/97/105	6474 100/100/107	- -	- -	- -	15947
35	5744 94/94/102	6339 98/98/105	- -	- -	- -	- -	14918
40	6164 95/95/102	- -	- -	- -	- -	- -	14000
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 2 - STD WATER (0.375 in) - ICE PROT OFF**PW535E ENGINES****SIMPLIFIED TAKEOFF ANALYSIS**

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: -1000 ft

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4528	4415	4300	4186	4696	5306	18387
	104/104/116	101/101/113	99/99/110	96/99/110	102/102/112	107/107/116	
5	4583	4471	4356	4241	4763	5396	18387
	104/104/116	101/101/113	98/98/110	96/99/110	102/102/112	107/107/116	
10	4637	4525	4410	4295	4872	5490	18387
	103/103/116	101/101/113	98/98/109	96/99/110	102/102/112	107/107/116	
15	4693	4580	4465	4351	4985	5585	18387
	103/103/116	101/101/112	98/98/109	96/99/110	102/102/112	107/107/116	
20	4760	4646	4529	4494	5061	5694	18387
	103/103/115	101/101/112	98/98/109	97/99/110	102/102/112	107/107/116	
25	4826	4712	4595	4677	5178	5803	18387
	103/103/115	100/100/112	98/98/109	98/99/110	102/102/112	107/107/116	
30	4869	4754	4636	4925	5338	6001	18387
	102/102/114	100/100/111	97/97/108	100/100/110	103/103/112	107/107/116	
35	4745	4629	4834	5265	5727	-	17297
	99/99/110	96/96/107	98/98/107	101/101/110	104/104/112	-	
40	4633	4732	5178	-	-	-	16155
	96/96/105	95/95/104	99/99/107	-	-	-	
45	4586	5058	-	-	-	-	15094
	93/93/102	96/96/104	-	-	-	-	
50	4916	-	-	-	-	-	14085
	94/94/102	-	-	-	-	-	
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4670 104/104/116	4554 101/101/113	4436 99/99/110	4319 96/99/110	4849 102/102/112	5485 107/107/116	18387
5	4727 104/104/116	4611 101/101/113	4493 98/98/110	4375 96/99/110	4963 102/102/112	5583 107/107/116	18387
10	4784 103/103/116	4668 101/101/113	4549 98/98/109	4464 96/99/110	5078 102/102/112	5682 107/107/116	18387
15	4840 103/103/116	4724 101/101/112	4606 98/98/109	4661 97/99/110	5150 102/102/112	5783 107/107/116	18387
20	4909 103/103/115	4792 100/100/112	4673 98/98/109	4775 98/99/110	5259 102/102/112	5898 107/107/116	18387
25	4977 103/103/115	4860 100/100/112	4741 98/98/109	4941 99/100/110	5392 103/103/112	6061 107/107/116	18387
30	4886 100/100/111	4770 98/98/108	4835 97/97/107	5257 100/100/110	5712 104/104/112	- -	17544
35	4768 97/97/107	4730 95/95/105	5171 98/98/107	- -	- -	- -	16375
40	4660 93/93/102	5057 96/96/105	- -	- -	- -	- -	15282
45	4910 94/94/102	- -	- -	- -	- -	- -	14278
46	4982 94/94/102	- -	- -	- -	- -	- -	14083
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4806	4689	4570	4477	5053	5685	18387
	104/104/116	101/101/113	98/98/110	96/99/110	102/102/112	107/107/116	
5	4866	4749	4630	4630	5168	5787	18387
	103/103/116	101/101/113	98/98/110	97/99/110	102/102/112	107/107/116	
10	4926	4808	4689	4791	5247	5891	18387
	103/103/116	101/101/112	98/98/109	98/99/110	102/102/112	107/107/116	
15	4987	4869	4749	4901	5344	5999	18387
	103/103/116	101/101/112	98/98/109	99/99/110	102/102/112	107/107/116	
20	5060	4940	4819	5022	5461	6150	18387
	103/103/115	100/100/112	98/98/109	99/99/110	102/103/112	107/107/116	
25	4993	4875	4849	5317	5777	-	17575
	100/100/112	98/98/109	97/97/107	100/100/110	103/103/112	-	
30	4903	4785	5182	5657	-	-	16542
	98/98/108	95/95/105	98/98/107	101/101/110	-	-	
35	4789	5073	-	-	-	-	15419
	94/94/104	96/96/105	-	-	-	-	
40	4923	-	-	-	-	-	14414
	93/93/102	-	-	-	-	-	
42	5068	-	-	-	-	-	14025
	94/94/102	-	-	-	-	-	
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	4938 103/103/116	4819 101/101/112	4699 98/98/109	4800 98/99/110	5257 102/102/112	5910 107/107/116	18387
5	5002 103/103/116	4883 101/101/112	4762 98/98/109	4914 99/99/110	5361 102/102/112	6017 107/107/116	18387
10	5064 103/103/115	4945 100/100/112	4824 98/98/109	4980 99/99/110	5452 102/102/112	6127 107/107/116	18387
15	5130 103/103/115	5010 100/100/112	4889 98/98/109	5098 99/99/110	5546 102/102/112	6247 107/107/116	18387
20	5092 101/101/112	4972 98/98/109	4947 97/97/107	5384 100/100/110	5860 103/103/112	- -	17525
25	5019 98/98/109	4901 96/96/106	5233 98/98/107	5712 101/101/110	- -	- -	16584
30	4927 95/95/105	5083 95/95/105	- -	- -	- -	- -	15577
35	4941 93/93/102	- -	- -	- -	- -	- -	14529
37	5084 93/93/102	- -	- -	- -	- -	- -	14148
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5027 102/102/114	4908 100/100/111	4787 97/97/108	5088 99/100/110	5516 103/103/112	6208 107/107/116	18387
5	5094 102/102/114	4974 100/100/111	4853 97/97/108	5161 99/100/110	5613 103/103/112	- -	18287
10	5159 102/102/114	5039 99/99/111	4917 97/97/108	5268 100/100/110	5707 103/103/112	- -	18122
15	5183 101/101/112	5063 98/98/109	5031 97/97/107	5470 100/100/110	5948 103/103/112	- -	17459
20	5119 98/98/109	4999 96/96/106	5304 98/98/107	5793 101/101/110	- -	- -	16540
25	5047 96/96/106	5126 95/95/105	5631 99/99/107	- -	- -	- -	15640
30	4953 93/93/102	- -	- -	- -	- -	- -	14664
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) OFF — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
0	5118 101/101/113	4998 99/99/110	4877 96/97/107	5338 100/100/110	5795 103/103/112	- -	17828
5	5184 101/101/113	5064 98/98/110	4991 97/97/107	5428 100/100/110	5902 103/103/112	- -	17661
10	5264 101/101/113	5143 98/98/109	5111 97/97/107	5558 100/100/110	6049 103/103/112	- -	17384
15	5216 99/99/109	5095 96/96/106	5383 98/98/107	5882 101/101/110	- -	- -	16470
20	5158 96/96/106	5191 95/95/105	5704 98/98/107	- -	- -	- -	15616
25	5094 94/94/103	- -	- -	- -	- -	- -	14794
V _{FS}	121	124	127	130	134	-	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

Takeoff

FLAP 1 - DRY RWY - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2174 104/104/117	2303 104/104/116	2440 104/104/115	2641 105/105/116	2891 108/108/119	3343 113/113/123	18387
-35	2205 104/104/117	2334 104/104/116	2473 104/104/115	2679 105/105/116	2933 108/108/119	3391 113/113/123	18387
-30	2240 104/104/117	2366 104/104/116	2507 104/104/115	2717 105/105/116	2975 108/108/119	3439 113/113/123	18387
-25	2278 104/104/117	2397 104/104/116	2541 103/103/115	2755 105/105/116	3017 108/108/119	3487 113/113/123	18387
-20	2315 104/104/117	2429 104/104/116	2576 103/103/115	2793 105/105/116	3060 108/108/119	3536 113/113/123	18387
-15	2351 104/104/117	2462 104/104/116	2610 103/103/115	2833 105/105/116	3103 108/108/119	3587 113/113/123	18387
-10	2388 104/104/117	2494 104/104/116	2644 103/103/115	2872 105/105/116	3147 108/108/119	3637 113/113/123	18387
-5	2424 104/104/117	2527 104/104/116	2679 103/103/115	2913 105/105/116	3191 108/108/119	3690 113/113/123	18387
0	2459 104/104/117	2559 103/103/116	2713 103/103/115	2954 105/105/116	3237 108/108/119	3743 113/113/123	18387
5	2494 104/104/116	2592 103/103/116	2748 103/103/115	2998 105/105/116	3284 108/108/119	3799 113/113/123	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2245 104/104/117	2358 104/104/116	2500 104/104/116	2695 105/105/116	2951 108/108/119	3406 113/113/123	18387
-35	2279 104/104/117	2387 104/104/116	2531 104/104/115	2733 105/105/116	2993 108/108/119	3454 113/113/123	18387
-30	2317 104/104/117	2419 104/104/116	2566 104/104/115	2773 105/105/116	3037 108/108/119	3504 113/113/123	18387
-25	2356 104/104/117	2452 104/104/116	2601 104/104/115	2812 105/105/116	3081 108/108/119	3555 113/113/123	18387
-20	2393 104/104/117	2486 104/104/116	2637 104/104/115	2854 105/105/116	3126 108/108/119	3608 113/113/123	18387
-15	2430 104/104/117	2519 104/104/116	2672 103/103/115	2896 105/105/116	3172 108/108/119	3662 113/113/123	18387
-10	2467 104/104/117	2553 104/104/116	2708 103/103/115	2938 105/105/116	3219 108/108/119	3716 113/113/123	18387
-5	2504 104/104/117	2587 104/104/116	2744 103/103/115	2981 105/105/116	3266 108/108/119	3770 113/113/123	18387
0	2541 104/104/117	2621 103/103/116	2780 103/103/115	3024 105/105/116	3313 108/108/119	3825 113/113/123	18387
5	2576 104/104/116	2655 103/103/116	2816 103/103/115	3071 105/105/116	3364 108/108/119	3887 113/113/123	18387
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2312 104/104/117	2415 104/104/116	2561 104/104/115	2765 105/105/116	3027 108/108/119	3491 113/113/123	18387
-35	2350 104/104/117	2447 104/104/116	2595 104/104/115	2806 105/105/116	3072 108/108/119	3543 113/113/123	18387
-30	2389 104/104/117	2481 104/104/116	2631 104/104/115	2847 105/105/116	3118 108/108/119	3595 113/113/123	18387
-25	2428 104/104/117	2515 104/104/116	2668 104/104/115	2889 105/105/116	3164 108/108/119	3648 113/113/123	18387
-20	2467 104/104/117	2550 104/104/116	2705 103/103/115	2932 105/105/116	3211 108/108/119	3703 113/113/123	18387
-15	2506 104/104/117	2585 104/104/116	2742 103/103/115	2975 105/105/116	3258 108/108/119	3758 113/113/123	18387
-10	2544 104/104/117	2619 104/104/116	2778 103/103/115	3018 105/105/116	3306 108/108/119	3813 113/113/123	18387
-5	2582 104/104/117	2654 103/103/116	2815 103/103/115	3062 105/105/116	3354 108/108/119	3869 113/113/123	18387
0	2620 104/104/117	2689 103/103/116	2852 103/103/115	3107 105/105/116	3404 108/108/119	3928 113/113/123	18387
5	2656 104/104/116	2724 103/103/115	2889 103/103/115	3155 105/105/116	3456 108/108/119	3991 113/113/123	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2383 104/104/117	2482 104/104/116	2632 104/104/115	2848 105/105/117	3117 108/108/119	3595 113/113/123	18387
-35	2420 104/104/117	2514 104/104/116	2666 103/103/115	2890 105/105/117	3165 108/108/119	3650 113/113/123	18387
-30	2459 104/104/117	2548 104/104/116	2702 103/103/115	2933 105/105/117	3212 108/108/119	3704 113/113/123	18387
-25	2500 104/104/117	2583 104/104/116	2739 103/103/115	2976 105/105/117	3259 108/108/119	3759 113/113/123	18387
-20	2540 104/104/117	2618 104/104/116	2777 103/103/115	3020 105/105/117	3308 108/108/119	3816 113/113/123	18387
-15	2580 104/104/117	2654 103/103/116	2815 103/103/115	3065 105/105/117	3357 108/108/119	3873 113/113/123	18387
-10	2620 104/104/116	2690 103/103/116	2853 103/103/115	3111 105/105/117	3407 108/108/119	3932 113/113/123	18387
-5	2659 104/104/116	2726 103/103/115	2891 103/103/115	3158 105/105/117	3459 108/108/119	3993 113/113/123	18387
0	2697 103/103/116	2763 103/103/115	2930 103/103/114	3206 105/105/117	3511 108/108/119	4055 113/113/123	18387
5	2726 103/103/116	2818 103/103/115	2986 102/102/114	3293 106/106/117	3617 109/109/119	4180 113/113/123	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2430 103/103/116	2556 103/103/115	2709 103/103/114	2977 106/106/117	3265 109/109/119	3770 113/113/123	18387
-35	2468 103/103/116	2589 103/103/115	2744 102/102/114	3022 106/106/117	3315 109/109/119	3828 113/113/123	18387
-30	2509 103/103/116	2625 103/103/115	2783 102/102/114	3067 106/106/117	3365 109/109/119	3886 113/113/123	18387
-25	2550 103/103/116	2662 103/103/115	2823 102/102/114	3113 106/106/117	3416 109/109/119	3945 113/113/123	18387
-20	2591 103/103/115	2699 103/103/115	2866 102/102/114	3160 106/106/117	3469 109/109/119	4006 113/113/123	18387
-15	2631 103/103/115	2736 102/102/114	2909 102/102/114	3208 106/106/117	3522 109/109/119	4068 113/113/123	18387
-10	2671 103/103/115	2773 102/102/114	2952 102/102/114	3256 106/106/117	3576 109/109/119	4130 113/113/123	18387
-5	2711 103/103/115	2810 102/102/114	2997 102/102/114	3305 106/106/117	3632 109/109/119	4194 113/113/123	18387
0	2750 102/102/115	2847 102/102/114	3042 102/102/114	3355 106/106/117	3688 109/109/119	4258 113/113/123	18387
5	2764 100/100/112	2943 100/100/111	3260 103/103/114	3599 106/106/117	3995 109/109/119	4589 114/114/123	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2474 102/102/114	2637 102/102/114	2836 103/103/114	3124 106/106/117	3449 109/109/119	3973 113/113/123	18387
-35	2515 102/102/114	2672 102/102/113	2879 103/103/114	3172 106/106/117	3501 109/109/119	4034 113/113/123	18387
-30	2557 102/102/114	2710 102/102/113	2922 103/103/114	3219 106/106/117	3554 109/109/119	4095 113/113/123	18387
-25	2600 102/102/114	2748 102/102/113	2966 103/103/114	3268 106/106/117	3609 109/109/119	4158 113/113/123	18387
-20	2641 102/102/114	2786 101/101/113	3011 103/103/114	3318 106/106/117	3665 109/109/119	4223 113/113/123	18387
-15	2682 102/102/114	2824 101/101/113	3056 103/103/114	3368 106/106/117	3721 109/109/119	4288 113/113/123	18387
-10	2723 102/102/114	2862 101/101/113	3102 103/103/114	3419 106/106/117	3779 109/109/119	4354 113/113/123	18387
-5	2764 101/101/114	2901 101/101/113	3150 103/103/114	3471 106/106/117	3838 109/109/119	4421 113/113/123	18387
0	2795 101/101/113	2977 100/100/112	3278 103/103/114	3612 106/106/117	4011 109/109/119	4612 114/114/123	18387
5	2895 98/98/109	3215 101/101/111	3570 104/104/114	3983 107/107/117	4401 110/110/119	5034 114/114/123	18387
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 1 - WET RWY - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3108 104/104/117	3127 104/104/116	3143 104/104/115	3159 103/105/116	3178 103/108/119	3343 103/113/123	18387
-35	3166 104/104/117	3186 104/104/116	3203 104/104/115	3220 103/105/116	3241 103/108/119	3391 103/113/123	18387
-30	3225 104/104/117	3247 104/104/116	3265 104/104/115	3283 103/105/116	3305 103/108/119	3439 103/113/123	18387
-25	3286 104/104/117	3308 104/104/116	3328 103/103/115	3347 103/105/116	3370 103/108/119	3487 103/113/123	18387
-20	3345 104/104/117	3369 104/104/116	3390 103/103/115	3410 103/105/116	3434 103/108/119	3536 103/113/123	18387
-15	3404 104/104/117	3429 104/104/116	3451 103/103/115	3473 103/105/116	3498 103/108/119	3587 103/113/123	18387
-10	3464 104/104/117	3490 104/104/116	3513 103/103/115	3536 103/105/116	3562 103/108/119	3637 102/113/123	18387
-5	3523 104/104/117	3550 104/104/116	3575 103/103/115	3599 103/105/116	3626 103/108/119	3690 102/113/123	18387
0	3581 104/104/117	3610 103/103/116	3635 103/103/115	3660 103/105/116	3688 103/108/119	3743 102/113/123	18387
5	3637 104/104/116	3668 103/103/116	3694 103/103/115	3720 103/105/116	3750 103/108/119	3799 102/113/123	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3237 104/104/117	3258 104/104/116	3276 104/104/116	3294 104/105/116	3315 103/108/119	3406 103/113/123	18387
-35	3294 104/104/117	3316 104/104/116	3335 104/104/115	3353 103/105/116	3375 103/108/119	3454 103/113/123	18387
-30	3356 104/104/117	3379 104/104/116	3399 104/104/115	3419 103/105/116	3442 103/108/119	3504 103/113/123	18387
-25	3418 104/104/117	3442 104/104/116	3464 104/104/115	3485 103/105/116	3509 103/108/119	3555 103/113/123	18387
-20	3477 104/104/117	3503 104/104/116	3526 104/104/115	3548 103/105/116	3573 103/108/119	3616 103/113/123	18387
-15	3538 104/104/117	3565 104/104/116	3589 103/103/115	3612 103/105/116	3639 103/108/119	3684 103/113/123	18387
-10	3599 104/104/117	3627 104/104/116	3652 103/103/115	3677 103/105/116	3704 103/108/119	3751 103/113/123	18387
-5	3659 104/104/117	3689 104/104/116	3715 103/103/115	3741 103/105/116	3770 103/108/119	3818 102/113/123	18387
0	3721 104/104/117	3752 103/103/116	3779 103/103/115	3806 103/105/116	3836 103/108/119	3886 102/113/123	18387
5	3778 104/104/116	3810 103/103/116	3839 103/103/115	3867 103/105/116	3898 103/108/119	3949 102/113/123	18387
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3351 104/104/117	3374 104/104/116	3394 104/104/115	3413 103/105/116	3435 103/108/119	3491 103/113/123	18387
-35	3412 104/104/117	3436 104/104/116	3457 104/104/115	3477 103/105/116	3500 103/108/119	3543 103/113/123	18387
-30	3476 104/104/117	3501 104/104/116	3523 104/104/115	3545 103/105/116	3569 103/108/119	3612 103/113/123	18387
-25	3540 104/104/117	3566 104/104/116	3590 104/104/115	3612 103/105/116	3638 103/108/119	3682 103/113/123	18387
-20	3603 104/104/117	3631 104/104/116	3656 103/103/115	3680 103/105/116	3707 103/108/119	3753 103/113/123	18387
-15	3667 104/104/117	3696 104/104/116	3722 103/103/115	3747 103/105/116	3775 103/108/119	3823 103/113/123	18387
-10	3730 104/104/117	3761 104/104/116	3788 103/103/115	3814 103/105/116	3844 103/108/119	3893 102/113/123	18387
-5	3794 104/104/117	3826 103/103/116	3854 103/103/115	3882 103/105/116	3913 103/108/119	3964 102/113/123	18387
0	3856 104/104/117	3890 103/103/116	3920 103/103/115	3948 103/105/116	3980 103/108/119	4033 102/113/123	18387
5	3916 104/104/116	3951 103/103/115	3982 103/103/115	4011 103/105/116	4045 102/108/119	4099 102/113/123	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3469 104/104/117	3494 104/104/116	3515 104/104/115	3536 103/105/117	3561 103/108/119	3602 103/113/123	18387
-35	3529 104/104/117	3555 104/104/116	3578 103/103/115	3600 103/105/117	3625 103/108/119	3669 103/113/123	18387
-30	3594 104/104/117	3621 104/104/116	3645 103/103/115	3668 103/105/117	3695 103/108/119	3740 103/113/123	18387
-25	3660 104/104/117	3689 104/104/116	3714 103/103/115	3739 103/105/117	3767 103/108/119	3814 102/113/123	18387
-20	3726 104/104/117	3757 104/104/116	3783 103/103/115	3809 103/105/117	3838 103/108/119	3887 102/113/123	18387
-15	3792 104/104/117	3824 103/103/116	3852 103/103/115	3879 103/105/117	3910 103/108/119	3960 102/113/123	18387
-10	3859 104/104/116	3892 103/103/116	3921 103/103/115	3950 103/105/117	3981 103/108/119	4034 102/113/123	18387
-5	3923 104/104/116	3958 103/103/115	3989 103/103/115	4018 103/105/117	4051 102/108/119	4105 102/113/123	18387
0	3987 103/103/116	4023 103/103/115	4055 103/103/114	4086 103/105/117	4120 102/108/119	4177 102/113/123	18387
5	4027 103/103/116	4065 103/103/115	4099 102/102/114	4132 102/106/117	4168 102/109/119	4227 102/113/123	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3538 103/103/116	3565 103/103/115	3589 103/103/114	3612 102/106/117	3638 102/109/119	3770 102/113/123	18387
-35	3600 103/103/116	3628 103/103/115	3653 102/102/114	3678 102/106/117	3705 102/109/119	3828 102/113/123	18387
-30	3668 103/103/116	3698 103/103/115	3724 102/102/114	3749 102/106/117	3778 102/109/119	3886 102/113/123	18387
-25	3736 103/103/116	3767 103/103/115	3795 102/102/114	3821 102/106/117	3852 102/109/119	3945 102/113/123	18387
-20	3803 103/103/115	3836 103/103/115	3865 102/102/114	3893 102/106/117	3925 102/109/119	4006 102/113/123	18387
-15	3870 103/103/115	3904 102/102/114	3935 102/102/114	3964 102/106/117	3997 102/109/119	4068 101/113/123	18387
-10	3937 103/103/115	3972 102/102/114	4004 102/102/114	4035 102/106/117	4069 102/109/119	4130 101/113/123	18387
-5	4003 103/103/115	4040 102/102/114	4073 102/102/114	4105 102/106/117	4141 102/109/119	4199 101/113/123	18387
0	4069 102/102/115	4108 102/102/114	4142 102/102/114	4175 102/106/117	4212 101/109/119	4272 101/113/123	18387
5	3997 100/100/112	4039 100/100/111	4076 100/103/114	4113 100/106/117	4153 99/109/119	4589 102/114/123	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3601 102/102/114	3631 102/102/114	3657 102/103/114	3682 101/106/117	3711 101/109/119	3973 101/113/123	18387
-35	3668 102/102/114	3699 102/102/113	3726 101/103/114	3753 101/106/117	3783 101/109/119	4034 101/113/123	18387
-30	3737 102/102/114	3770 102/102/113	3799 101/103/114	3827 101/106/117	3858 101/109/119	4095 101/113/123	18387
-25	3808 102/102/114	3841 102/102/113	3872 101/103/114	3901 101/106/117	3934 101/109/119	4158 101/113/123	18387
-20	3876 102/102/114	3912 101/101/113	3943 101/103/114	3974 101/106/117	4008 101/109/119	4223 101/113/123	18387
-15	3944 102/102/114	3981 101/101/113	4014 101/103/114	4046 101/106/117	4082 101/109/119	4288 101/113/123	18387
-10	4013 102/102/114	4052 101/101/113	4086 101/103/114	4119 101/106/117	4156 101/109/119	4354 101/113/123	18387
-5	4082 101/101/114	4122 101/101/113	4158 101/103/114	4192 101/106/117	4230 100/109/119	4421 101/113/123	18387
0	4109 101/101/113	4151 100/100/112	4190 100/103/114	4228 100/106/117	4269 100/109/119	4612 101/114/123	18387
5	3979 98/98/109	4025 97/101/111	4067 97/104/114	4109 97/107/117	4401 98/110/119	5034 103/114/123	18387
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

Takeoff

FLAP 1 - STD WATER (0.125 in) - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4182 103/103/116	4206 103/103/115	4224 103/103/115	4241 103/105/116	4262 102/108/119	4297 102/113/123	18387
-35	4242 103/103/116	4267 103/103/115	4289 103/103/114	4308 103/105/116	4330 102/108/119	4369 102/113/123	18387
-30	4303 103/103/116	4331 103/103/115	4355 103/103/114	4376 103/105/116	4401 102/108/119	4442 102/113/123	18387
-25	4365 103/103/116	4396 103/103/115	4422 103/103/114	4446 103/105/116	4473 102/108/119	4517 102/113/123	18387
-20	4427 103/103/116	4460 103/103/115	4489 103/103/114	4515 102/105/116	4544 102/108/119	4592 102/113/123	18387
-15	4488 103/103/116	4524 103/103/115	4555 103/103/114	4583 102/105/116	4614 102/108/119	4665 102/113/123	18387
-10	4550 103/103/116	4588 103/103/115	4621 103/103/114	4652 102/105/116	4685 102/108/119	4739 102/113/123	18387
-5	4612 103/103/116	4653 103/103/115	4688 103/103/114	4721 102/105/116	4756 102/108/119	4813 102/113/123	18387
0	4674 103/103/116	4716 103/103/115	4754 102/102/114	4789 102/105/116	4826 102/108/119	4886 102/113/123	18387
5	4733 103/103/116	4778 103/103/115	4818 102/102/114	4855 102/105/116	4894 102/108/119	4957 102/113/123	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4328 104/104/117	4355 103/103/116	4378 103/103/115	4398 103/105/116	4422 103/108/119	4462 102/113/123	18387
-35	4387 104/104/116	4416 103/103/116	4441 103/103/115	4463 103/105/116	4489 102/108/119	4532 102/113/123	18387
-30	4451 103/103/116	4483 103/103/116	4510 103/103/115	4535 103/105/116	4563 102/108/119	4609 102/113/123	18387
-25	4515 103/103/116	4549 103/103/115	4579 103/103/115	4606 103/105/116	4636 102/108/119	4686 102/113/123	18387
-20	4575 103/103/116	4612 103/103/115	4644 103/103/115	4674 103/105/116	4706 102/108/119	4759 102/113/123	18387
-15	4639 103/103/116	4678 103/103/115	4713 103/103/114	4745 102/105/116	4779 102/108/119	4835 102/113/123	18387
-10	4702 103/103/116	4744 103/103/115	4781 103/103/114	4815 102/105/116	4852 102/108/119	4910 102/113/123	18387
-5	4764 103/103/116	4808 103/103/115	4848 103/103/114	4884 102/105/116	4923 102/108/119	4985 102/113/123	18387
0	4829 103/103/116	4876 103/103/115	4918 102/102/114	4956 102/105/116	4997 102/108/119	5062 102/113/123	18387
5	4889 103/103/116	4938 103/103/115	4982 102/102/114	5022 102/105/116	5066 102/108/119	5134 102/113/123	18387
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4457 104/104/116	4488 103/103/116	4514 103/103/115	4537 103/105/116	4564 103/108/119	4608 102/113/123	18387
-35	4520 103/103/116	4553 103/103/115	4581 103/103/115	4607 103/105/116	4636 102/108/119	4684 102/113/123	18387
-30	4586 103/103/116	4622 103/103/115	4653 103/103/115	4681 103/105/116	4712 102/108/119	4763 102/113/123	18387
-25	4651 103/103/116	4690 103/103/115	4723 103/103/114	4754 103/105/116	4787 102/108/119	4842 102/113/123	18387
-20	4716 103/103/116	4758 103/103/115	4793 103/103/114	4827 102/105/116	4862 102/108/119	4920 102/113/123	18387
-15	4782 103/103/116	4826 103/103/115	4864 103/103/114	4900 102/105/116	4938 102/108/119	4999 102/113/123	18387
-10	4848 103/103/116	4894 103/103/115	4935 103/103/114	4973 102/105/116	5013 102/108/119	5077 102/113/123	18387
-5	4914 103/103/116	4963 103/103/115	5006 102/102/114	5046 102/105/116	5089 102/108/119	5156 102/113/123	18387
0	4980 103/103/116	5031 103/103/115	5076 102/102/114	5119 102/105/116	5164 102/108/119	5234 102/113/123	18387
5	5042 103/103/116	5096 102/102/115	5143 102/102/114	5188 102/105/116	5235 102/108/119	5308 101/113/123	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4589 103/103/116	4624 103/103/115	4653 103/103/115	4681 103/105/117	4711 102/108/119	4760 102/113/123	18387
-35	4650 103/103/116	4688 103/103/115	4719 103/103/114	4749 102/105/117	4781 102/108/119	4834 102/113/123	18387
-30	4717 103/103/116	4757 103/103/115	4791 103/103/114	4823 102/105/117	4858 102/108/119	4914 102/113/123	18387
-25	4786 103/103/116	4829 103/103/115	4865 103/103/114	4900 102/105/117	4937 102/108/119	4996 102/113/123	18387
-20	4854 103/103/116	4899 103/103/115	4938 102/102/114	4975 102/105/117	5015 102/108/119	5078 102/113/123	18387
-15	4922 103/103/116	4970 103/103/115	5012 102/102/114	5051 102/105/117	5093 102/108/119	5159 102/113/123	18387
-10	4991 103/103/116	5042 103/103/115	5086 102/102/114	5128 102/105/117	5172 102/108/119	5242 102/113/123	18387
-5	5058 103/103/116	5111 102/102/115	5158 102/102/114	5202 102/105/117	5249 102/108/119	5322 101/113/123	18387
0	5125 103/103/115	5180 102/102/115	5230 102/102/114	5276 102/105/117	5325 102/108/119	5401 101/113/123	18387
5	5166 102/102/115	5224 102/102/114	5276 102/102/114	5325 101/106/117	5376 101/109/119	5456 101/113/123	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4665 102/102/115	4703 102/102/114	4736 102/102/114	4766 102/106/117	4800 101/109/119	4854 101/113/123	18387
-35	4730 102/102/115	4770 102/102/114	4805 102/102/114	4838 101/106/117	4873 101/109/119	4931 101/113/123	18387
-30	4800 102/102/115	4843 102/102/114	4881 102/102/114	4916 101/106/117	4954 101/109/119	5015 101/113/123	18387
-25	4870 102/102/115	4916 102/102/114	4956 102/102/114	4994 101/106/117	5034 101/109/119	5099 101/113/123	18387
-20	4939 102/102/115	4988 102/102/114	5031 102/102/114	5071 101/106/117	5114 101/109/119	5182 101/113/123	18387
-15	5009 102/102/115	5060 102/102/114	5106 101/102/114	5149 101/106/117	5194 101/109/119	5265 101/113/123	18387
-10	5078 102/102/114	5132 102/102/114	5180 101/102/114	5225 101/106/117	5273 101/109/119	5348 101/113/123	18387
-5	5146 102/102/114	5203 101/101/113	5254 101/102/114	5301 101/106/117	5351 101/109/119	5430 101/113/123	18387
0	5217 102/102/114	5276 101/101/113	5329 101/102/114	5379 101/106/117	5431 101/109/119	5512 100/113/123	18387
5	5135 99/99/111	5197 99/100/111	5253 99/103/114	5305 99/106/117	5361 99/109/119	5785 102/114/123	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4737 101/101/114	4778 101/101/113	4814 101/103/114	4848 101/106/117	4884 100/109/119	4943 100/113/123	18387
-35	4805 101/101/114	4849 101/101/113	4888 101/103/114	4924 100/106/117	4963 100/109/119	5025 100/113/123	18387
-30	4877 101/101/113	4924 101/101/113	4965 101/103/114	5004 100/106/117	5046 100/109/119	5112 100/113/123	18387
-25	4950 101/101/113	5000 101/101/112	5044 101/103/114	5085 100/106/117	5129 100/109/119	5199 100/113/123	18387
-20	5021 101/101/113	5074 101/101/112	5120 100/103/114	5164 100/106/117	5211 100/109/119	5284 100/113/123	18387
-15	5092 101/101/113	5147 101/101/112	5196 100/103/114	5243 100/106/117	5292 100/109/119	5368 100/113/123	18387
-10	5164 101/101/113	5221 100/100/112	5273 100/103/114	5322 100/106/117	5374 100/109/119	5457 100/113/123	18387
-5	5236 101/101/113	5296 100/100/112	5351 100/103/114	5402 100/106/117	5456 100/109/119	5575 100/113/123	18387
0	5263 100/100/112	5327 100/100/111	5385 99/103/114	5440 99/106/117	5497 99/109/119	5855 101/114/123	18387
5	5118 97/97/108	5184 97/101/111	5244 96/104/114	5301 96/107/117	5541 98/110/119	6468 105/114/123	18387
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 1 - STD WATER (0.250 in) - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3938 103/103/115	3976 102/102/115	4010 102/102/114	4042 102/105/116	4076 102/108/119	4354 104/113/123	18387
-35	3992 103/103/115	4033 102/102/115	4069 102/102/114	4104 102/105/116	4141 102/108/119	4463 105/113/123	18387
-30	4048 103/103/115	4092 102/102/114	4131 102/102/114	4168 102/105/116	4207 102/108/119	4572 105/113/123	18387
-25	4105 102/102/115	4151 102/102/114	4193 102/102/114	4233 102/105/116	4275 102/108/119	4684 106/113/123	18387
-20	4162 102/102/115	4211 102/102/114	4255 102/102/114	4297 102/105/116	4342 102/108/119	4801 106/113/123	18387
-15	4218 102/102/115	4269 102/102/114	4316 102/102/114	4361 102/105/116	4408 101/108/119	4922 106/113/123	18387
-10	4274 102/102/115	4328 102/102/114	4378 102/102/114	4425 102/105/116	4475 101/108/119	5046 107/113/123	18387
-5	4331 102/102/115	4388 102/102/114	4440 102/102/114	4490 101/105/116	4541 101/108/119	5177 107/113/123	18387
0	4387 102/102/115	4446 102/102/114	4501 102/102/114	4553 101/105/116	4607 101/108/119	5317 108/113/123	18387
5	4441 102/102/115	4503 102/102/114	4560 101/102/114	4615 101/105/116	4671 101/108/119	5458 108/113/123	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4070 103/103/116	4112 103/103/115	4151 102/102/114	4187 102/105/116	4226 102/108/119	4512 105/113/123	18387
-35	4123 103/103/116	4168 102/102/115	4209 102/102/114	4248 102/105/116	4288 102/108/119	4633 105/113/123	18387
-30	4182 103/103/116	4230 102/102/115	4273 102/102/114	4315 102/105/116	4358 102/108/119	4751 105/113/123	18387
-25	4240 103/103/115	4291 102/102/115	4337 102/102/114	4381 102/105/116	4427 102/108/119	4872 106/113/123	18387
-20	4295 102/102/115	4349 102/102/115	4398 102/102/114	4444 102/105/116	4493 102/108/119	5000 106/113/123	18387
-15	4353 102/102/115	4410 102/102/114	4461 102/102/114	4510 102/105/116	4562 101/108/119	5134 107/113/123	18387
-10	4411 102/102/115	4470 102/102/114	4524 102/102/114	4576 102/105/116	4630 101/108/119	5271 107/113/123	18387
-5	4468 102/102/115	4530 102/102/114	4587 102/102/114	4641 101/105/116	4697 101/108/119	5412 108/113/123	18387
0	4527 102/102/115	4592 102/102/114	4651 102/102/114	4708 101/105/116	4767 101/108/119	5566 108/113/123	18387
5	4582 102/102/115	4649 102/102/114	4711 101/102/114	4770 101/105/116	4832 101/108/119	5736 109/113/123	18387
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4186 103/103/116	4233 102/102/115	4275 102/102/114	4315 102/105/116	4358 102/108/119	4725 105/113/123	18387
-35	4243 103/103/115	4293 102/102/115	4338 102/102/114	4381 102/105/116	4425 102/108/119	4858 106/113/123	18387
-30	4304 103/103/115	4356 102/102/115	4404 102/102/114	4449 102/105/116	4497 102/108/119	4984 106/113/123	18387
-25	4363 102/102/115	4419 102/102/114	4469 102/102/114	4517 102/105/116	4568 102/108/119	5116 107/113/123	18387
-20	4423 102/102/115	4481 102/102/114	4534 102/102/114	4586 102/105/116	4638 101/108/119	5255 107/113/123	18387
-15	4483 102/102/115	4544 102/102/114	4600 102/102/114	4654 102/105/116	4710 101/108/119	5400 108/113/123	18387
-10	4543 102/102/115	4607 102/102/114	4666 102/102/114	4722 101/105/116	4780 101/108/119	5547 108/113/123	18387
-5	4603 102/102/115	4670 102/102/114	4732 102/102/114	4791 101/105/116	4852 101/108/119	5705 109/113/123	18387
0	4663 102/102/115	4732 102/102/114	4797 101/102/114	4859 101/105/116	4922 101/108/119	5855 109/113/123	18387
5	4720 102/102/115	4792 102/102/114	4859 101/102/114	4923 101/105/116	5007 101/108/119	6023 110/113/123	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4306 103/103/115	4358 102/102/115	4404 102/102/114	4449 102/105/117	4496 102/108/119	4973 106/113/123	18387
-35	4362 102/102/115	4416 102/102/114	4465 102/102/114	4512 102/105/117	4562 101/108/119	5127 107/113/123	18387
-30	4423 102/102/115	4480 102/102/114	4532 102/102/114	4582 102/105/117	4634 101/108/119	5263 107/113/123	18387
-25	4485 102/102/115	4545 102/102/114	4601 102/102/114	4653 102/105/117	4708 101/108/119	5410 108/113/123	18387
-20	4547 102/102/115	4610 102/102/114	4668 102/102/114	4724 101/105/117	4781 101/108/119	5560 108/113/123	18387
-15	4609 102/102/115	4675 102/102/114	4736 102/102/114	4795 101/105/117	4855 101/108/119	5715 109/113/123	18387
-10	4672 102/102/115	4741 102/102/114	4805 101/102/114	4866 101/105/117	4929 101/108/119	5874 109/113/123	18387
-5	4734 102/102/115	4805 102/102/114	4872 101/102/114	4936 101/105/117	5021 101/108/119	6069 110/113/123	18387
0	4795 102/102/114	4869 101/101/114	4939 101/102/114	5005 101/105/117	5159 102/108/119	6241 111/113/123	18387
5	4835 101/101/114	4913 101/101/113	4985 101/102/114	5055 101/106/117	5401 103/109/119	6519 112/113/123	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4377 102/102/114	4433 101/101/113	4483 101/102/114	4532 101/106/117	4582 101/109/119	5368 108/113/123	18387
-35	4436 101/101/114	4494 101/101/113	4547 101/102/114	4598 101/106/117	4652 101/109/119	5550 109/113/123	18387
-30	4500 101/101/114	4562 101/101/113	4618 101/102/114	4672 101/106/117	4746 101/109/119	5721 110/113/123	18387
-25	4564 101/101/114	4628 101/101/113	4688 101/102/114	4745 101/106/117	4874 101/109/119	5864 110/113/123	18387
-20	4627 101/101/114	4695 101/101/113	4757 101/102/114	4817 100/106/117	5007 102/109/119	6028 111/113/123	18387
-15	4691 101/101/114	4761 101/101/113	4827 101/102/114	4889 100/106/117	5151 102/109/119	6214 111/113/123	18387
-10	4754 101/101/113	4828 101/101/113	4896 100/102/114	4961 100/106/117	5291 103/109/119	6445 112/113/123	18387
-5	4817 101/101/113	4893 101/101/112	4964 100/102/114	5033 100/106/117	5438 103/109/119	6551 112/113/123	18387
0	4881 101/101/113	4960 100/100/112	5034 100/102/114	5105 100/106/117	5590 104/109/119	6717 113/113/123	18387
5	4823 99/99/110	4905 98/100/111	4982 98/103/114	5444 102/106/117	6245 108/109/119	7221 114/114/123	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4446 100/100/113	4505 100/100/112	4559 100/103/114	4612 100/106/117	4874 102/109/119	5864 111/113/123	18387
-35	4508 100/100/113	4570 100/100/112	4628 100/103/114	4683 100/106/117	5015 103/109/119	6045 112/113/123	18387
-30	4574 100/100/113	4639 100/100/112	4700 100/103/114	4758 100/106/117	5157 103/109/119	6232 112/113/123	18387
-25	4640 100/100/112	4709 100/100/112	4773 100/103/114	4834 100/106/117	5304 104/109/119	6400 113/113/123	18387
-20	4706 100/100/112	4778 100/100/112	4845 100/103/114	4909 99/106/117	5457 104/109/119	6512 113/113/123	18387
-15	4770 100/100/112	4845 100/100/111	4915 100/103/114	4982 99/106/117	5618 105/109/119	6684 113/113/123	18387
-10	4836 100/100/112	4914 100/100/111	4987 99/103/114	5057 99/106/117	5790 105/109/119	6798 113/113/123	18387
-5	4902 100/100/112	4983 99/99/111	5059 99/103/114	5188 100/106/117	5942 106/109/119	7071 113/113/123	18387
0	4936 99/99/111	5021 99/100/111	5101 99/103/114	5532 102/106/117	6394 109/109/119	7384 114/114/123	18387
5	4825 96/97/108	4911 96/101/111	5479 100/104/114	6265 106/107/117	6832 110/110/119	7905 114/114/123	18387
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 1 - STD WATER (0.375 in) - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3742 102/102/115	3793 102/102/114	3841 101/102/114	3887 101/105/116	4418 107/108/119	4990 113/113/123	18387
-35	3793 102/102/115	3848 101/101/114	3898 101/102/114	3962 101/105/116	4531 108/108/119	5079 113/113/123	18387
-30	3847 102/102/114	3904 101/101/114	3957 101/102/114	4097 102/105/116	4607 108/108/119	5183 113/113/123	18387
-25	3901 102/102/114	3961 101/101/114	4017 101/102/114	4221 103/105/116	4726 108/108/119	5280 113/113/123	18387
-20	3954 101/101/114	4018 101/101/113	4077 101/102/114	4355 103/105/116	4805 108/108/119	5380 113/113/123	18387
-15	4008 101/101/114	4074 101/101/113	4137 101/102/114	4469 104/105/116	4883 108/108/119	5481 113/113/123	18387
-10	4062 101/101/114	4131 101/101/113	4196 101/102/114	4577 105/105/116	4986 108/108/119	5584 113/113/123	18387
-5	4116 101/101/114	4188 101/101/113	4256 101/102/114	4646 105/105/116	5075 108/108/119	5690 113/113/123	18387
0	4169 101/101/114	4244 101/101/113	4315 101/102/114	4758 105/105/116	5165 108/108/119	5799 113/113/123	18387
5	4222 101/101/114	4300 101/101/113	4373 101/102/114	4863 105/105/116	5258 108/108/119	- -	18327
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3865 102/102/115	3922 102/102/114	3975 102/102/114	4026 101/105/116	4582 108/108/119	5158 113/113/123	18387
-35	3916 102/102/115	3975 102/102/114	4031 101/102/114	4151 102/105/116	4694 108/108/119	5259 113/113/123	18387
-30	3972 102/102/115	4034 101/101/114	4093 101/102/114	4286 103/105/116	4774 108/108/119	5360 113/113/123	18387
-25	4027 102/102/115	4093 101/101/114	4154 101/102/114	4418 104/105/116	4891 108/108/119	5463 113/113/123	18387
-20	4080 102/102/114	4149 101/101/114	4213 101/102/114	4553 104/105/116	4976 108/108/119	5568 113/113/123	18387
-15	4135 101/101/114	4207 101/101/113	4275 101/102/114	4665 105/105/116	5058 108/108/119	5677 113/113/123	18387
-10	4190 101/101/114	4265 101/101/113	4336 101/102/114	4736 105/105/116	5160 108/108/119	5788 113/113/123	18387
-5	4245 101/101/114	4323 101/101/113	4397 101/102/114	4850 105/105/116	5252 108/108/119	5899 113/113/123	18387
0	4302 101/101/114	4383 101/101/113	4460 101/102/114	4924 105/105/116	5348 108/108/119	- -	18276
5	4355 101/101/114	4439 101/101/113	4601 102/102/114	5033 105/105/116	5448 108/108/119	- -	18089
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3974 102/102/115	4036 102/102/114	4093 101/102/114	4256 103/105/116	4772 108/108/119	5347 113/113/123	18387
-35	4029 102/102/115	4093 101/101/114	4154 101/102/114	4408 104/105/116	4886 108/108/119	5453 113/113/123	18387
-30	4086 102/102/114	4154 101/101/114	4218 101/102/114	4556 104/105/116	4975 108/108/119	5557 113/113/123	18387
-25	4143 101/101/114	4214 101/101/114	4281 101/102/114	4670 105/105/116	5061 108/108/119	5670 113/113/123	18387
-20	4200 101/101/114	4274 101/101/113	4344 101/102/114	4744 105/105/116	5146 108/108/119	5782 113/113/123	18387
-15	4258 101/101/114	4335 101/101/113	4409 101/102/114	4861 105/105/116	5254 108/108/119	5897 113/113/123	18387
-10	4315 101/101/114	4396 101/101/113	4472 101/102/114	4936 105/105/116	5350 108/108/119	- -	18315
-5	4373 101/101/114	4457 101/101/113	4578 101/102/114	5012 105/105/116	5448 108/108/119	- -	18141
0	4431 101/101/114	4518 101/101/113	4685 102/102/114	5124 105/105/116	5549 108/108/119	- -	17963
5	4486 101/101/114	4576 101/101/113	4791 102/102/114	5209 105/105/116	5655 108/108/119	- -	17777
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4088 102/102/114	4155 101/101/114	4218 101/102/114	4555 105/105/117	4976 108/108/119	5559 113/113/123	18387
-35	4141 101/101/114	4211 101/101/113	4277 101/102/114	4664 105/105/117	5055 108/108/119	5672 113/113/123	18387
-30	4199 101/101/114	4272 101/101/113	4341 101/102/114	4739 105/105/117	5165 108/108/119	5787 113/113/123	18387
-25	4259 101/101/114	4336 101/101/113	4408 101/102/114	4860 105/105/117	5261 108/108/119	5904 113/113/123	18387
-20	4319 101/101/114	4399 101/101/113	4474 101/102/114	4938 105/105/117	5359 108/108/119	- -	18306
-15	4378 101/101/114	4462 101/101/113	4582 101/102/114	5046 105/105/117	5458 108/108/119	- -	18130
-10	4439 101/101/114	4525 101/101/113	4692 102/102/114	5137 105/105/117	5563 108/108/119	- -	17950
-5	4498 101/101/114	4588 101/101/113	4803 102/102/114	5222 105/105/117	5669 108/108/119	- -	17770
0	4557 101/101/113	4650 100/100/113	4872 102/102/114	5325 105/105/117	5778 108/108/119	- -	17590
5	4601 100/100/113	4698 100/100/112	5019 102/102/114	5458 106/106/117	5936 109/109/119	- -	17223
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4159 101/101/113	4230 100/100/112	4298 100/102/114	4822 106/106/117	5207 109/109/119	5843 113/113/123	18387
-35	4215 100/100/113	4289 100/100/112	4437 101/102/114	4899 105/106/117	5310 109/109/119	- -	18241
-30	4277 100/100/113	4355 100/100/112	4551 101/102/114	5004 106/106/117	5413 109/109/119	- -	18060
-25	4338 100/100/113	4420 100/100/112	4664 102/102/114	5095 106/106/117	5517 109/109/119	- -	17884
-20	4399 100/100/113	4484 100/100/112	4779 102/102/114	5189 106/106/117	5626 109/109/119	- -	17704
-15	4461 100/100/113	4549 100/100/112	4852 102/102/114	5281 106/106/117	5736 109/109/119	- -	17528
-10	4522 100/100/112	4614 100/100/112	4959 102/102/114	5383 106/106/117	5848 109/109/119	- -	17357
-5	4583 100/100/112	4678 100/100/112	5045 102/102/114	5483 106/106/117	- -	- -	17181
0	4645 100/100/112	4743 99/99/111	5120 102/102/114	5586 106/106/117	- -	- -	17010
5	4609 98/98/109	4936 100/100/111	5398 103/103/114	- -	- -	- -	16142
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 1 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4228	4304	4624	5056	5476	-	17771
	99/99/112	99/99/111	102/103/114	106/106/117	109/109/119	-	
-35	4288	4368	4740	5152	5587	-	17589
	99/99/112	99/99/111	103/103/114	106/106/117	109/109/119	-	
-30	4352	4435	4818	5244	5699	-	17417
	99/99/112	99/99/111	102/103/114	106/106/117	109/109/119	-	
-25	4416	4503	4928	5351	5815	-	17243
	99/99/112	99/99/111	103/103/114	106/106/117	109/109/119	-	
-20	4480	4570	5017	5453	-	-	17069
	99/99/111	99/99/111	103/103/114	106/106/117	-	-	
-15	4542	4637	5099	5558	-	-	16900
	99/99/111	99/99/111	103/103/114	106/106/117	-	-	
-10	4606	4748	5200	5665	-	-	16732
	99/99/111	99/99/111	103/103/114	106/106/117	-	-	
-5	4671	4855	5296	5775	-	-	16565
	99/99/111	99/99/111	103/103/114	106/106/117	-	-	
0	4715	5010	5480	-	-	-	16102
	98/98/110	100/100/111	103/103/114	-	-	-	
5	4820	5316	-	-	-	-	15123
	97/97/108	101/101/111	-	-	-	-	
V _{FS}	121	124	127	130	134	-	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 2 - DRY RWY - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2463 106/106/118	2390 104/104/115	2360 101/101/112	2359 99/99/110	2531 102/102/112	2802 107/107/116	18387
-35	2502 106/106/118	2424 104/104/115	2395 101/101/112	2395 99/99/110	2570 102/102/112	2847 107/107/116	18387
-30	2543 106/106/118	2460 104/104/115	2430 101/101/112	2431 98/99/110	2610 102/102/112	2891 107/107/116	18387
-25	2584 106/106/118	2495 104/104/115	2465 101/101/112	2467 98/99/110	2649 102/102/112	2936 107/107/116	18387
-20	2625 106/106/118	2530 103/103/115	2500 101/101/112	2504 98/99/110	2689 102/102/112	2981 107/107/116	18387
-15	2665 106/106/118	2565 103/103/115	2535 101/101/112	2541 98/99/110	2729 102/102/112	3026 107/107/116	18387
-10	2705 106/106/118	2603 103/103/115	2569 101/101/112	2578 98/99/110	2769 102/102/112	3072 107/107/116	18387
-5	2745 106/106/118	2642 103/103/115	2603 101/101/112	2615 98/99/110	2810 102/102/112	3118 107/107/116	18387
0	2784 106/106/118	2680 103/103/115	2636 101/101/112	2653 98/99/110	2851 102/102/112	3164 107/107/116	18387
5	2822 106/106/118	2717 103/103/115	2669 100/100/112	2691 98/99/110	2893 102/102/112	3212 107/107/116	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2552 107/107/119	2461 104/104/116	2430 101/101/112	2420 99/99/110	2596 102/102/112	2875 107/107/116	18387
-35	2590 107/107/119	2494 104/104/115	2463 101/101/112	2457 99/99/110	2637 102/102/112	2920 107/107/116	18387
-30	2632 107/107/119	2530 104/104/115	2499 101/101/112	2495 99/99/110	2678 102/102/112	2967 107/107/116	18387
-25	2674 107/107/119	2570 104/104/115	2535 101/101/112	2532 98/99/110	2719 102/102/112	3013 107/107/116	18387
-20	2714 106/106/119	2610 104/104/115	2570 101/101/112	2571 98/99/110	2761 102/102/112	3060 107/107/116	18387
-15	2755 106/106/118	2649 103/103/115	2605 101/101/112	2609 98/99/110	2803 101/102/112	3108 107/107/116	18387
-10	2796 106/106/118	2689 103/103/115	2640 101/101/112	2648 98/99/110	2845 101/102/112	3156 107/107/116	18387
-5	2836 106/106/118	2729 103/103/115	2674 101/101/112	2687 98/99/110	2887 101/102/112	3204 107/107/116	18387
0	2877 106/106/118	2768 103/103/115	2708 101/101/112	2725 98/99/110	2929 101/102/112	3252 107/107/116	18387
5	2914 106/106/118	2805 103/103/115	2741 100/100/112	2766 98/99/110	2974 101/102/112	3303 107/107/116	18387
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2627 107/107/119	2524 104/104/116	2493 101/101/112	2486 99/99/110	2669 102/102/112	2956 107/107/116	18387
-35	2668 107/107/119	2564 104/104/115	2527 101/101/112	2525 99/99/110	2711 102/102/112	3004 107/107/116	18387
-30	2711 106/106/119	2606 104/104/115	2564 101/101/112	2564 98/99/110	2753 102/102/112	3052 107/107/116	18387
-25	2754 106/106/119	2648 104/104/115	2601 101/101/112	2603 98/99/110	2796 101/102/112	3100 107/107/116	18387
-20	2797 106/106/119	2690 103/103/115	2637 101/101/112	2642 98/99/110	2839 101/102/112	3149 107/107/116	18387
-15	2839 106/106/118	2731 103/103/115	2673 101/101/112	2682 98/99/110	2882 101/102/112	3198 107/107/116	18387
-10	2881 106/106/118	2772 103/103/115	2709 101/101/112	2722 98/99/110	2926 101/102/112	3247 107/107/116	18387
-5	2923 106/106/118	2813 103/103/115	2745 101/101/112	2762 98/99/110	2969 101/102/112	3297 107/107/116	18387
0	2964 106/106/118	2853 103/103/115	2780 100/100/112	2802 98/99/110	3014 101/102/112	3347 107/107/116	18387
5	3003 106/106/118	2891 103/103/115	2814 100/100/111	2844 98/99/110	3060 101/102/112	3399 107/107/116	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2705	2600	2559	2560	2749	3048	18387
	107/107/119	104/104/115	101/101/112	98/99/110	102/102/112	107/107/116	
-35	2745	2639	2593	2600	2793	3098	18387
	106/106/118	103/103/115	101/101/112	98/99/110	102/102/112	107/107/116	
-30	2788	2681	2629	2640	2837	3147	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
-25	2833	2724	2667	2681	2881	3197	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
-20	2877	2768	2705	2722	2926	3248	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
-15	2920	2810	2742	2763	2970	3298	18387
	106/106/118	103/103/115	101/101/112	98/99/110	101/102/112	107/107/116	
-10	2964	2853	2778	2804	3015	3349	18387
	106/106/118	103/103/115	100/100/112	98/99/110	101/102/112	107/107/116	
-5	3006	2894	2815	2846	3061	3402	18387
	106/106/118	103/103/115	100/100/111	98/99/110	101/102/112	107/107/116	
0	3048	2935	2850	2888	3108	3454	18387
	106/106/118	103/103/115	100/100/111	98/99/110	101/102/112	107/107/116	
5	3076	2964	2882	2949	3175	3533	18387
	105/105/117	102/102/114	100/100/111	98/100/110	101/103/112	107/107/116	
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2751	2646	2608	2657	2856	3171	18387
	106/106/117	103/103/114	100/100/111	98/100/110	102/103/112	107/107/116	
-35	2792	2686	2643	2699	2903	3223	18387
	105/105/117	102/102/114	100/100/111	98/100/110	102/103/112	107/107/116	
-30	2837	2730	2681	2741	2948	3275	18387
	105/105/117	102/102/114	100/100/111	98/100/110	102/103/112	107/107/116	
-25	2882	2774	2720	2784	2995	3328	18387
	105/105/117	102/102/114	100/100/111	98/100/110	102/103/112	107/107/116	
-20	2927	2818	2758	2827	3042	3381	18387
	105/105/117	102/102/114	100/100/111	98/100/110	102/103/112	107/107/116	
-15	2971	2861	2795	2870	3089	3435	18387
	105/105/117	102/102/114	100/100/110	98/100/110	102/103/112	107/107/116	
-10	3014	2903	2832	2914	3137	3489	18387
	105/105/117	102/102/114	99/99/110	98/100/110	102/103/112	107/107/116	
-5	3058	2946	2869	2958	3185	3543	18387
	105/105/117	102/102/113	99/99/110	98/100/110	102/103/112	107/107/116	
0	3100	2988	2906	3001	3233	3598	18387
	105/105/117	102/102/113	99/99/110	98/100/110	102/103/112	107/107/116	
5	3068	2960	2917	3152	3400	3841	18387
	102/102/114	100/100/110	97/97/107	99/100/110	103/103/112	108/108/116	
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — DRY RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	2793 104/104/116	2689 102/102/113	2656 99/99/110	2766 99/100/110	2976 102/103/112	3310 107/107/116	18387
-35	2837 104/104/116	2732 101/101/113	2694 99/99/109	2810 99/100/110	3025 102/103/112	3364 107/107/116	18387
-30	2883 104/104/116	2777 101/101/113	2734 99/99/109	2854 99/100/110	3073 102/103/112	3419 107/107/116	18387
-25	2929 104/104/116	2822 101/101/112	2773 99/99/109	2899 99/100/110	3122 102/103/112	3474 107/107/116	18387
-20	2975 104/104/116	2867 101/101/112	2812 99/99/109	2944 98/100/110	3171 102/103/112	3531 107/107/116	18387
-15	3020 104/104/116	2910 101/101/112	2850 99/99/109	2989 98/100/110	3221 102/103/112	3587 107/107/116	18387
-10	3064 104/104/115	2954 101/101/112	2888 98/98/109	3035 98/100/110	3271 102/103/112	3644 107/107/116	18387
-5	3109 104/104/115	2998 101/101/112	2926 98/98/109	3081 98/100/110	3322 102/103/112	3702 107/107/116	18387
0	3136 103/103/114	3026 100/100/111	2966 98/98/108	3181 99/100/110	3432 103/103/112	3859 108/108/116	18387
5	3071 100/100/110	2995 97/97/107	3124 97/98/107	3383 101/101/110	3671 104/104/112	- -	18221
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 2 - WET RWY - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3569 106/106/118	3400 104/104/115	3241 101/101/112	3093 99/99/110	2960 96/102/112	2910 95/107/116	18387
-35	3631 106/106/118	3460 104/104/115	3299 101/101/112	3150 99/99/110	3015 96/102/112	2965 95/107/116	18387
-30	3695 106/106/118	3523 104/104/115	3360 101/101/112	3208 98/99/110	3072 96/102/112	3022 95/107/116	18387
-25	3760 106/106/118	3586 104/104/115	3421 101/101/112	3268 98/99/110	3130 96/102/112	3080 95/107/116	18387
-20	3824 106/106/118	3648 103/103/115	3482 101/101/112	3327 98/99/110	3187 96/102/112	3137 95/107/116	18387
-15	3888 106/106/118	3710 103/103/115	3541 101/101/112	3385 98/99/110	3243 96/102/112	3193 95/107/116	18387
-10	3952 106/106/118	3772 103/103/115	3602 101/101/112	3443 98/99/110	3300 96/102/112	3250 95/107/116	18387
-5	4016 106/106/118	3834 103/103/115	3661 101/101/112	3501 98/99/110	3355 96/102/112	3306 95/107/116	18387
0	4079 106/106/118	3895 103/103/115	3720 101/101/112	3558 98/99/110	3410 96/102/112	3361 95/107/116	18387
5	4140 106/106/118	3954 103/103/115	3777 100/100/112	3612 98/99/110	3464 96/102/112	3414 95/107/116	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3716 107/107/119	3539 104/104/116	3371 101/101/112	3216 99/99/110	3077 96/102/112	3025 95/107/116	18387
-35	3776 107/107/119	3597 104/104/115	3428 101/101/112	3271 99/99/110	3130 96/102/112	3078 95/107/116	18387
-30	3844 107/107/119	3662 104/104/115	3491 101/101/112	3332 99/99/110	3189 96/102/112	3137 95/107/116	18387
-25	3910 107/107/119	3727 104/104/115	3553 101/101/112	3392 98/99/110	3247 96/102/112	3195 95/107/116	18387
-20	3974 106/106/119	3789 104/104/115	3614 101/101/112	3451 98/99/110	3304 96/102/112	3253 95/107/116	18387
-15	4039 106/106/118	3852 103/103/115	3675 101/101/112	3511 98/99/110	3362 96/102/112	3311 95/107/116	18387
-10	4105 106/106/118	3916 103/103/115	3737 101/101/112	3570 98/99/110	3420 96/102/112	3369 95/107/116	18387
-5	4170 106/106/118	3979 103/103/115	3798 101/101/112	3629 98/99/110	3477 96/102/112	3426 95/107/116	18387
0	4236 106/106/118	4043 103/103/115	3860 101/101/112	3689 98/99/110	3535 96/102/112	3484 95/107/116	18387
5	4297 106/106/118	4102 103/103/115	3917 100/100/112	3745 98/99/110	3589 96/102/112	3538 95/107/116	18387
V _{FS}	120	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3842 107/107/119	3659 104/104/116	3487 101/101/112	3328 99/99/110	3184 96/102/112	3131 95/107/116	18387
-35	3907 107/107/119	3723 104/104/115	3548 101/101/112	3387 99/99/110	3241 96/102/112	3189 95/107/116	18387
-30	3976 106/106/119	3789 104/104/115	3613 101/101/112	3449 98/99/110	3302 96/102/112	3249 95/107/116	18387
-25	4044 106/106/119	3856 104/104/115	3678 101/101/112	3512 98/99/110	3362 96/102/112	3310 95/107/116	18387
-20	4113 106/106/119	3922 103/103/115	3742 101/101/112	3574 98/99/110	3423 96/102/112	3370 95/107/116	18387
-15	4181 106/106/118	3989 103/103/115	3806 101/101/112	3636 98/99/110	3483 96/102/112	3431 95/107/116	18387
-10	4249 106/106/118	4055 103/103/115	3870 101/101/112	3698 98/99/110	3543 96/102/112	3491 95/107/116	18387
-5	4318 106/106/118	4121 103/103/115	3935 101/101/112	3761 98/99/110	3604 96/102/112	3552 95/107/116	18387
0	4385 106/106/118	4187 103/103/115	3998 100/100/112	3823 98/99/110	3663 96/102/112	3612 95/107/116	18387
5	4449 106/106/118	4249 103/103/115	4058 100/100/111	3880 98/99/110	3719 96/102/112	3668 94/107/116	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	3970 107/107/119	3783 104/104/115	3606 101/101/112	3442 98/99/110	3294 96/102/112	3241 95/107/116	18387
-35	4034 106/106/118	3845 103/103/115	3666 101/101/112	3500 98/99/110	3351 96/102/112	3298 95/107/116	18387
-30	4104 106/106/118	3913 103/103/115	3732 101/101/112	3564 98/99/110	3412 96/102/112	3359 95/107/116	18387
-25	4176 106/106/118	3983 103/103/115	3799 101/101/112	3629 98/99/110	3475 96/102/112	3422 95/107/116	18387
-20	4247 106/106/118	4052 103/103/115	3866 101/101/112	3694 98/99/110	3538 96/102/112	3485 95/107/116	18387
-15	4319 106/106/118	4121 103/103/115	3933 101/101/112	3758 98/99/110	3601 96/102/112	3548 95/107/116	18387
-10	4390 106/106/118	4190 103/103/115	4000 100/100/112	3823 98/99/110	3664 96/102/112	3611 95/107/116	18387
-5	4460 106/106/118	4257 103/103/115	4065 100/100/111	3886 98/99/110	3724 96/102/112	3672 94/107/116	18387
0	4528 106/106/118	4324 103/103/115	4130 100/100/111	3949 98/99/110	3785 95/102/112	3733 94/107/116	18387
5	4567 105/105/117	4363 102/102/114	4170 100/100/111	3989 97/100/110	3825 95/103/112	3775 94/107/116	18387
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4039	3850	3672	3506	3357	3316	18387
	106/106/117	103/103/114	100/100/111	98/100/110	95/103/112	94/107/116	
-35	4105	3915	3734	3567	3416	3380	18387
	105/105/117	102/102/114	100/100/111	97/100/110	95/103/112	94/107/116	
-30	4179	3986	3803	3634	3481	3443	18387
	105/105/117	102/102/114	100/100/111	97/100/110	95/103/112	94/107/116	
-25	4252	4057	3872	3700	3545	3506	18387
	105/105/117	102/102/114	100/100/111	97/100/110	95/103/112	94/107/116	
-20	4324	4127	3940	3766	3609	3571	18387
	105/105/117	102/102/114	100/100/111	97/100/110	95/103/112	94/107/116	
-15	4396	4197	4008	3831	3672	3637	18387
	105/105/117	102/102/114	100/100/110	97/100/110	95/103/112	94/107/116	
-10	4468	4266	4075	3897	3735	3704	18387
	105/105/117	102/102/114	99/99/110	97/100/110	95/103/112	94/107/116	
-5	4539	4336	4142	3961	3798	3772	18387
	105/105/117	102/102/113	99/99/110	97/100/110	95/103/112	94/107/116	
0	4610	4405	4209	4026	3861	3841	18387
	105/105/117	102/102/113	99/99/110	97/100/110	95/103/112	94/107/116	
5	4514	4314	4125	3949	3790	4115	18387
	102/102/114	100/100/110	97/97/107	95/100/110	93/103/112	96/108/116	
V _{FS}	121	124	127	130	133	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — WET RUNWAY — ZERO SLOPE — NO WIND
ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4100 104/104/116	3911 102/102/113	3732 99/99/110	3567 97/100/110	3417 94/103/112	3502 95/107/116	18387
-35	4171 104/104/116	3980 101/101/113	3799 99/99/109	3631 96/100/110	3480 94/103/112	3569 95/107/116	18387
-30	4246 104/104/116	4053 101/101/113	3870 99/99/109	3699 96/100/110	3546 94/103/112	3636 95/107/116	18387
-25	4322 104/104/116	4126 101/101/112	3941 99/99/109	3768 96/100/110	3612 94/103/112	3704 95/107/116	18387
-20	4396 104/104/116	4198 101/101/112	4010 99/99/109	3835 96/100/110	3678 94/103/112	3773 95/107/116	18387
-15	4469 104/104/116	4269 101/101/112	4079 99/99/109	3902 96/100/110	3742 94/103/112	3843 95/107/116	18387
-10	4544 104/104/115	4341 101/101/112	4149 98/98/109	3970 96/100/110	3807 94/103/112	3914 94/107/116	18387
-5	4618 104/104/115	4413 101/101/112	4218 98/98/109	4037 96/100/110	3873 94/103/112	3987 94/107/116	18387
0	4640 103/103/114	4435 100/100/111	4241 98/98/108	4060 95/100/110	3896 93/103/112	4157 95/108/116	18387
5	4475 100/100/110	4280 97/97/107	4096 95/98/107	3925 92/101/110	3934 92/104/112	- -	18221
V _{FS}	121	124	127	130	134	138	

WARNING: THE VALUES ABOVE DO NOT TAKE INTO ACCOUNT OBSTACLES.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 2 - STD WATER (0.125 in) - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4633 106/106/118	4462 103/103/115	4291 100/100/112	4126 98/99/110	3971 96/102/112	3906 95/107/116	18387
-35	4694 106/106/118	4522 103/103/115	4351 100/100/111	4186 98/99/110	4031 96/102/112	3968 95/107/116	18387
-30	4756 106/106/118	4584 103/103/115	4413 100/100/111	4248 98/99/110	4092 96/102/112	4031 95/107/116	18387
-25	4819 106/106/118	4648 103/103/115	4477 100/100/111	4311 98/99/110	4155 96/102/112	4096 94/107/116	18387
-20	4883 106/106/118	4711 103/103/115	4540 100/100/111	4374 98/99/110	4217 96/102/112	4160 94/107/116	18387
-15	4945 106/106/118	4773 103/103/114	4602 100/100/111	4435 98/99/110	4279 96/102/112	4223 94/107/116	18387
-10	5009 105/105/118	4837 103/103/114	4665 100/100/111	4498 98/99/110	4341 95/102/112	4286 94/107/116	18387
-5	5073 105/105/117	4900 103/103/114	4728 100/100/111	4560 98/99/110	4402 95/102/112	4349 94/107/116	18387
0	5137 105/105/117	4963 102/102/114	4790 100/100/111	4622 98/99/110	4463 95/102/112	4411 94/107/116	18387
5	5198 105/105/117	5024 102/102/114	4850 100/100/111	4681 97/99/110	4521 95/102/112	4471 94/107/116	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4790 106/106/118	4613 103/103/115	4437 101/101/112	4267 98/99/110	4108 96/102/112	4044 95/107/116	18387
-35	4850 106/106/118	4672 103/103/115	4496 100/100/112	4325 98/99/110	4166 96/102/112	4103 95/107/116	18387
-30	4916 106/106/118	4738 103/103/115	4562 100/100/112	4390 98/99/110	4229 96/102/112	4168 95/107/116	18387
-25	4981 106/106/118	4803 103/103/115	4626 100/100/112	4454 98/99/110	4292 96/102/112	4233 94/107/116	18387
-20	5042 106/106/118	4864 103/103/115	4687 100/100/111	4515 98/99/110	4354 96/102/112	4296 94/107/116	18387
-15	5108 106/106/118	4929 103/103/115	4752 100/100/111	4580 98/99/110	4418 95/102/112	4362 94/107/116	18387
-10	5173 106/106/118	4994 103/103/114	4816 100/100/111	4644 98/99/110	4481 95/102/112	4427 94/107/116	18387
-5	5236 105/105/118	5057 103/103/114	4879 100/100/111	4706 98/99/110	4543 95/102/112	4490 94/107/116	18387
0	5304 105/105/118	5125 103/103/114	4946 100/100/111	4771 97/99/110	4607 95/102/112	4556 94/107/116	18387
5	5366 105/105/117	5185 102/102/114	5006 100/100/111	4831 97/99/110	4666 95/102/112	4616 94/107/116	18387
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4927 106/106/118	4747 103/103/115	4568 100/100/112	4395 98/99/110	4233 96/102/112	4170 95/107/116	18387
-35	4990 106/106/118	4810 103/103/115	4632 100/100/112	4458 98/99/110	4295 96/102/112	4234 95/107/116	18387
-30	5058 106/106/118	4878 103/103/115	4699 100/100/112	4525 98/99/110	4361 96/102/112	4302 94/107/116	18387
-25	5124 106/106/118	4944 103/103/115	4765 100/100/111	4590 98/99/110	4427 96/102/112	4369 94/107/116	18387
-20	5192 106/106/118	5011 103/103/115	4831 100/100/111	4656 98/99/110	4492 95/102/112	4436 94/107/116	18387
-15	5260 106/106/118	5078 103/103/114	4898 100/100/111	4723 98/99/110	4558 95/102/112	4504 94/107/116	18387
-10	5327 105/105/118	5146 103/103/114	4965 100/100/111	4789 98/99/110	4624 95/102/112	4571 94/107/116	18387
-5	5395 105/105/118	5213 103/103/114	5032 100/100/111	4856 98/99/110	4690 95/102/112	4639 94/107/116	18387
0	5463 105/105/117	5281 102/102/114	5099 100/100/111	4922 97/99/110	4755 95/102/112	4706 94/107/116	18387
5	5527 105/105/117	5344 102/102/114	5162 100/100/111	4984 97/99/110	4817 95/102/112	4769 94/107/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	5065 106/106/118	4883 103/103/115	4702 100/100/112	4526 98/99/110	4361 96/102/112	4300 94/107/116	18387
-35	5127 106/106/118	4944 103/103/115	4763 100/100/111	4587 98/99/110	4422 95/102/112	4363 94/107/116	18387
-30	5196 106/106/118	5013 103/103/114	4831 100/100/111	4655 98/99/110	4489 95/102/112	4431 94/107/116	18387
-25	5266 105/105/118	5083 103/103/114	4901 100/100/111	4724 98/99/110	4558 95/102/112	4502 94/107/116	18387
-20	5336 105/105/118	5152 103/103/114	4970 100/100/111	4792 98/99/110	4625 95/102/112	4571 94/107/116	18387
-15	5406 105/105/117	5222 102/102/114	5039 100/100/111	4861 97/99/110	4694 95/102/112	4641 94/107/116	18387
-10	5478 105/105/117	5293 102/102/114	5110 100/100/111	4931 97/99/110	4762 95/102/112	4712 94/107/116	18387
-5	5547 105/105/117	5362 102/102/114	5178 100/100/111	4998 97/99/110	4829 95/102/112	4780 94/107/116	18387
0	5616 105/105/117	5430 102/102/114	5245 100/100/111	5065 97/99/110	4895 95/102/112	4848 94/107/116	18387
5	5655 104/104/116	5470 102/102/113	5286 99/99/110	5107 97/100/110	4938 95/103/112	4893 93/107/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	5139 105/105/117	4956 102/102/113	4775 99/99/110	4599 97/100/110	4433 95/103/112	4375 94/107/116	18387
-35	5205 105/105/117	5022 102/102/113	4840 99/99/110	4664 97/100/110	4498 95/103/112	4441 93/107/116	18387
-30	5277 105/105/116	5094 102/102/113	4912 99/99/110	4735 97/100/110	4568 95/103/112	4513 93/107/116	18387
-25	5349 104/104/116	5166 102/102/113	4983 99/99/110	4805 97/100/110	4638 94/103/112	4585 93/107/116	18387
-20	5421 104/104/116	5236 102/102/113	5053 99/99/110	4875 97/100/110	4707 94/103/112	4656 93/107/116	18387
-15	5493 104/104/116	5308 101/101/113	5124 99/99/110	4945 97/100/110	4776 94/103/112	4727 93/107/116	18387
-10	5564 104/104/116	5379 101/101/113	5194 99/99/110	5014 96/100/110	4845 94/103/112	4797 93/107/116	18387
-5	5635 104/104/116	5449 101/101/113	5264 99/99/110	5084 96/100/110	4914 94/103/112	4867 93/107/116	18387
0	5708 104/104/116	5521 101/101/113	5335 99/99/109	5154 96/100/110	4983 94/103/112	4939 93/107/116	18387
5	5611 102/102/113	5427 99/99/110	5244 97/97/107	5067 94/100/110	4899 92/103/112	5230 95/108/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.125 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	5209 104/104/115	5026 101/101/112	4844 98/98/109	4668 96/100/110	4503 94/103/112	4448 93/107/116	18387
-35	5278 104/104/115	5095 101/101/112	4914 98/98/109	4737 96/100/110	4571 94/103/112	4518 93/107/116	18387
-30	5353 103/103/115	5169 101/101/112	4987 98/98/109	4809 96/100/110	4643 94/103/112	4591 92/107/116	18387
-25	5428 103/103/115	5244 101/101/112	5061 98/98/109	4883 96/100/110	4715 94/103/112	4666 92/107/116	18387
-20	5502 103/103/115	5317 101/101/112	5134 98/98/109	4955 96/100/110	4787 93/103/112	4739 92/107/116	18387
-15	5574 103/103/115	5389 100/100/112	5205 98/98/108	5026 96/100/110	4857 93/103/112	4824 92/107/116	18387
-10	5649 103/103/115	5463 100/100/111	5278 98/98/108	5098 95/100/110	4929 93/103/112	4926 93/107/116	18387
-5	5724 103/103/115	5537 100/100/111	5352 98/98/108	5171 95/100/110	5001 93/103/112	5030 93/107/116	18387
0	5749 102/102/113	5561 99/99/110	5375 97/97/107	5195 95/100/110	5024 92/103/112	5289 94/108/116	18387
5	5581 99/99/110	5398 96/96/106	5217 94/98/107	5042 92/101/110	4987 91/104/112	- -	18221
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 2 - STD WATER (0.250 in) - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4332 105/105/117	4192 102/102/114	4052 100/100/111	3915 97/99/110	3785 95/102/112	3866 96/107/116	18387
-35	4387 105/105/117	4248 102/102/114	4108 100/100/111	3971 97/99/110	3841 95/102/112	3956 96/107/116	18387
-30	4444 105/105/117	4305 102/102/114	4165 100/100/111	4028 97/99/110	3899 95/102/112	4043 96/107/116	18387
-25	4502 105/105/117	4363 102/102/114	4224 100/100/111	4087 97/99/110	3957 95/102/112	4134 97/107/116	18387
-20	4559 105/105/117	4421 102/102/114	4282 100/100/111	4145 97/99/110	4015 95/102/112	4228 97/107/116	18387
-15	4616 105/105/117	4478 102/102/114	4339 99/99/111	4202 97/99/110	4073 95/102/112	4324 97/107/116	18387
-10	4674 105/105/117	4536 102/102/114	4397 99/99/111	4260 97/99/110	4130 95/102/112	4423 98/107/116	18387
-5	4732 105/105/117	4594 102/102/114	4455 99/99/110	4318 97/99/110	4187 95/102/112	4527 98/107/116	18387
0	4790 104/104/117	4652 102/102/113	4512 99/99/110	4375 97/99/110	4244 95/102/112	4635 98/107/116	18387
5	4845 104/104/116	4707 102/102/113	4567 99/99/110	4430 97/99/110	4299 95/102/112	4752 99/107/116	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4473 105/105/117	4330 102/102/114	4186 100/100/111	4045 98/99/110	3912 95/102/112	3996 96/107/116	18387
-35	4527 105/105/117	4384 102/102/114	4240 100/100/111	4099 97/99/110	3965 95/102/112	4094 96/107/116	18387
-30	4587 105/105/117	4444 102/102/114	4300 100/100/111	4159 97/99/110	4025 95/102/112	4190 96/107/116	18387
-25	4646 105/105/117	4503 102/102/114	4359 100/100/111	4218 97/99/110	4084 95/102/112	4287 97/107/116	18387
-20	4702 105/105/117	4559 102/102/114	4416 100/100/111	4275 97/99/110	4141 95/102/112	4390 97/107/116	18387
-15	4761 105/105/117	4619 102/102/114	4475 99/99/111	4335 97/99/110	4201 95/102/112	4496 98/107/116	18387
-10	4820 105/105/117	4678 102/102/114	4535 99/99/111	4394 97/99/110	4260 95/102/112	4605 98/107/116	18387
-5	4878 105/105/117	4736 102/102/114	4593 99/99/110	4451 97/99/110	4317 95/102/112	4716 98/107/116	18387
0	4940 104/104/117	4797 102/102/113	4653 99/99/110	4512 97/99/110	4377 95/102/112	4832 99/107/116	18387
5	4996 104/104/117	4853 102/102/113	4709 99/99/110	4567 97/99/110	4433 94/102/112	4960 99/107/116	18387
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4595	4450	4304	4162	4027	4172	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	96/107/116	
-35	4653	4508	4363	4220	4085	4277	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	97/107/116	
-30	4714	4570	4424	4282	4147	4384	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	97/107/116	
-25	4775	4630	4485	4343	4208	4486	18387
	105/105/117	102/102/114	100/100/111	97/99/110	95/102/112	97/107/116	
-20	4835	4691	4546	4404	4269	4596	18387
	105/105/117	102/102/114	99/99/111	97/99/110	95/102/112	98/107/116	
-15	4897	4753	4608	4466	4330	4710	18387
	105/105/117	102/102/114	99/99/111	97/99/110	95/102/112	98/107/116	
-10	4958	4814	4670	4527	4391	4827	18387
	105/105/117	102/102/114	99/99/110	97/99/110	95/102/112	99/107/116	
-5	5020	4876	4732	4589	4453	4949	18387
	104/104/117	102/102/114	99/99/110	97/99/110	95/102/112	99/107/116	
0	5082	4938	4793	4650	4514	5075	18387
	104/104/117	102/102/113	99/99/110	97/99/110	95/102/112	100/107/116	
5	5140	4996	4851	4708	4571	5221	18387
	104/104/116	101/101/113	99/99/110	97/99/110	94/102/112	100/107/116	
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4720 105/105/117	4573 102/102/114	4427 100/100/111	4283 97/99/110	4147 95/102/112	4377 97/107/116	18387
-35	4776 105/105/117	4630 102/102/114	4483 99/99/111	4339 97/99/110	4203 95/102/112	4492 98/107/116	18387
-30	4838 105/105/117	4692 102/102/114	4546 99/99/111	4402 97/99/110	4265 95/102/112	4606 98/107/116	18387
-25	4902 105/105/117	4756 102/102/114	4610 99/99/110	4466 97/99/110	4329 95/102/112	4722 98/107/116	18387
-20	4965 105/105/117	4820 102/102/114	4673 99/99/110	4529 97/99/110	4392 95/102/112	4840 99/107/116	18387
-15	5029 104/104/117	4883 102/102/113	4737 99/99/110	4593 97/99/110	4456 95/102/112	4963 99/107/116	18387
-10	5094 104/104/117	4948 102/102/113	4802 99/99/110	4657 97/99/110	4520 94/102/112	5093 100/107/116	18387
-5	5157 104/104/116	5011 101/101/113	4864 99/99/110	4720 97/99/110	4582 94/102/112	5229 100/107/116	18387
0	5220 104/104/116	5073 101/101/113	4926 99/99/110	4782 96/99/110	4644 94/102/112	5372 101/107/116	18387
5	5259 104/104/116	5114 101/101/112	4968 98/98/109	4824 96/100/110	4687 94/103/112	5626 102/107/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4789 104/104/116	4643 101/101/113	4496 99/99/110	4352 96/100/110	4216 94/103/112	4699 99/107/116	18387
-35	4848 104/104/116	4703 101/101/113	4556 99/99/109	4412 96/100/110	4276 94/103/112	4832 100/107/116	18387
-30	4914 104/104/116	4769 101/101/112	4622 98/98/109	4478 96/100/110	4341 94/103/112	4959 100/107/116	18387
-25	4980 104/104/116	4834 101/101/112	4688 98/98/109	4543 96/100/110	4407 94/103/112	5089 100/107/116	18387
-20	5045 104/104/116	4899 101/101/112	4752 98/98/109	4608 96/100/110	4471 94/103/112	5233 101/107/116	18387
-15	5110 103/103/115	4964 101/101/112	4818 98/98/109	4673 96/100/110	4536 94/103/112	5368 101/107/116	18387
-10	5175 103/103/115	5029 101/101/112	4882 98/98/109	4738 96/100/110	4600 94/103/112	5516 102/107/116	18387
-5	5240 103/103/115	5093 100/100/112	4946 98/98/109	4802 96/100/110	4679 94/103/112	5668 103/107/116	18387
0	5306 103/103/115	5159 100/100/112	5012 98/98/109	4867 96/100/110	4799 94/103/112	5825 103/107/116	18387
5	5236 101/101/112	5091 98/98/109	4945 96/97/107	4802 94/100/110	5341 98/103/112	6511 107/108/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.250 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4855 103/103/115	4710 100/100/111	4563 98/98/108	4420 95/100/110	4284 93/103/112	5100 101/107/116	18387
-35	4918 103/103/114	4773 100/100/111	4627 97/97/108	4484 95/100/110	4355 93/103/112	5245 102/107/116	18387
-30	4986 103/103/114	4841 100/100/111	4695 97/97/108	4551 95/100/110	4464 94/103/112	5389 102/107/116	18387
-25	5055 102/102/114	4909 100/100/111	4763 97/97/108	4619 95/100/110	4578 94/103/112	5539 103/107/116	18387
-20	5122 102/102/114	4976 100/100/111	4830 97/97/108	4686 95/100/110	4697 94/103/112	5697 104/107/116	18387
-15	5188 102/102/114	5042 100/100/111	4896 97/97/108	4752 95/100/110	4820 95/103/112	5863 104/107/116	18387
-10	5256 102/102/114	5110 100/100/111	4964 97/97/108	4819 95/100/110	4947 95/103/112	6026 105/107/116	18387
-5	5325 102/102/114	5178 99/99/111	5031 97/97/107	4887 95/100/110	5081 96/103/112	6236 105/107/116	18387
0	5357 101/101/113	5210 99/99/109	5062 96/97/107	4918 94/100/110	5431 98/103/112	6601 107/108/116	18387
5	5228 98/98/109	5083 96/96/106	4939 93/98/107	5381 97/101/110	6237 104/104/112	- -	18221
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

FLAP 2 - STD WATER (0.375 in) - ICE PROT ON

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: -1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4089 104/104/116	3974 101/101/113	3857 99/99/110	3742 97/99/110	3754 96/102/112	4571 106/107/116	18387
-35	4141 104/104/116	4026 101/101/113	3910 99/99/110	3795 97/99/110	3868 97/102/112	4688 106/107/116	18387
-30	4195 104/104/116	4081 101/101/113	3965 99/99/110	3850 97/99/110	3964 98/102/112	4765 106/107/116	18387
-25	4249 104/104/116	4136 101/101/113	4020 99/99/110	3906 97/99/110	4078 98/102/112	4887 107/107/116	18387
-20	4304 104/104/116	4191 101/101/113	4076 99/99/110	3962 96/99/110	4188 99/102/112	4966 107/107/116	18387
-15	4358 104/104/116	4246 101/101/113	4131 99/99/110	4017 96/99/110	4309 99/102/112	5045 107/107/116	18387
-10	4413 104/104/116	4301 101/101/113	4186 99/99/110	4072 96/99/110	4434 100/102/112	5125 107/107/116	18387
-5	4468 104/104/116	4356 101/101/113	4241 99/99/110	4127 96/99/110	4578 101/102/112	5232 107/107/116	18387
0	4523 104/104/116	4411 101/101/113	4296 98/98/110	4182 96/99/110	4694 102/102/112	5322 107/107/116	18387
5	4577 103/103/116	4464 101/101/112	4349 98/98/109	4235 96/99/110	4802 102/102/112	5412 107/107/116	18387
V _{FS}	120	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 0 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4220 104/104/117	4102 102/102/113	3983 99/99/110	3864 97/99/110	3911 97/102/112	4729 106/107/116	18387
-35	4271 104/104/117	4153 102/102/113	4034 99/99/110	3916 97/99/110	4032 98/102/112	4845 106/107/116	18387
-30	4328 104/104/116	4210 101/101/113	4091 99/99/110	3973 97/99/110	4148 98/102/112	4925 106/107/116	18387
-25	4384 104/104/116	4267 101/101/113	4148 99/99/110	4029 97/99/110	4269 99/102/112	5046 107/107/116	18387
-20	4437 104/104/116	4321 101/101/113	4202 99/99/110	4085 96/99/110	4423 100/102/112	5131 107/107/116	18387
-15	4494 104/104/116	4377 101/101/113	4259 99/99/110	4142 96/99/110	4587 100/102/112	5214 107/107/116	18387
-10	4550 104/104/116	4434 101/101/113	4316 99/99/110	4199 96/99/110	4709 102/102/112	5317 107/107/116	18387
-5	4605 104/104/116	4490 101/101/113	4372 98/98/110	4254 96/99/110	4776 102/102/112	5409 107/107/116	18387
0	4664 104/104/116	4548 101/101/113	4430 98/98/110	4312 96/99/110	4890 102/102/112	5505 107/107/116	18387
5	4718 103/103/116	4602 101/101/112	4484 98/98/109	4393 96/99/110	5002 102/102/112	5606 107/107/116	18387
V _{FS}	120	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 1000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4333 104/104/117	4214 102/102/113	4094 99/99/110	3975 97/99/110	4128 98/102/112	4923 106/107/116	18387
-35	4388 104/104/116	4270 101/101/113	4150 99/99/110	4031 97/99/110	4276 99/102/112	5042 107/107/116	18387
-30	4446 104/104/116	4328 101/101/113	4208 99/99/110	4090 97/99/110	4400 100/102/112	5132 107/107/116	18387
-25	4504 104/104/116	4386 101/101/113	4267 99/99/110	4148 96/99/110	4559 100/102/112	5216 107/107/116	18387
-20	4562 104/104/116	4445 101/101/113	4325 99/99/110	4207 96/99/110	4673 101/102/112	5302 107/107/116	18387
-15	4621 104/104/116	4504 101/101/113	4385 99/99/110	4266 96/99/110	4787 102/102/112	5412 107/107/116	18387
-10	4679 104/104/116	4563 101/101/113	4444 98/98/110	4325 96/99/110	4903 102/102/112	5508 107/107/116	18387
-5	4739 104/104/116	4622 101/101/113	4503 98/98/110	4385 96/99/110	4975 102/102/112	5605 107/107/116	18387
0	4798 103/103/116	4681 101/101/113	4562 98/98/109	4555 97/99/110	5094 102/102/112	5702 107/107/116	18387
5	4854 103/103/115	4737 101/101/112	4618 98/98/109	4698 98/99/110	5164 102/102/112	5813 107/107/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Feb 13/26 - 12:44:21

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 2000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4451 104/104/116	4331 101/101/113	4210 99/99/110	4090 97/99/110	4387 100/102/112	5130 107/107/116	18387
-35	4504 104/104/116	4385 101/101/113	4264 99/99/110	4144 96/99/110	4561 100/102/112	5210 107/107/116	18387
-30	4563 104/104/116	4444 101/101/113	4324 99/99/110	4204 96/99/110	4712 102/102/112	5324 107/107/116	18387
-25	4624 104/104/116	4506 101/101/113	4385 98/98/110	4266 96/99/110	4786 102/102/112	5420 107/107/116	18387
-20	4685 104/104/116	4567 101/101/113	4446 98/98/110	4327 96/99/110	4904 102/102/112	5518 107/107/116	18387
-15	4746 103/103/116	4628 101/101/113	4508 98/98/109	4400 96/99/110	5025 102/102/112	5617 107/107/116	18387
-10	4808 103/103/116	4690 101/101/112	4570 98/98/109	4539 97/99/110	5101 102/102/112	5722 107/107/116	18387
-5	4868 103/103/115	4750 101/101/112	4630 98/98/109	4728 98/99/110	5176 102/102/112	5828 107/107/116	18387
0	4929 103/103/115	4811 100/100/112	4690 98/98/109	4838 99/99/110	5292 102/102/112	5936 107/107/116	18387
5	4972 103/103/115	4854 100/100/112	4735 98/98/108	4983 99/100/110	5419 103/103/112	6095 107/107/116	18387
V _{FS}	121	124	127	130	133	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 3000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4520 103/103/115	4401 100/100/112	4280 98/98/109	4160 96/100/110	4756 102/103/112	5369 107/107/116	18387
-35	4576 103/103/115	4458 100/100/112	4337 98/98/109	4260 96/100/110	4873 102/103/112	5472 107/107/116	18387
-30	4639 103/103/115	4521 100/100/112	4400 98/98/109	4396 97/100/110	4951 102/103/112	5575 107/107/116	18387
-25	4702 103/103/115	4584 100/100/112	4463 98/98/108	4540 98/100/110	5076 103/103/112	5679 107/107/116	18387
-20	4765 103/103/115	4647 100/100/111	4526 97/97/108	4709 99/100/110	5157 103/103/112	5787 107/107/116	18387
-15	4828 102/102/114	4709 100/100/111	4589 97/97/108	4823 99/100/110	5257 103/103/112	5897 107/107/116	18387
-10	4890 102/102/114	4772 100/100/111	4652 97/97/108	4892 99/100/110	5349 103/103/112	6008 107/107/116	18387
-5	4953 102/102/114	4834 100/100/111	4714 97/97/108	5008 99/100/110	5443 103/103/112	6122 107/107/116	18387
0	5017 102/102/114	4898 99/99/111	4777 97/97/108	5116 100/100/110	5541 103/103/112	- -	18347
5	4972 100/100/111	4854 97/97/108	4922 97/97/107	5370 100/100/110	5840 103/103/112	- -	17436
V _{FS}	121	124	127	130	133	138	

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

PW535E ENGINES

SIMPLIFIED TAKEOFF ANALYSIS

FLAP 2 — STD WATER (0.375 in) RUNWAY — ZERO SLOPE —
NO WIND

ICE PROTECTION (WINGSTAB + ENG) ON — ATR OFF

Airport Pressure Altitude: 4000 ft

Temp (°C)	TAKEOFF WEIGHT (lb)						LIMITED WEIGHT
	RUNWAY LENGTH (ft) V ₁ /V _R /V ₂ (KIAS)						
	14000	14800	15600	16400	17200	18387	
-40	4587 102/102/114	4469 99/99/110	4348 97/97/107	4564 99/100/110	5042 103/103/112	5641 107/107/116	18387
-35	4648 102/102/114	4530 99/99/110	4410 97/97/107	4676 99/100/110	5123 103/103/112	5751 107/107/116	18387
-30	4713 102/102/113	4595 99/99/110	4475 97/97/107	4793 99/100/110	5225 103/103/112	5863 107/107/116	18387
-25	4779 102/102/113	4661 99/99/110	4541 97/97/107	4914 100/100/110	5320 103/103/112	5978 107/107/116	18387
-20	4844 101/101/113	4726 99/99/110	4606 96/97/107	4989 100/100/110	5417 103/103/112	6095 107/107/116	18387
-15	4909 101/101/113	4790 99/99/110	4670 96/97/107	5064 100/100/110	5515 103/103/112	- -	18220
-10	4974 101/101/113	4856 99/99/110	4736 96/97/107	5180 100/100/110	5615 103/103/112	- -	18054
-5	5041 101/101/113	4922 99/99/110	4802 96/97/107	5266 100/100/110	5719 103/103/112	- -	17887
0	5084 100/100/112	4964 98/98/109	4987 97/97/107	5447 100/100/110	5925 103/103/112	- -	17405
5	4990 97/97/108	4871 95/95/105	5308 98/98/107	- -	- -	- -	16382
V _{FS}	121	124	127	130	134	138	

**WARNING: THE VALUES ABOVE DO NOT TAKE INTO
ACCOUNT OBSTACLES.**

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Takeoff

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

DRIFTDOWN - NET GRADIENT**PW535E ENGINES**

DRIFTDOWN — NET GRADIENT = 0%

Weight (lb)	Drift Down Speed (KIAS)	Ceiling Altitude (x 100 ft) Ice Protection (WINGSTAB+ENG) OFF				
		ISA - 10	ISA	ISA + 10	ISA + 20	ISA + 35
12400	116	300	340	330	300	210
12800	118	300	330	320	280	200
13200	120	300	330	310	270	200
13600	122	300	320	300	250	190
14000	123	300	310	290	240	170
14400	125	300	300	280	230	160
14800	127	300	300	270	220	150
15200	128	290	290	250	210	130
15600	130	280	280	240	210	120
16000	131	270	270	230	200	150
16400	133	260	260	220	200	100
16800	134	250	250	210	190	90
17200	136	240	240	210	180	80
17600	137	240	240	200	170	60
18000	138	230	230	200	160	50
18387	140	220	220	200	150	40

CAUTION: SHADED AREAS REPRESENT THE CEILING ALTITUDES CALCULATED CONSIDERING THE MINIMUM MACH IN REGION 2 OF OPERATIONAL ENVELOPE.

DRIFTDOWN — NET GRADIENT = 0%

Weight (lb)	Drift Down Speed (KIAS)	Ceiling Altitude (x 100 ft) Ice Protection (WINGSTAB+ENG) ON				
		ISA - 30	ISA - 20	ISA - 10	ISA	ISA + 10
12400	165	120	150	150	150	140
12800	165	120	150	150	150	130
13200	165	120	150	150	150	120
13600	165	120	150	150	150	120
14000	165	120	150	150	150	110
14400	165	120	150	150	150	110
14800	165	120	150	150	150	100
15200	165	120	150	150	150	100
15600	165	120	150	150	140	90
16000	165	120	150	150	140	-
16400	165	120	150	150	140	-
16800	165	120	150	150	130	-
17200	165	120	150	150	130	-
17600	165	120	150	150	120	-
18000	165	120	150	150	120	-
18387	165	120	150	150	110	-

User: andreiap0t - Feb 13/26 - 12:44:21

MLW - CLIMB LIMITED**PW535E ENGINES****MAXIMUM LANDING WEIGHT - CLIMB LIMITED**

APPROACH FLAP 1 — LANDING FLAP 3

ENGINE ICE PROTECTION OFF — WINGSTAB OFF

TEMP (°C)	MAXIMUM LANDING WEIGHT - CLIMB LIMITED (lb)							
	ALTITUDE (ft)							
	0	1000	2000	3000	4000	5000	6000	7000
-40	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-35	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-30	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-25	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-20	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-15	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-10	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
0	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
10	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
15	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
20	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
25	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
30	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
35	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18104 (E)	17251 (E)
40	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	17670 (E)	-	-
45	18387 (O)	18387 (O)	18387 (O)	-	-	-	-	-
50	18387 (O)	-	-	-	-	-	-	-

PW535E ENGINES**MAXIMUM LANDING WEIGHT - CLIMB LIMITED**

APPROACH FLAP 2 — LANDING FLAP FULL

ENGINE ICE PROTECTION OFF — WINGSTAB OFF

TEMP (°C)	MAXIMUM LANDING WEIGHT - CLIMB LIMITED (lb)							
	ALTITUDE (ft)							
	0	1000	2000	3000	4000	5000	6000	7000
-40	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-35	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-30	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-25	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-20	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-15	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-10	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
0	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
10	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
15	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
20	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	17798 (A)
25	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	17730 (A)	16749 (A)
30	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	17547 (A)	16601 (A)	15593 (A)
35	18387 (O)	18387 (O)	18387 (O)	18016 (A)	17198 (A)	16387 (A)	15494 (A)	14557 (A)
40	18387 (O)	18387 (O)	17688 (A)	16843 (A)	16056 (A)	15287 (A)	-	-
45	18204 (A)	17357 (A)	16521 (A)	-	-	-	-	-
50	17017 (A)	-	-	-	-	-	-	-

Landing

PW535E ENGINES

MAXIMUM LANDING WEIGHT - CLIMB LIMITED

APPROACH FLAP 1 — LANDING FLAP 3

ENGINE ICE PROTECTION ON — WINGSTAB ON

TEMP (°C)	MAXIMUM LANDING WEIGHT - CLIMB LIMITED (lb)							
	ALTITUDE (ft)							
	0	1000	2000	3000	4000	5000	6000	7000
-40	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-35	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-30	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-25	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-20	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-15	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-10	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
0	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18012 (E)
5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	17655 (E)	16755 (E)

PW535E ENGINES

MAXIMUM LANDING WEIGHT - CLIMB LIMITED

APPROACH FLAP 2 — LANDING FLAP FULL

ENGINE ICE PROTECTION ON — WINGSTAB ON

TEMP (°C)	MAXIMUM LANDING WEIGHT - CLIMB LIMITED (lb)							
	ALTITUDE (ft)							
	0	1000	2000	3000	4000	5000	6000	7000
-40	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-35	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-30	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-25	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-20	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-15	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-10	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
-5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)
0	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18012 (E)
5	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	18387 (O)	17655 (E)	16755 (E)

- NOTE:** — (A) Approach Climb Limited
 — (L) Landing Climb Limited
 — (E) Enroute Climb Limited
 — (O) Overweight Landing Limited

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

LANDING DISTANCE CORRECTION (ABNORMAL)

LANDING DISTANCE CORRECTION
(FOR ABNORMAL LANDING USE ONLY)
FLAP FULL

UNFACTORED LANDING DISTANCE (ft)	MINIMUM REQUIRED RUNWAY LENGTH (ft)					
	ABNORMAL LANDING FACTOR					
	1.00	1.15	1.20	1.25	1.30	1.35
1800	1800	2070	2160	2250	2340	2430
2000	2000	2300	2400	2500	2600	2700
2200	2200	2530	2640	2750	2860	2970
2400	2400	2760	2880	3000	3120	3240
2600	2600	2990	3120	3250	3380	3510
2800	2800	3220	3360	3500	3640	3780
3000	3000	3450	3600	3750	3900	4050
3200	3200	3680	3840	4000	4160	4320
3400	3400	3910	4080	4250	4420	4590
3600	3600	4140	4320	4500	4680	4860
3800	3800	4370	4560	4750	4940	5130
4000	4000	4600	4800	5000	5200	5400
4200	4200	4830	5040	5250	5460	5670
4400	4400	5060	5280	5500	5720	5940
4600	4600	5290	5520	5750	5980	6210
4800	4800	5520	5760	6000	6240	6480
5000	5000	5750	6000	6250	6500	6750
5200	5200	5980	6240	6500	6760	7020

UNFACTORED LANDING DISTANCE (ft)	MINIMUM REQUIRED RUNWAY LENGTH (ft)					
	ABNORMAL LANDING FACTOR					
	1.40	1.45	1.50	1.55	1.60	1.65
1800	2520	2610	2700	2790	2880	2970
2000	2800	2900	3000	3100	3200	3300
2200	3080	3190	3300	3410	3520	3630
2400	3360	3480	3600	3720	3840	3960
2600	3640	3770	3900	4030	4160	4290
2800	3920	4060	4200	4340	4480	4620
3000	4200	4350	4500	4650	4800	4950
3200	4480	4640	4800	4960	5120	5280
3400	4760	4930	5100	5270	5440	5610
3600	5040	5220	5400	5580	5760	5940
3800	5320	5510	5700	5890	6080	6270
4000	5600	5800	6000	6200	6400	6600
4200	5880	6090	6300	6510	6720	6930
4400	6160	6380	6600	6820	7040	7260
4600	6440	6670	6900	7130	7360	7590
4800	6720	6960	7200	7440	7680	7920
5000	7000	7250	7500	7750	8000	8250
5200	7280	7540	7800	8060	8320	8580

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

Landing

**LANDING DISTANCE CORRECTION
(FOR ABNORMAL LANDING USE ONLY)
FLAP FULL**

UNFACTORED LANDING DISTANCE (ft)	MINIMUM REQUIRED RUNWAY LENGTH (ft)					
	ABNORMAL LANDING FACTOR					
	1.70	1.80	1.85	1.90	2.00	2.15
1800	3060	3240	3330	3420	3600	3870
2000	3400	3600	3700	3800	4000	4300
2200	3740	3960	4070	4180	4400	4730
2400	4080	4320	4440	4560	4800	5160
2600	4420	4680	4810	4940	5200	5590
2800	4760	5040	5180	5320	5600	6020
3000	5100	5400	5550	5700	6000	6450
3200	5440	5760	5920	6080	6400	6880
3400	5780	6120	6290	6460	6800	7310
3600	6120	6480	6660	6840	7200	7740
3800	6460	6840	7030	7220	7600	8170
4000	6800	7200	7400	7600	8000	8600
4200	7140	7560	7770	7980	8400	9030
4400	7480	7920	8140	8360	8800	9460
4600	7820	8280	8510	8740	9200	9890
4800	8160	8640	8880	9120	9600	10320
5000	8500	9000	9250	9500	10000	10750
5200	8840	9360	9620	9880	10400	11180

UNFACTORED LANDING DISTANCE (ft)	MINIMUM REQUIRED RUNWAY LENGTH (ft)					
	ABNORMAL LANDING FACTOR					
	2.20	2.30	2.70	3.10	-	-
1800	3960	4140	4860	5580	-	-
2000	4400	4600	5400	6200	-	-
2200	4840	5060	5940	6820	-	-
2400	5280	5520	6480	7440	-	-
2600	5720	5980	7020	8060	-	-
2800	6160	6440	7560	8680	-	-
3000	6600	6900	8100	9300	-	-
3200	7040	7360	8640	9920	-	-
3400	7480	7820	9180	10540	-	-
3600	7920	8280	9720	11160	-	-
3800	8360	8740	10260	11780	-	-
4000	8800	9200	10800	12400	-	-
4200	9240	9660	11340	13020	-	-
4400	9680	10120	11880	13640	-	-
4600	10120	10580	12420	14260	-	-
4800	10560	11040	12960	14880	-	-
5000	11000	11500	13500	15500	-	-
5200	11440	11960	14040	16120	-	-

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

LANDING DISTANCE - NO WIND

- NOTE:** – The tables in the following pages provide the corrected distances for landings with different weights and runway conditions. The distances provided consider the worst case among the scenarios presented in the POH in terms of contaminant depths and landing flaps.
- These tables constitute a simplification and therefore, do not represent the optimized landing performance for each condition. They are a source for an in-flight quick assessment of the actual landing condition if the runway becomes wet or contaminated. For flight planning purposes, the detailed data for contaminated runways provided in either the POH or OPERA software must be used.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF

ZERO SLOPE — NO WIND — LANDING FLAP 3

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	101	104	113	3416	3928	2187	2877	4482	4516	4825
	12800	102	105	115	3479	4000	2233	2958	4601	4636	4931
	13200	104	107	117	3543	4074	2279	3042	4724	4761	5041
	13600	105	109	119	3608	4149	2327	3128	4849	4887	5153
	14000	107	110	121	3674	4225	2374	3216	4976	5016	5268
	14400	108	111	122	3736	4296	2419	3301	5098	5140	5377
	14800	110	113	124	3799	4368	2464	3387	5222	5265	5487
	15200	111	114	126	3862	4441	2510	3474	5346	5391	5598
	15600	113	116	127	3926	4515	2556	3558	5466	5513	5702
	16000	114	117	129	3991	4590	2602	3644	5588	5636	5807
	16400	115	119	130	4052	4660	2646	3725	5703	5754	5906
	16800	117	120	132	4114	4730	2690	3807	5821	5872	6007
	17200*	118	121	133	4176	4802	2734	3891	5939	5992	6108
1000	12400	101	104	113	3477	3999	2232	2952	4589	4625	4926
	12800	102	105	115	3542	4073	2279	3036	4713	4750	5036
	13200	104	107	117	3608	4149	2326	3123	4838	4878	5148
	13600	105	109	119	3674	4225	2374	3212	4967	5008	5264
	14000	107	110	121	3742	4303	2423	3304	5099	5141	5382
	14400	108	111	122	3806	4376	2469	3391	5224	5268	5493
	14800	110	113	124	3870	4450	2515	3481	5351	5398	5607
	15200	111	114	126	3935	4525	2562	3570	5478	5527	5720
	15600	113	116	127	4001	4601	2609	3657	5602	5652	5827
	16000	114	117	129	4068	4678	2657	3746	5728	5780	5936
	16400	115	119	130	4130	4749	2701	3830	5846	5900	6037
	16800	117	120	132	4193	4822	2746	3915	5967	6022	6141
	17200*	118	121	133	4257	4895	2791	4002	6089	6146	6245
2000	12400	101	104	114	3541	4072	2278	3031	4702	4739	5030
	12800	102	105	115	3607	4148	2326	3118	4828	4868	5143
	13200	104	107	117	3674	4226	2374	3208	4958	4999	5259
	13600	105	109	119	3743	4304	2424	3300	5091	5134	5378
	14000	107	110	121	3812	4384	2474	3395	5225	5270	5498
	14400	108	111	122	3878	4459	2521	3485	5354	5401	5613
	14800	110	113	124	3944	4535	2568	3578	5485	5534	5730
	15200	111	114	126	4011	4612	2616	3671	5616	5667	5846
	15600	113	116	127	4078	4690	2664	3761	5743	5796	5956
	16000	114	117	129	4146	4768	2713	3852	5873	5927	6068
	16400	115	119	130	4210	4842	2759	3939	5995	6052	6173
	16800	117	120	132	4275	4916	2804	4027	6119	6177	6279
	17200*	118	121	133	4340	4991	2851	4117	6245	6305	6386
3000	12400	101	104	114	3607	4148	2325	3114	4818	4858	5138
	12800	102	105	115	3675	4226	2374	3203	4948	4990	5254
	13200	104	107	117	3744	4305	2424	3297	5082	5126	5374
	13600	105	109	119	3814	4386	2475	3392	5218	5264	5495
	14000	107	110	121	3885	4468	2526	3490	5356	5404	5619
	14400	108	111	122	3952	4545	2574	3583	5489	5539	5738
	14800	110	113	124	4020	4623	2623	3679	5624	5676	5858
	15200	111	114	126	4088	4702	2671	3775	5759	5813	5977
	15600	113	116	127	4158	4781	2721	3869	5891	5947	6091
	16000	114	117	129	4228	4862	2771	3964	6023	6081	6205
	16400	115	119	130	4294	4938	2818	4054	6150	6210	6313
	16800	117	120	132	4360	5014	2865	4146	6278	6340	6422
	17200*	118	121	134	4427	5091	2912	4239	6407	6471	6532

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON – WINGSTAB OFF
ZERO SLOPE – NO WIND – LANDING FLAP 3

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	101	104	114	3675	4226	2374	3199	4938	4981	5250
	12800	102	105	115	3744	4306	2425	3293	5073	5117	5370
	13200	104	107	117	3815	4387	2476	3389	5210	5256	5493
	13600	105	109	119	3887	4470	2527	3488	5350	5399	5618
	14000	107	110	121	3960	4554	2580	3589	5493	5544	5745
	14400	108	111	122	4029	4633	2629	3686	5629	5682	5867
	14800	110	113	124	4099	4713	2679	3785	5768	5823	5991
	15200	111	114	126	4169	4794	2729	3885	5908	5965	6114
	15600	113	116	127	4240	4876	2780	3982	6043	6102	6230
	16000	114	117	129	4312	4959	2831	4080	6180	6241	6348
	16400	115	119	130	4380	5037	2878	4173	6310	6373	6459
	16800	117	120	132	4448	5115	2927	4269	6442	6507	6571
	17200*	118	121	134	4517	5195	2975	4365	6576	6643	6684
5000	12400	101	104	114	3745	4306	2425	3289	5062	5108	5366
	12800	102	105	115	3816	4388	2476	3385	5200	5247	5488
	13200	104	107	117	3889	4472	2528	3485	5341	5391	5614
	13600	105	109	119	3963	4557	2581	3587	5486	5538	5744
	14000	107	110	121	4038	4643	2635	3692	5633	5687	5875
	14400	108	111	122	4109	4725	2686	3793	5774	5830	6000
	14800	110	113	124	4180	4807	2737	3896	5917	5975	6127
	15200	111	114	126	4252	4890	2788	3999	6060	6121	6254
	15600	113	116	127	4326	4974	2840	4099	6199	6262	6373
	16000	114	117	129	4400	5059	2892	4201	6341	6406	6494
	16400	115	119	130	4469	5139	2941	4298	6475	6543	6609
	16800	117	120	132	4539	5220	2991	4397	6611	6680	6724
	17200*	118	121	134	4610	5301	3041	4497	6793	6867	6841
6000	12400	101	104	114	3832	4407	2486	3412	5262	5312	5571
	12800	102	105	115	3906	4491	2538	3512	5404	5456	5696
	13200	104	107	117	3980	4577	2592	3616	5550	5605	5826
	13600	105	109	119	4056	4665	2646	3723	5699	5756	5957
	14000	107	110	121	4133	4753	2701	3832	5851	5910	6092
	14400	108	111	122	4206	4836	2753	3936	5995	6057	6220
	14800	110	113	124	4279	4921	2805	4044	6143	6208	6350
	15200	111	114	126	4353	5006	2858	4151	6291	6358	6479
	15600	113	116	127	4428	5092	2911	4256	6435	6504	6602
	16000	114	117	129	4504	5180	2965	4362	6580	6652	6725
	16400	115	119	131	4576	5262	3015	4463	6719	6793	6842
	16800	117	120	132	4648	5345	3065	4565	6888	6966	6960
	17200*	118	121	134	4738	5449	3122	4669	7070	7152	7079
7000	12400	101	104	114	3915	4502	2544	3525	5431	5486	5738
	12800	102	105	115	3990	4589	2598	3630	5579	5635	5867
	13200	104	107	117	4067	4677	2653	3737	5729	5788	5999
	13600	105	109	119	4145	4766	2709	3848	5883	5944	6135
	14000	107	110	121	4224	4857	2765	3962	6039	6103	6273
	14400	108	111	122	4298	4943	2818	4070	6188	6255	6404
	14800	110	113	124	4374	5030	2871	4182	6341	6410	6538
	15200	111	114	126	4450	5117	2925	4293	6493	6565	6670
	15600	113	116	127	4527	5206	2980	4402	6641	6716	6796
	16000	114	117	129	4605	5296	3035	4512	6792	6869	6922
	16400	115	119	131	4678	5380	3086	4617	6976	7058	7042
	16800	117	120	132	4760	5473	3138	4724	7161	7248	7163
	17200*	118	121	134	4869	5599	3209	4832	7348	7439	7285

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION ON — WINGSTAB ON
ZERO SLOPE — NO WIND — LANDING FLAP 3

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	108	108	126	3740	4301	2420	3263	5009	5053	5334
	12800	110	110	128	3815	4387	2474	3362	5149	5194	5459
	13200	111	111	130	3886	4469	2525	3458	5285	5332	5580
	13600	113	113	132	3958	4552	2576	3556	5423	5472	5703
	14000	115	115	134	4031	4636	2629	3657	5563	5615	5829
	14400	116	116	136	4102	4717	2679	3756	5701	5754	5951
	14800	118	118	138	4175	4801	2731	3859	5843	5899	6078
	15200	119	119	140	4248	4885	2784	3961	5985	6042	6203
	15600	121	121	142	4318	4966	2833	4056	6116	6175	6316
	16000	122	122	143	4388	5046	2883	4150	6246	6308	6428
	16400	124	124	145	4461	5130	2934	4249	6383	6446	6545
	16800	125	125	147	4530	5210	2983	4346	6515	6580	6658
	17200*	127	127	149	4601	5291	3033	4443	6649	6716	6771
1000	12400	108	108	126	3810	4381	2470	3351	5130	5175	5447
	12800	110	110	128	3886	4469	2525	3453	5274	5321	5575
	13200	111	111	130	3959	4553	2577	3552	5413	5463	5699
	13600	113	113	132	4033	4638	2630	3654	5555	5607	5826
	14000	115	115	134	4108	4724	2684	3758	5699	5753	5955
	14400	116	116	136	4180	4807	2735	3860	5841	5897	6081
	14800	118	118	138	4255	4894	2789	3967	5987	6046	6211
	15200	119	119	140	4331	4980	2842	4073	6133	6194	6340
	15600	121	121	142	4403	5063	2893	4171	6267	6330	6455
	16000	122	122	143	4474	5145	2944	4269	6402	6467	6571
	16400	124	124	145	4549	5231	2996	4371	6542	6609	6691
	16800	125	125	147	4620	5313	3047	4471	6716	6787	6807
	17200*	127	127	149	4705	5411	3100	4572	6863	6937	6924
2000	12400	108	108	126	3881	4464	2521	3442	5254	5303	5563
	12800	110	110	129	3960	4554	2577	3548	5402	5453	5695
	13200	111	111	130	4035	4640	2631	3651	5546	5599	5823
	13600	113	113	132	4110	4727	2685	3756	5692	5747	5953
	14000	115	115	134	4187	4815	2740	3864	5841	5898	6086
	14400	116	116	136	4262	4901	2793	3969	5986	6046	6215
	14800	118	118	138	4339	4990	2848	4079	6136	6198	6349
	15200	119	119	140	4416	5078	2902	4190	6287	6351	6481
	15600	121	121	142	4490	5163	2955	4291	6425	6492	6600
	16000	122	122	144	4563	5248	3006	4392	6564	6633	6718
	16400	124	124	145	4640	5336	3060	4499	6754	6828	6842
	16800	125	125	147	4715	5422	3112	4602	6903	6980	6961
	17200*	127	127	149	4822	5545	3179	4707	7079	7160	7081
3000	12400	108	108	127	3956	4549	2574	3538	5384	5435	5683
	12800	110	110	129	4036	4641	2632	3647	5536	5590	5819
	13200	111	111	131	4113	4730	2687	3754	5684	5740	5951
	13600	113	113	132	4191	4819	2742	3862	5834	5892	6084
	14000	115	115	134	4270	4910	2798	3974	5987	6048	6221
	14400	116	116	136	4346	4998	2853	4084	6137	6200	6354
	14800	118	118	138	4425	5089	2909	4198	6292	6358	6492
	15200	119	119	140	4505	5180	2965	4312	6447	6515	6628
	15600	121	121	142	4580	5267	3018	4417	6590	6661	6750
	16000	122	122	144	4656	5354	3071	4522	6761	6836	6872
	16400	124	124	145	4735	5445	3126	4632	6946	7024	6999
	16800	125	125	147	4832	5557	3187	4739	7124	7207	7121
	17200*	127	127	149	4945	5686	3260	4848	7305	7392	7245

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA
ENGINE ICE PROTECTION ON — WINGSTAB ON
ZERO SLOPE — NO WIND — LANDING FLAP 3

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	108	108	127	4032	4637	2629	3638	5518	5572	5809
	12800	110	110	129	4115	4732	2688	3751	5675	5731	5948
	13200	111	111	131	4194	4823	2744	3861	5827	5886	6084
	13600	113	113	132	4274	4915	2801	3974	5982	6044	6222
	14000	115	115	134	4355	5008	2859	4089	6139	6203	6361
	14400	116	116	136	4433	5098	2914	4203	6294	6361	6499
	14800	118	118	138	4515	5192	2972	4321	6453	6523	6640
	15200	119	119	140	4596	5285	3029	4439	6613	6685	6780
	15600	121	121	142	4674	5375	3084	4548	6796	6872	6906
	16000	122	122	144	4752	5464	3138	4657	6977	7058	7031
	16400	124	124	145	4843	5569	3195	4771	7167	7253	7162
	16800	125	125	147	4956	5699	3269	4882	7352	7442	7288
	17200*	127	127	149	5074	5835	3346	4995	7539	7633	7414
5000	12400	108	108	127	4111	4728	2685	3741	5656	5713	5937
	12800	110	110	129	4196	4825	2746	3858	5817	5877	6081
	13200	111	111	131	4277	4919	2803	3973	5974	6037	6221
	13600	113	113	133	4359	5013	2862	4090	6134	6199	6362
	14000	115	115	134	4443	5109	2921	4209	6296	6364	6506
	14400	116	116	136	4523	5202	2978	4327	6455	6526	6647
	14800	118	118	138	4607	5298	3036	4450	6620	6693	6792
	15200	119	119	140	4691	5394	3095	4572	6826	6905	6936
	15600	121	121	142	4771	5486	3151	4685	7013	7097	7066
	16000	122	122	144	4850	5578	3207	4798	7202	7290	7195
	16400	124	124	145	4967	5712	3278	4917	7397	7490	7329
	16800	125	125	147	5086	5848	3355	5032	7589	7686	7459
	17200*	127	127	149	5209	5991	3435	5148	7782	7883	7589
6000	12400	108	108	127	4211	4842	2754	3886	5879	5943	6165
	12800	110	110	129	4297	4942	2816	4008	6045	6112	6312
	13200	111	111	131	4381	5038	2875	4126	6207	6276	6454
	13600	113	113	133	4465	5135	2935	4248	6371	6443	6599
	14000	115	115	134	4551	5233	2995	4373	6539	6614	6746
	14400	116	116	136	4633	5328	3053	4495	6703	6781	6890
	14800	118	118	138	4719	5427	3113	4623	6921	7005	7039
	15200	119	119	140	4805	5526	3174	4751	7130	7219	7187
	15600	121	121	142	4888	5621	3231	4868	7325	7419	7319
	16000	122	122	144	4989	5738	3293	4986	7521	7620	7451
	16400	124	124	145	5115	5882	3375	5109	7724	7828	7588
	16800	125	125	147	5240	6026	3455	5229	7924	8032	7720
	17200*	127	127	149	5370	6176	3539	5350	8126	8238	7854
7000	12400	108	108	127	4304	4950	2819	4018	6069	6137	6351
	12800	110	110	129	4393	5052	2883	4145	6240	6311	6501
	13200	111	111	131	4479	5151	2943	4268	6407	6481	6647
	13600	113	113	133	4565	5250	3004	4395	6577	6654	6796
	14000	115	115	134	4653	5351	3066	4524	6788	6871	6947
	14400	116	116	136	4739	5449	3126	4652	6972	7059	7095
	14800	118	118	138	4827	5550	3188	4785	7189	7282	7248
	15200	119	119	140	4915	5652	3249	4917	7404	7502	7399
	15600	121	121	142	5006	5757	3308	5039	7606	7709	7535
	16000	122	122	144	5129	5898	3385	5161	7809	7917	7670
	16400	124	124	145	5261	6050	3470	5289	8021	8134	7810
	16800	125	125	147	5393	6201	3555	5414	8228	8346	7947
	17200*	127	127	149	5530	6360	3642	5540	8438	8561	8084

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF

ZERO SLOPE — NO WIND — LANDING FLAP FULL

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	100	100	113	3315	3812	2134	2776	4330	4360	4680
	12800	101	101	115	3375	3881	2177	2851	4439	4470	4779
	13200	103	103	117	3439	3954	2223	2932	4557	4589	4886
	13600	104	104	119	3499	4024	2266	3009	4669	4702	4989
	14000	106	106	121	3560	4094	2310	3089	4784	4819	5093
	14400	107	107	122	3622	4166	2354	3170	4901	4937	5200
	14800	109	109	124	3680	4232	2396	3247	5011	5049	5300
	15200	110	110	126	3743	4305	2441	3330	5130	5169	5407
	15600	111	111	127	3803	4373	2483	3405	5237	5277	5502
	16000	113	113	129	3860	4438	2524	3477	5341	5383	5593
	16400	114	114	130	3921	4509	2567	3556	5453	5495	5691
	16800	115	115	132	3978	4574	2608	3630	5558	5602	5783
	17200*	117	117	133	4035	4640	2649	3704	5665	5710	5876
1000	12400	100	100	113	3376	3883	2178	2849	4433	4464	4778
	12800	101	101	115	3437	3953	2222	2926	4546	4578	4880
	13200	103	103	117	3503	4028	2269	3009	4666	4700	4990
	13600	104	104	119	3565	4100	2313	3090	4783	4818	5096
	14000	106	106	121	3628	4172	2358	3172	4900	4937	5203
	14400	107	107	122	3691	4245	2403	3255	5020	5058	5312
	14800	109	109	124	3751	4313	2446	3336	5134	5174	5416
	15200	110	110	126	3815	4388	2492	3421	5256	5297	5525
	15600	111	111	127	3876	4457	2535	3498	5366	5409	5623
	16000	113	113	129	3934	4524	2577	3574	5474	5518	5717
	16400	114	114	130	3997	4596	2622	3655	5589	5634	5818
	16800	115	115	132	4055	4664	2663	3731	5697	5743	5912
	17200*	117	117	133	4114	4731	2705	3808	5806	5854	6007
2000	12400	100	100	114	3439	3955	2223	2924	4540	4573	4879
	12800	101	101	115	3502	4027	2268	3004	4656	4690	4984
	13200	103	103	117	3569	4105	2316	3090	4780	4816	5097
	13600	104	104	119	3633	4178	2362	3173	4899	4936	5205
	14000	106	106	121	3697	4252	2408	3258	5021	5059	5316
	14400	107	107	122	3762	4326	2454	3345	5144	5185	5428
	14800	109	109	124	3823	4396	2498	3427	5261	5303	5534
	15200	110	110	126	3889	4473	2545	3516	5387	5430	5647
	15600	111	111	127	3952	4544	2589	3596	5500	5545	5747
	16000	113	113	129	4011	4613	2632	3674	5611	5657	5844
	16400	114	114	130	4076	4687	2678	3758	5729	5777	5948
	16800	115	115	132	4135	4756	2720	3837	5840	5890	6045
	17200*	117	117	133	4196	4825	2763	3917	5953	6004	6143
3000	12400	100	100	114	3505	4030	2270	3002	4651	4686	4983
	12800	101	101	115	3569	4104	2316	3085	4770	4807	5092
	13200	103	103	117	3638	4183	2365	3174	4898	4936	5208
	13600	104	104	119	3703	4258	2412	3260	5021	5060	5319
	14000	106	106	121	3769	4334	2459	3348	5145	5186	5433
	14400	107	107	122	3836	4411	2506	3438	5272	5315	5548
	14800	109	109	124	3898	4483	2551	3523	5393	5438	5658
	15200	110	110	126	3966	4561	2599	3615	5522	5568	5773
	15600	111	111	127	4030	4634	2645	3698	5639	5687	5876
	16000	113	113	129	4091	4705	2689	3779	5753	5802	5976
	16400	114	114	130	4157	4780	2735	3865	5875	5925	6082
	16800	115	115	132	4218	4851	2779	3947	5990	6042	6182
	17200*	117	117	134	4280	4922	2823	4030	6106	6160	6284

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF
ZERO SLOPE — NO WIND — LANDING FLAP FULL

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	100	100	114	3572	4108	2318	3085	4766	4803	5093
	12800	101	101	115	3638	4183	2365	3170	4888	4927	5204
	13200	103	103	117	3709	4265	2415	3262	5020	5061	5323
	13600	104	104	119	3775	4342	2463	3351	5146	5188	5438
	14000	106	106	121	3843	4419	2512	3442	5275	5319	5555
	14400	107	107	122	3911	4498	2560	3535	5405	5451	5673
	14800	109	109	124	3975	4572	2606	3623	5530	5577	5785
	15200	110	110	126	4045	4652	2656	3719	5663	5712	5905
	15600	111	111	127	4110	4727	2702	3804	5783	5834	6010
	16000	113	113	129	4173	4799	2747	3888	5901	5953	6113
	16400	114	114	130	4241	4877	2795	3978	6026	6080	6223
	16800	115	115	132	4304	4950	2840	4062	6144	6200	6325
	17200*	117	117	134	4368	5023	2885	4148	6264	6321	6429
5000	12400	100	100	114	3642	4188	2367	3169	4884	4923	5204
	12800	101	101	115	3709	4265	2416	3258	5010	5051	5319
	13200	103	103	117	3781	4349	2467	3353	5146	5188	5441
	13600	104	104	119	3850	4427	2516	3446	5276	5320	5560
	14000	106	106	121	3919	4507	2566	3540	5408	5454	5679
	14400	107	107	122	3989	4588	2616	3636	5543	5591	5801
	14800	109	109	124	4055	4663	2663	3727	5671	5721	5917
	15200	110	110	126	4127	4746	2714	3826	5807	5859	6040
	15600	111	111	127	4194	4823	2761	3915	5932	5986	6149
	16000	113	113	129	4258	4897	2807	4001	6053	6108	6254
	16400	114	114	130	4328	4977	2856	4095	6182	6239	6367
	16800	115	115	132	4392	5051	2902	4183	6304	6363	6473
	17200*	117	117	134	4458	5126	2948	4272	6428	6488	6579
6000	12400	100	100	114	3729	4288	2428	3287	5072	5115	5401
	12800	101	101	115	3798	4367	2477	3379	5202	5247	5517
	13200	103	103	117	3872	4453	2530	3478	5342	5389	5644
	13600	104	104	119	3942	4534	2580	3574	5476	5524	5764
	14000	106	106	121	4013	4615	2631	3672	5612	5663	5887
	14400	107	107	122	4085	4698	2682	3771	5750	5803	6011
	14800	109	109	124	4152	4775	2730	3867	5883	5938	6130
	15200	110	110	126	4226	4860	2782	3969	6023	6080	6255
	15600	111	111	127	4295	4939	2831	4062	6152	6210	6366
	16000	113	113	129	4361	5015	2878	4152	6277	6337	6474
	16400	114	114	131	4432	5097	2929	4248	6409	6472	6589
	16800	115	115	132	4498	5173	2976	4340	6536	6600	6697
	17200*	117	117	134	4565	5250	3023	4432	6702	6770	6806
7000	12400	100	100	114	3811	4382	2486	3395	5233	5279	5562
	12800	101	101	115	3881	4464	2536	3490	5367	5416	5682
	13200	103	103	117	3958	4551	2590	3593	5510	5561	5810
	13600	104	104	119	4030	4634	2642	3693	5649	5702	5934
	14000	106	106	121	4102	4718	2694	3794	5789	5844	6060
	14400	107	107	122	4176	4803	2746	3898	5932	5989	6188
	14800	109	109	124	4245	4882	2795	3997	6068	6127	6309
	15200	110	110	126	4321	4969	2849	4103	6214	6275	6439
	15600	111	111	127	4391	5050	2899	4199	6345	6409	6552
	16000	113	113	129	4459	5128	2947	4292	6474	6539	6662
	16400	114	114	131	4532	5212	2998	4392	6612	6678	6780
	16800	115	115	132	4600	5290	3047	4487	6770	6841	6891
	17200*	117	117	134	4680	5382	3103	4584	6929	7003	7003

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION ON – WINGSTAB ON
ZERO SLOPE – NO WIND – LANDING FLAP FULL

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	106	106	126	3586	4124	2326	3079	4737	4773	5079
	12800	108	108	128	3656	4204	2376	3168	4863	4900	5193
	13200	109	109	130	3722	4280	2423	3254	4985	5024	5305
	13600	111	111	132	3789	4357	2471	3342	5109	5149	5417
	14000	112	112	134	3857	4435	2520	3431	5235	5277	5532
	14400	114	114	136	3922	4510	2566	3519	5359	5402	5644
	14800	115	115	138	3990	4588	2615	3611	5486	5531	5759
	15200	117	117	140	4058	4666	2663	3702	5613	5659	5874
	15600	118	118	142	4122	4740	2709	3785	5729	5777	5976
	16000	119	119	143	4186	4814	2754	3868	5845	5895	6078
	16400	121	121	145	4253	4891	2802	3955	5966	6018	6184
	16800	122	122	147	4316	4964	2847	4039	6083	6136	6286
	17200*	124	124	149	4381	5038	2892	4125	6201	6256	6389
1000	12400	106	106	126	3654	4202	2374	3161	4850	4888	5186
	12800	108	108	128	3725	4284	2425	3252	4980	5019	5304
	13200	109	109	130	3793	4362	2474	3341	5105	5146	5418
	13600	111	111	132	3862	4441	2523	3432	5233	5275	5534
	14000	112	112	134	3931	4521	2573	3525	5362	5406	5652
	14400	114	114	136	3998	4598	2620	3615	5489	5535	5767
	14800	115	115	138	4068	4678	2670	3710	5620	5668	5886
	15200	117	117	140	4137	4757	2719	3804	5750	5799	6003
	15600	118	118	142	4203	4833	2766	3890	5870	5921	6108
	16000	119	119	143	4269	4909	2813	3976	5989	6042	6212
	16400	121	121	145	4337	4987	2861	4066	6114	6168	6321
	16800	122	122	147	4402	5063	2908	4153	6235	6290	6426
	17200*	124	124	149	4468	5139	2954	4241	6356	6414	6532
2000	12400	106	106	126	3723	4282	2424	3245	4967	5007	5297
	12800	108	108	129	3796	4366	2476	3340	5100	5141	5418
	13200	109	109	130	3866	4446	2526	3432	5229	5272	5535
	13600	111	111	132	3937	4527	2576	3526	5360	5405	5654
	14000	112	112	134	4008	4609	2627	3622	5494	5540	5775
	14400	114	114	136	4077	4688	2676	3716	5624	5672	5893
	14800	115	115	138	4148	4770	2727	3814	5759	5809	6015
	15200	117	117	140	4219	4852	2777	3911	5892	5945	6136
	15600	118	118	142	4287	4930	2825	4000	6016	6070	6244
	16000	119	119	144	4354	5007	2873	4089	6139	6195	6352
	16400	121	121	145	4424	5088	2923	4182	6267	6325	6464
	16800	122	122	147	4491	5165	2970	4272	6392	6451	6571
	17200*	124	124	149	4559	5243	3018	4364	6517	6577	6681
3000	12400	106	106	127	3795	4365	2475	3334	5088	5130	5411
	12800	108	108	129	3870	4451	2529	3432	5225	5269	5536
	13200	109	109	131	3942	4533	2580	3527	5358	5403	5656
	13600	111	111	132	4014	4616	2631	3624	5493	5541	5779
	14000	112	112	134	4087	4700	2683	3723	5630	5679	5903
	14400	114	114	136	4158	4781	2734	3821	5764	5816	6025
	14800	115	115	138	4231	4865	2785	3922	5903	5956	6150
	15200	117	117	140	4304	4949	2837	4023	6041	6096	6274
	15600	118	118	142	4373	5029	2887	4115	6168	6225	6386
	16000	119	119	144	4442	5108	2936	4207	6295	6354	6496
	16400	121	121	145	4514	5191	2986	4304	6428	6488	6612
	16800	122	122	147	4583	5270	3035	4397	6575	6638	6722
	17200*	124	124	149	4662	5361	3090	4492	6728	6794	6835

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA
ENGINE ICE PROTECTION ON — WINGSTAB ON
ZERO SLOPE — NO WIND — LANDING FLAP FULL

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	106	106	127	3870	4450	2528	3426	5213	5258	5530
	12800	108	108	129	3947	4539	2583	3528	5354	5401	5658
	13200	109	109	131	4020	4623	2635	3626	5491	5540	5783
	13600	111	111	132	4094	4708	2688	3727	5630	5680	5908
	14000	112	112	134	4169	4794	2742	3830	5772	5824	6037
	14400	114	114	136	4241	4877	2793	3930	5910	5964	6161
	14800	115	115	138	4316	4964	2846	4035	6053	6109	6291
	15200	117	117	140	4391	5050	2899	4139	6194	6253	6418
	15600	118	118	142	4463	5132	2950	4235	6326	6386	6533
	16000	119	119	144	4533	5213	3000	4330	6457	6519	6646
	16400	121	121	145	4607	5298	3052	4430	6620	6686	6765
	16800	122	122	147	4678	5380	3102	4527	6776	6844	6879
	17200*	124	124	149	4779	5496	3171	4625	6933	7004	6994
5000	12400	106	106	127	3946	4538	2583	3522	5342	5389	5652
	12800	108	108	129	4025	4629	2639	3627	5488	5537	5785
	13200	109	109	131	4100	4715	2693	3729	5628	5680	5912
	13600	111	111	133	4176	4803	2747	3833	5771	5825	6041
	14000	112	112	134	4253	4891	2801	3940	5917	5973	6173
	14400	114	114	136	4328	4977	2854	4044	6059	6117	6302
	14800	115	115	138	4405	5065	2909	4152	6207	6266	6435
	15200	117	117	140	4482	5154	2963	4260	6353	6415	6566
	15600	118	118	142	4555	5238	3015	4360	6514	6580	6683
	16000	119	119	144	4628	5322	3066	4459	6657	6724	6801
	16400	121	121	145	4703	5409	3120	4562	6822	6892	6922
	16800	122	122	147	4795	5515	3183	4663	6982	7056	7040
	17200*	124	124	149	4902	5638	3254	4764	7145	7222	7158
6000	12400	106	106	127	4043	4649	2650	3656	5547	5600	5866
	12800	108	108	129	4124	4742	2707	3765	5697	5751	6001
	13200	109	109	131	4201	4831	2762	3870	5842	5898	6131
	13600	111	111	133	4279	4921	2817	3979	5990	6048	6263
	14000	112	112	134	4358	5011	2873	4089	6139	6200	6398
	14400	114	114	136	4434	5099	2927	4198	6287	6350	6530
	14800	115	115	138	4513	5189	2983	4310	6438	6504	6665
	15200	117	117	140	4592	5280	3039	4423	6623	6692	6800
	15600	118	118	142	4667	5367	3092	4526	6770	6842	6920
	16000	119	119	144	4741	5452	3145	4629	6935	7010	7040
	16400	121	121	145	4828	5552	3205	4736	7106	7185	7164
	16800	122	122	147	4936	5677	3277	4841	7273	7355	7284
	17200*	124	124	149	5049	5806	3352	4946	7442	7527	7405
7000	12400	106	106	127	4134	4754	2713	3778	5723	5779	6041
	12800	108	108	129	4217	4849	2772	3891	5877	5935	6179
	13200	109	109	131	4296	4940	2828	4001	6027	6087	6313
	13600	111	111	133	4376	5032	2885	4113	6178	6242	6449
	14000	112	112	134	4457	5125	2942	4228	6333	6398	6587
	14400	114	114	136	4535	5215	2998	4340	6485	6553	6722
	14800	115	115	138	4615	5308	3055	4457	6662	6733	6861
	15200	117	117	140	4697	5401	3112	4574	6845	6921	6999
	15600	118	118	142	4774	5490	3166	4681	7015	7094	7122
	16000	119	119	144	4850	5578	3220	4788	7186	7269	7245
	16400	121	121	145	4961	5706	3295	4899	7364	7450	7373
	16800	122	122	147	5075	5836	3371	5008	7537	7627	7496
	17200*	124	124	149	5193	5972	3449	5117	7713	7805	7620

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

LANDING DISTANCE - 10 KT TAILWIND

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF

ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP 3

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	101	104	113	4070	4681	2598	3625	5608	5666	5924
	12800	102	105	115	4137	4757	2647	3720	5741	5801	6039
	13200	104	107	117	4204	4835	2696	3818	5878	5940	6158
	13600	105	109	119	4273	4914	2746	3919	6017	6082	6278
	14000	107	110	121	4342	4993	2797	4022	6159	6226	6401
	14400	108	111	122	4408	5069	2844	4120	6294	6363	6518
	14800	110	113	124	4474	5145	2892	4221	6433	6504	6638
	15200	111	114	126	4541	5222	2941	4322	6571	6644	6756
	15600	113	116	127	4609	5300	2990	4419	6703	6779	6866
	16000	114	117	129	4677	5379	3039	4518	6839	6916	6979
	16400	115	119	130	4741	5452	3085	4612	7021	7105	7084
	16800	117	120	132	4806	5527	3132	4706	7158	7243	7191
	17200*	118	121	133	4895	5629	3192	4803	7326	7415	7299
1000	12400	101	104	113	4136	4756	2646	3713	5726	5787	6033
	12800	102	105	115	4203	4834	2696	3812	5864	5927	6151
	13200	104	107	117	4273	4914	2746	3913	6003	6069	6272
	13600	105	109	119	4343	4994	2797	4017	6147	6215	6397
	14000	107	110	121	4414	5076	2849	4123	6292	6362	6523
	14400	108	111	122	4481	5154	2898	4226	6432	6504	6644
	14800	110	113	124	4549	5232	2947	4329	6574	6648	6766
	15200	111	114	126	4618	5311	2996	4434	6716	6793	6887
	15600	113	116	127	4688	5391	3047	4534	6853	6932	7001
	16000	114	117	129	4758	5471	3097	4636	7026	7109	7116
	16400	115	119	130	4824	5547	3144	4733	7193	7282	7225
	16800	117	120	132	4901	5636	3197	4832	7364	7457	7334
	17200*	118	121	133	5002	5752	3265	4931	7536	7632	7445
2000	12400	101	104	114	4203	4833	2695	3805	5848	5912	6145
	12800	102	105	115	4272	4913	2746	3907	5989	6055	6265
	13200	104	107	117	4343	4995	2797	4012	6133	6202	6391
	13600	105	109	119	4416	5078	2850	4119	6280	6351	6518
	14000	107	110	121	4489	5162	2903	4229	6430	6504	6648
	14400	108	111	122	4558	5241	2953	4334	6574	6650	6772
	14800	110	113	124	4627	5321	3003	4442	6720	6798	6898
	15200	111	114	126	4698	5402	3054	4550	6866	6947	7022
	15600	113	116	127	4769	5484	3105	4654	7046	7132	7139
	16000	114	117	129	4841	5567	3157	4760	7229	7320	7258
	16400	115	119	130	4909	5645	3205	4860	7401	7496	7369
	16800	117	120	132	5009	5760	3271	4962	7576	7676	7482
	17200*	118	121	133	5113	5880	3341	5065	7755	7859	7596
3000	12400	101	104	114	4272	4913	2746	3901	5974	6042	6260
	12800	102	105	115	4344	4995	2797	4006	6120	6189	6385
	13200	104	107	117	4417	5079	2850	4114	6268	6340	6513
	13600	105	109	119	4491	5164	2904	4226	6420	6494	6644
	14000	107	110	121	4566	5250	2958	4339	6573	6651	6777
	14400	108	111	122	4636	5332	3009	4449	6721	6801	6905
	14800	110	113	124	4708	5414	3061	4560	6871	6954	7034
	15200	111	114	126	4780	5497	3113	4672	7067	7155	7163
	15600	113	116	127	4853	5581	3165	4779	7251	7344	7283
	16000	114	117	129	4927	5666	3218	4889	7439	7537	7405
	16400	115	119	130	5015	5767	3277	4993	7618	7720	7520
	16800	117	120	132	5121	5889	3347	5098	7798	7905	7635
	17200*	118	121	134	5231	6015	3420	5205	7982	8093	7753

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF

ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP 3

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	101	104	114	4344	4996	2798	4001	6106	6177	6381
	12800	102	105	115	4417	5080	2851	4110	6255	6328	6509
	13200	104	107	117	4492	5166	2905	4222	6408	6484	6641
	13600	105	109	119	4568	5253	2960	4337	6563	6642	6775
	14000	107	110	121	4645	5342	3016	4455	6722	6804	6913
	14400	108	111	122	4718	5425	3068	4568	6874	6958	7044
	14800	110	113	124	4791	5510	3120	4683	7079	7170	7177
	15200	111	114	126	4866	5595	3174	4798	7273	7368	7309
	15600	113	116	127	4941	5682	3227	4910	7464	7565	7433
	16000	114	117	129	5022	5775	3283	5023	7656	7762	7557
	16400	115	119	130	5128	5898	3354	5131	7841	7951	7675
	16800	117	120	132	5239	6025	3427	5240	8028	8143	7795
	17200*	118	121	134	5354	6157	3503	5351	8218	8337	7915
5000	12400	101	104	114	4418	5081	2851	4104	6240	6314	6503
	12800	102	105	115	4493	5167	2906	4217	6394	6471	6636
	13200	104	107	117	4570	5256	2961	4333	6551	6630	6771
	13600	105	109	119	4648	5345	3018	4453	6712	6794	6910
	14000	107	110	121	4727	5436	3074	4574	6917	7005	7051
	14400	108	111	122	4802	5522	3128	4692	7087	7179	7186
	14800	110	113	124	4877	5609	3182	4811	7286	7383	7323
	15200	111	114	126	4954	5696	3236	4931	7487	7590	7459
	15600	113	116	127	5031	5785	3291	5046	7682	7790	7586
	16000	114	117	129	5135	5905	3360	5164	7882	7996	7715
	16400	115	119	130	5247	6034	3434	5275	8072	8190	7836
	16800	117	120	132	5363	6167	3510	5388	8266	8389	7958
	17200*	118	121	134	5483	6306	3589	5503	8464	8591	8082
6000	12400	101	104	114	4514	5191	2918	4256	6476	6557	6742
	12800	102	105	115	4591	5279	2974	4373	6633	6717	6875
	13200	104	107	117	4669	5370	3030	4494	6795	6882	7014
	13600	105	109	119	4749	5462	3088	4617	7006	7099	7155
	14000	107	110	121	4830	5555	3146	4744	7190	7287	7299
	14400	108	111	122	4907	5643	3201	4866	7394	7498	7436
	14800	110	113	124	4984	5732	3256	4989	7601	7710	7576
	15200	111	114	126	5062	5822	3312	5114	7810	7925	7714
	15600	113	116	127	5153	5925	3372	5234	8013	8133	7844
	16000	114	117	129	5272	6063	3451	5356	8221	8347	7975
	16400	115	119	131	5389	6198	3528	5471	8418	8549	8098
	16800	117	120	132	5511	6338	3608	5589	8620	8756	8223
	17200*	118	121	134	5639	6484	3691	5709	8826	8967	8350
7000	12400	101	104	114	4602	5293	2981	4392	6669	6756	6929
	12800	102	105	115	4681	5383	3038	4513	6831	6921	7066
	13200	104	107	117	4762	5476	3096	4638	7045	7143	7208
	13600	105	109	119	4844	5571	3155	4767	7233	7334	7352
	14000	107	110	121	4927	5666	3214	4899	7454	7562	7500
	14400	108	111	122	5006	5757	3270	5024	7663	7777	7640
	14800	110	113	124	5085	5848	3327	5153	7879	7999	7784
	15200	111	114	126	5166	5940	3384	5282	8093	8219	7925
	15600	113	116	127	5281	6073	3458	5407	8306	8437	8058
	16000	114	117	129	5407	6218	3541	5533	8520	8657	8192
	16400	115	119	131	5530	6359	3621	5654	8727	8869	8319
	16800	117	120	132	5658	6507	3705	5775	8936	9083	8447
	17200*	118	121	134	5792	6661	3791	5900	9150	9302	8576

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION ON — WINGSTAB ON
ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP 3

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	108	108	126	4416	5078	2848	4073	6186	6257	6480
	12800	110	110	128	4494	5168	2904	4187	6340	6414	6613
	13200	111	111	130	4569	5255	2959	4299	6490	6566	6742
	13600	113	113	132	4645	5342	3014	4413	6644	6723	6875
	14000	115	115	134	4722	5430	3069	4529	6800	6881	7009
	14400	116	116	136	4797	5516	3122	4644	6991	7078	7141
	14800	118	118	138	4874	5605	3178	4763	7185	7277	7277
	15200	119	119	140	4951	5694	3233	4882	7380	7476	7412
	15600	121	121	142	5025	5779	3286	4990	7560	7660	7531
	16000	122	122	143	5119	5887	3348	5098	7741	7846	7650
	16400	124	124	145	5234	6019	3424	5212	7930	8040	7774
	16800	125	125	147	5349	6151	3500	5322	8113	8227	7893
	17200*	127	127	149	5468	6288	3578	5434	8301	8419	8014
1000	12400	108	108	126	4489	5163	2901	4174	6316	6390	6600
	12800	110	110	128	4570	5255	2959	4293	6475	6552	6737
	13200	111	111	130	4647	5344	3014	4408	6630	6710	6871
	13600	113	113	132	4725	5433	3070	4526	6788	6870	7006
	14000	115	115	134	4804	5524	3127	4646	6989	7077	7145
	14400	116	116	136	4880	5612	3182	4764	7182	7275	7280
	14800	118	118	138	4959	5703	3238	4888	7382	7481	7420
	15200	119	119	140	5038	5794	3295	5010	7581	7684	7557
	15600	121	121	142	5120	5887	3350	5122	7768	7876	7680
	16000	122	122	143	5232	6017	3424	5234	7954	8066	7802
	16400	124	124	145	5352	6155	3504	5352	8149	8266	7930
	16800	125	125	147	5472	6293	3582	5466	8340	8461	8052
	17200*	127	127	149	5597	6437	3664	5581	8533	8658	8176
2000	12400	108	108	126	4565	5250	2955	4280	6451	6530	6724
	12800	110	110	129	4648	5345	3015	4403	6615	6696	6865
	13200	111	111	130	4726	5435	3072	4522	6775	6858	7002
	13600	113	113	132	4806	5527	3129	4644	6979	7068	7142
	14000	115	115	134	4887	5620	3187	4768	7181	7275	7283
	14400	116	116	136	4966	5711	3243	4891	7381	7480	7423
	14800	118	118	138	5047	5804	3301	5018	7586	7691	7566
	15200	119	119	140	5129	5898	3359	5145	7792	7902	7708
	15600	121	121	142	5233	6018	3427	5260	7984	8098	7834
	16000	122	122	144	5351	6153	3505	5377	8178	8297	7960
	16400	124	124	145	5476	6298	3587	5498	8378	8502	8090
	16800	125	125	147	5602	6442	3669	5616	8576	8704	8217
	17200*	127	127	149	5733	6593	3754	5736	8775	8908	8344
3000	12400	108	108	127	4643	5340	3012	4391	6592	6673	6852
	12800	110	110	129	4728	5437	3073	4517	6760	6845	6997
	13200	111	111	131	4809	5530	3131	4641	6967	7058	7139
	13600	113	113	132	4891	5625	3190	4767	7172	7268	7282
	14000	115	115	134	4974	5720	3249	4896	7382	7483	7428
	14400	116	116	136	5055	5813	3306	5022	7586	7693	7571
	14800	118	118	138	5138	5909	3366	5154	7798	7910	7719
	15200	119	119	140	5232	6017	3428	5285	8011	8128	7865
	15600	121	121	142	5352	6155	3507	5405	8210	8332	7994
	16000	122	122	144	5475	6297	3588	5526	8410	8537	8124
	16400	124	124	145	5607	6448	3674	5651	8619	8750	8258
	16800	125	125	147	5739	6600	3759	5774	8823	8959	8388
	17200*	127	127	149	5877	6758	3848	5898	9031	9172	8519

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA
 ENGINE ICE PROTECTION ON — WINGSTAB ON
 ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP 3

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	108	108	127	4724	5433	3070	4506	6737	6823	6986
	12800	110	110	129	4811	5533	3132	4637	6953	7046	7136
	13200	111	111	131	4895	5629	3192	4765	7161	7258	7281
	13600	113	113	132	4979	5726	3252	4895	7372	7475	7428
	14000	115	115	134	5064	5824	3313	5029	7588	7697	7579
	14400	116	116	136	5147	5919	3372	5160	7799	7913	7725
	14800	118	118	138	5233	6018	3432	5296	8019	8139	7878
	15200	119	119	140	5352	6154	3508	5432	8238	8363	8027
	15600	121	121	142	5477	6299	3591	5557	8445	8575	8161
	16000	122	122	144	5606	6447	3675	5681	8652	8787	8293
	16400	124	124	145	5744	6606	3765	5811	8869	9008	8432
	16800	125	125	147	5883	6765	3854	5938	9079	9224	8565
	17200*	127	127	149	6028	6932	3946	6066	9295	9444	8700
5000	12400	108	108	127	4808	5529	3130	4626	6927	7020	7124
	12800	110	110	129	4897	5632	3194	4762	7147	7246	7277
	13200	111	111	131	4983	5730	3255	4894	7361	7466	7426
	13600	113	113	133	5069	5830	3316	5029	7580	7690	7579
	14000	115	115	134	5157	5931	3379	5167	7801	7918	7733
	14400	116	116	136	5242	6028	3439	5303	8021	8143	7884
	14800	118	118	138	5344	6146	3505	5444	8247	8375	8040
	15200	119	119	140	5476	6298	3592	5584	8474	8607	8194
	15600	121	121	142	5608	6449	3678	5713	8689	8827	8331
	16000	122	122	144	5743	6605	3766	5842	8903	9046	8468
	16400	124	124	145	5888	6772	3860	5978	9128	9276	8610
	16800	125	125	147	6034	6939	3953	6108	9347	9499	8747
	17200*	127	127	149	6187	7115	4050	6242	9570	9727	8886
6000	12400	108	108	127	4916	5653	3204	4801	7230	7334	7384
	12800	110	110	129	5007	5758	3269	4942	7458	7569	7541
	13200	111	111	131	5095	5859	3332	5080	7681	7798	7693
	13600	113	113	133	5184	5961	3395	5220	7907	8030	7847
	14000	115	115	134	5274	6065	3459	5363	8138	8267	8005
	14400	116	116	136	5361	6165	3520	5505	8367	8502	8159
	14800	118	118	138	5490	6313	3602	5651	8602	8743	8319
	15200	119	119	140	5629	6473	3692	5797	8839	8985	8476
	15600	121	121	142	5767	6632	3782	5932	9062	9214	8616
	16000	122	122	144	5910	6796	3874	6066	9286	9443	8755
	16400	124	124	145	6063	6972	3972	6206	9520	9682	8900
	16800	125	125	147	6217	7150	4070	6342	9748	9915	9040
	17200*	127	127	149	6379	7336	4172	6481	9982	10153	9181
7000	12400	108	108	127	5016	5768	3274	4959	7489	7604	7591
	12800	110	110	129	5110	5876	3341	5105	7727	7848	7752
	13200	111	111	131	5200	5980	3405	5248	7956	8084	7907
	13600	113	113	133	5291	6085	3470	5393	8191	8325	8065
	14000	115	115	134	5383	6191	3535	5542	8432	8572	8227
	14400	116	116	136	5492	6315	3604	5689	8667	8814	8385
	14800	118	118	138	5632	6477	3696	5841	8912	9065	8548
	15200	119	119	140	5777	6644	3790	5993	9159	9318	8710
	15600	121	121	142	5923	6811	3884	6132	9390	9554	8852
	16000	122	122	144	6073	6984	3980	6271	9625	9794	8995
	16400	124	124	145	6235	7170	4083	6417	9867	10041	9144
	16800	125	125	147	6398	7358	4185	6558	10104	10283	9287
	17200*	127	127	149	6570	7555	4292	6702	10347	10531	9432

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF
ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP FULL

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	100	100	113	3959	4553	2539	3496	5416	5467	5758
	12800	101	101	115	4022	4625	2585	3583	5538	5591	5865
	13200	103	103	117	4089	4703	2634	3676	5669	5723	5980
	13600	104	104	119	4154	4776	2680	3767	5795	5850	6091
	14000	106	106	121	4218	4851	2727	3860	5923	5980	6203
	14400	107	107	122	4284	4926	2774	3953	6052	6111	6317
	14800	109	109	124	4345	4997	2818	4043	6176	6237	6426
	15200	110	110	126	4412	5073	2866	4140	6308	6371	6541
	15600	111	111	127	4474	5145	2911	4225	6426	6491	6641
	16000	113	113	129	4535	5215	2954	4309	6542	6608	6739
	16400	114	114	130	4599	5289	3000	4399	6665	6733	6843
	16800	115	115	132	4659	5358	3043	4484	6820	6892	6941
	17200*	117	117	133	4721	5429	3090	4570	6941	7015	7040
1000	12400	100	100	113	4024	4628	2586	3580	5529	5582	5864
	12800	101	101	115	4088	4701	2633	3669	5654	5709	5973
	13200	103	103	117	4158	4781	2683	3767	5789	5846	6092
	13600	104	104	119	4223	4857	2730	3860	5919	5977	6206
	14000	106	106	121	4290	4933	2778	3955	6049	6110	6321
	14400	107	107	122	4357	5010	2826	4053	6183	6245	6439
	14800	109	109	124	4419	5082	2871	4145	6310	6374	6550
	15200	110	110	126	4488	5161	2920	4245	6445	6511	6668
	15600	111	111	127	4552	5235	2966	4334	6568	6636	6772
	16000	113	113	129	4614	5306	3011	4420	6687	6756	6872
	16400	114	114	130	4680	5382	3058	4513	6838	6911	6978
	16800	115	115	132	4742	5453	3102	4601	6983	7059	7079
	17200*	117	117	133	4823	5546	3161	4690	7130	7209	7181
2000	12400	100	100	114	4091	4704	2634	3667	5645	5701	5971
	12800	101	101	115	4157	4780	2682	3760	5775	5832	6084
	13200	103	103	117	4228	4862	2733	3860	5913	5972	6206
	13600	104	104	119	4295	4939	2782	3957	6046	6107	6323
	14000	106	106	121	4363	5018	2831	4055	6181	6244	6442
	14400	107	107	122	4432	5097	2880	4156	6318	6383	6562
	14800	109	109	124	4496	5171	2926	4252	6449	6516	6677
	15200	110	110	126	4566	5251	2976	4354	6588	6658	6799
	15600	111	111	127	4632	5327	3024	4446	6714	6785	6905
	16000	113	113	129	4695	5400	3069	4536	6867	6942	7008
	16400	114	114	130	4763	5478	3117	4632	7025	7103	7118
	16800	115	115	132	4835	5560	3170	4722	7174	7255	7221
	17200*	117	117	133	4930	5669	3234	4814	7325	7410	7325
3000	12400	100	100	114	4160	4784	2684	3758	5767	5825	6084
	12800	101	101	115	4228	4862	2733	3854	5900	5960	6200
	13200	103	103	117	4301	4946	2785	3958	6041	6104	6325
	13600	104	104	119	4370	5025	2835	4058	6178	6243	6445
	14000	106	106	121	4439	5105	2885	4159	6317	6383	6567
	14400	107	107	122	4510	5186	2936	4263	6458	6527	6691
	14800	109	109	124	4576	5262	2983	4362	6592	6663	6809
	15200	110	110	126	4648	5345	3034	4468	6766	6841	6934
	15600	111	111	127	4715	5422	3083	4564	6903	6980	7044
	16000	113	113	129	4780	5497	3129	4656	7055	7135	7149
	16400	114	114	130	4850	5577	3179	4756	7218	7302	7262
	16800	115	115	132	4942	5683	3244	4850	7373	7460	7369
	17200*	117	117	134	5041	5797	3311	4945	7530	7620	7476

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION OFF/ON — WINGSTAB OFF
ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP FULL

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	100	100	114	4232	4866	2736	3853	5892	5953	6200
	12800	101	101	115	4301	4946	2786	3952	6028	6092	6320
	13200	103	103	117	4376	5032	2839	4059	6174	6240	6449
	13600	104	104	119	4446	5113	2890	4163	6315	6383	6572
	14000	106	106	121	4518	5195	2941	4268	6458	6529	6698
	14400	107	107	122	4590	5279	2993	4375	6603	6676	6825
	14800	109	109	124	4658	5356	3042	4478	6776	6853	6947
	15200	110	110	126	4732	5441	3094	4588	6932	7011	7075
	15600	111	111	127	4801	5521	3144	4686	7093	7176	7187
	16000	113	113	129	4867	5597	3191	4782	7251	7337	7296
	16400	114	114	130	4954	5697	3254	4885	7419	7508	7412
	16800	115	115	132	5054	5812	3321	4982	7578	7671	7522
	17200*	117	117	134	5158	5932	3391	5081	7741	7837	7632
5000	12400	100	100	114	4305	4951	2788	3952	6020	6085	6320
	12800	101	101	115	4376	5033	2839	4054	6161	6227	6443
	13200	103	103	117	4453	5121	2895	4165	6311	6380	6576
	13600	104	104	119	4525	5204	2947	4272	6456	6527	6702
	14000	106	106	121	4599	5288	2999	4381	6603	6677	6832
	14400	107	107	122	4673	5374	3052	4492	6792	6871	6963
	14800	109	109	124	4742	5454	3102	4598	6942	7023	7088
	15200	110	110	126	4818	5541	3156	4712	7124	7209	7220
	15600	111	111	127	4889	5622	3206	4813	7290	7379	7335
	16000	113	113	129	4959	5703	3258	4913	7453	7545	7447
	16400	114	114	130	5067	5827	3331	5020	7627	7723	7567
	16800	115	115	132	5172	5948	3402	5120	7791	7891	7679
	17200*	117	117	134	5280	6072	3474	5222	7959	8062	7793
6000	12400	100	100	114	4400	5060	2854	4095	6241	6312	6548
	12800	101	101	115	4473	5144	2907	4202	6386	6459	6673
	13200	103	103	117	4552	5234	2963	4316	6540	6616	6807
	13600	104	104	119	4626	5320	3016	4427	6690	6767	6937
	14000	106	106	121	4701	5406	3070	4540	6864	6946	7068
	14400	107	107	122	4777	5493	3124	4656	7049	7135	7202
	14800	109	109	124	4848	5575	3175	4765	7225	7315	7329
	15200	110	110	126	4925	5664	3230	4884	7413	7508	7464
	15600	111	111	127	4998	5748	3282	4989	7586	7685	7582
	16000	113	113	129	5091	5854	3347	5092	7754	7856	7695
	16400	114	114	131	5204	5984	3423	5203	7935	8040	7818
	16800	115	115	132	5313	6110	3497	5307	8107	8216	7932
	17200*	117	117	134	5427	6241	3573	5413	8281	8393	8048
7000	12400	100	100	114	4489	5162	2917	4224	6425	6500	6729
	12800	101	101	115	4563	5248	2970	4334	6573	6651	6856
	13200	103	103	117	4644	5340	3028	4453	6733	6813	6994
	13600	104	104	119	4720	5427	3082	4568	6912	6997	7126
	14000	106	106	121	4796	5516	3137	4685	7101	7190	7261
	14400	107	107	122	4874	5605	3193	4805	7290	7385	7398
	14800	109	109	124	4947	5689	3245	4919	7473	7572	7529
	15200	110	110	126	5027	5781	3301	5041	7667	7770	7667
	15600	111	111	127	5110	5877	3362	5151	7847	7953	7787
	16000	113	113	129	5219	6002	3434	5258	8022	8133	7904
	16400	114	114	131	5337	6137	3514	5372	8209	8323	8029
	16800	115	115	132	5452	6270	3590	5480	8387	8505	8146
	17200*	117	117	134	5572	6407	3669	5590	8568	8689	8264

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

PW535E ENGINES

LANDING DISTANCE (ft) - ISA

ENGINE ICE PROTECTION ON — WINGSTAB ON
ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP FULL

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
Sea Level	12400	106	106	126	4249	4886	2746	3844	5860	5919	6193
	12800	108	108	128	4322	4971	2799	3946	6000	6061	6316
	13200	109	109	130	4392	5051	2849	4046	6136	6199	6435
	13600	111	111	132	4463	5133	2900	4147	6273	6338	6556
	14000	112	112	134	4535	5215	2951	4251	6414	6481	6679
	14400	114	114	136	4604	5294	3001	4352	6550	6619	6799
	14800	115	115	138	4675	5377	3052	4458	6721	6794	6924
	15200	117	117	140	4747	5459	3103	4563	6868	6944	7046
	15600	118	118	142	4815	5537	3152	4658	7021	7100	7155
	16000	119	119	143	4883	5615	3200	4753	7174	7256	7263
	16400	121	121	145	4968	5713	3261	4853	7333	7417	7375
	16800	122	122	147	5068	5829	3329	4949	7488	7575	7483
	17200*	124	124	149	5173	5949	3399	5046	7645	7735	7593
1000	12400	106	106	126	4321	4969	2797	3938	5983	6045	6308
	12800	108	108	128	4396	5055	2851	4044	6127	6191	6434
	13200	109	109	130	4468	5138	2903	4147	6266	6332	6556
	13600	111	111	132	4540	5221	2955	4252	6408	6476	6681
	14000	112	112	134	4614	5306	3008	4358	6552	6622	6807
	14400	114	114	136	4684	5387	3058	4463	6725	6799	6931
	14800	115	115	138	4758	5471	3111	4572	6877	6954	7059
	15200	117	117	140	4831	5556	3163	4681	7047	7128	7185
	15600	118	118	142	4901	5636	3213	4779	7204	7288	7296
	16000	119	119	143	4971	5716	3265	4877	7362	7449	7407
	16400	121	121	145	5077	5839	3337	4980	7527	7616	7523
	16800	122	122	147	5182	5960	3407	5079	7686	7778	7634
	17200*	124	124	149	5291	6085	3480	5180	7848	7944	7746
2000	12400	106	106	126	4394	5053	2850	4036	6110	6175	6426
	12800	108	108	129	4472	5142	2906	4145	6257	6325	6556
	13200	109	109	130	4545	5227	2958	4251	6401	6470	6681
	13600	111	111	132	4619	5312	3012	4360	6547	6618	6809
	14000	112	112	134	4695	5399	3066	4470	6712	6787	6939
	14400	114	114	136	4767	5482	3117	4579	6882	6960	7066
	14800	115	115	138	4843	5569	3171	4691	7057	7140	7198
	15200	117	117	140	4918	5655	3225	4803	7232	7318	7327
	15600	118	118	142	4989	5738	3276	4905	7395	7484	7442
	16000	119	119	144	5081	5843	3340	5006	7557	7649	7555
	16400	121	121	145	5191	5970	3415	5113	7727	7823	7674
	16800	122	122	147	5301	6097	3489	5216	7893	7991	7789
	17200*	124	124	149	5415	6228	3565	5320	8060	8162	7904
3000	12400	106	106	127	4471	5141	2905	4138	6241	6309	6548
	12800	108	108	129	4550	5232	2961	4251	6393	6463	6681
	13200	109	109	131	4625	5319	3016	4361	6541	6614	6811
	13600	111	111	132	4701	5407	3070	4473	6710	6786	6942
	14000	112	112	134	4779	5495	3125	4587	6888	6968	7076
	14400	114	114	136	4853	5581	3179	4699	7063	7147	7206
	14800	115	115	138	4930	5670	3233	4816	7244	7332	7342
	15200	117	117	140	5008	5759	3288	4931	7425	7516	7475
	15600	118	118	142	5087	5850	3346	5037	7593	7688	7593
	16000	119	119	144	5196	5975	3419	5142	7762	7860	7710
	16400	121	121	145	5312	6108	3497	5252	7937	8039	7832
	16800	122	122	147	5426	6240	3574	5358	8109	8213	7950
	17200*	124	124	149	5546	6378	3653	5467	8283	8391	8069

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

PW535E ENGINES

LANDING DISTANCE (ft) - ISA
ENGINE ICE PROTECTION ON — WINGSTAB ON
ZERO SLOPE — 10 kt TAILWIND — LANDING FLAP FULL

ALT (ft)	WEIGHT (lb)	SPEEDS			FACTORED		UNFACTORED		CONTAMINATED		
		VREF (KIAS)	VAC (KIAS)	VFS (KIAS)	DRY (ft)	WET (ft)	DRY (ft)	WET (ft)	STD. WATER (ft)	SLUSH (ft)	WET SNOW (ft)
4000	12400	106	106	127	4550	5232	2961	4244	6377	6449	6675
	12800	108	108	129	4631	5325	3019	4361	6534	6608	6813
	13200	109	109	131	4708	5414	3075	4475	6706	6784	6946
	13600	111	111	132	4786	5504	3131	4591	6887	6969	7081
	14000	112	112	134	4866	5595	3187	4709	7071	7157	7218
	14400	114	114	136	4942	5683	3242	4825	7252	7341	7353
	14800	115	115	138	5021	5774	3298	4945	7439	7532	7492
	15200	117	117	140	5100	5865	3354	5065	7625	7723	7629
	15600	118	118	142	5203	5983	3426	5174	7799	7900	7750
	16000	119	119	144	5316	6114	3502	5283	7974	8078	7870
	16400	121	121	145	5437	6253	3582	5397	8156	8264	7996
	16800	122	122	147	5557	6391	3662	5507	8333	8444	8117
	17200*	124	124	149	5682	6535	3745	5619	8513	8627	8239
5000	12400	106	106	127	4631	5325	3019	4355	6518	6593	6806
	12800	108	108	129	4714	5421	3079	4475	6700	6779	6947
	13200	109	109	131	4793	5512	3135	4593	6884	6967	7085
	13600	111	111	133	4874	5605	3193	4713	7070	7157	7223
	14000	112	112	134	4955	5698	3251	4835	7261	7352	7365
	14400	114	114	136	5033	5788	3306	4955	7447	7542	7503
	14800	115	115	138	5115	5882	3364	5080	7640	7740	7646
	15200	117	117	140	5208	5989	3430	5203	7833	7936	7786
	15600	118	118	142	5324	6122	3508	5317	8013	8120	7911
	16000	119	119	144	5442	6258	3587	5429	8194	8304	8035
	16400	121	121	145	5569	6404	3671	5547	8383	8497	8165
	16800	122	122	147	5695	6549	3755	5661	8566	8683	8289
	17200*	124	124	149	5826	6700	3841	5777	8753	8874	8414
6000	12400	106	106	127	4736	5446	3092	4516	6779	6863	7051
	12800	108	108	129	4821	5544	3153	4642	6975	7063	7196
	13200	109	109	131	4902	5638	3211	4763	7165	7257	7335
	13600	111	111	133	4985	5732	3269	4887	7358	7454	7476
	14000	112	112	134	5068	5828	3329	5015	7555	7656	7621
	14400	114	114	136	5148	5920	3386	5139	7748	7853	7761
	14800	115	115	138	5231	6016	3445	5268	7949	8059	7907
	15200	117	117	140	5349	6152	3526	5397	8149	8263	8050
	15600	118	118	142	5471	6291	3607	5514	8337	8454	8178
	16000	119	119	144	5595	6434	3689	5631	8525	8646	8304
	16400	121	121	145	5728	6587	3777	5753	8721	8846	8436
	16800	122	122	147	5861	6740	3865	5871	8912	9040	8562
	17200*	124	124	149	5999	6899	3955	5992	9107	9238	8691
7000	12400	106	106	127	4833	5558	3160	4661	7009	7101	7247
	12800	108	108	129	4921	5659	3222	4791	7211	7307	7394
	13200	109	109	131	5004	5755	3282	4916	7407	7507	7537
	13600	111	111	133	5088	5851	3342	5046	7608	7712	7682
	14000	112	112	134	5174	5950	3402	5177	7811	7920	7829
	14400	114	114	136	5256	6044	3461	5306	8012	8126	7974
	14800	115	115	138	5358	6162	3533	5440	8220	8338	8123
	15200	117	117	140	5487	6310	3619	5573	8427	8550	8270
	15600	118	118	142	5614	6456	3703	5695	8623	8749	8400
	16000	119	119	144	5744	6606	3790	5816	8817	8947	8529
	16400	121	121	145	5884	6767	3882	5943	9022	9155	8664
	16800	122	122	147	6024	6927	3973	6066	9221	9358	8795
	17200*	124	124	149	6170	7095	4068	6190	9422	9563	8925

(*) Maximum Landing Weight or Climb Limited Weight exceeded.

Landing

OPERATIONAL LANDING

PW535E ENGINES

OPERATIONAL LANDING DISTANCE (ft)

FLAP 3 — WITHOUT ICE ACCRETION

	REF	WEIGHT		ALT	TEMP		WIND		SLOPE		V _{AP}
RWYCC (Braking Action)	16500 lb landing weight	per 200 lb blw/abv 16500 lb		per 1000 ft above SL	per 5°C		per 5 kt		per 1 %		per 5 kt above V _{REF}
		below	above		below ISA	above ISA	head wind	tail wind	uphill	down hill	
6 (DRY)	2929	-24	24	77	-29	61	-71	365	-22	434	488
5 (GOOD)	3890	-42	43	143	-48	104	-109	627	-47	693	698
4 (GOOD TO MEDIUM)	4673	-40	40	136	-47	93	-130	535	-109	740	562
3 (MEDIUM)	5364	-46	46	161	-50	109	-155	643	-163	962	606
2 (MEDIUM TO POOR)	6175	-77	84	303	-53	219	-183	1377	-177	2138	874
1 (POOR)	8806	-59	61	283	-11	189	-301	1248	-608	3419	728

For overweight landing add 121 ft per each 200 lb above 16500 lb.

PW535E ENGINES

OPERATIONAL LANDING DISTANCE (ft)

FLAP FULL — WITHOUT ICE ACCRETION

	REF	WEIGHT		ALT	TEMP		WIND		SLOPE		V _{AP}
RWYCC (Braking Action)	16500 lb landing weight	per 200 lb blw/abv 16500 lb		per 1000 ft above SL	per 5°C		per 5 kt		per 1 %		per 5 kt above V _{REF}
		below	above		below ISA	above ISA	head wind	tail wind	uphill	down hill	
6 (DRY)	2899	-23	23	75	-30	59	-71	357	-23	406	476
5 (GOOD)	3773	-38	39	134	-48	97	-106	592	-45	631	629
4 (GOOD TO MEDIUM)	4528	-37	37	131	-46	89	-129	524	-103	692	510
3 (MEDIUM)	5149	-42	42	153	-48	104	-152	627	-151	890	566
2 (MEDIUM TO POOR)	5724	-64	68	257	-49	186	-173	1198	-161	1781	876
1 (POOR)	8120	-52	54	258	-17	173	-285	1183	-527	3788	640

For overweight landing add 130 ft per each 200 lb above 16500 lb.

PW535E ENGINES

OPERATIONAL LANDING DISTANCE (ft)

FLAP 3 — WITH ICE ACCRETION

	REF	WEIGHT		ALT	TEMP		WIND		SLOPE		V _{AP}
RWYCC (Braking Action)	16500 lb landing weight	per 200 lb blw/abv 16500 lb		per 1000 ft above SL	per 5°C		per 5 kt		per 1 %		per 5 kt above V _{REF}
		below	above		below ISA	above ISA	head wind	tail wind	uphill	down hill	
6 (DRY)	3243	-27	27	97	-34	73	-74	413	-26	480	560
5 (GOOD)	4424	-48	50	166	-57	122	-118	683	-57	783	721
4 (GOOD TO MEDIUM)	5183	-44	45	152	-53	104	-137	559	-122	800	651
3 (MEDIUM)	5937	-50	51	179	-56	122	-164	672	-181	1036	610
2 (MEDIUM TO POOR)	7126	-90	92	335	-94	241	-196	1431	-202	1999	842
1 (POOR)	9601	-65	68	309	-21	207	-313	1290	-654	3053	666

For overweight landing add 128 ft per each 200 lb above 16500 lb.

User: andreiap01 - Printed by TechPubs - Feb 13/26 - 12:44:21

Landing

PW535E ENGINES
OPERATIONAL LANDING DISTANCE (ft)
FLAP FULL — WITH ICE ACCRETION

	REF	WEIGHT		ALT	TEMP		WIND		SLOPE		VAP
RWYCC (Braking Action)	16500 lb landing weight	per 200 lb blw/abv 16500 lb		per 1000 ft above SL	per 5°C		per 5 kt		per 1 %		per 5 kt above VREF
		below	above		below ISA	above ISA	head wind	tail wind	uphill	down hill	
6 (DRY)	3157	-25	26	90	-33	69	-73	394	-26	442	529
5 (GOOD)	4185	-43	44	152	-54	110	-113	630	-53	693	640
4 (GOOD TO MEDIUM)	4927	-41	41	143	-50	98	-134	544	-113	738	516
3 (MEDIUM)	5589	-45	46	167	-53	113	-158	649	-164	944	567
2 (MEDIUM TO POOR)	6379	-73	75	279	-70	201	-182	1233	-178	1900	709
1 (POOR)	8692	-57	60	277	-23	185	-292	1215	-552	3525	629

For overweight landing add 112 ft per each 200 lb above 16500 lb.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

GROUND RESETS

The purpose of this section is to provide flight crew with information and procedures to clear nuisance messages and miscellaneous nuisance faults.

Occasional transitory CAS messages may arise in normal operations as a result of simultaneous initialization of multiple systems. These transitory conditions may occur mainly during the airplane power up and may not represent a real issue with the airplane.

This guide intends to evaluate common indications to determine if they are transitory events or true issues that will require further investigation or maintenance actions.

The procedures run built-in tests for a second time via switches, knobs and Circuit Breakers (CB) in the cockpit. They are not intended to be considered fixes of any kind.

This section does not cover all messages/faults that may be detected on the airplane. Any message/fault not covered by this document must be reported to the maintenance personnel.

The procedures for the application of this section must be established by the flight crew. These procedures must be adapted according to the requirements of the airports and Local Regulatory Authorities.

- NOTE:** – Multiple messages/faults might be associated with one single nuisance. The messages/faults with a matching ground reset procedure should be addressed by order of priority, as follows:
- GOLDEN messages;
 - Non-annunciated faults (listed in the INDEX BY FAULTS NOT ANNUNCIATED table);
 - CAS messages in the order they are displayed.
 - The ground reset procedure must be performed for each message/fault according to instructions and limitations defined herein.
 - It is recommended to log any transitory condition with the airplane. This is an essential part of the process to identify a true system or component issue.

This section is organized in a four-column table, as follows:

- ATA: gives the ATA number for the related message/fault;
- MESSAGE/FAULT: provides the messages/faults or fault condition, alphabetically ordered. Messages are written in capital letters and conditions are written in plain text;
- MSG LEVEL/LOCATION: indicates the type of the message displayed – for CAS messages – or the location of the fault or annunciation:
 - W, warning messages;
 - C, caution messages;
 - A, advisory messages.
- PROCEDURES: provides the proper procedures required to clear the nuisance CAS message/fault. It may also provide the effectivity of the procedure and/or Fault Condition in which the procedure applies.

This section is based on the FAULT ISOLATION MANUAL (FIM). Therefore, in case a discrepancy is found between this section and FIM, the FIM shall prevail.

NOTE: In the effectivity field, airplanes equipped with G1000 and G3000 avionics systems are specified. If no effectivity is referenced, the procedure is applicable to both avionics systems.

This section does not constitute an operational approval. If Local Regulatory Authority approval is required, it should be obtained by the operator.

LIMITATIONS

This section shall be used under the following conditions:

- Airplane on the ground with parking brake set;
- Each procedure may be performed only once for each flight leg. If the nuisance message/fault is not cleared, if applicable, the maintenance personnel must be notified;
- Effectivity and Fault Condition must be observed. Ground Reset Procedures should be accomplished only if the applicable effectivity and fault conditions are satisfied. Applicable effectivity and fault conditions are listed above the procedures. Those procedures that do not have effectivity and fault conditions listed above the procedures can be accomplished to every model and conditions, observing the items above.

GROUND RESETS GROUND RESETS GROUND RESETS

INDEX BY CAS MESSAGE

TYPE	MESSAGE	PAGE
CAUTION	ADS 1 FAIL	GR1-8
	ADS 1 HTR FAIL	GR1-8
	ADS 2 FAIL	GR1-8
	ADS 2 HTR FAIL	GR1-8
	AHRS 1 FAIL	GR1-9
	AHRS 2 FAIL	GR1-9
	AURAL WRN FAIL	GR1-10
	BAG SMK FAIL	GR1-11
	BRK FAIL	GR1-11
	CONFIG MDL FAIL	GR1-12
	ECS 1 VALVE FAIL	GR1-12
	ECS 2 VALVE FAIL	GR1-12
	EMER LT NOT ARM	GR1-13
	FUEL PUMP 1 FAIL	GR1-13
	FUEL PUMP 2 FAIL	GR1-13
	GIA 1 FAIL	GR1-14
	GIA 2 FAIL	GR1-14
	MFD FAULT	GR1-16
	PFD 1 FAULT	GR1-17
	PFD 2 FAULT	GR1-17
	PRESN AUTO FAIL	GR1-17
	TCAS FAIL	GR1-19

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

TYPE	MESSAGE	PAGE
A D V I S O R Y	ADS 1 SLIP FAIL	GR1-9
	ADS 2 SLIP FAIL	GR1-9
	AHRS 1 FAULT	GR1-9
	AHRS 2 FAULT	GR1-9
	AURAL WRN FAULT	GR1-10
	AVNX FAN FAIL	GR1-11
	GEA 1 FAIL	GR1-14
	GEA 2 FAIL	GR1-14
	GEA 3 FAIL	GR1-14
	GSD 1 FAIL	GR1-14
	GSD 2 FAIL	GR1-14
	GTC 1 FAULT	GR1-14
	GTC 2 FAULT	GR1-14
	HSDB FAULT	GR1-15
	MFD FAN FAIL	GR1-15
	NAV 1 FAIL	GR1-16
	NAV 2 FAIL	GR1-16
	PFD 1 FAN FAIL	GR1-16
	PFD 2 FAN FAIL	GR1-16
	RALT FAIL	GR1-18
	RAM AIR FAIL	GR1-18
	VENTRAL RUD FAIL	GR1-19
	VHF 3 FAIL	GR1-19
	XPDR 1 FAIL	GR1-19
	XPDR 2 FAIL	GR1-20

GROUND RESETS GROUND RESETS GROUND RESETS

INDEX BY FAULTS NOT ANNUNCIATED

LOCATION	CONDITION/ANNUNCIATION	PAGE
GTC	GTC 1 (2) BUTTONS FAILURE	GR1-14
	GTC 1 (2) MISBEHAVIOR (YELLOW "X" ON INDICATIONS WITH NO ASSOCIATED CAS MESSAGE)	GR1-15
HYD RSVR	DPI POPPED UP (HYDRAULIC SYSTEM)	GR1-12
IESI	IESI MISBEHAVIOR (BLACK SCREEN)	GR1-15
	IESI MISBEHAVIOR (RED "X" ON INDICATIONS)	GR1-15
MFD	AIR COND TEMP CONTROL FAIL (ECS SYNOPTIC)	GR1-8
	MFD MISBEHAVIOR (YELLOW "X" ON INDICATIONS WITH NO ASSOCIATED CAS MESSAGE)	GR1-16
	"RADAR FAIL" ON WEATHER RADAR PAGE	GR1-18
PFD	ATTITUDE AND HEADING MISBEHAVIOR (AHRS 1)	GR1-10
	ATTITUDE AND HEADING MISBEHAVIOR (AHRS 2)	GR1-11
	PFD 1 (2) MISBEHAVIOR (YELLOW "X" ON INDICATIONS WITH NO ASSOCIATED CAS MESSAGE)	GR1-17
	PFD 1 (2) MISBEHAVIOR (YELLOW "X" ON CAS WINDOW WITH "DB MISMATCH: NAVIGATION DATABASE MISMATCH. XTALK IS OFF. " SYSTEM MESSAGE ON GTCS)	GR1-17
	RAD ALT OSCILLATION ON GROUND	GR1-18

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

AIRPLANE POWER RESET

This procedure must be applied only in messages/faults covered by this section where the Airplane Power Reset is required.

THRUST Levers..... IDLE

EMER/PARKING BRAKE Handle..... APPLY

CAUTION: MAINTAIN IDLE FOR AT LEAST 2 MINUTES PRIOR TO ENGINE SHUTDOWN.

ENG 1 & 2 START/STOP Knobs..... STOP

If a GPU is connected, push the GPU Button out and physically unplug the GPU.

BATT 1 & 2 Switches..... OFF

Wait 1 min.

Power up using normal procedures.

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

QRH 2669-354

ENGINE DOES NOT START (S/GEN DOES NOT START TO RUN)

The procedures bellow must be accomplished when the engine does not start associated with the starter generator (S/GEN) not running.

NOTE: It is recommended to verify if all knobs and switches are in the appropriated position, according to the normal procedures, before turning ON the batteries. After switching the batteries to ON, do not command or change any switch position until the power up is completely finished. When the displays are ready and presenting all the flight information properly the power up is complete.

If during the attempt to start an engine, it does not initiate the engine start sequence, try to start the opposite engine.

Fault Condition 1: If both engines fail to start, follow these procedures:

- Shut down all electrical power sources (Batteries OFF and if applicable, push the GPU Button out and physically unplug the GPU);
- Wait 2 min;
- Connect the electrical power source (Batteries or GPU);
- Wait for the systems to power up;
- Perform the engine start procedure again;
- If the engine does not start, contact maintenance personnel.

Fault Condition 2: If the start of the opposite engine is successful, follow these procedures:

- Turn off the battery switch from the opposite side of the engine. For instance, if engine 1 fails to start, turn OFF battery 2;
- Disconnect external power sources (Push the GPU Button out and physically unplug the GPU);
- Wait 2 min;
- Set the battery switch back to the ON position;
- After 25 s perform the engine start procedure again;
- If the engine does not start, contact maintenance personnel.

NUISANCE CAS MESSAGE OR FAULT

- NOTE:**
- Some procedures may require the reset of more than one CB. In these cases, unless specified, the CBs can be reset one by one or open all of them at one time then reset all of them next.
 - For circuit breaker location refer to POH Section 9-04-20 CIRCUIT BREAKERS PANELS.

AIR COND TEMP CONTROL FAIL (ECS SYNOPTIC)**LOCATION:** MFD**FAULT CONDITION:** During airplane power up.

Open the following CBs, wait 5 s, then reset them:

LHCBP..... TEMP PWR 1
 RHCBP..... TEMP PWR 2

END**ADS 1 FAIL****FAULT CONDITION:** During airplane power up.

Open the following CB, wait 5 s, then reset it:

LHCBP..... IASP 1

END**ADS 2 FAIL****FAULT CONDITION:** During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... IASP 2

END**ADS 1 HTR FAIL****FAULT CONDITION:** During airplane power up.

Open the following CB, wait 5 s, then reset it:

LHCBP..... IASP 1

END**ADS 2 HTR FAIL****FAULT CONDITION:** During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... IASP 2

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

QRH 2669-354

ADS 1 (2) SLIP FAIL

FAULT CONDITION: During airplane power up.

Open the following CBs, wait 5 s, then reset them:

LHCBP..... IASP 1

RHCBP..... IASP 2

END

AHRS 1 (2) FAIL

FAULT CONDITION: During airplane power up.

Airplane should not be moved before 10 s after applying power to the AHRS/airplane.

CAUTION: MAKE SURE THE AIRPLANE IS NOT SUFFERING ELECTROMAGNETIC INTERFERENCE AND NOT BEING CLOSE TO METALLIC SURFACES.

Do not take off if the heading displayed on the PFD is noticeably drifting. When this occurs, power down then power up the airplane, using the Airplane Power Reset procedures.

If the message still persists, it means that real failure exists and maintenance personnel has to be actioned.

END

AHRS 1 (2) FAULT

FAULT CONDITION: During airplane power up.

Airplane should not be moved before 10 s after applying power to the AHRS/airplane.

CAUTION: MAKE SURE THE AIRPLANE IS NOT SUFFERING ELECTROMAGNETIC INTERFERENCE AND NOT BEING CLOSE TO METALLIC SURFACES.

Do not take off if the heading displayed on the PFD is noticeably drifting. When this power occurs, power down then power up the airplane, using the Airplane Power Reset procedures.

If the message still persists, it means that real failure exists and maintenance personnel has to be actioned.

END

AURAL WRN FAIL

FAULT CONDITION: During airplane power up.

Open the following CBs, wait 5 s, then reset them:

LHCBP.....	AUDIO 1
LHCBP.....	GIA 1
LHCBP.....	PFD 1
LHCBP.....	MFD PWR 1
RHCBP.....	AUDIO 2
RHCBP.....	GIA 2
RHCBP.....	PFD 2
RHCBP.....	MFD PWR 2

NOTE: Open additionally the following CBs:

LHCBP.....	GTC 1
RHCBP.....	GTC 2

END

AURAL WRN FAULT

FAULT CONDITION: During airplane power up.

2. Power down then power up the airplane, using the Airplane Power Reset procedures.

END

ATTITUDE AND HEADING MISBEHAVIOR (AHRS 1)

LOCATION: PFD

FAULT CONDITION: During airplane power up.

Airplane should not be moved before 10 s after applying power to the AHRS/airplane.

CAUTION: MAKE SURE THE AIRPLANE IS NOT SUFFERING ELECTROMAGNETIC INTERFERENCE AND NOT BEING CLOSE TO METALLIC SURFACES.

Do not take off if the heading displayed on the PFD is noticeably drifting. When this power occurs, power down then power up the airplane, using the Airplane Power Reset procedures.

If the message still persists, it means that real failure exists and maintenance personnel has to be actioned.

END

ATTITUDE AND HEADING MISBEHAVIOR (AHRS 2)

LOCATION: PFD

FAULT CONDITION: During airplane power up.

Airplane should not be moved before 10 s after applying power to the AHRS/airplane.

CAUTION: MAKE SURE THE AIRPLANE IS NOT SUFFERING ELECTROMAGNETIC INTERFERENCE AND NOT BEING CLOSE TO METALLIC SURFACES.

Do not take off if the heading displayed on the PFD is noticeably drifting. When this power occurs, power down then power up the airplane, using the Airplane Power Reset procedures.

If the message still persists, it means that real failure exists and maintenance personnel has to be actioned.

END

AVNX FAN FAIL

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

BAG SMK FAIL

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

LHCBP..... BAG SMK DET

In Test Switch Panel, select switch to SMK DET and start test. After test, in case of BAG SMK FAIL is presented in CAS, it is necessary to call maintenance personnel.

END

BRK FAIL

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

CONFIG MDL FAIL**FAULT CONDITION:** During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END**DPI POPPED UP (HYDRAULIC SYSTEM)****LOCATION:** HYD RSVR**FAULT CONDITION:** Airplane on ground.

DPI..... PUSH IN

21 Check the DPI status again after next flight landing and call maintenance personnel if it is popped again.

NOTE: Only 1 (one) DPI reset is allowed before maintenance intervention.**END****ECS 1 VALVE FAIL****FAULT CONDITION:** Airplane on ground.

Open the following CBs, wait 5 s, then reset them:

LHCBP.....	CKPT FCSOV
LHCBP.....	TEMP PWR 1
RHCBP.....	TEMP PWR 2

END**ECS 2 VALVE FAIL****FAULT CONDITION:** Airplane on ground.

Open the following CBs, wait 5 s, then reset them:

RHCBP.....	CABIN FCSOV
LHCBP.....	TEMP PWR 1
RHCBP.....	TEMP PWR 2

END

EMER LT NOT ARM

FAULT CONDITION: Airplane on ground.

On the overhead panel, make sure the EMER Lights Switch is on the ARM position. If not, switch to position and check if the message will be cleared. However, if it was already on ARM position, turn EMER Lights Switch to OFF position and keep it for at least 5 s. After that, turn the EMER Lights Switch back to ARM position.

END**FUEL PUMP 1 FAIL**

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

NOTE: If FUEL PUMP 1 FAIL is displayed associated with FUEL PUMP 2 FAIL, FUEL 1 (2) PSW FAIL; power down the airplane, remove and verify inside the 3 Supplemental Database SD Cards (bottom slots) if contains the folder "ldr_sys". If so, delete this folder, reinsert the SD cards back to the bottom slots, and power up the airplane again. If the cards do not contain the mentioned folder, or the messages persists, call maintenance personnel.

END**FUEL PUMP 2 FAIL**

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

NOTE: If FUEL PUMP 2 FAIL is displayed associated with FUEL PUMP 1 FAIL, FUEL 1 (2) PSW FAIL; power down the airplane, remove and verify inside the 3 Supplemental Database SD Cards (bottom slots) if contains the folder "ldr_sys". If so, delete this folder, reinsert the SD cards back to the bottom slots, and power up the airplane again. If the cards do not contain the mentioned folder, or the messages persists, call maintenance personnel.

END

GEA 1 (2,3) FAIL

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END**GIA 1 (2) FAIL**

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END**GSD 1 (2) FAIL**

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END**GTC 1 (2) BUTTONS FAILURE**

LOCATION: GTC

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

NOTE: One of the known conditions that can cause GTC locking is when it is in the Takeoff dataset screen during the takeoff phase. The recommended mitigation action is to bring the GTC to its main screen, before the takeoff phase, to minimize the possibility of having it locked.

END**GTC 1 (2) FAULT**

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

GTC 1 (2) MISBEHAVIOR (YELLOW "X" ON INDICATIONS WITH NO ASSOCIATED CAS MESSAGE)

LOCATION: GTC

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

HSDB FAULT

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

IESI MISBEHAVIOR (BLACK SCREEN)

LOCATION: IESI

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

IESI MISBEHAVIOR (RED "X" ON INDICATIONS)

LOCATION: IESI

FAULT CONDITION: During airplane power up.

Depressing the CAGE Button for more than 2 s, or power down then power up the airplane, using the Airplane Power Reset procedures.

END

MFD FAN FAIL

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

**MFD MISBEHAVIOR (YELLOW "X" ON INDICATIONS
WITH NO ASSOCIATED CAS MESSAGE)****LOCATION:** MFD**FAULT CONDITION:** During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END**MFD FAULT****FAULT CONDITION:** During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END**NAV 1 FAIL****FAULT CONDITION:** During airplane power up.

Open the following CB, wait 5 s, then reset it:

LHCBP..... GIA 1

END**NAV 2 FAIL****FAULT CONDITION:** During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... GIA 2

END**PFD 1 (2) FAN FAIL****FAULT CONDITION:** During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

User: andreia0t - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

QRH 2669-354

PFD 1 (2) FAULT

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

PFD 1 (2) MISBEHAVIOR (YELLOW "X" ON INDICATIONS WITH NO ASSOCIATED CAS MESSAGE)

LOCATION: PFD

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

PFD 1 (2) MISBEHAVIOR (YELLOW "X" ON CAS WINDOW WITH "DB MISMATCH: NAVIGATION DATABASE MISMATCH. XTALK IS OFF. " SYSTEM MESSAGE ON GTCS)

LOCATION: PFD

FAULT CONDITION: During airplane power up.

Power down then power up the airplane, using the Airplane Power Reset procedures.

END

PRESN AUTO FAIL

FAULT CONDITION: During airplane power up.

Set PRESN MODE Switch to MAN on the PRESN control panel, wait 5 s, then set it back to AUTO.

END

RAD ALT OSCILLATION ON GROUND**LOCATION:** PFD

FAULT CONDITION: Oscillations in the radio altimeter indication, while the airplane is on ground. Move the airplane to an open area without any reflecting surface within 120° around the radio altimeter antennas. In case of oscillation remains, call maintenance.

NOTE: In case oscillations reach values greater than 1000 ft, the TCAS II may be automatically commanded to TA/RA mode. In case this occurs it is recommended to set TCAS manually to STBY mode, if needed, in order to avoid interference with ATC.

END**"RADAR FAIL" ON WEATHER RADAR PAGE****LOCATION:** MFD

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

LHCBP..... WX RADAR

END**RALT FAIL**

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... RADAR ALT

If the message is still displayed, open the following CB, wait 5 s, then reset:

RHCBP..... GIA 2

END**RAM AIR FAIL**

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... RAM AIR VALVE

END

User: andreia01 - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

QRH 2669-354

TCAS FAIL

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... TCAS II

NOTE: Wait a minimum of 10 s before checking if the fault is removed.

END**VENTRAL RUD FAIL**

FAULT CONDITION: After engine start.

Open the following CB, wait 5 s, then reset it:

RHCBP..... AFCS SERVOS

END**VHF 3 FAIL**

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... VHF 3

END**XPDR 1 FAIL**

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

LHCBP..... XPDR 1

Select XPDR 1 as the active transponder and check if the message has cleared.

END

XPDR 2 FAIL

FAULT CONDITION: During airplane power up.

Open the following CB, wait 5 s, then reset it:

RHCBP..... XPDR 2

Select XPDR 2 as the active transponder and check if the message has cleared.

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

GROUND RESETS GROUND RESETS GROUND RESETS

QRH 2669-354

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21

INTENTIONALLY BLANK

QRH 2669-354

ORIGINAL

QAP1-1

EMERGENCY EVACUATION

THRUST Levers..... IDLE
Emergency/Parking
Brake..... ON
ENG START/STOP
Knobs..... STOP
SHUTOFF 1 & 2
Buttons..... PUSH IN
PRESN MODE
Switch..... MAN
DUMP Button..... PUSH IN
ATC..... NOTIFY
Evacuation..... PERFORM
BATT 1 & 2 Switches... OFF

END

User: andreiap0t - Printed by TechPubs - Feb 13/26 - 12:44:21