


Only connect ProgrammingArduino
when programming KCX_BT_EMITTER
Bluetooth audio transmitter module

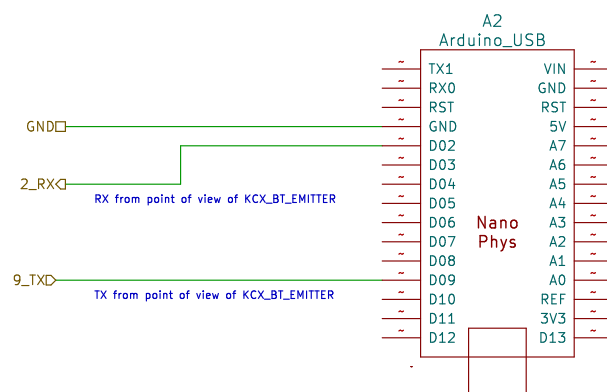

Programming Arduino does not need to be a Nano.
It must be Arduino with 5V interfaces.
Power via USB and use Serial Monitor to control.

Connection to ProgrammingArduino:
9_TX – Yellow
2_RX – Green
GND – Black

Note: label TX/RX refers to the KCX_BT_EMITTER chip.
Usage in Programming Arduino is reversed from that.

for code: https://github.com/Mark-MD047/BluetoothAudioTransmitter_KCX_BT_EMITTER

Sheet: /ProgramingArduino/
File: ProgramingArduino.kicad_sch

Title: ProgrammingArduino

Size: USLetter | Date: 2023-07-23

KiCad E.D.A. kicad 7.0.2

Rev:

Id: 2/2