


Only connect ProgrammingArduino
when programming KCX_BT_EMITTER
Bluetooth audio transmitter module

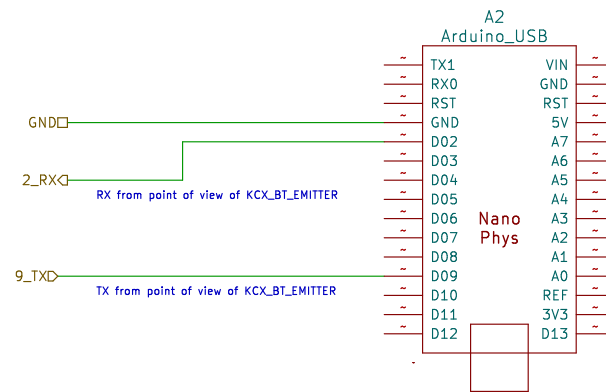

Programming Arduino does not need to be a Nano.
It must be Arduino with 5V interfaces.
Power via USB and use Serial Monitor to control.

Connection to ProgrammingArduino:

9_TX – Yellow

2_RX – Green

GND – Black

Note: label TX/RX refers to the KCX_BT_EMITTER chip.
Usage in Programming Arduino is reversed from that.

for code: https://github.com/Mark-MDO47/BluetoothAudioTransmitter_KCX_BT_EMITTER

Author: <https://github.com/Mark-MDO47/ArduinoClass>

Sheet: /ProgrammingArduino/

File: ProgrammingArduino.kicad_sch

Title: 04 The Finale – DemoReelVoiceCommand_UART

Size: USLetter Date: 2023-08-06

KiCad E.D.A. kicad 7.0.2

Rev:

Id: 2/2