

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1286, y: 315

Root

```
graph TD
    Server[Server-PT Server0] --- Switch[2960-41T Switch]
    Router[2811 Router0] --- Switch
    PC0[PC-PT PC0] --- Switch
    PC1[PC-PT PC1] --- Switch
    PC2[PC-PT PC2] --- Switch
    Printer[Printer-PT Printer0] --- Switch
```

Time: 00:13:53

Realtime Simulation

Scenario 0

New Delete

Toggle PDU List Window

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit

Automatically Choose Connection Type

Поиск

ENG 8:34

Router0

Physical Config CLI Attributes

IOS Command Line Interface

DRAM configuration is 64 bits wide with parity disabled.
286K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:

Press RETURN to get started!

Press RETURN to get started!

Router>en

Router#conf

Configuring from terminal, memory, or network [terminal]? t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#fa0/0

% Invalid input detected at '^' marker.

Router(config)#int fa0/0

Router(config-if)#ip address 192.168.0.4

% Incomplete command.

Router(config-if)#ip address 192.168.0.4 255.255.255.0

Router(config-if)#no shutdown



Router(config-if)#

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#ip

Copy Paste

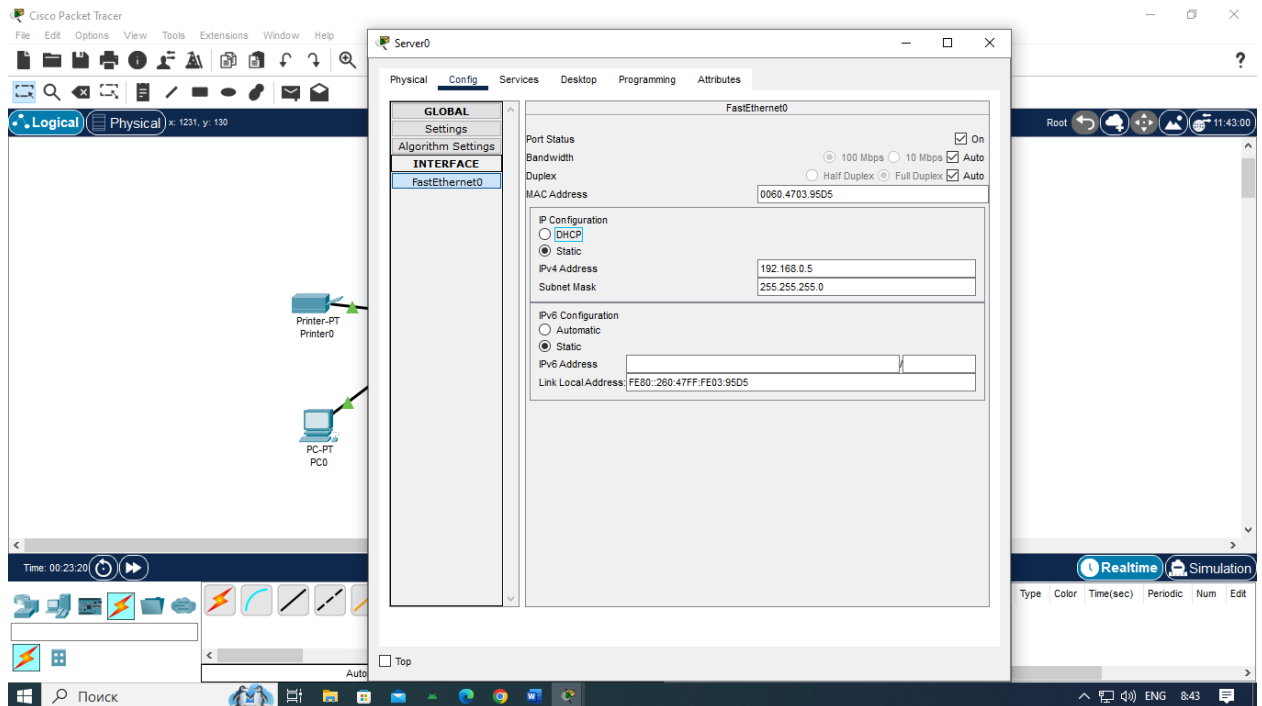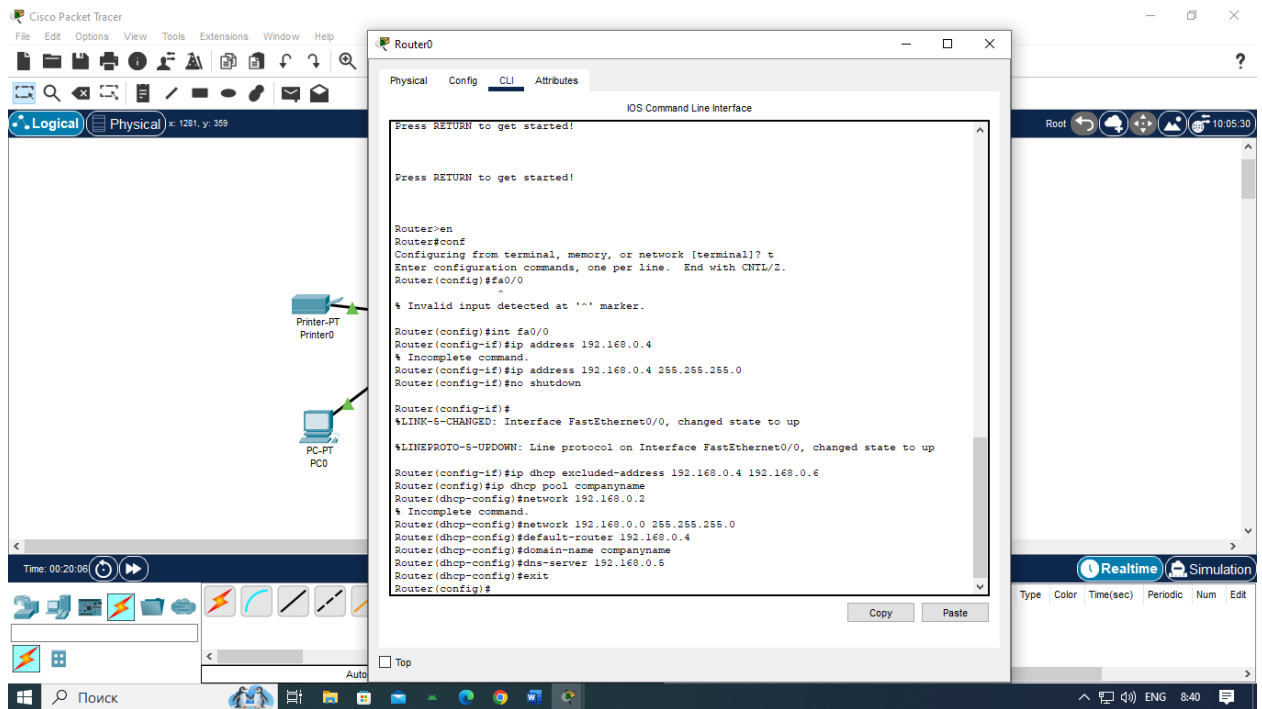

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1284, y: 321

Printer-PT
Printer0

PC-PT
PC0

Time: 00:25:44

Server0

Physical Config Services Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

DNS

DNS Service ☒ On ☐ Off

Resource Records

Name Type

Address

Add Save Remove

No.	Name	Type	Detail
0	frunze86	A Record	192.168.0.5

DNS Cache

Realtime Simulation

Type Color Time(sec) Periodic Num Edit

ENG 8:46

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1158, y: 184

Printer-PT
Printer0

PC-PT
PC0

Time: 00:26:35

Printer0

Physical Config Attributes

GLOBAL

Settings

INTERFACE

FastEthernet0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0060.3E4A.D930

IP Configuration

☐ DHCP

☒ Static

IPv4 Address 192.168.0.6

Subnet Mask 255.255.255.0

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address

Link Local Address FE80::260:3EFF:FE4A:D930

Realtime Simulation

Type Color Time(sec) Periodic Num Edit

ENG 8:46

