


## Practice\_13

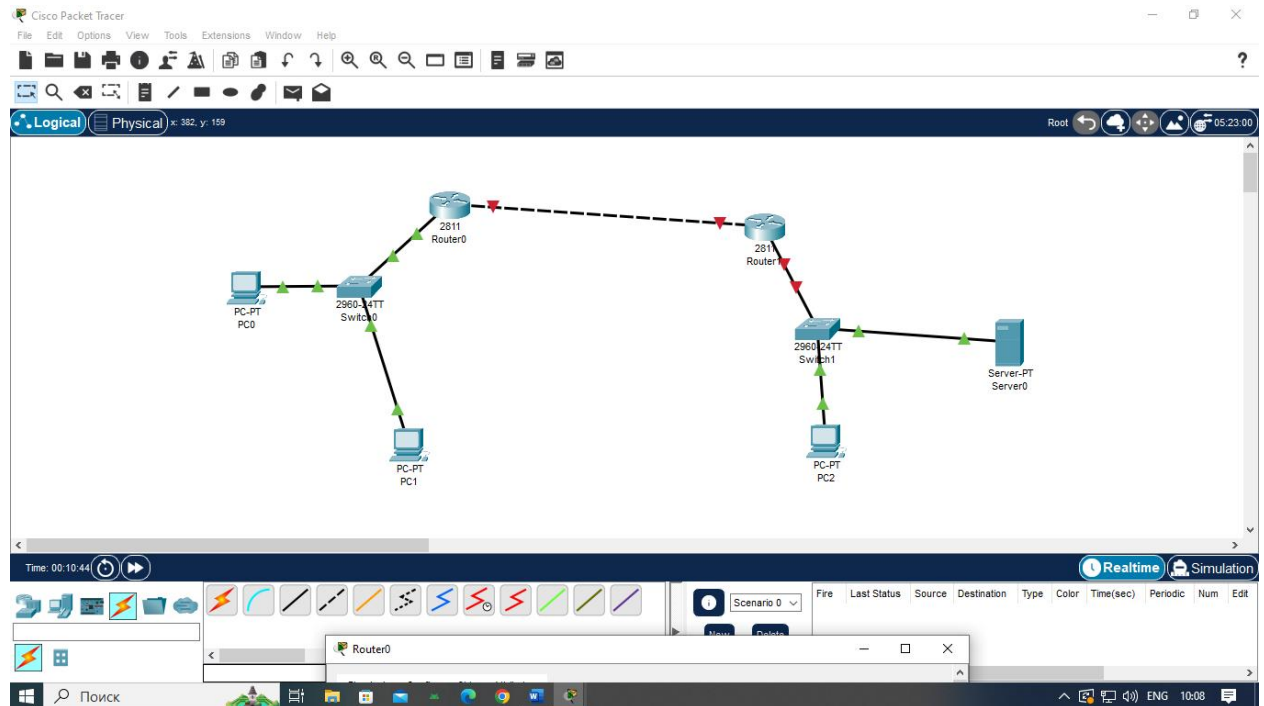

The image shows the CLI window for Router0 in Cisco Packet Tracer. The configuration commands entered are as follows:

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#router rip
Router(config-router)#
Router(config-router)#end
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#%SYS-5-CONFIG_I: Configured from console by console
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.0.3 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
Router(config-if)#exit
Router(config)#int fa0/1
Router(config-if)#ip address 192.168.3.1 255.255.255.0
Router(config-if)#no sh

% Invalid input detected at '^' marker.
Router(config-if)#ip address 192.168.3.1 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
Router(config-if)#exit
Router(config)#
```

