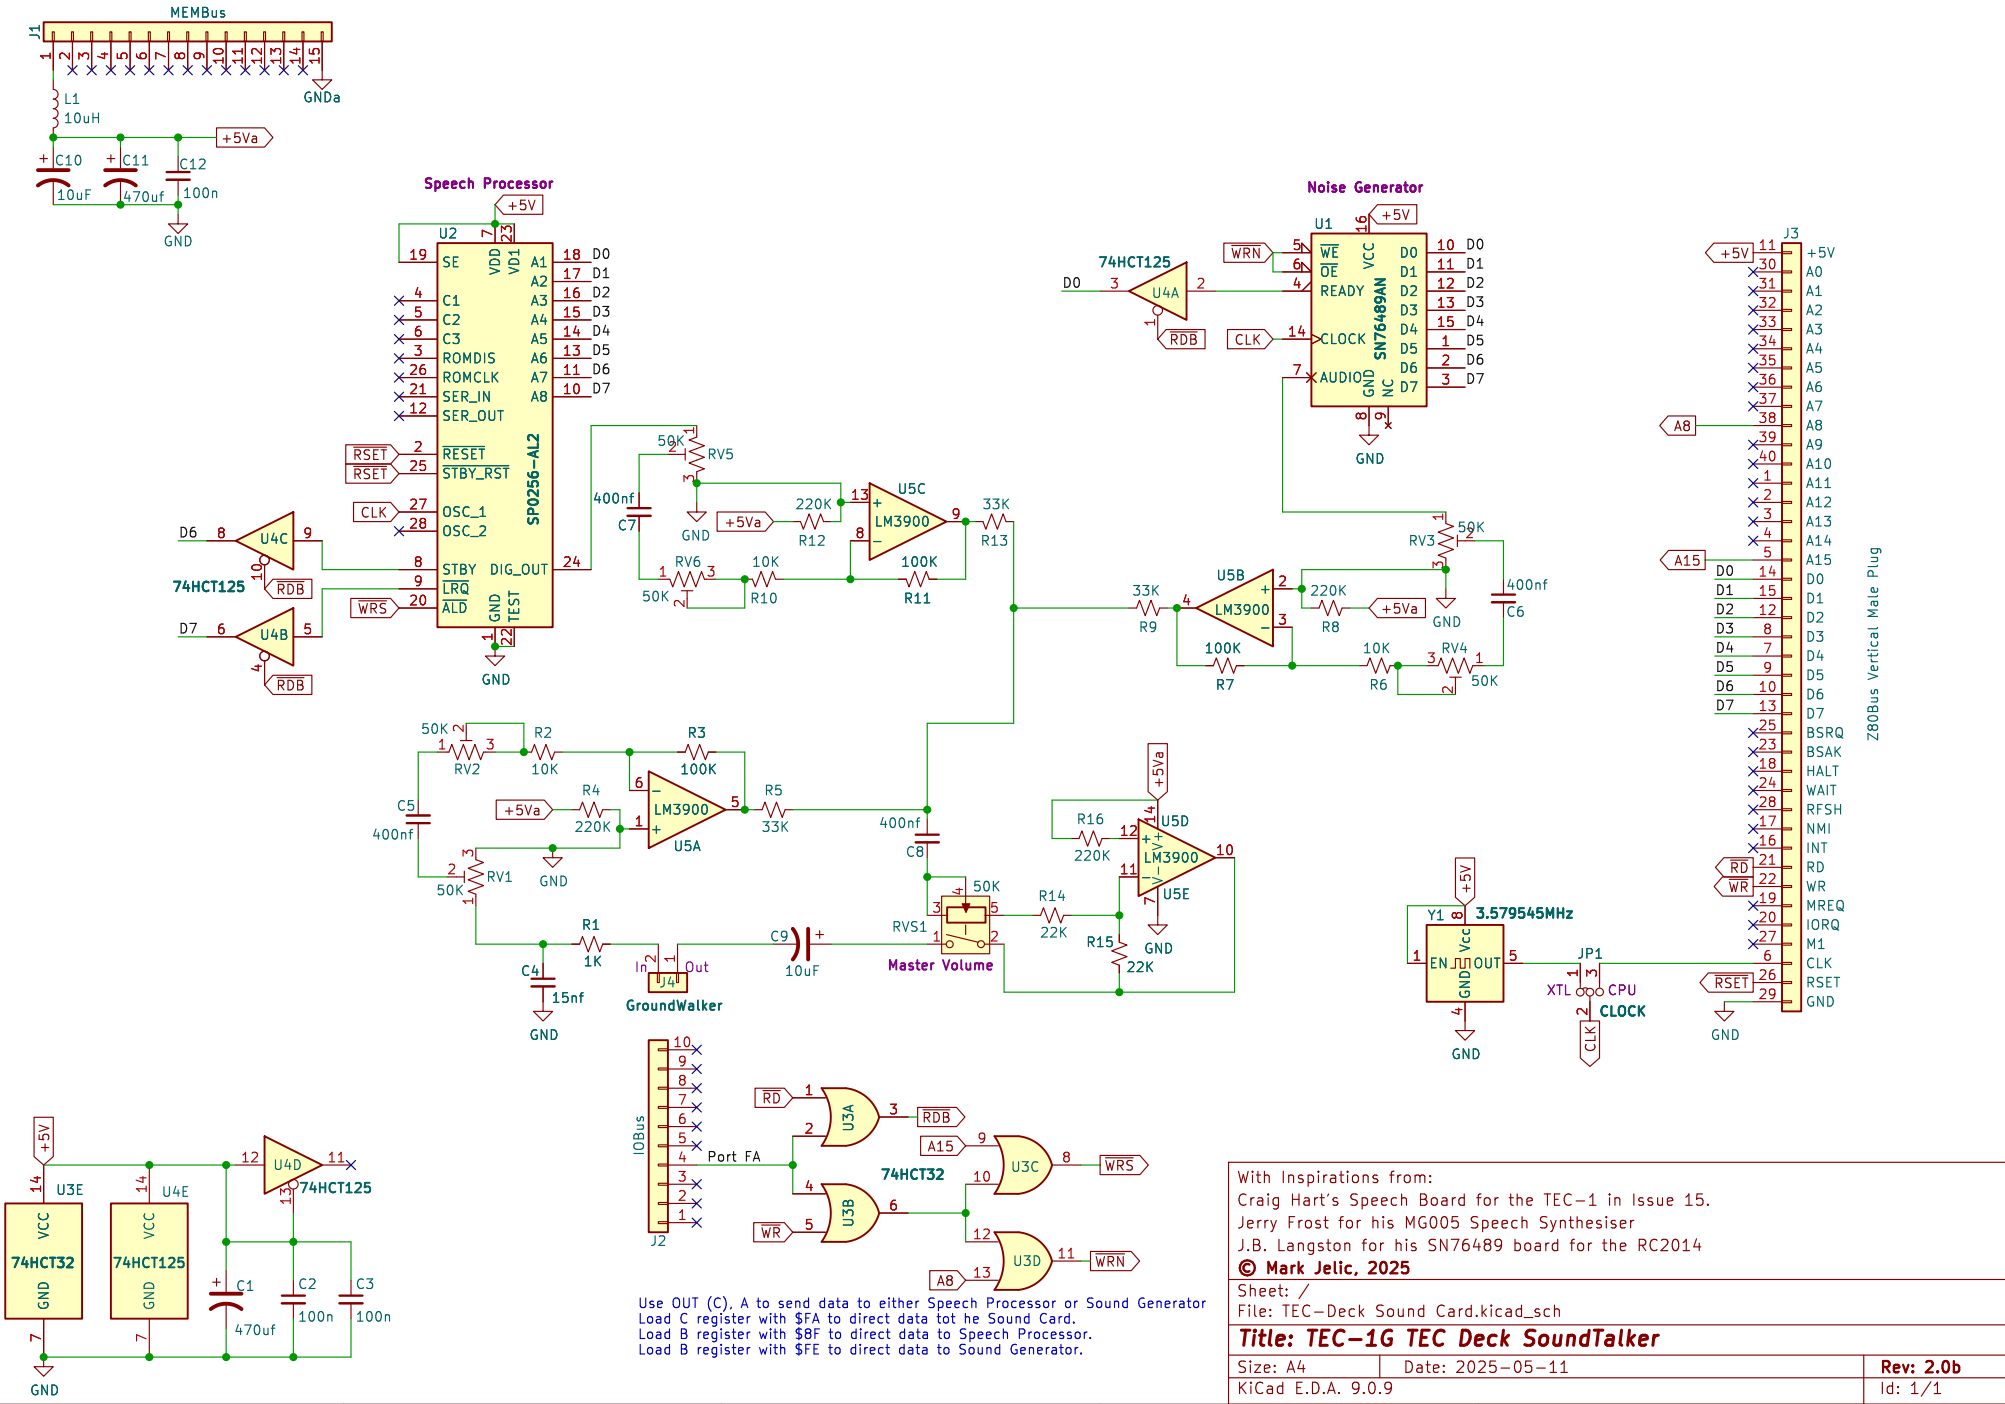


Use OUT (C), A to send data to either Speech Processor or Sound Generator
Load C register with $FA to direct data tot he Sound Card.
Load B register with $8F to direct data to Speech Processor.
Load B register with $FE to direct data to Sound Generator.

With Inspirations from:
Craig Hart's Speech Board for the TEC-1 in Issue 15.
Jerry Frost for his MG005 Speech Synthesiser
J.B. Langston for his SN76489 board for the RC2014

© Mark Jelic, 2025

Sheet: /
File: TEC-Deck Sound Card.kicad_sch

Title: TEC-1G TEC Deck SoundTalker

Size: A4	Date: 2025-05-11	Rev: 2.0b
KiCad E.D.A. 9.0.9		Id: 1/1