


On my recovered A4988 module MS2 had been rewired to Vref. Bench testing determined that phase current limit is set to $(V_{ref} * 315)$ mA, valid between 250 – 1000 mA.

My devices have pins soldered on opposite side to normal so pin numbers are mirrored along the long axis.

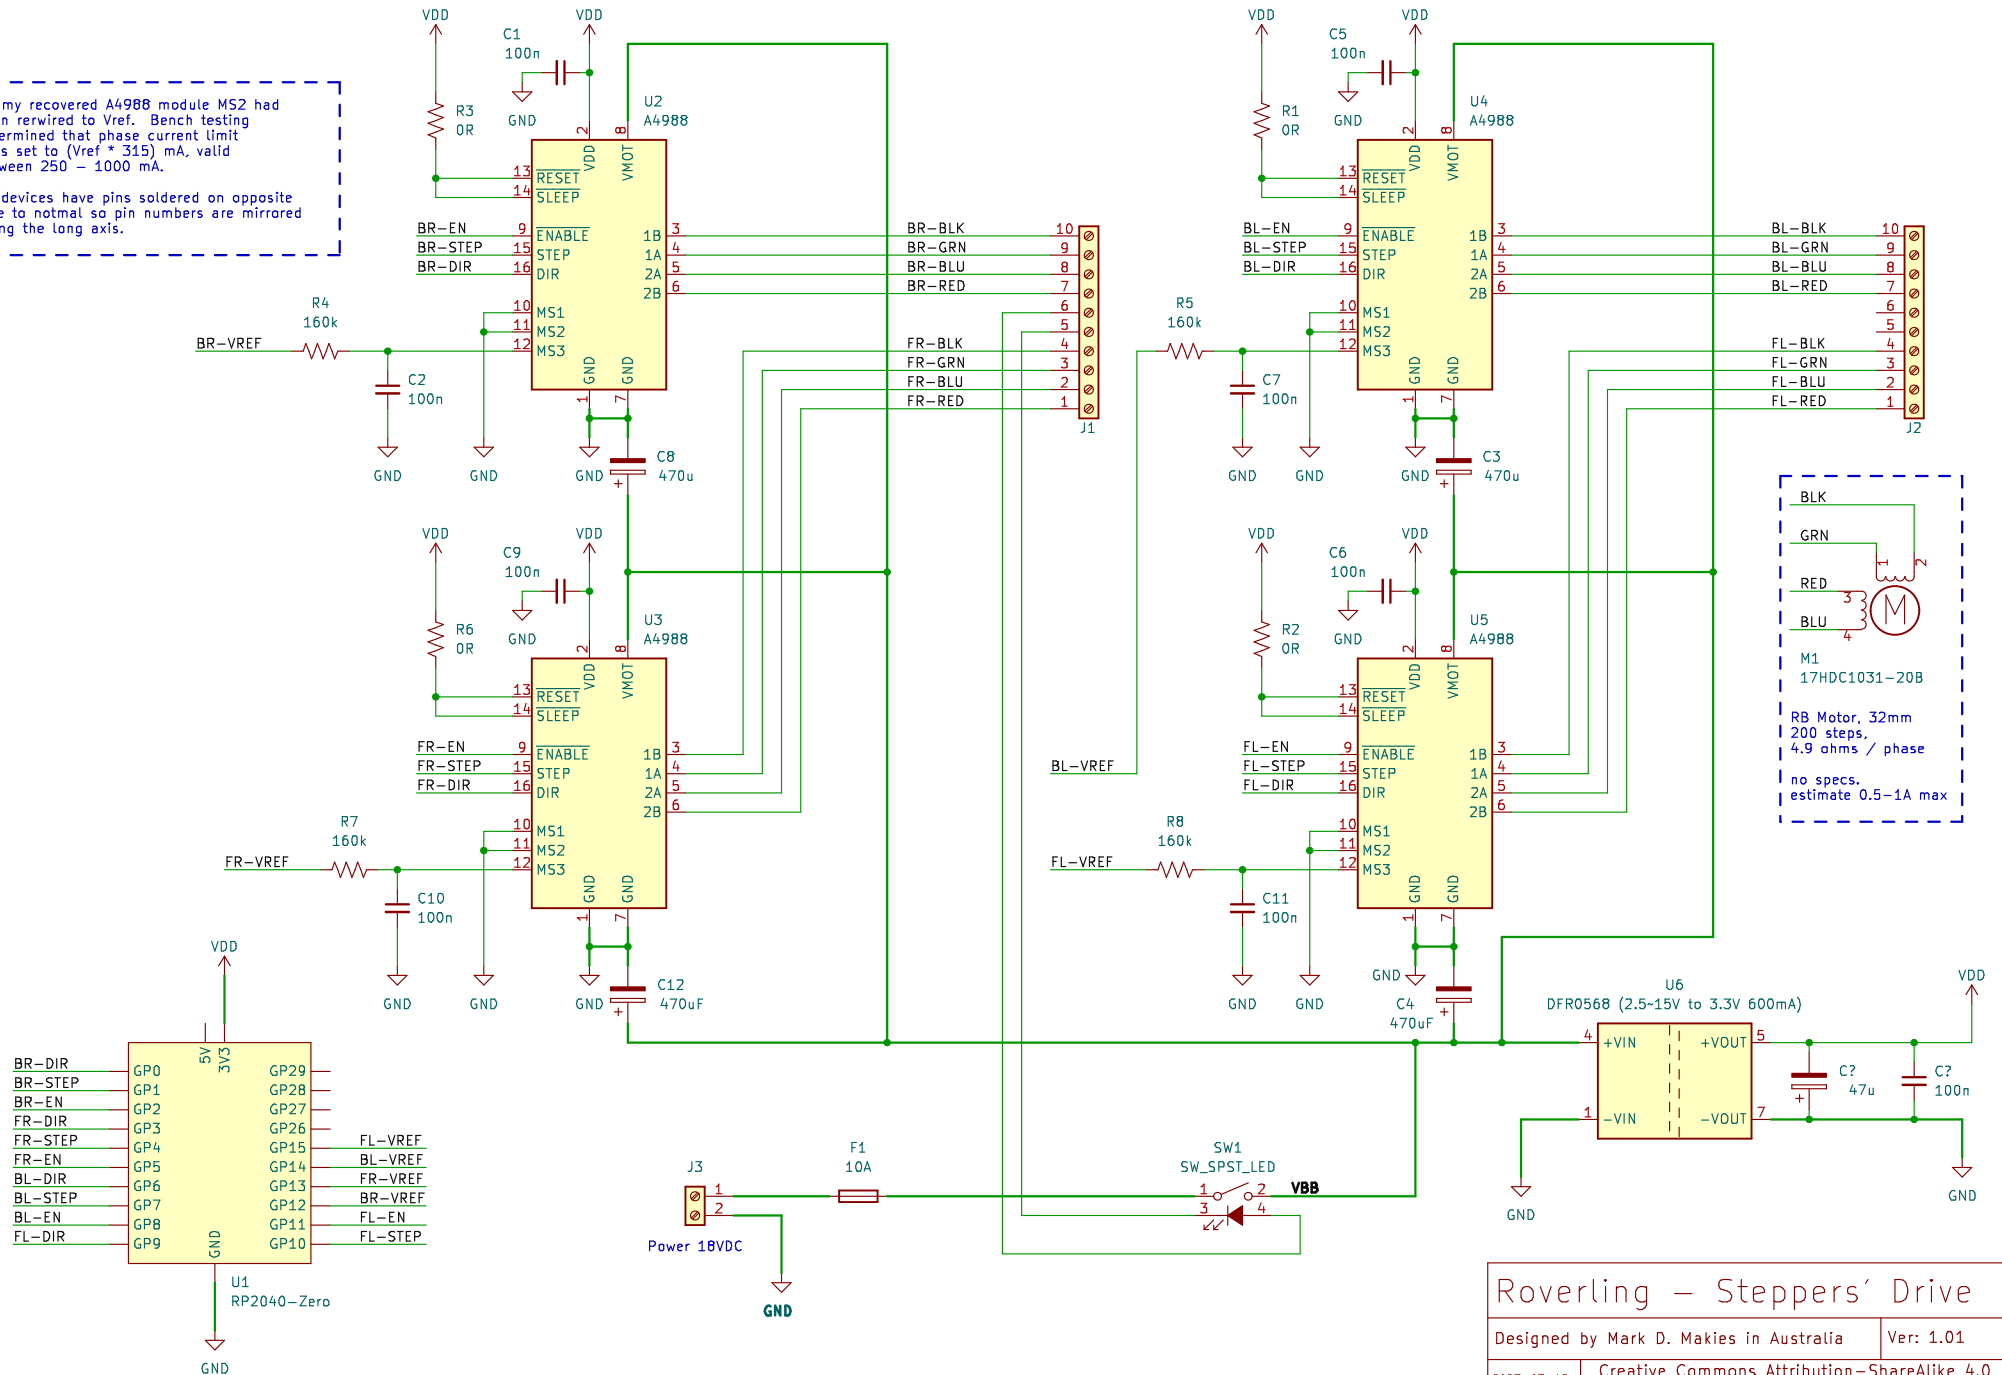

Roverling – Steppers' Drive

Designed by Mark D. Makies in Australia | Ver: 1.01

2023-07-15 | Creative Commons Attribution-ShareAlike 4.0 International License Granted