


PyZebArdYolo — RGB-LED stimulation circuit (Arduino Uno R3)

Each zone = 3× KY-009 (common-cathode RGB) in parallel; one colour pin per set wired to a digital pin; commons to GND. No series resistors (as built).

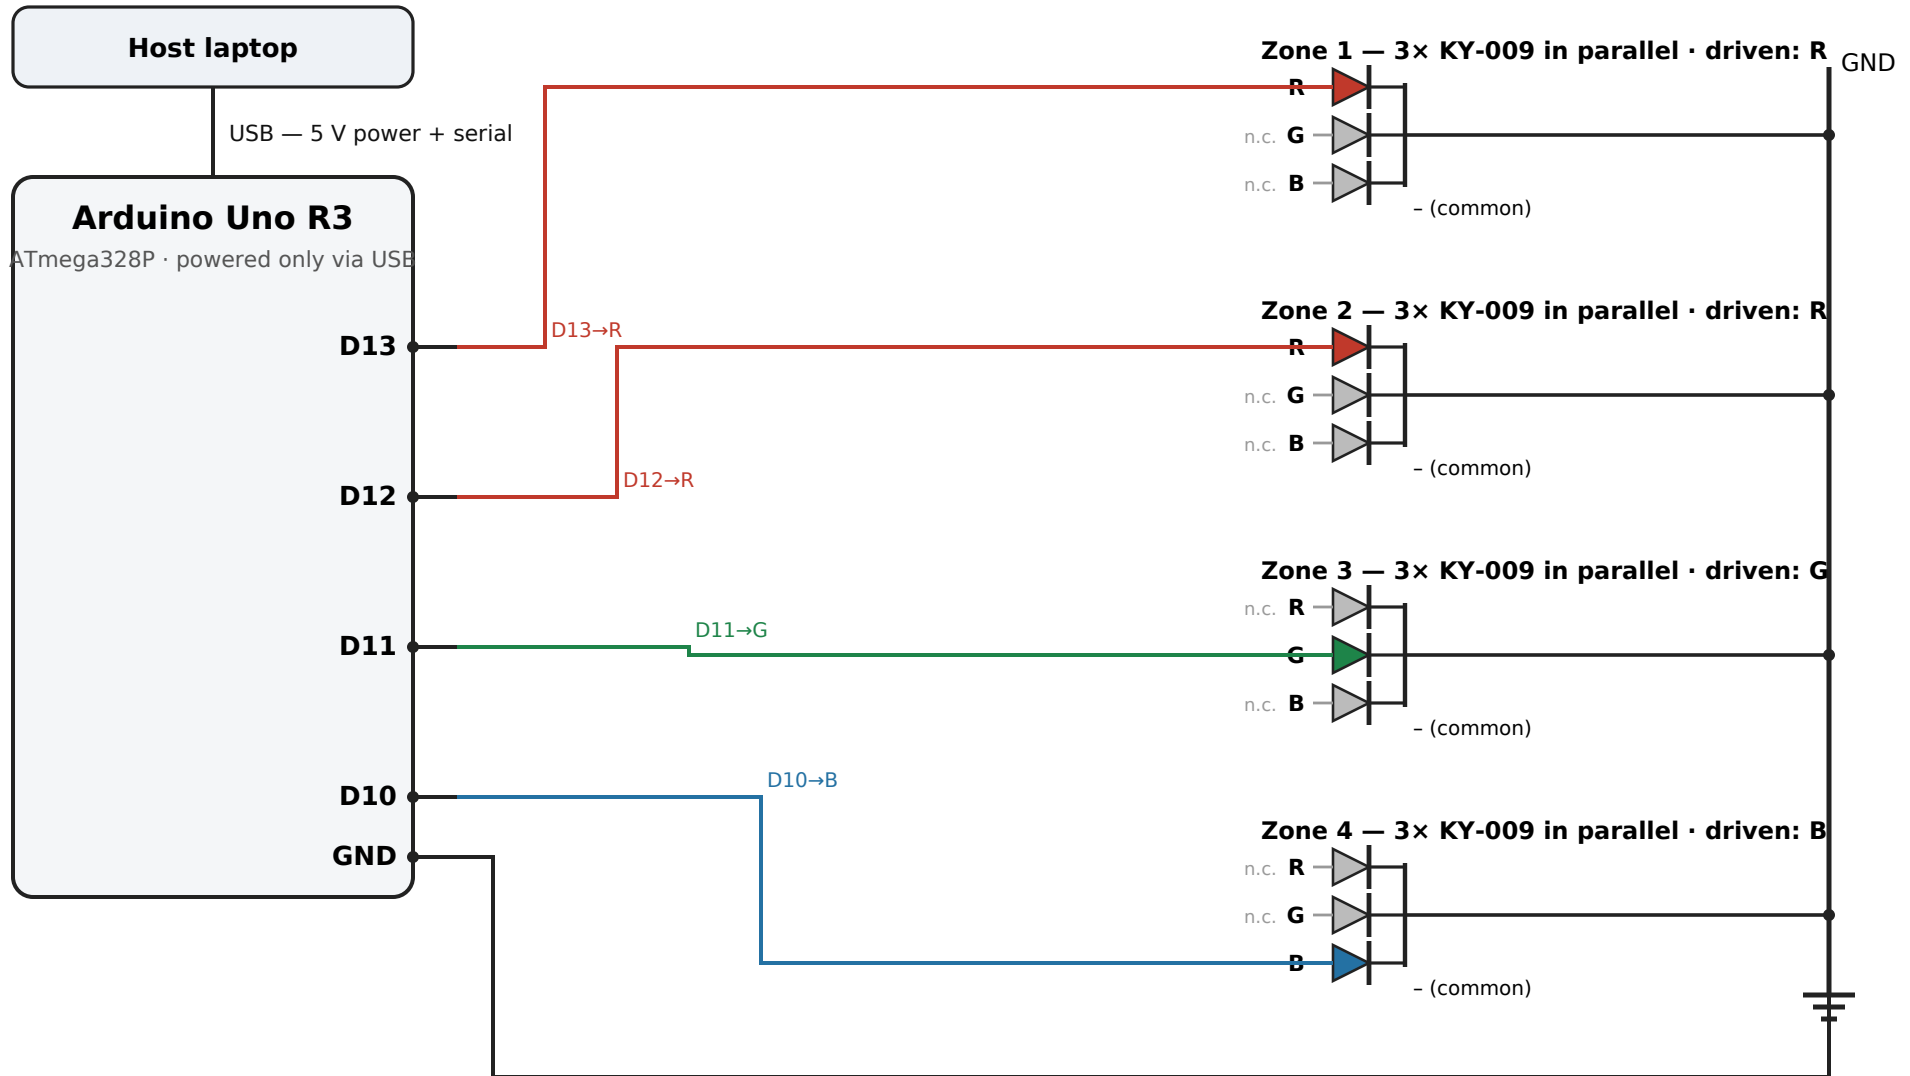

Daily colour change: the 3-module set is moved to another pin (D10–D13), so a different colour pin is energised. Undriven colour pins left n.c.

As built: no onboard or series resistors; LEDs driven directly from the 5 V digital pins with brief, intermittent cues (see Electrical safety).