

**WORLD-CLASS
HVLS FANS
FROM MARLEY**

Marley
H V L S F A N S



**SERVICE BEYOND
EXPECTATIONS**

SOLUTIONS TAILORED JUST FOR YOU

**High
Volume
Low
Speed**



www.marleyfans.in

MARLEY HYLS FANS (High Volume Low Speed), which differ from residential ceiling fans with varied diameter, rotational speed, and performance.

MARLEY HVLS FANS ranges from 8FT to 24 FT in diameter.





WHAT IS HVLS?

High volume low speed fan is a air circulating device of large diameter. It is an excellent ventilation option for a variety of applications. HVLS fans provide optimum air movement with best-in-class energy efficiency and quiet performance. HVLS fans work on the principle, that cool moving air breaks up the moisture-saturated boundary layer, surrounding the body and accelerates evaporation to produce a cooling effect. These larger diameter fans can move more air than smaller fans at the same speed.

WHY HVLS?

During summer seasons, the air around us is hot. This hot air is lighter than cold air so it rises to the ceiling level through a process called stratification. The most efficient and effective way of mixing the air, by pushing hot air down to the occupant level. HVLS fans produce a column of air as it rotates. This column of air moves unused heated air from the ceiling down to floor. This process of mixing of the air in the space decreases heat loss through the building walls and roof. This reduces the temperature up to 5° C, where it can have a positive impact on room's occupants by improving the IAQ (Indoor Air Quality).

FUNCTION INTRODUCTION:

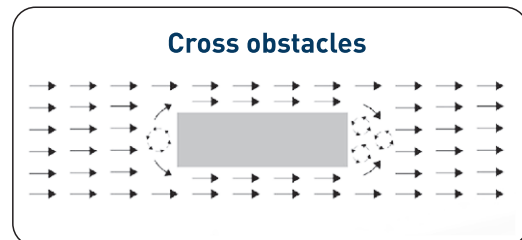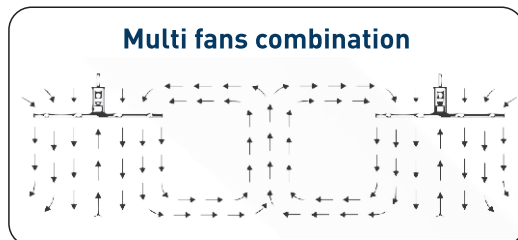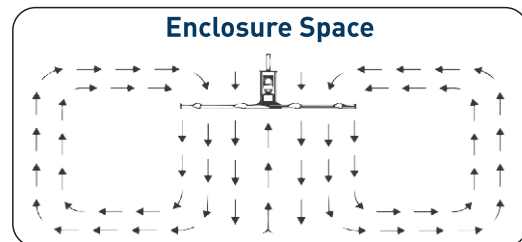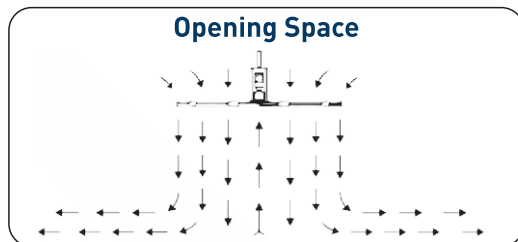

Comparison MARLEY HVLS Fans and between Industrial Air Circulators

Size	24 Feet	30 Inches or 750mm
Power	1.5kW or 1500 W	320 W
Number of fans	1	30
Operating power in kW	1.5kW or 1500 W	9.6kW or 9600 W
Operating Cost	Rs.135 for 10 hours	Rs.864 for 10 hours
Unit Rate per hour = Rs.9.00		

MARLEY HVLS FAN-German Make Helical Geared Motor Series

Model	Fan Dia. Ft.(Mtrs)	Motor Power kW/HP	Number of Blades	Max Speed RPM	Full Load Current (Ampere)	Area Covered in (Ft.Dia)	Total Weight Kgs.
MGF-24 B5	24ft(7.3m)	1.5/2.0	5	0-53	3.15A@415V	80-120	148
MGF-20 B5	20ft(6.0m)	1.5/2.0	5	0-60	3.15A@415V	70-80	140
MGF-18 B5	18ft(5.4m)	1.5/2.0	5	0-60	3.15A@415V	60-70	136
MGF-16 B5	16ft(4.9m)	1.1/1.5	5	0-70	2.15A@415V	50-60	128
MGF-14 B5	14ft(4.2m)	1.1/1.5	5	0-70	2.15A@415V	45-50	118
MGF-12 B5	12ft(3.6m)	1.1/1.5	5	0-98	2.15A@415V	40-48	106

- ▶ Standard Input Voltage AC 3PH 380-440V, +10%/-15%
- ▶ Customized Size Color options are available



Forward Reverse Switch



Start & Stop From VFD Panel



Aerodynamically Designed Blades



Uniform air Circulation



Noiseless Operation



Low Speed



High Volume



Maximum torque




Low on Power Consumption



1 year warranty



Experience installation team

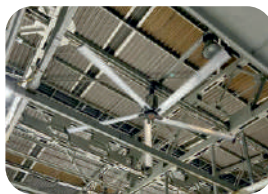

WHY US

HELICAL GEARED MOTOR



- ▶ Using German make Geared Motor especially designed and developed for Marley HVLS fans
- ▶ High efficient motors with proprietary Double Reinforced bearing to withstand horizontal & vertical loads.
- ▶ Using synthetic oil (Double service life of 20000 Hours)

BLADES



- ▶ Number of blades- 5 Nos
- ▶ Type of material - High grade Aluminum Alloy (6063 T6)
- ▶ Blade with 240mm wide Cambered Airfoil Design
- ▶ Type & grade for hub- Single piece M3 Hub design adds strength and rigidity to improve fan performance.
- ▶ Using Advance Model VFD for extra protections and long life of motors.

SAFETY FEATURES



- ▶ Using Blade toppers above blades & safety ring Z bracket on hub - The ring will hold the blades by the hub thus avoiding their fall to the ground.
- ▶ 5mm Guy wires of GI material qty- 4nos- to avoid unnecessary sway of the fan in case of unbalanced blade and second- to avoid large movements to due winds or draft.

MARLEY HVLS PMSM FANS (GEARLESS)

Model	Fan Dia. Ft.(Mtrs)	Motor Power kW/HP	Number of Blades	Max Speed RPM	Area Covered in (Ft.Dia)	Full Load Current (Ampere)	Total Weight Kgs.
MPF-24 B5	24ft(7.3m)	1.5/2.0	5	0-50	80-120	2.80A@415V	130
MPF-20 B5	20ft(6.0m)	1.5/2.0	5	0-60	70-80	2.80A@415V	120
MPF-18 B5	18ft(5.4m)	1.1/1.5	5	0-65	60-70	2.60A@415V	100
MPF-16 B5	16ft(4.9m)	1.1/1.5	5	0-75	50-60	2.60A@415V	95
MPF-14 B5	14ft(4.2m)	0.75/1	5	0-85	45-50	2.50A@220V	80
MPF-12 B5	12ft(3.6m)	0.75/1	5	0-85	40-48	2.50A@220V	75


MARLEY LITE HVLS FAN

Model	Fan Dia. Ft.(Mtrs)	Motor Power kW/HP	Number of Blades	Max Speed RPM	Air Covered in (Ft.Dia)	Power Supply	Total Weight Kgs.
MCF 25-E	8ft(2.5m)	325	6	120	20-30	220V-1PH	31
MCF 30-E	10ft(3m)	325	6	100	20-30	220V-1PH	34
MCF 36-E	12ft(3.5m)	325	6	85	30-40	220V-1PH	37

PMSM

Permanent Magnet Synchronous Motor THE ADVANTAGES OF PERMANENT MAGNET SYNCHRONOUS MOTOR

PMSM is an electromagnetic device that is produced by a permanent magnet as a medium for the conversion of mechanical energy and electromagnetic energy to each other. In addition, PMSM Permanent magnet synchronous brushless direct drive motor has the characteristics of high control accuracy, high torque density, good torque balance, low noise, small volume, high efficiency, high power factor, low temperature rise and so on.

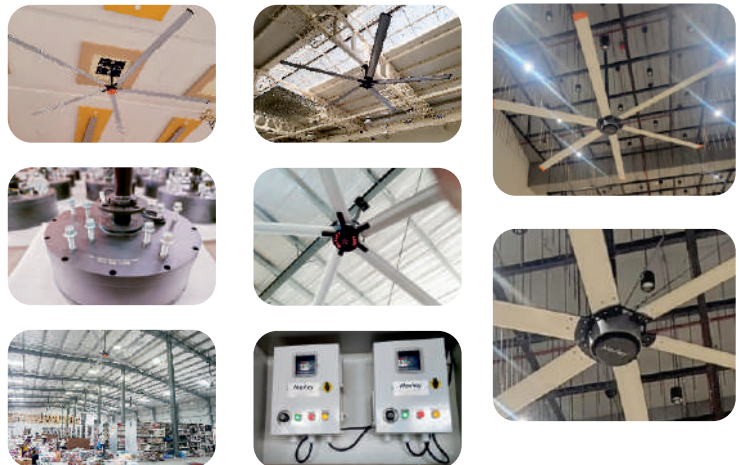

MOBILE HVLS FAN

Mobile fans are designed where ceiling fans use is limited. This fan creates horizontal air circulation up to 60- 80ft.



MOBILE HVLS Fan

MIST FAN

MARLEY MOBILE HVLS FANS

MOBILE		MIST FAN
Model	: MMHF 150	MMHF92M
Voltage	: 220V-1PH	220V-1PH
Frequency	: 50HZ	50HZ
Motor Power	: 600watt	550watt
Motor type	: PMSM 100% Copper	PMSM 100% Copper
Fan blade type	: 3 blades	3 blades
Speed	: 200-440 (RPM)	700 RPM
Machine Size	: 168(H)x79(W)x151(D) cm	170(H)x60(W)x100(D)
Air volume	: 38000 (m ³ /h)	22000(m ³ /h)
Net Weight	: 60kg	65kg
Fan body material	: Polypropylene (PP)	Polypropylene (PP)

INDUSTRIAL EXHAUST FAN



High Performance Industrial Exhaust Fans

Why exhaust fan?

Ventilation is essential to create a comfortable working environment, whether it is to bring fresh cool air into a room or remove noxious fumes or vapours. For certain activities there is a legal requirement to provide a minimum level of ventilation.

The rate of ventilation for an area is normally expressed in 'air changes per hour', i.e. the number of times per hour that the entire air volume of the area is changed.

The rate depends of the type of shed and the activity being undertaken. The following table lists suggested air changes per hour for some typical applications.

Ventilating a simply replaces stale or foul air with clean & fresh air can be done by Exhaust fan only.

AIR CHANGES PER HOUR

Bakery	20 - 30
Canteen	8 - 12
Commercial kitchen	30+
Dairy	8 - 10
Electroplating shop	10 - 12
Engine room	15 - 30
Factory or workshop	8 - 15
Fume cupboard	40 - 50
Foundry	15 - 25
Garage	8 - 15
Spray booth	20 - 50
Warehouse or store	6 - 8

Model	Diameter Blades(mm)	Noise (decibels)	Air flow (m ³ /h)	Blades rotational speed (r/min)	Import Power (W)	Rated Voltage (V)	H X W X Thickness (mm× mm× mm)
MIEF-900	900	≤ 70	35,000	670	750	415	1000x1000x450



HD
HEAVY-DUTY



SOME OF OUR VALUABLE CUSTOMERS

A Signature of Comfort for our valued clients



APPLICATION



Manufacturing Units



Warehouses



Shopping Malls



Supermarkets



Food Courts



Academic Institutions



Religious Institutions



Community Halls



Interstate Bus Terminals



Railway Terminals



Airport Terminals




Cow Sheds

PRODUCTS

GEARED HVLS FANS




PMSM HVLS FANS

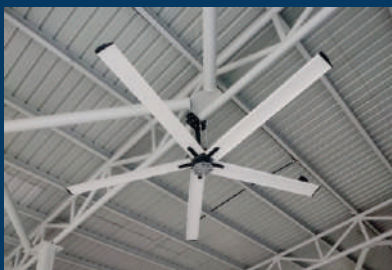

POLE MOUNTED HVLS FANS



MARLEY LITE HVLS FANS

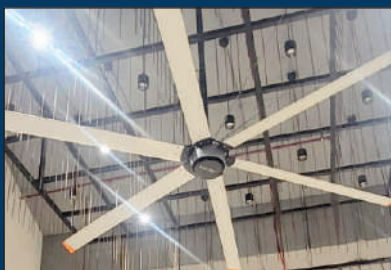

MOBILE HVLS FANS



INDUSTRIAL EXHAUST FANS



Marley

H V L S F A N S

MARLEY ENTERPRISES PRIVATE LIMITED

REGISTERED OFFICE:

H No: 5-5-81/7/A/, Plot No: 20/NR, First Floor, Swapna Nilayam, Prakash Nagar,
High Tension Road, Kukatpally, Hyderabad, Medchal Malkajgiri, Telangana-500072

Contact Number: 90300 34982 | 99122 20222

Email ID: sales1@marleyfans.in | marleyhvlsfans@gmail.com

CIN: U29308TG2021PTC156778

BRANCH OFFICES : CHENNAI | BANGALURU | PUNE | INDORE | JAIPUR | COIMBATORE | NAGPUR | DELHI | GOA

www.marleyfans.in

[marleyhvlsfans/](https://www.marleyfans.in)

