The Memory Hierarchy

CSE 238/2038/2138: Systems Programming

Instructor:


Fatma CORUT ERGİN

Slides adapted from Bryant & O'Hallaron's slides


Today

- **Storage technologies and trends**
- Locality of reference
- Caching in the memory hierarchy

Example Memory Hierarchy

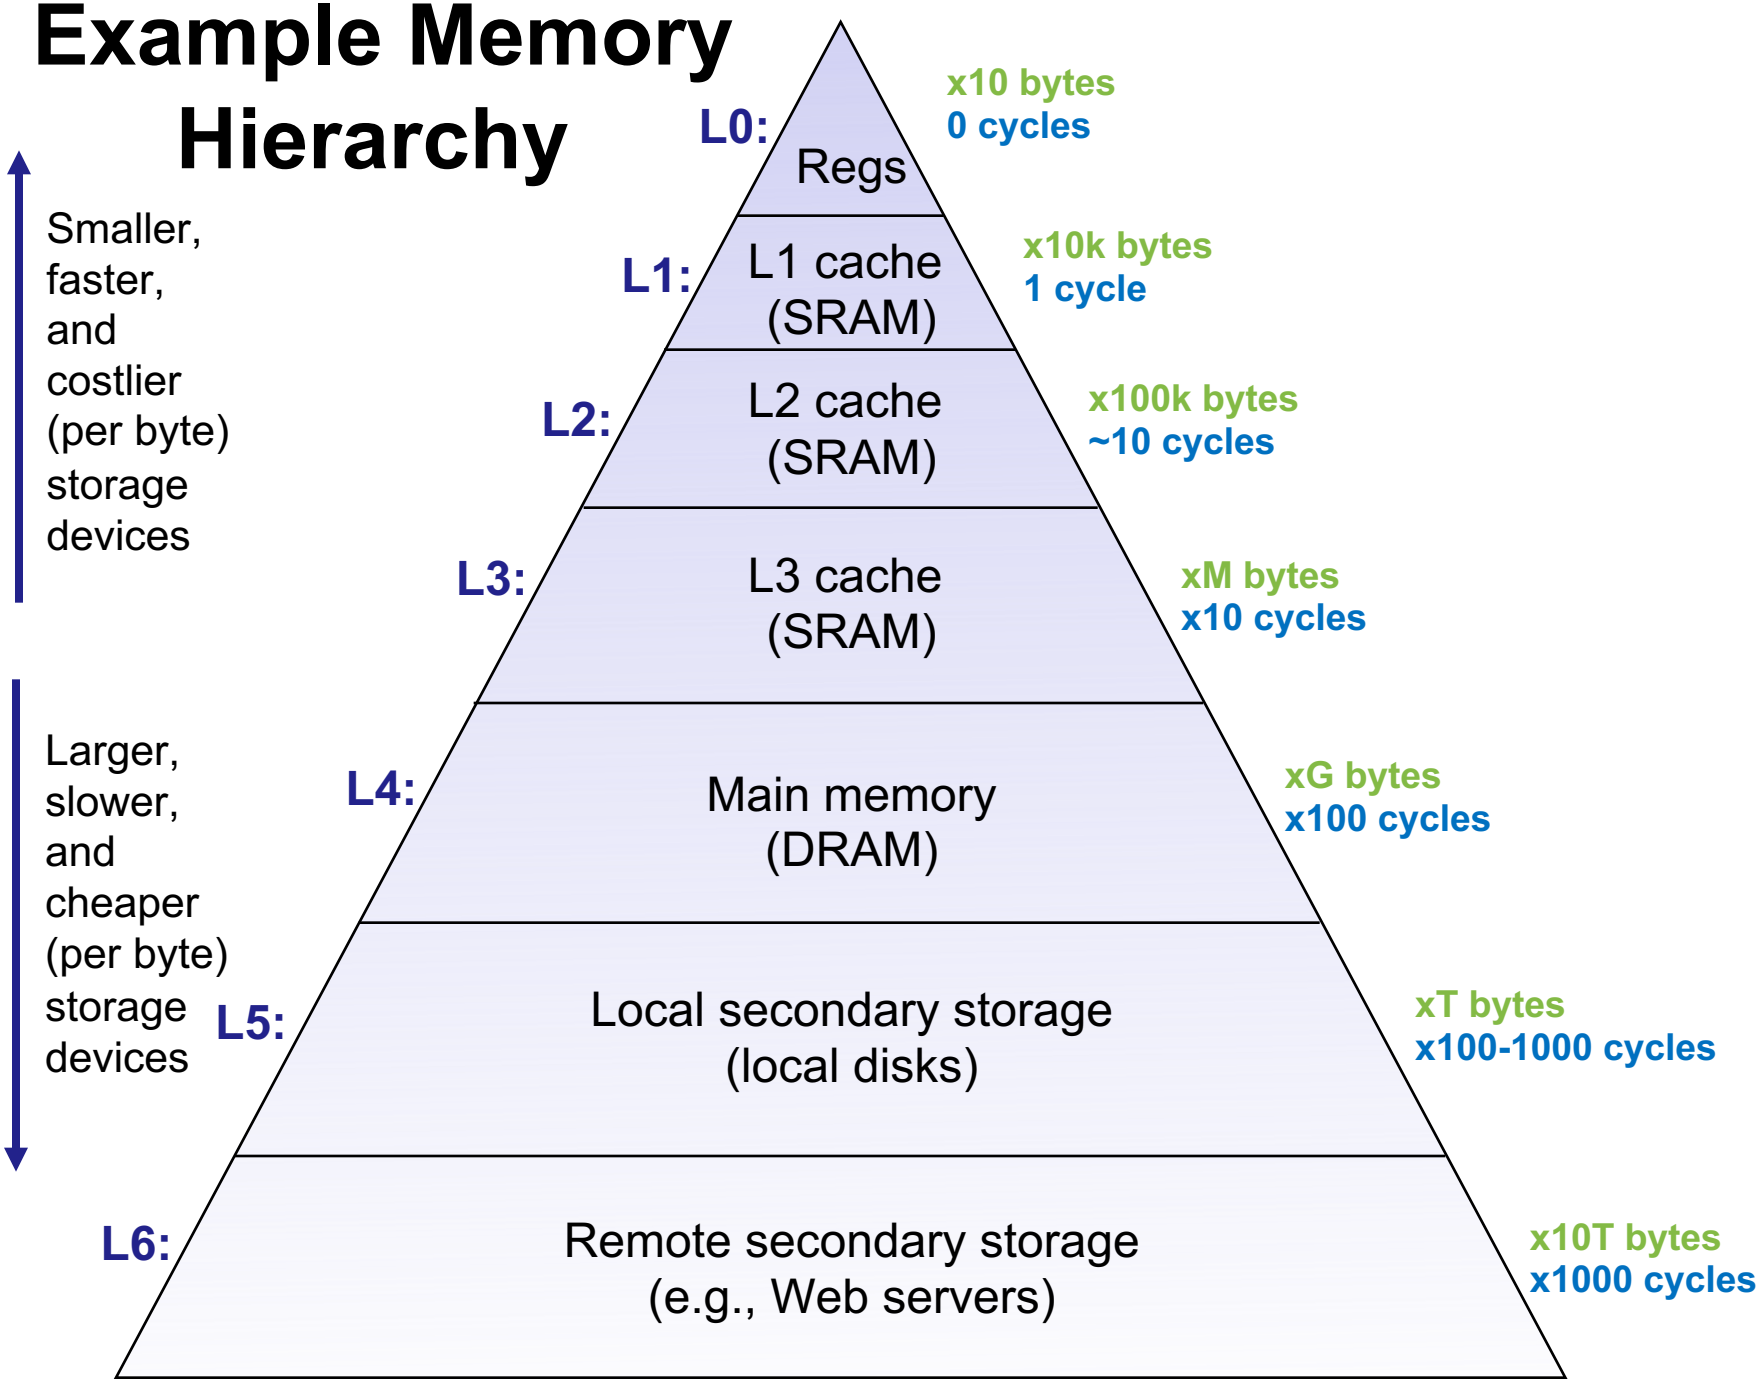

Cache Hierarchy

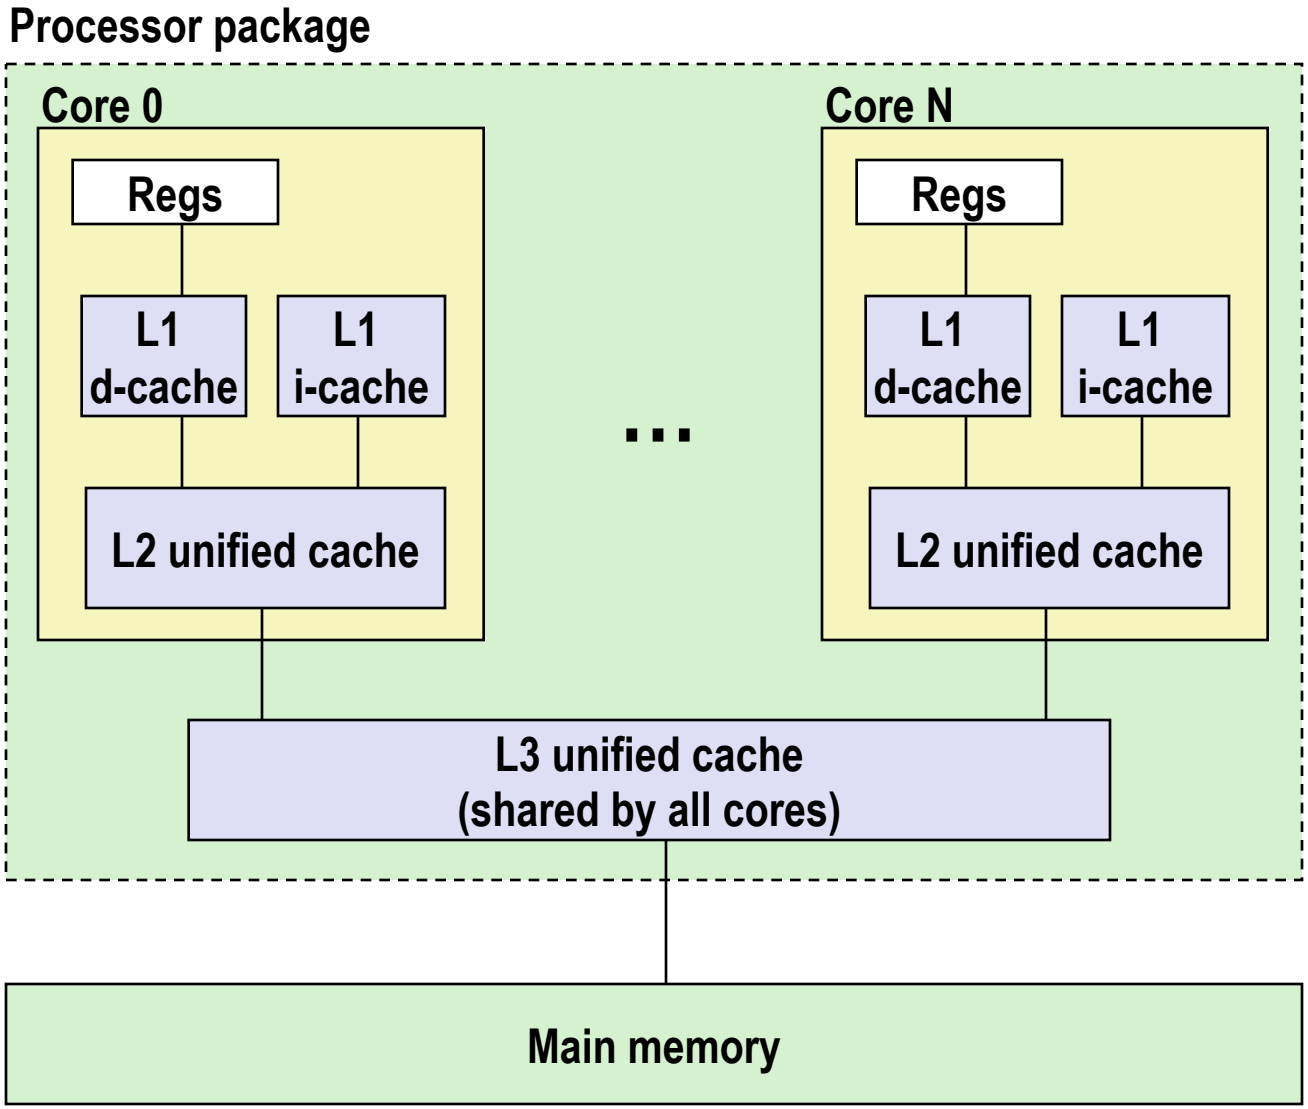

Random-Access Memory (RAM)

- **Key features**
  - RAM is traditionally packaged as a chip.
  - Basic storage unit is normally a cell (one bit per cell).
  - Multiple RAM chips form a memory.

- **RAM comes in two varieties:**
  - SRAM (Static RAM)
  - DRAM (Dynamic RAM)

SRAM vs DRAM Summary


	Trans. per bit	Access time	Needs refresh?	Needs EDC?	Cost	Applications
SRAM	4 or 6	1X	No	Maybe	100X	Cache memories
DRAM	1	10X	Yes	Yes	1X	Main memories, frame buffers

Nonvolatile Memories

- **DRAM and SRAM are volatile memories**
  - Lose information if powered off.
- **Nonvolatile memories retain value even if powered off**
  - Read-only memory (ROM): programmed during production
  - Programmable ROM (PROM): can be programmed once
  - Eraseable PROM (EPROM): can be bulk erased (UV, X-Ray)
  - Electrically eraseable PROM (EEPROM): electronic erase capability
  - Flash memory: EEPROMs. with partial (block-level) erase capability
    - Wears out after about 100,000 erasings
- **Uses for Nonvolatile Memories**
  - Firmware programs stored in a ROM (BIOS, controllers for disks, network cards, graphics accelerators, security subsystems,…)
  - Solid state disks (replace rotating disks in thumb drives, smart phones, mp3 players, tablets, laptops,…)
  - Disk caches


Traditional Bus Structure Connecting CPU and Memory

- A bus is a collection of parallel wires that carry address, data, and control signals.
- Buses are typically shared by multiple devices.

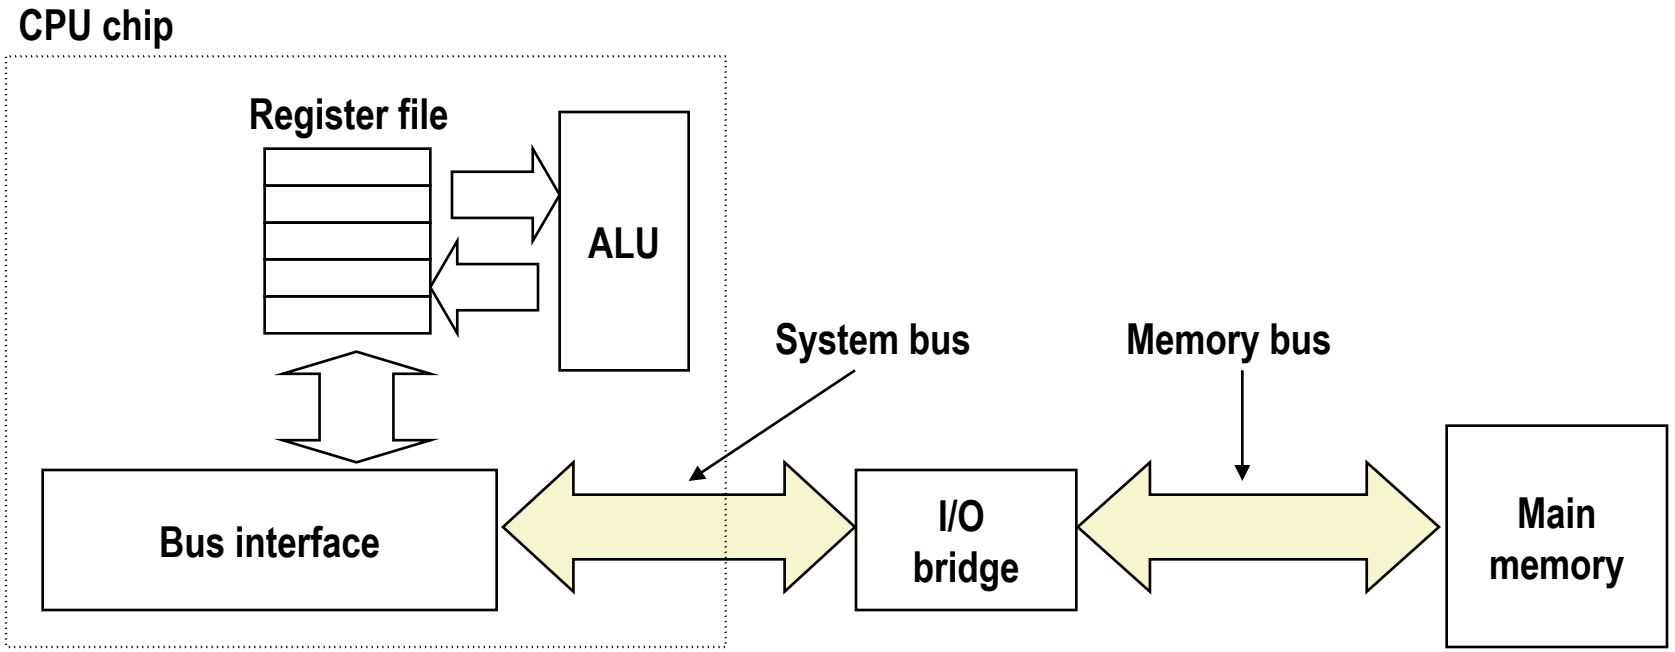


Memory Read Transaction (1)

- CPU places address A on the memory bus.

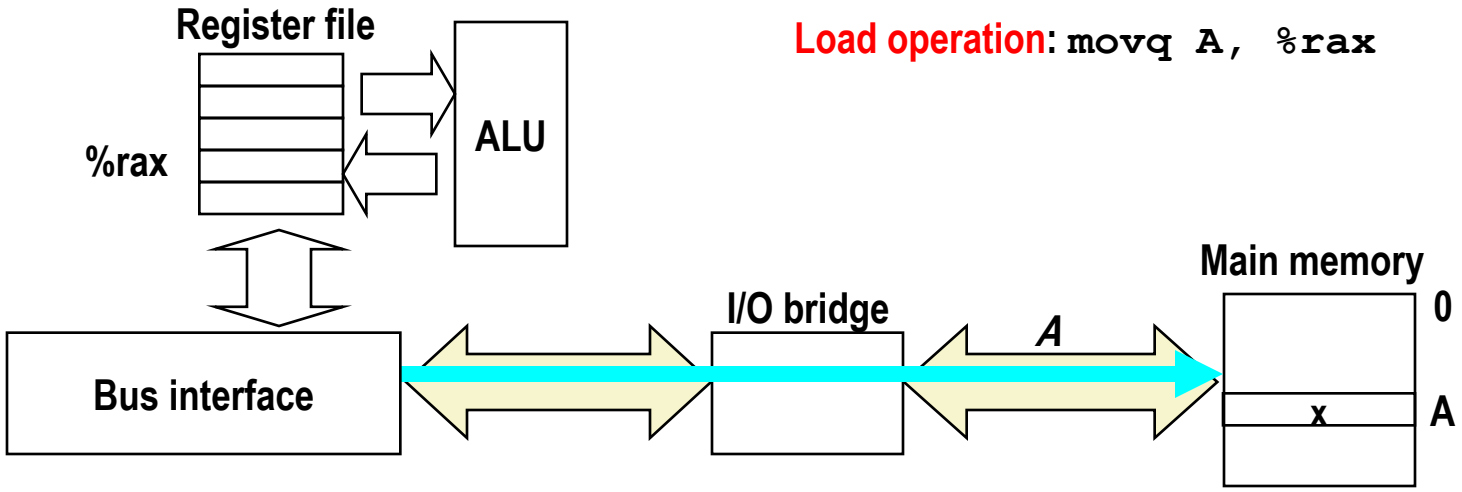


Memory Read Transaction (2)

- Main memory reads A from the memory bus, retrieves word x, and places it on the bus.

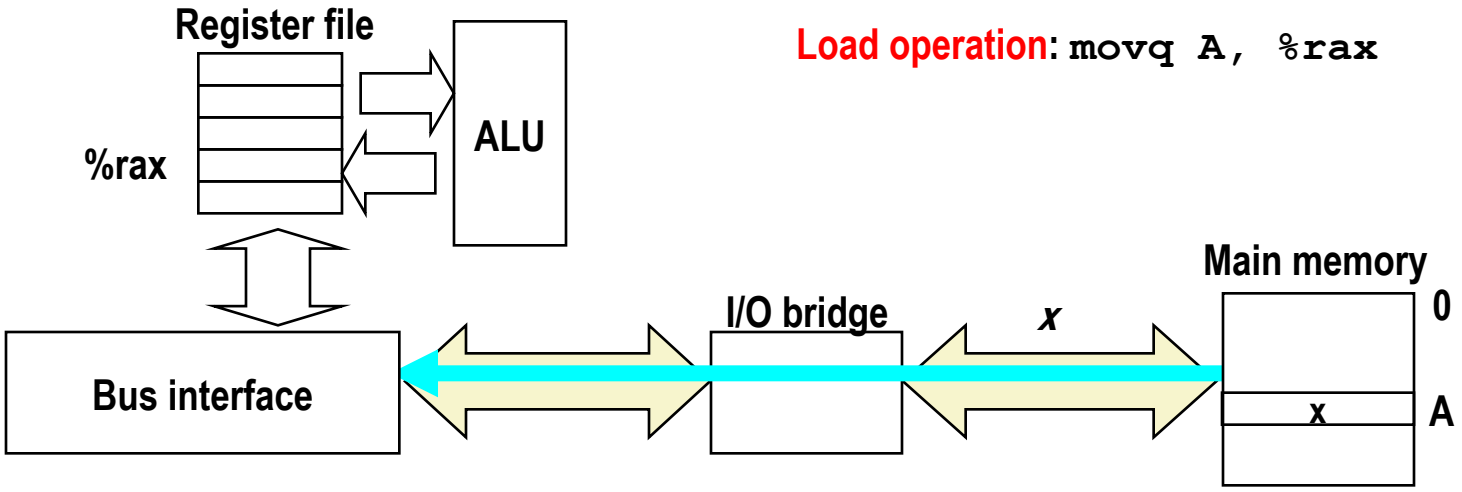


Memory Read Transaction (3)

- CPU read word x from the bus and copies it into register %rax.

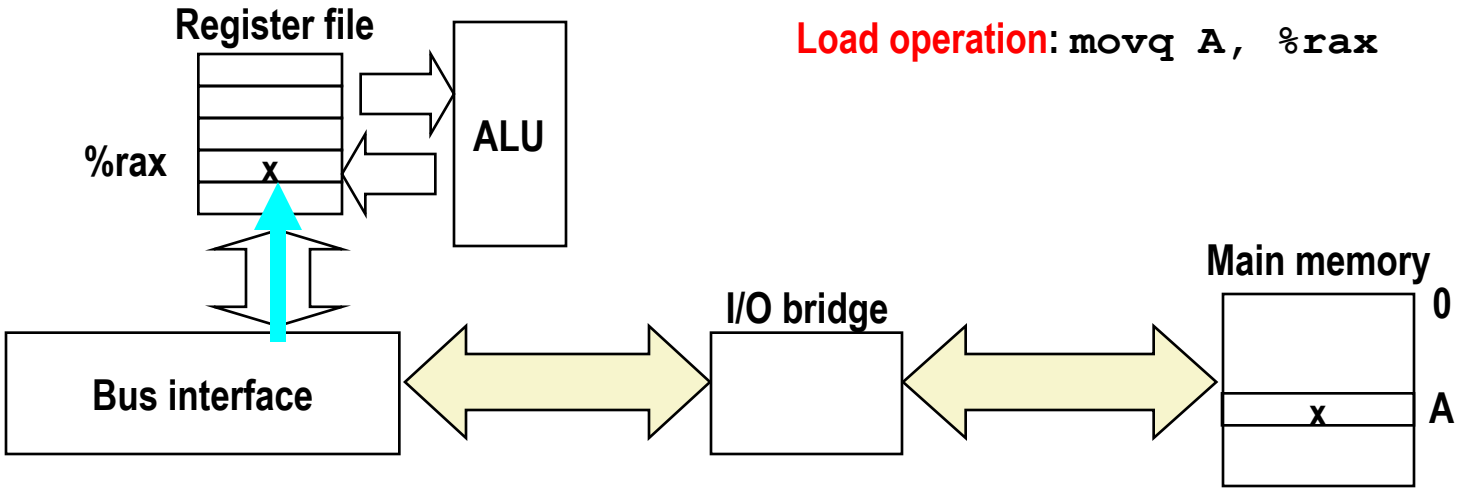


Memory Write Transaction (1)

- CPU places address A on bus. Main memory reads it and waits for the corresponding data word to arrive.

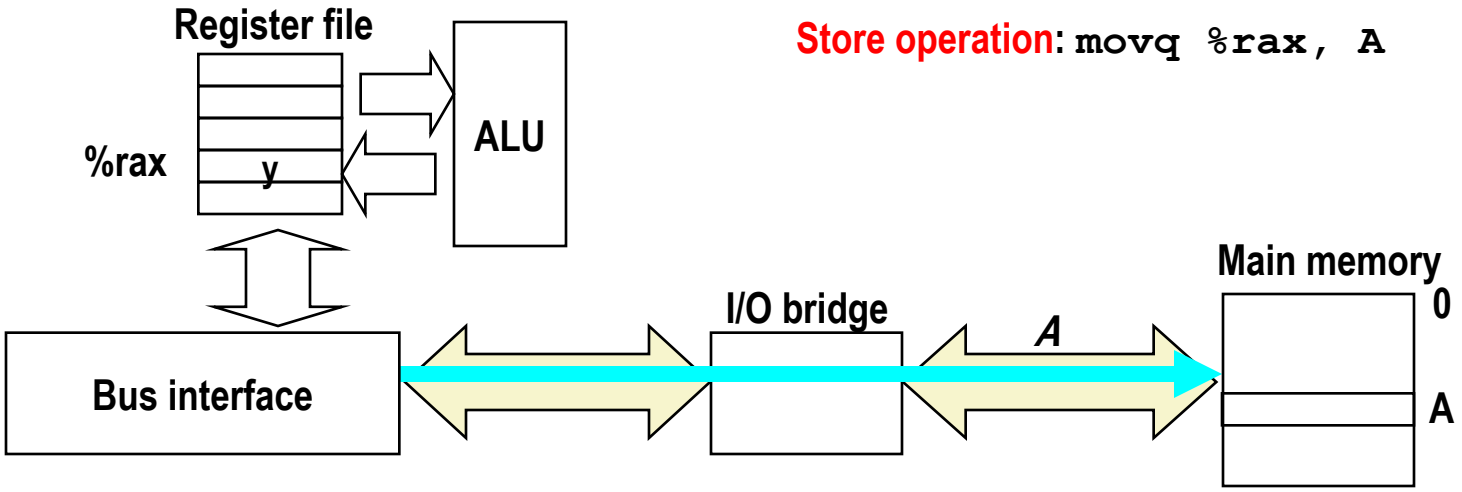


Memory Write Transaction (2)

- CPU places data word y on the bus.

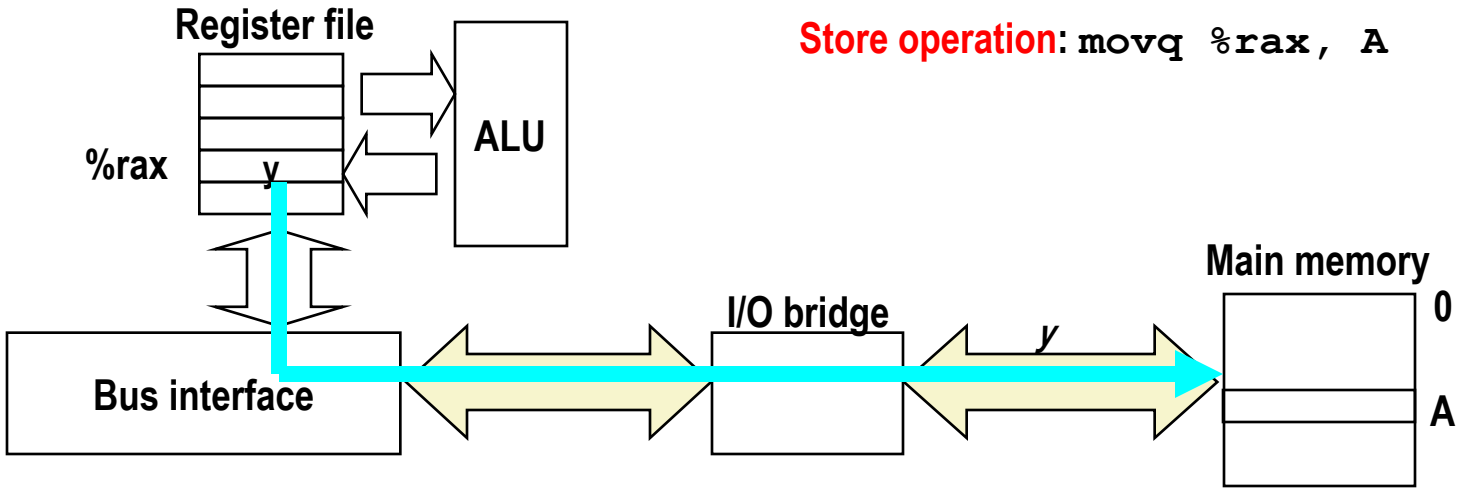

Memory Write Transaction (3)

- Main memory reads data word y from the bus and stores it at address A.

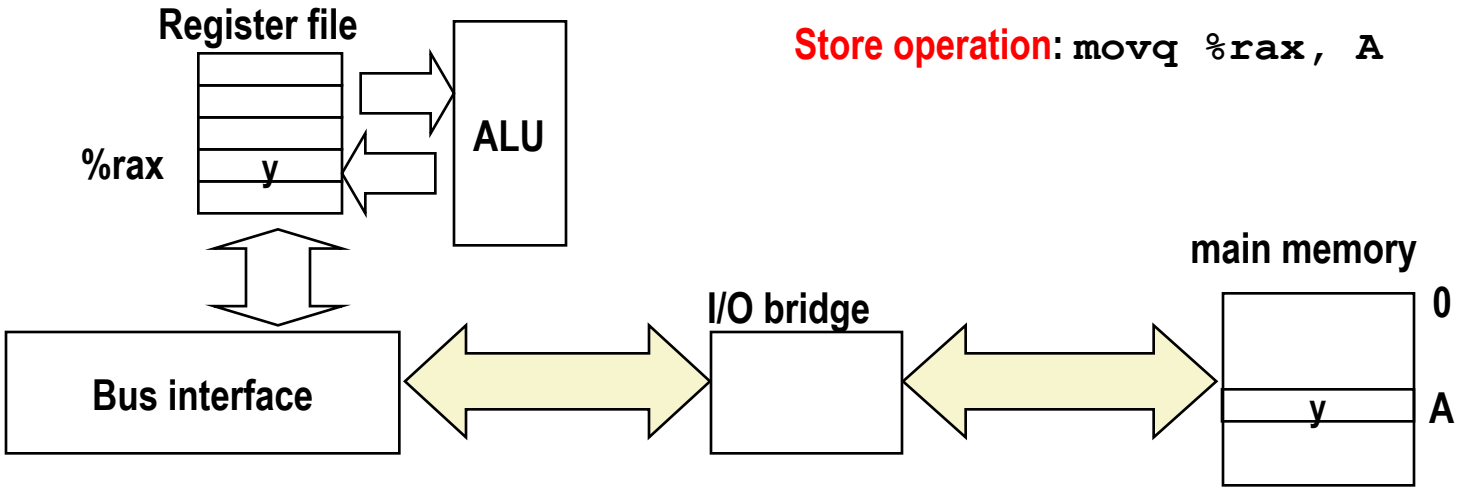

What's Inside A Disk Drive?


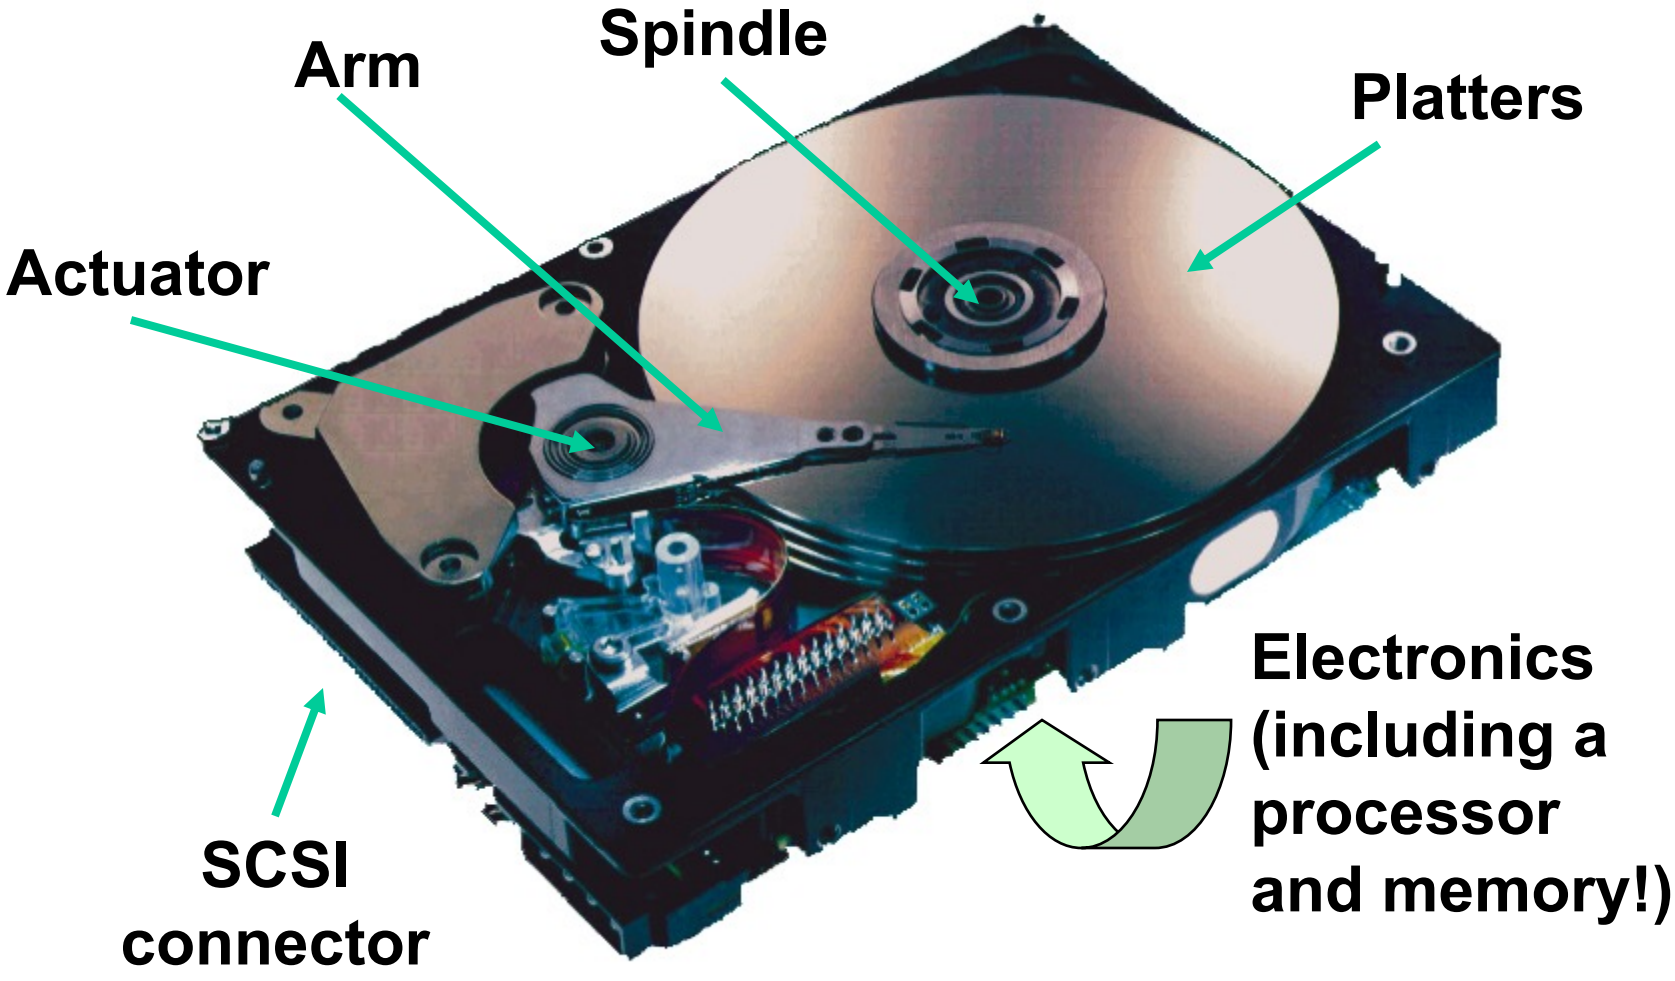


Image courtesy of Seagate Technology


Disk Geometry

- Disks consist of platters, each with two surfaces.
- Each surface consists of concentric rings called tracks.
- Each track consists of sectors separated by gaps.

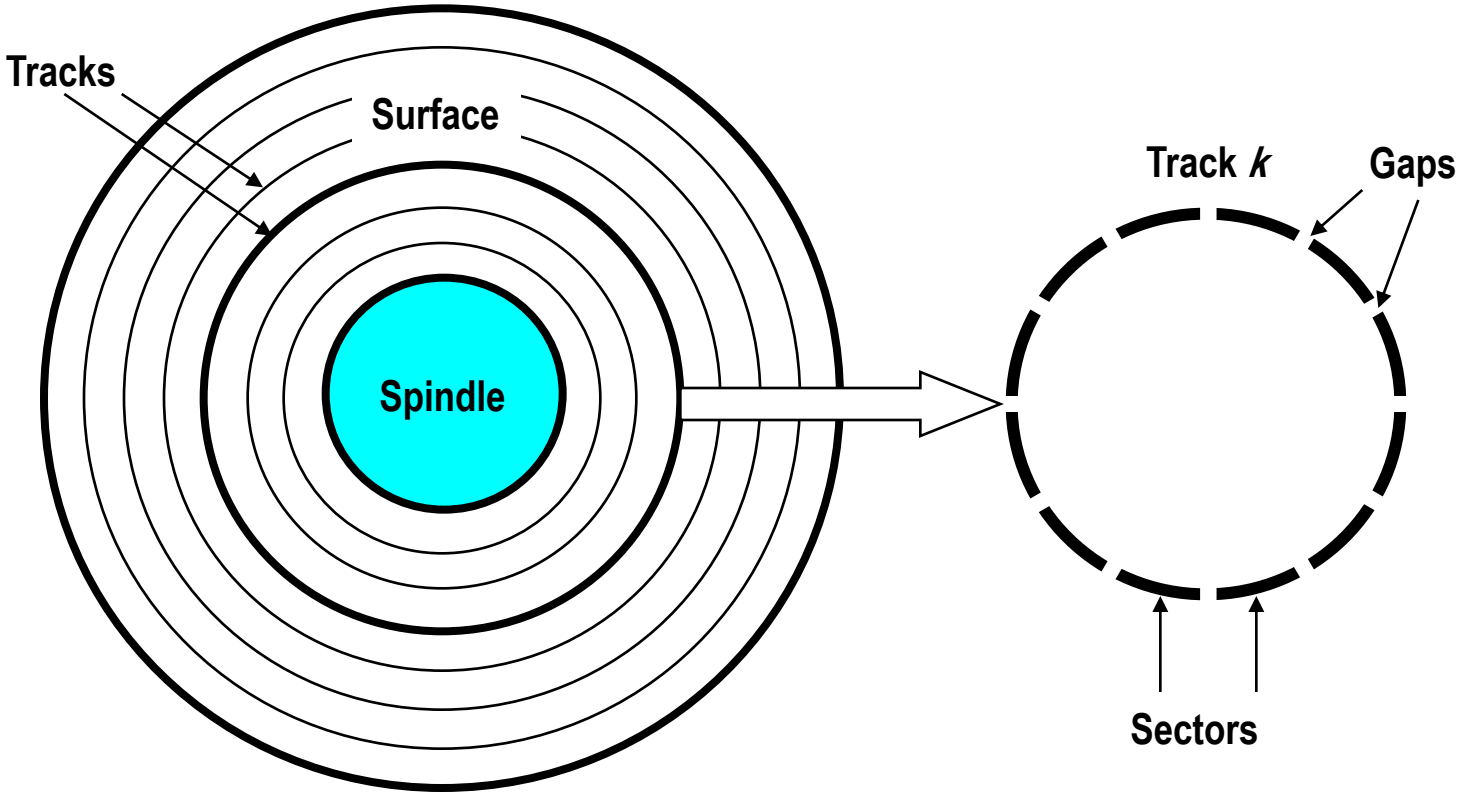

Disk Geometry (Multiple-Platter View)

- Aligned tracks form a cylinder.

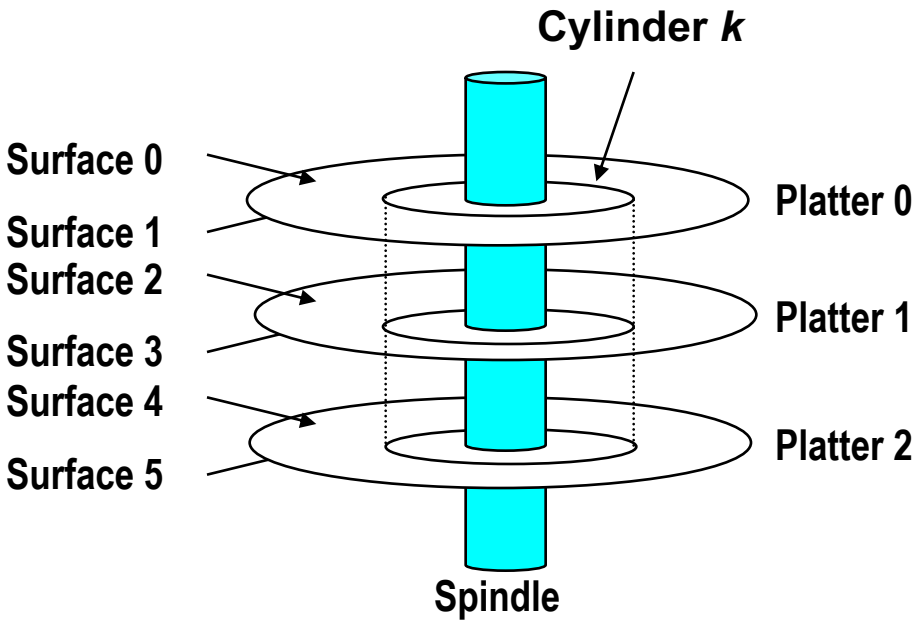


Disk Capacity

- **Capacity: maximum number of bits that can be stored.**
  - Vendors express capacity in units of gigabytes (GB), where 1 GB = 10^9 Bytes.
- **Capacity is determined by these technology factors:**
  - Recording density (bits/in): number of bits that can be squeezed into a 1 inch segment of a track.
  - Track density (tracks/in): number of tracks that can be squeezed into a 1 inch radial segment.
  - Areal density (bits/in2): product of recording and track density.

Recording zones

- **Modern disks partition tracks into disjoint subsets called recording zones**
  - Each track in a zone has the same number of sectors, determined by the circumference of innermost track.
  - Each zone has a different number of sectors/track, outer zones have more sectors/track than inner zones.
  - So we use **average** number of sectors/track when computing capacity.

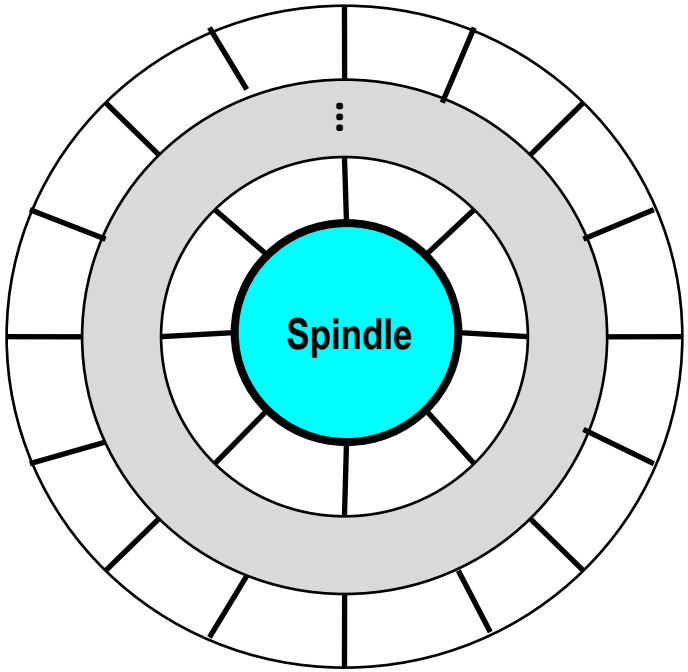

Computing Disk Capacity

Capacity = (# bytes/sector) x (avg. # sectors/track) x
(# tracks/surface) x (# surfaces/platter) x
(# platters/disk)


Example:

- 512 bytes/sector
- 300 sectors/track (on average)
- 20,000 tracks/surface
- 2 surfaces/platter
- 5 platters/disk

Capacity = 512 x 300 x 20000 x 2 x 5
= 30,720,000,000
= 30.72 GB

Disk Operation (Single-Platter View)


The disk surface spins at a fixed rotational rate

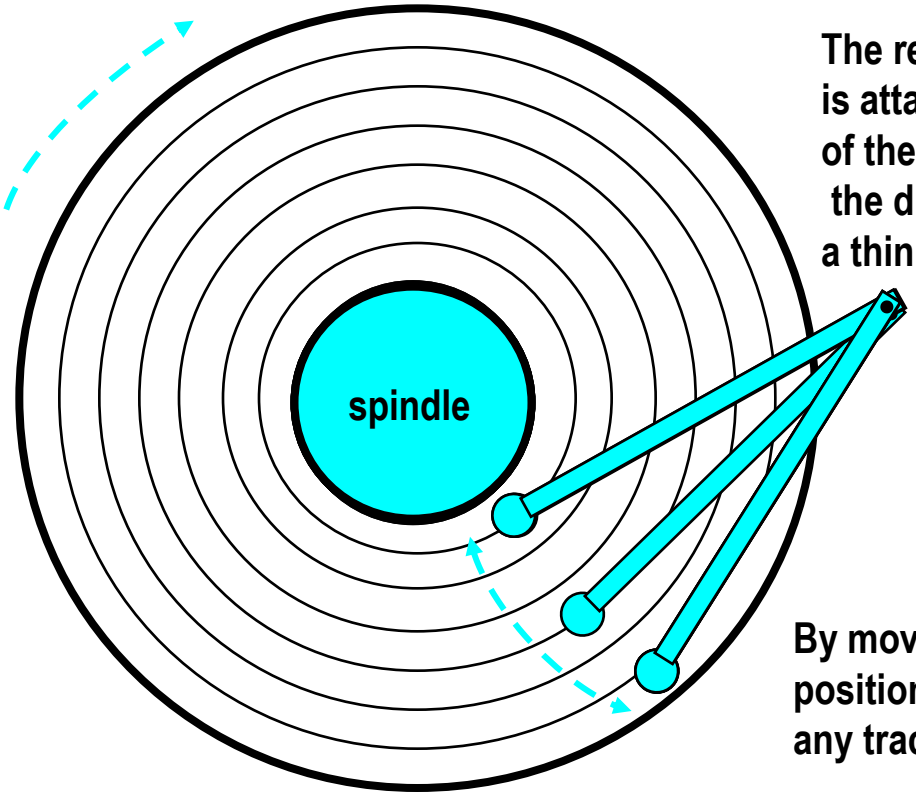

The read/write *head* is attached to the end of the *arm* and flies over the disk surface on a thin cushion of air.

By moving radially, the arm can position the read/write head over any track.


Disk Structure - top view of single platter

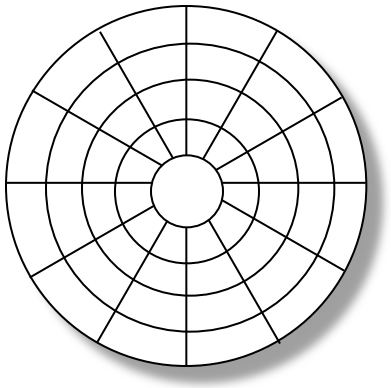

Surface organized into tracks


Tracks divided into sectors

Disk Access

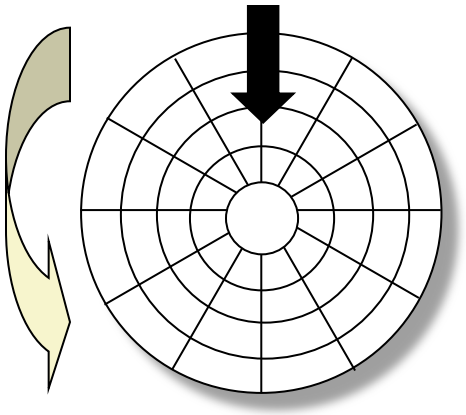

Rotation is counter-clockwise


Disk Access – Read

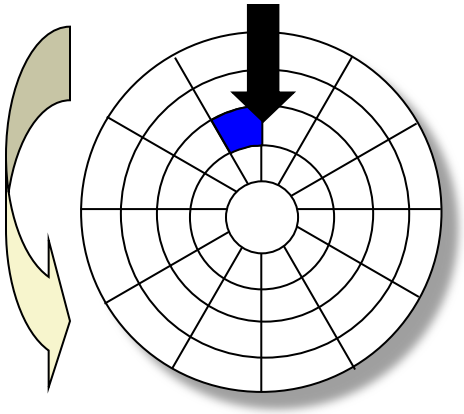

After BLUE read

After reading blue sector


Disk Access – Read

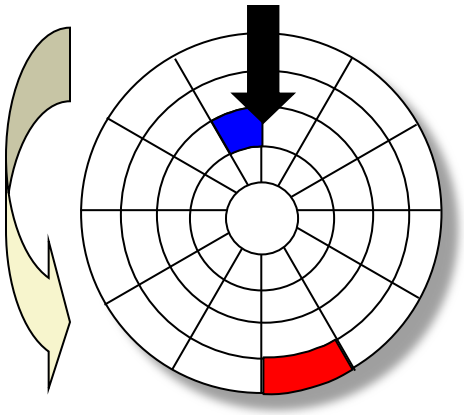

After BLUE read

Red request scheduled next

Disk Access – Seek

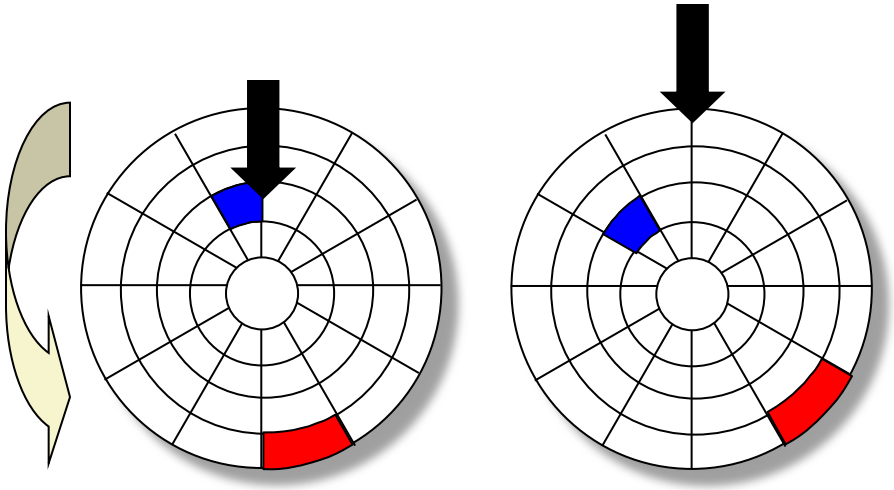


After BLUE read

Seek for RED

Seek to red's track


Disk Access – Rotational Latency

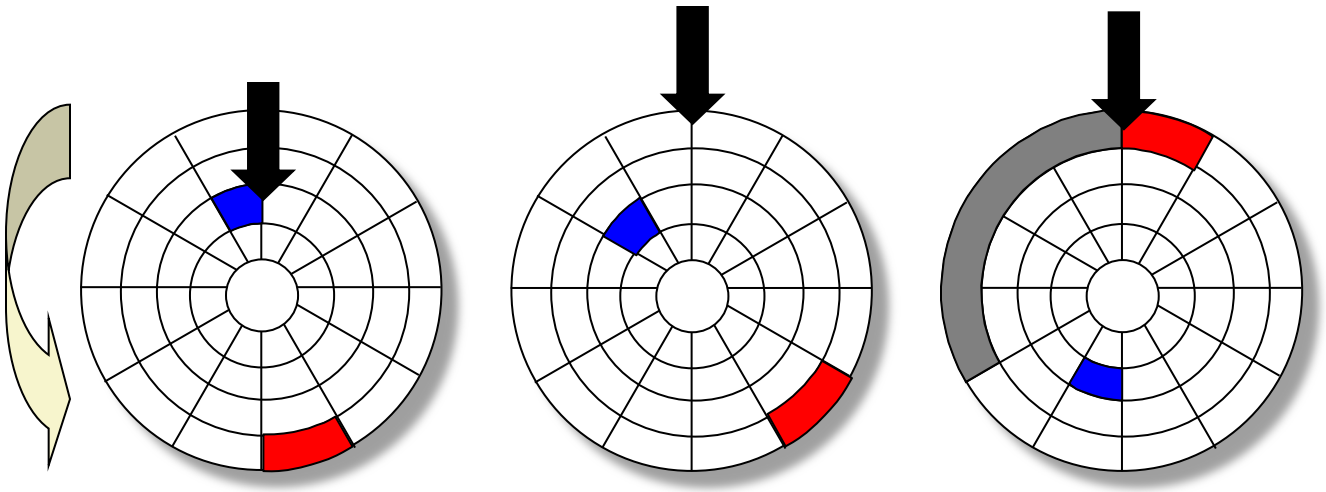

After BLUE read | Seek for RED | Rotational latency


Wait for red sector to rotate around

Disk Access – Read

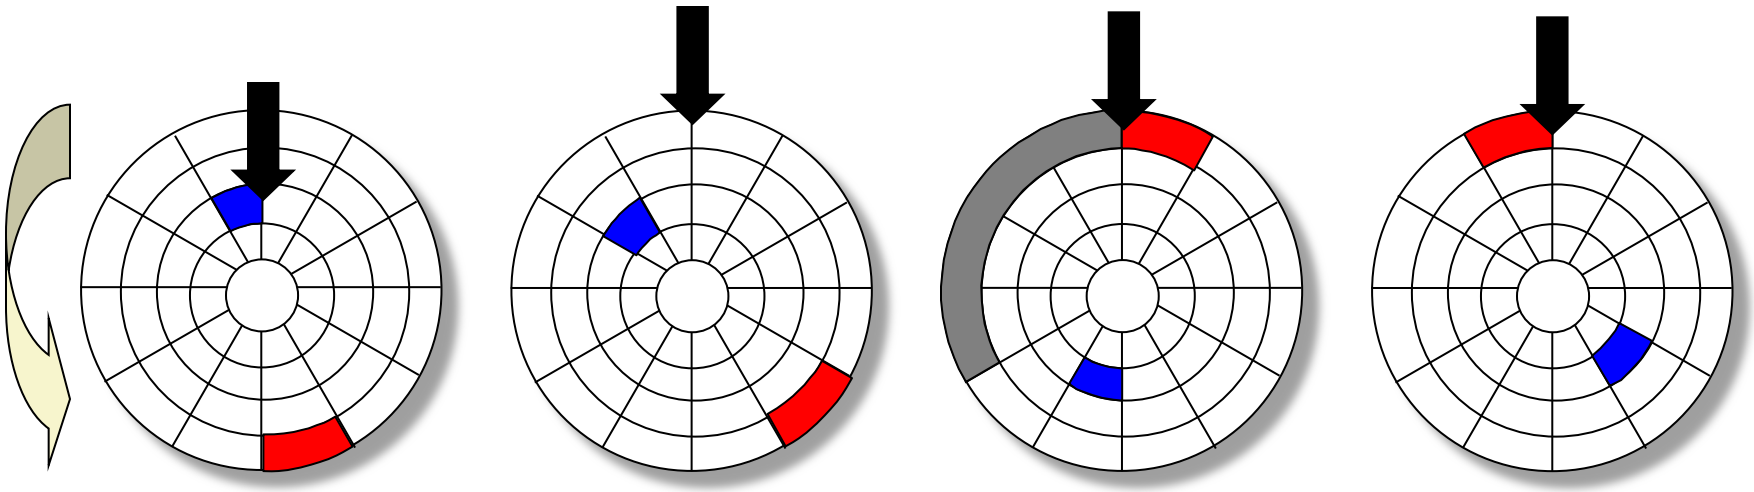

Complete read of red

Disk Access – Service Time Components

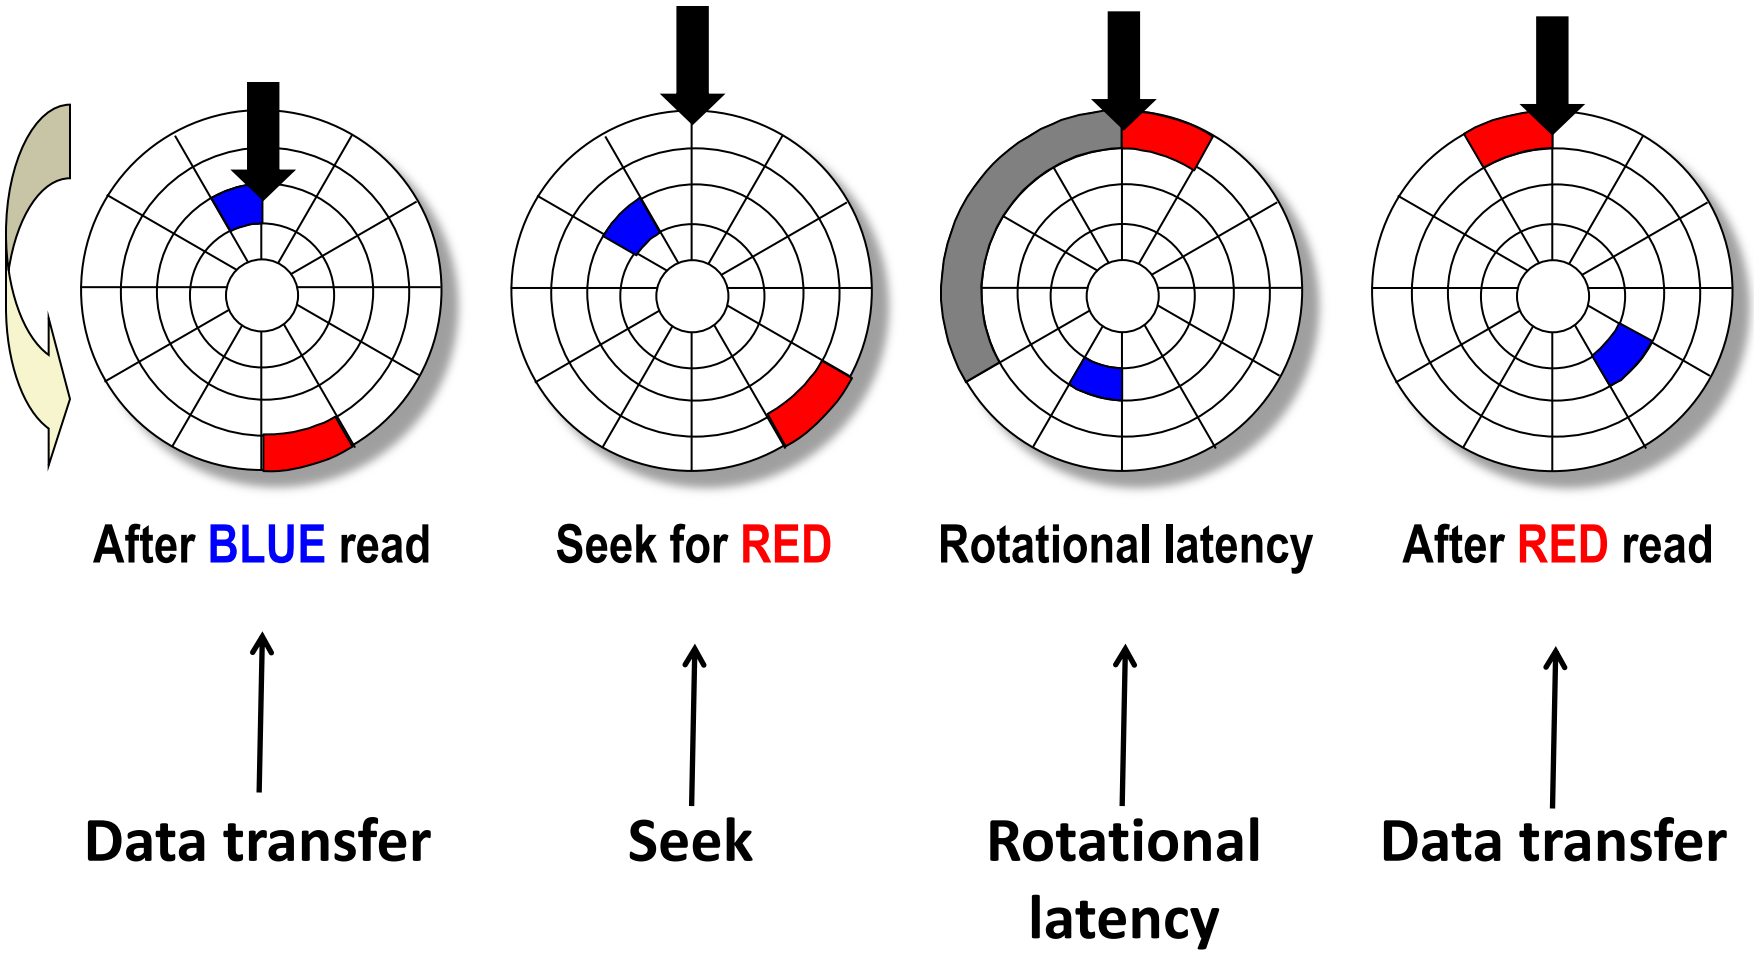

Disk Access Time


- **Average time to access some target sector approximated by :**
  - Taccess = Tavg seek + Tavg rotation + Tavg transfer
- **Seek time (Tavg seek)**
  - Time to position heads over cylinder containing target sector.
  - Typical Tavg seek is 3—9 ms
- **Rotational latency (Tavg rotation)**
  - Time waiting for first bit of target sector to pass under r/w head.
  - Tavg rotation = 1/2 x 1/RPMs x 60 sec/1 min
  - Typical Tavg rotation = 7200 RPMs
- **Transfer time (Tavg transfer)**
  - Time to read the bits in the target sector.
  - Tavg transfer = 1/RPM x 1/(avg # sectors/track) x 60 secs/1 min.

Today


- Storage technologies and trends
- **Locality of reference**
- Caching in the memory hierarchy

Locality

- **Principle of Locality: Programs tend to use data and instructions with addresses near or equal to those they have used recently**

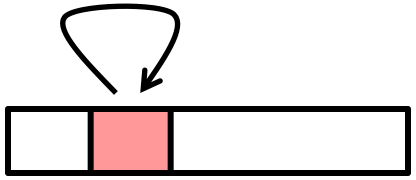

- **Temporal locality:**
  - Recently referenced items are likely to be referenced again in the near future

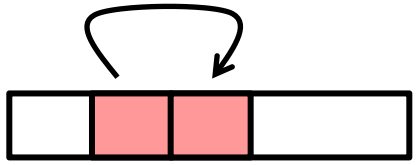

- **Spatial locality:**
  - Items with nearby addresses tend to be referenced close together in time

Locality Example

```
sum = 0;
for (i = 0; i < n; i++)
    sum += a[i];
return sum;
```

- **Data references**
  1. Reference array elements sequentially (stride-1 reference pattern). — **Spatial locality**
  2. Reference variable `sum` each iteration. — **Temporal locality**
- **Instruction references**
  1. Reference instructions in sequence. — **Spatial locality**
  2. Cycle through loop repeatedly. — **Temporal locality**

Qualitative Estimates of Locality

- **Claim:** Being able to look at code and get a qualitative sense of its locality is a key skill for a professional programmer.

- **Question:** Does this function have good locality with respect to array `a`?

```
int sum_array_rows(int a[M][N])
{
    int i, j, sum = 0;

    for (i = 0; i < M; i++)
        for (j = 0; j < N; j++)
            sum += a[i][j];
    return sum;
}
```

Locality Example

- **Question:** Does this function have good locality with respect to array `a`?

```
int sum_array_cols(int a[M][N])
{
    int i, j, sum = 0;

    for (j = 0; j < N; j++)
        for (i = 0; i < M; i++)
            sum += a[i][j];
    return sum;
}
```

Locality Example

- **Question: Can you permute the loops so that the function scans the 3-d array `a` with a stride-1 reference pattern (and thus has good spatial locality)?**

```
int sum_array_3d(int a[M][N][N])
{
    int i, j, k, sum = 0;

    for (i = 0; i < M; i++)
        for (j = 0; j < N; j++)
            for (k = 0; k < N; k++)
                sum += a[k][i][j];
    return sum;
}
```

Memory Hierarchies

- **Some fundamental and enduring properties of hardware and software:**
  - Fast storage technologies cost more per byte, have less capacity, and require more power (heat!).
  - The gap between CPU and main memory speed is widening.
  - Well-written programs tend to exhibit good locality.


- **These fundamental properties complement each other beautifully.**

- **They suggest an approach for organizing memory and storage systems known as a memory hierarchy.**

Today

- Storage technologies and trends
- Locality of reference
- **Caching in the memory hierarchy**


Example Memory Hierarchy

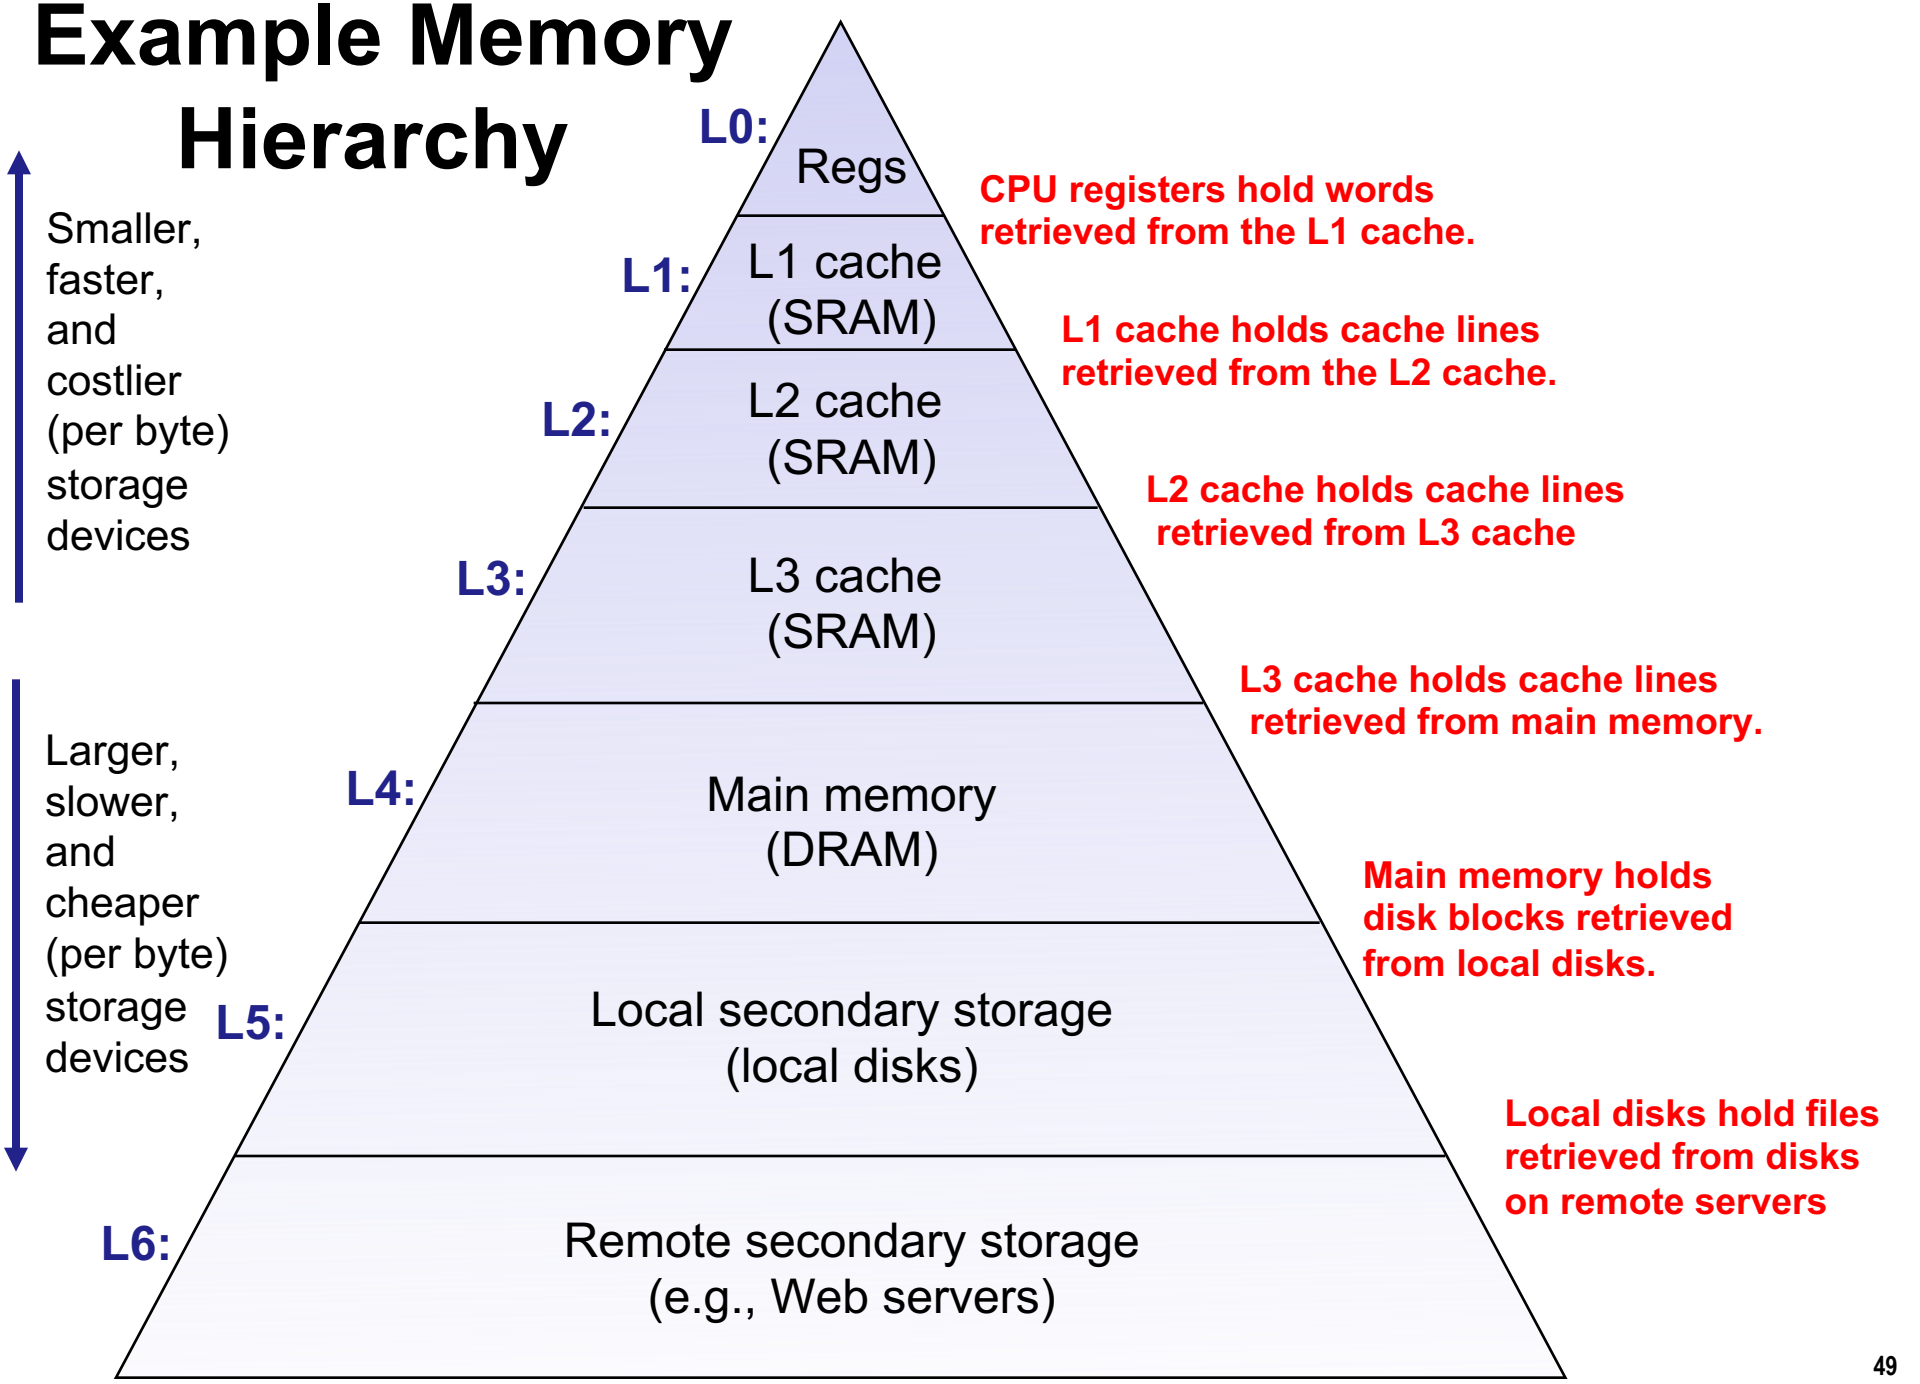


Caches

- ***Cache:*** **A smaller, faster storage device that acts as a staging area for a subset of the data in a larger, slower device.**
- **Fundamental idea of a memory hierarchy:**
  - For each k, the faster, smaller device at level k serves as a cache for the larger, slower device at level k+1.
- **Why do memory hierarchies work?**
  - Because of locality, programs tend to access the data at level k more often than they access the data at level k+1.
  - Thus, the storage at level k+1 can be slower, and thus larger and cheaper per bit.
- ***Big Idea:*** **The memory hierarchy creates a large pool of storage that costs as much as the cheap storage near the bottom, but that serves data to programs at the rate of the fast storage near the top.**

General Cache Concepts

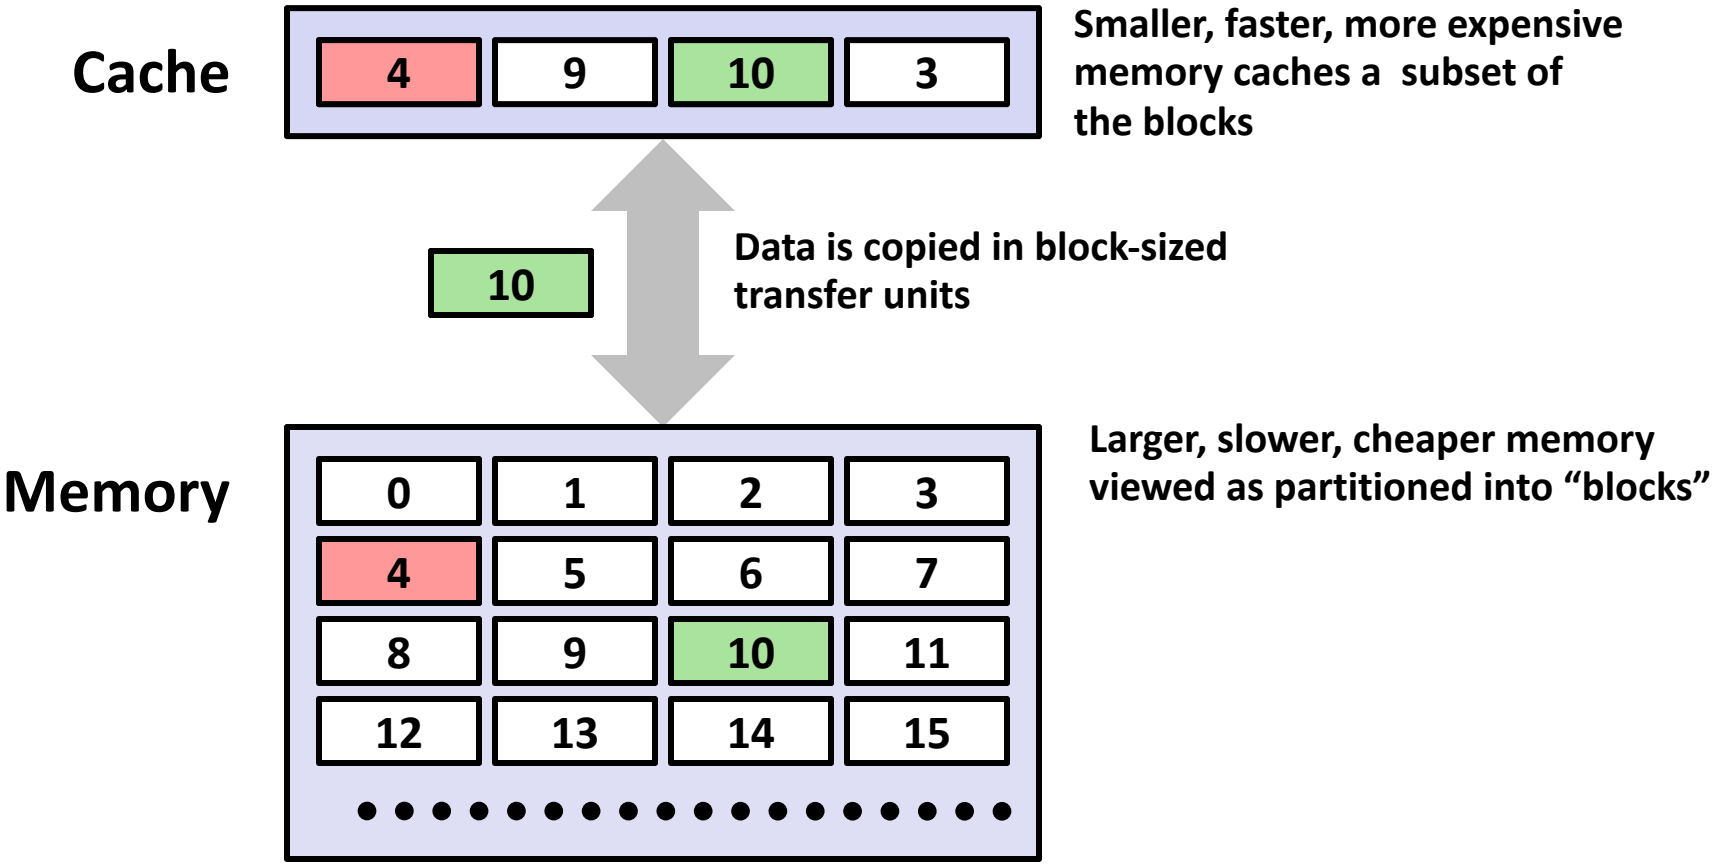


General Cache Concepts: Hit

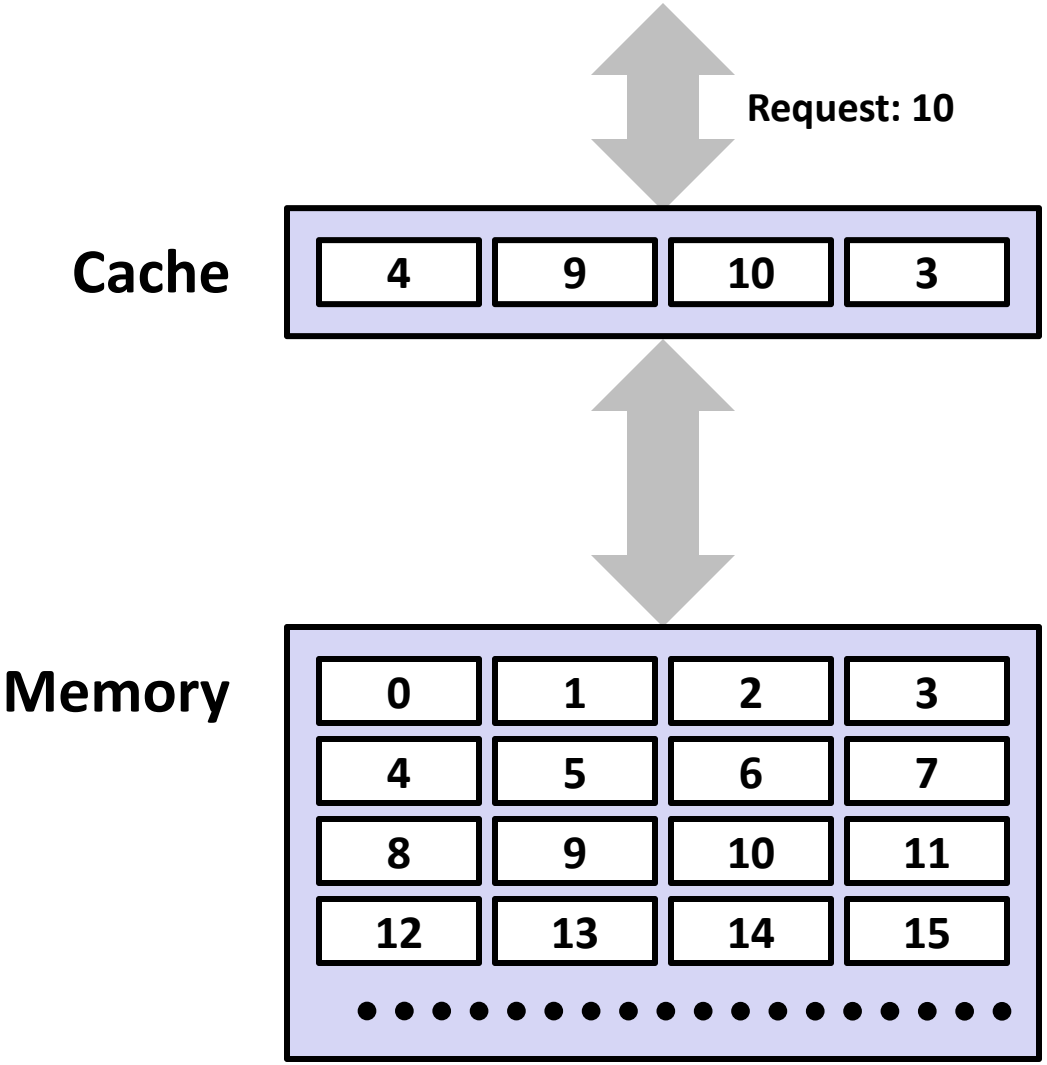

Data in block b is needed

Block b is in cache:
Hit!

General Cache Concepts: Miss

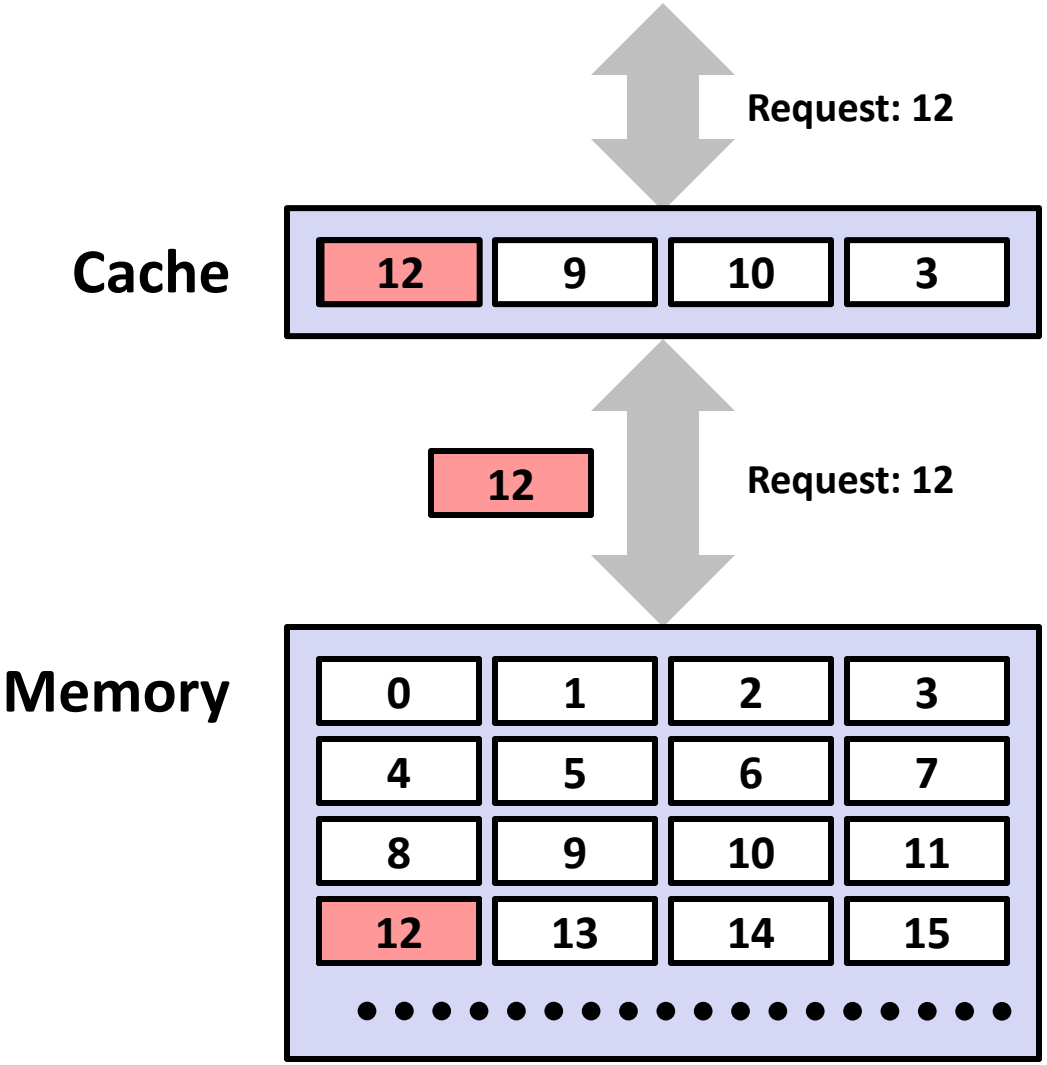

Data in block b is needed

Block b is not in cache:
Miss!

Block b is fetched from memory

Block b is stored in cache

- Placement policy: determines where b goes
- Replacement policy: determines which block gets evicted (victim)

General Caching Concepts: Types of Cache Misses

- **Cold (compulsory) miss**
  - Cold misses occur because the cache is empty.
- **Conflict miss**
  - Most caches limit blocks at level k+1 to a small subset (sometimes a singleton) of the block positions at level k.
    - E.g. Block i at level k+1 must be placed in block (i mod 4) at level k.
  - Conflict misses occur when the level k cache is large enough, but multiple data objects all map to the same level k block.
    - E.g. Referencing blocks 0, 8, 0, 8, 0, 8, ... would miss every time.
- **Capacity miss**
  - Occurs when the set of active cache blocks (working set) is larger than the cache.

Examples of Caching in the Mem. Hierarchy

Cache Type	What is Cached?	Where is it Cached?	Latency (cycles)	Managed By
Registers	4-8 bytes words	CPU core	0	Compiler
TLB	Address translations	On-Chip TLB	0	Hardware MMU
L1 cache	64-byte blocks	On-Chip L1	4	Hardware
L2 cache	64-byte blocks	On-Chip L2	10	Hardware
Virtual Memory	4-KB pages	Main memory	100	Hardware + OS
Buffer cache	Parts of files	Main memory	100	OS
Disk cache	Disk sectors	Disk controller	100,000	Disk firmware
Network buffer cache	Parts of files	Local disk	10,000,000	NFS client
Browser cache	Web pages	Local disk	10,000,000	Web browser
Web cache	Web pages	Remote server disks	1,000,000,000	Web proxy server

Summary

- **The speed gap between CPU, memory and mass storage continues to widen.**
- **Well-written programs exhibit a property called *locality*.**
- **Memory hierarchies based on *caching* close the gap by exploiting locality.**