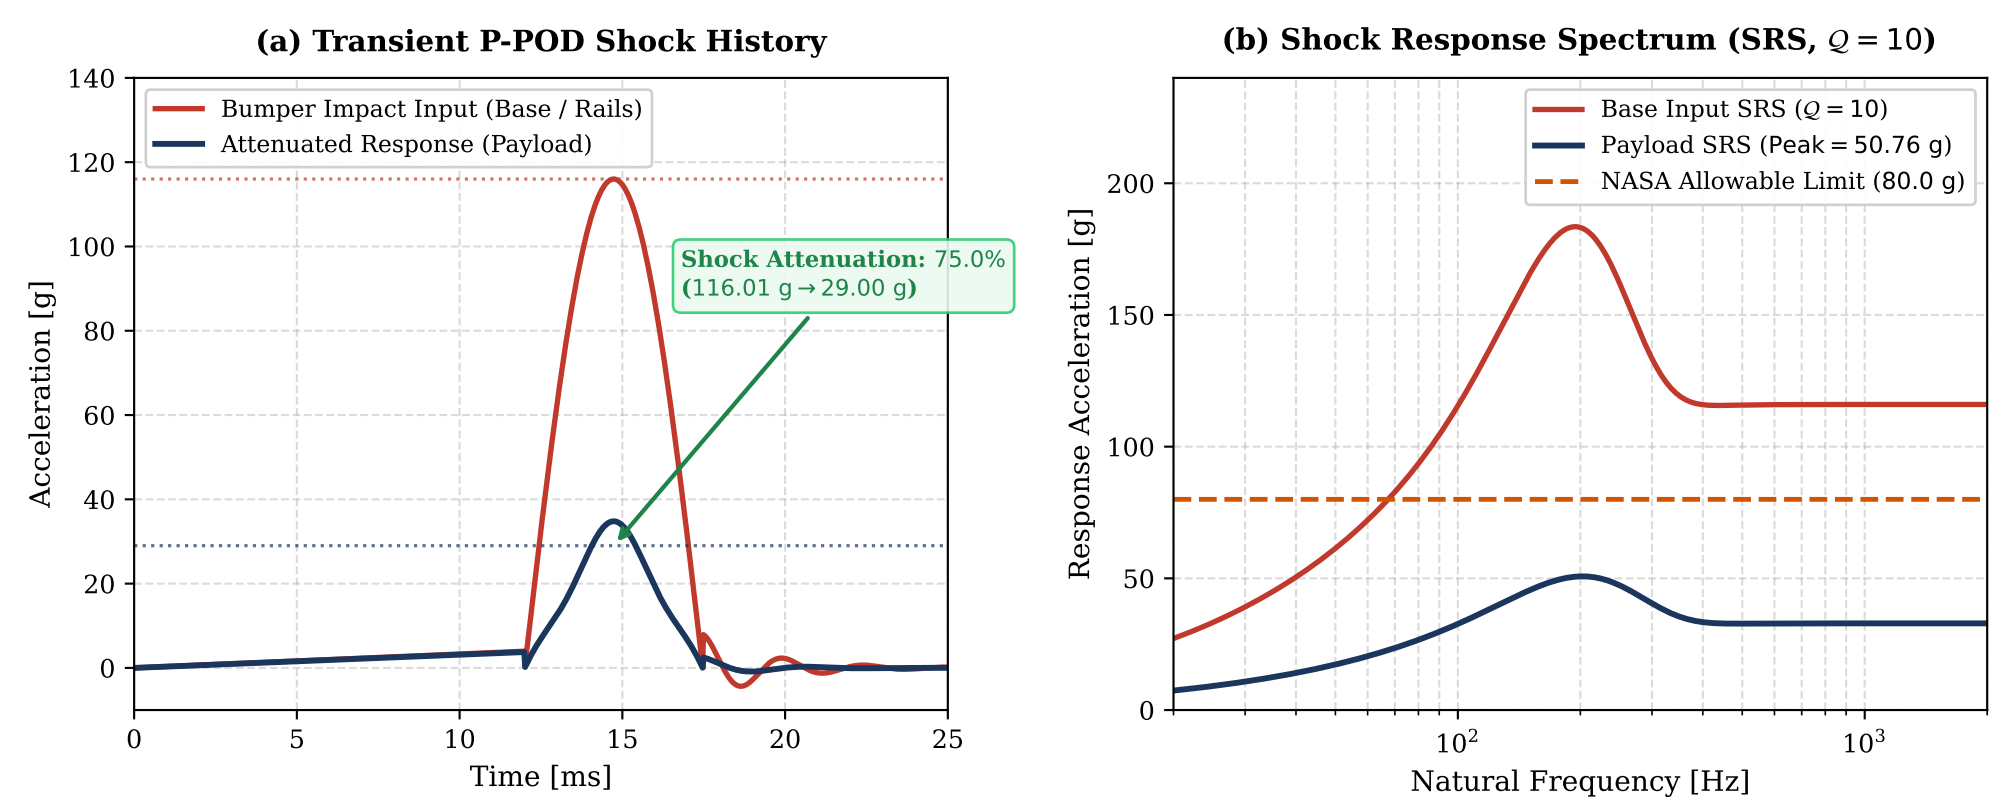
(a) Transient P-POD Shock History
Bumper Impact Input (Base / Rails)
Attenuated Response (Payload)
Shock Attenuation: 75.0%
(116.01 g → 29.00 g)
Acceleration [g]
Time [ms]
0
20
40
60
80
100
120
140
0
5
10
15
20
25
(b) Shock Response Spectrum (SRS, Q = 10)
Base Input SRS (Q = 10)
Payload SRS (Peak = 50.76 g)
NASA Allowable Limit (80.0 g)
Response Acceleration [g]
Natural Frequency [Hz]
0
50
100
150
200
10^2
10^3