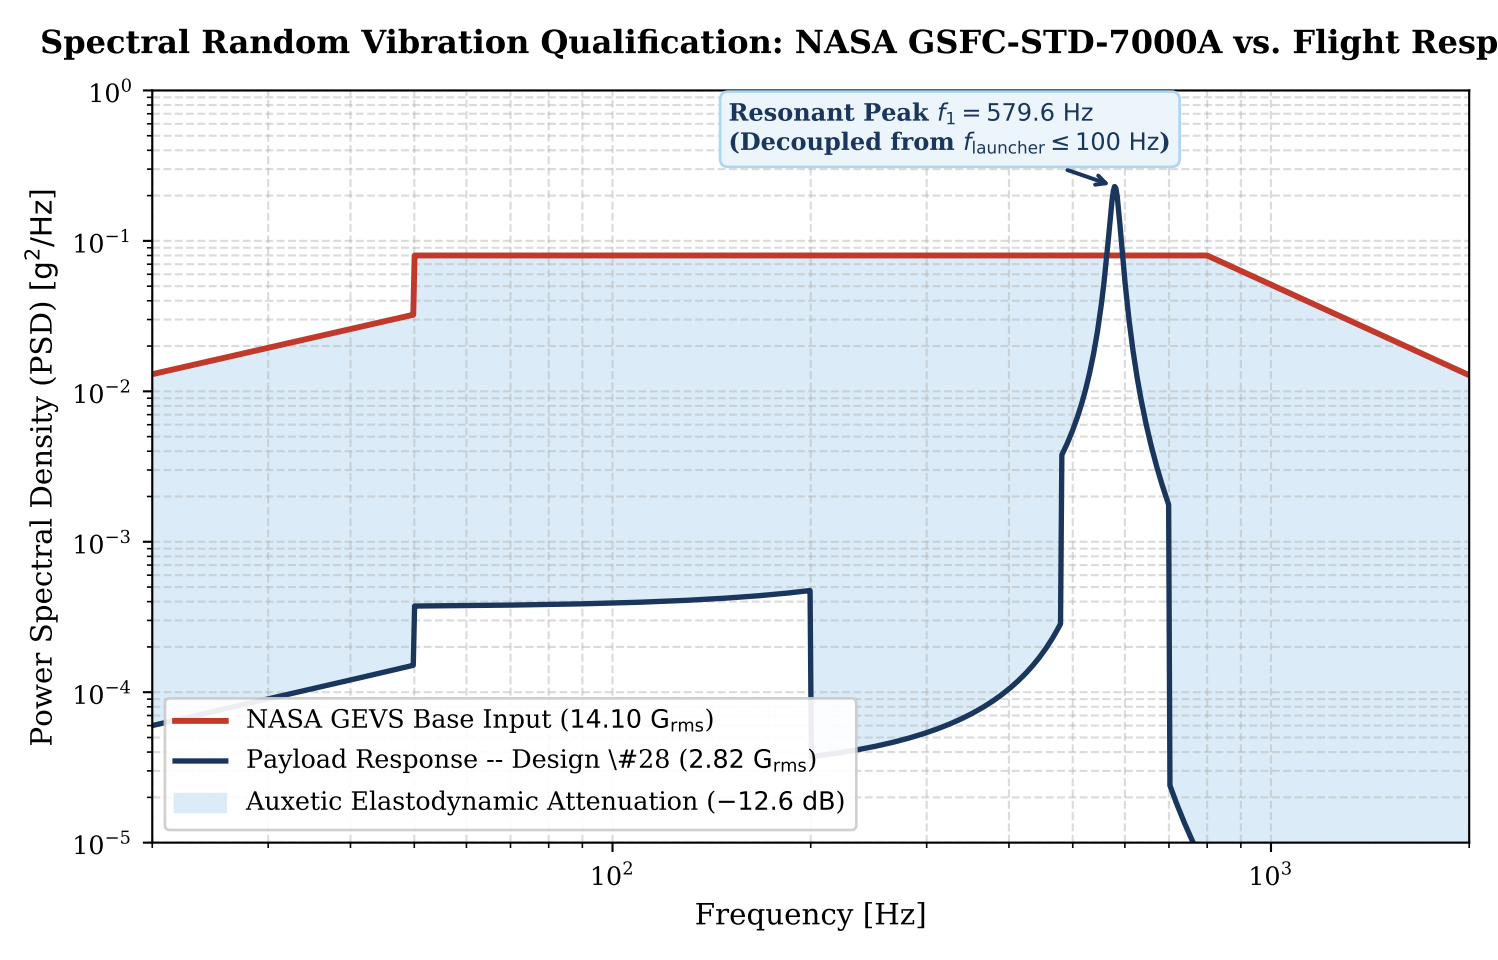

Spectral Random Vibration Qualification: NASA GSFC-STD-7000A vs. Flight Resp
Resonant Peak $f_1 = 579.6$ Hz
(Decoupled from $f_{launcher} \leq 100$ Hz)
NASA GEVS Base Input (14.10 G_{rms})
Payload Response -- Design \#28 (2.82 G_{rms})
Auxetic Elastodynamic Attenuation (−12.6 dB)
Power Spectral Density (PSD) [g^2/Hz]
Frequency [Hz]
10^0
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^2
10^3